



Apr. 2015 Ver.2.0
TDK Corporation

Multilayer Diplexer

For UWB

DPX Series

2012 TYPE


P/N: **DPX209504DT-4183A1**

Apr. 2015 Ver.2.0
TDK Corporation


DPX209504DT-4183A1

■ SHAPES AND DIMENSIONS

[Top View]

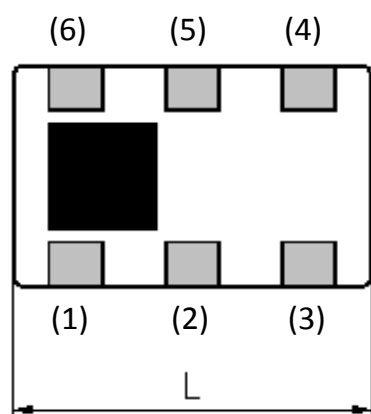

[Bottom View]

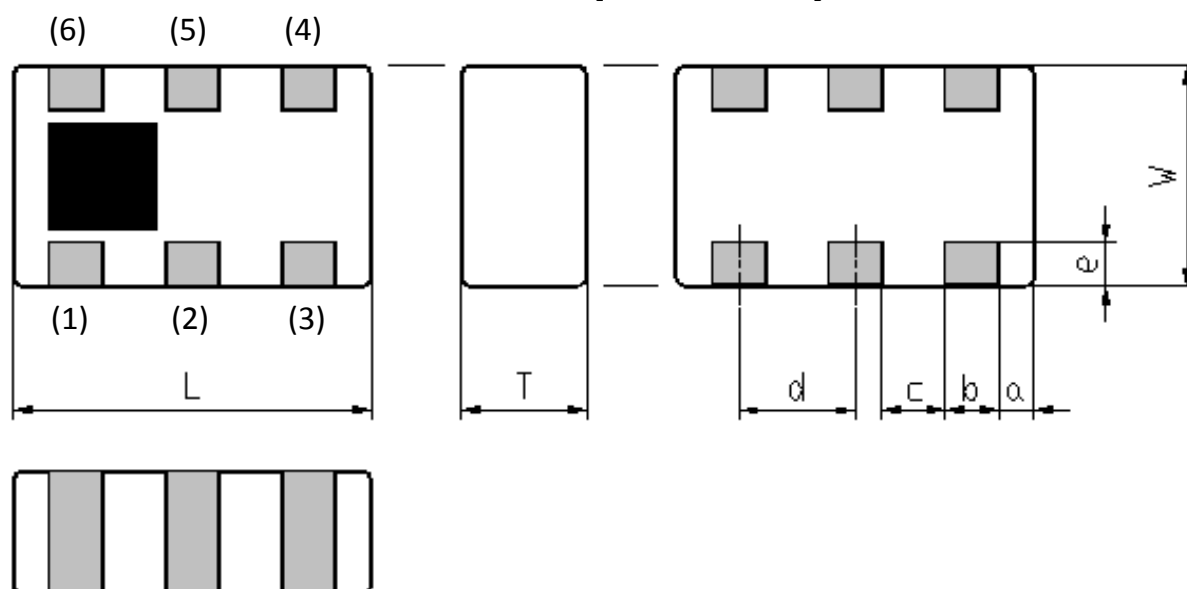

Dimensions (mm)

L	W	T	a	b	c	d
2.00	1.25	0.60	0.20	0.30	0.35	0.65
+/-0.15	+/-0.15	+/-0.10	+/-0.20	+/-0.20	+/-0.20	+/-0.20

Terminal functions

(1)	GND
(2)	Common Port
(3)	GND
(4)	Low-Band Port
(5)	GND
(6)	High-Band Port

Note:

These samples are marked with trial sample identification.

In mass production, this sample marking will be changed to show in the TDK full specification.

■ TEMPERATURE RANGE

Operating temperature	Storage temperature
-40 to +85 °C	-40 to +85 °C

DPX209504DT-4183A1

■ ELECTRICAL CHARACTERISTICS

(Measurement)

Low-Band

Parameter	Frequency (MHz)	Target Spec		
		Min.	Typ.	Max.
Insertion Loss (dB)	3168 to 4752	-	0.31	0.60
Attenuation (dB)	6336 to 9504	18	20.0	-
VSWR	3168 to 4752	-	1.4	2.0

Ta = +25+/-5°C

High-Band

Parameter	Frequency (MHz)	Target Spec		
		Min.	Typ.	Max.
Insertion Loss (dB)	6336 to 9504	-	0.59	0.85
Attenuation (dB)	3168 to 4752	16	20	-
VSWR	6336 to 9504	-	1.8	2.2

Ta = +25+/-5°C

ESD

The Diplexer satisfies the electrical specification after the following tests.
 (When measured after two hours in normal conditions):

•HBM
 MIL-STD-883D
 EIAJ ED-4701-1 C-111
 Cd=100pF Rd=1.5kohm V=+/-1000V 1time


Apr. 2015 Ver.2.0
TDK Corporation

DPX209504DT-4183A1

FREQUENCY CHARACTERISTICS


(Measurement)

Low band-Port

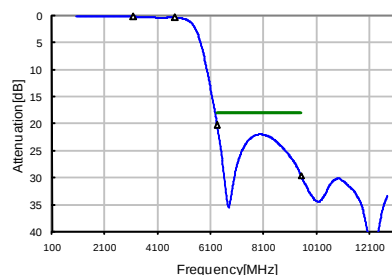


Attenuation	
6336 MHz	20.23 dB
9504 MHz	29.63 dB

High band-Port

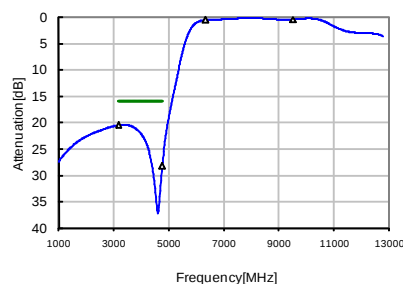


Attenuation	
3168 MHz	20.52 dB
4752 MHz	28.28 dB

Low band-Port

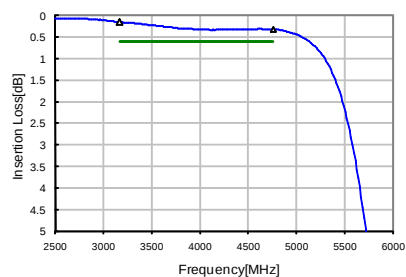


Insertion Loss	
3168 MHz	0.15 dB
4752 MHz	0.31 dB

High band-Port

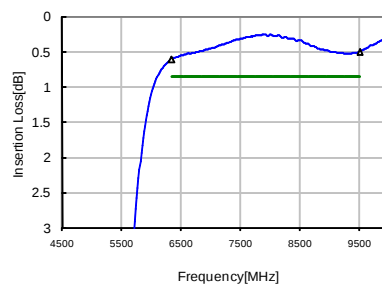


Insertion Loss	
6336 MHz	0.61 dB
9504 MHz	0.50 dB

Common Port Return Loss

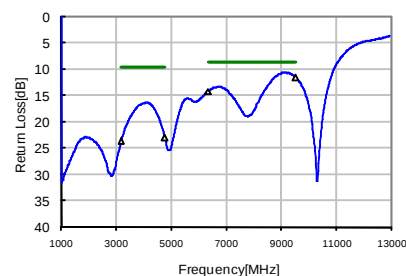


Return Loss	
3168 MHz	23.62 dB
4752 MHz	22.95 dB
6336 MHz	14.15 dB
9504 MHz	11.49 dB

Isolation

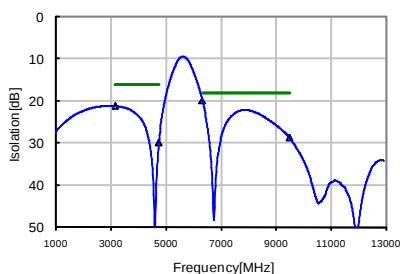


Isolation	
3168 MHz	21.2 dB
4752 MHz	30.0 dB
6336 MHz	19.9 dB
9504 MHz	28.8 dB

Low band-Port Return Loss

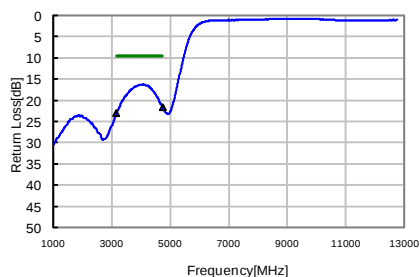

Return Loss	
3168 MHz	22.90 dB
4752 MHz	21.65 dB

High band-Port Return Loss

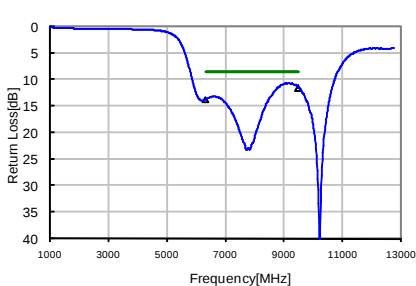


Return Loss	
6336 MHz	13.71 dB
9504 MHz	11.55 dB

Apr. 2015 Ver.2.0
TDK Corporation

DPX209504DT-4183A1

RECOMMENDED LAND PATTERN

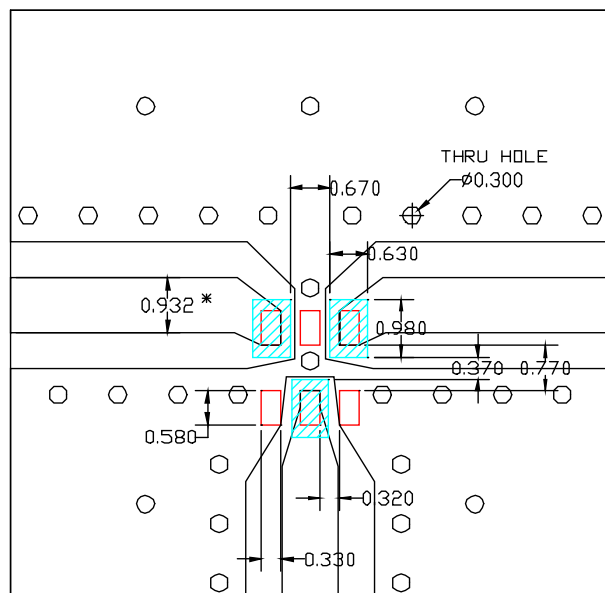

 No pattern area of internal layers


* Line width should be designed to match 50 ohm characteristic impedance depending on PCB material and thickness.

ENVIRONMENT INFORMATION

RoHS Statement
RoHS Compliance

DPX209504DT-4183A1**RECOMMENDED REFLOW PROFILE**

Pb free solder

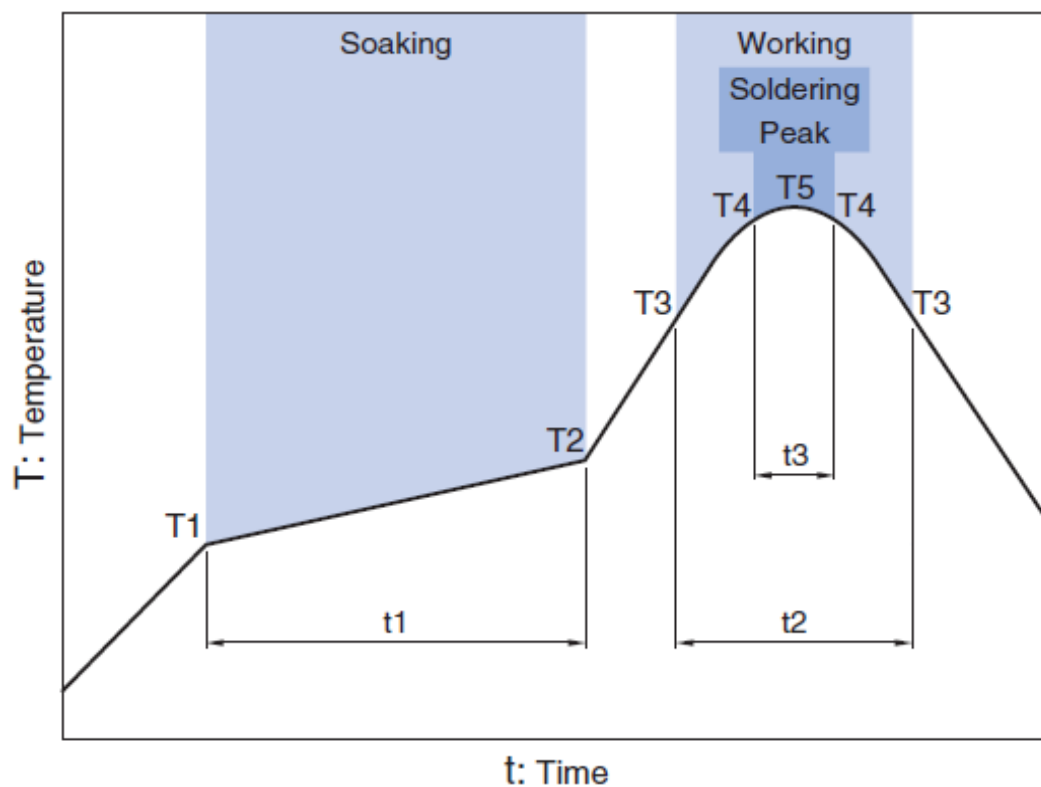


Soaking			Working		Soldering		Peak
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.

Apr. 2015 Ver.2.0
TDK Corporation


DPX209504DT-4183A1

■ PACKAGING STYLE

Reel Dimensions

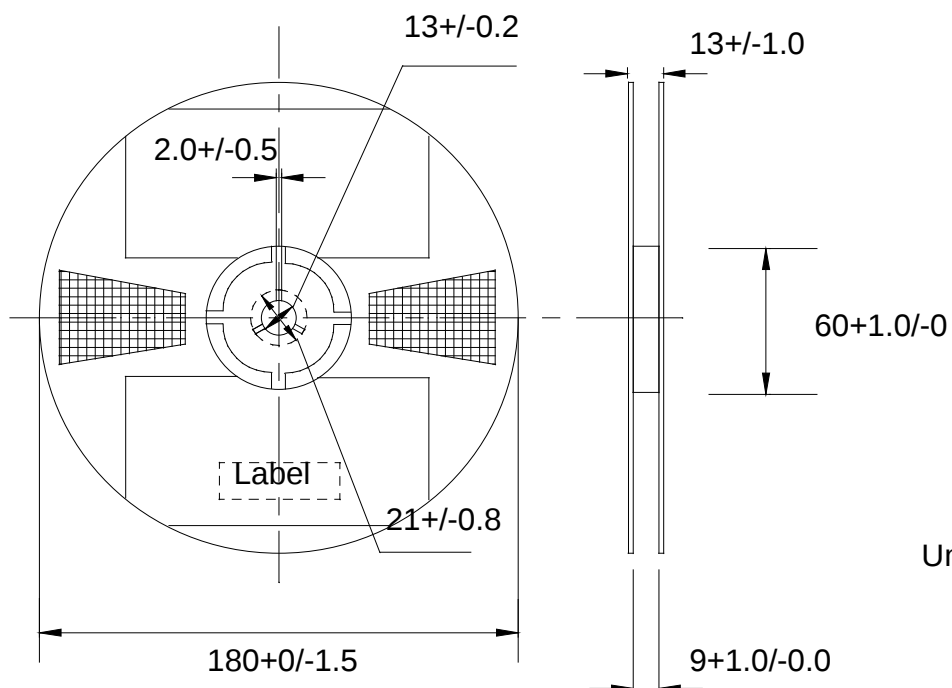

Carrier Tape

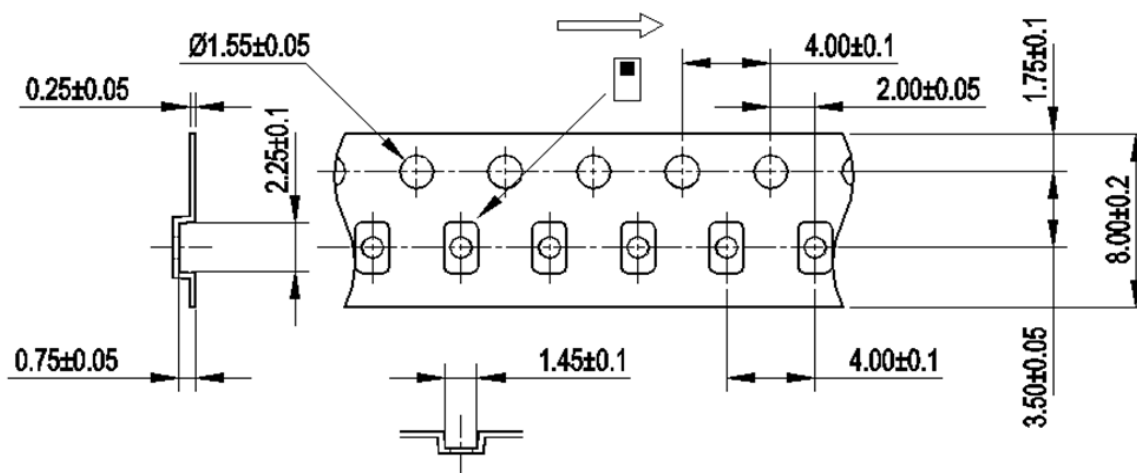

STANDARD PACKAGE QUANTITY (pieces/reel)
2,000

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.



REMINDERS

The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet.

1. Aerospace/Aviation equipment
2. Transportation equipment (cars, electric trains, ships, etc.)
3. Medical equipment
4. Power-generation control equipment
5. Atomic energy-related equipment
6. Seabed equipment
7. Transportation control equipment
8. Public information-processing equipment
9. Military equipment
10. Electric heating apparatus, burning equipment
11. Disaster prevention/crime prevention equipment
12. Safety equipment
13. Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/equipment or providing backup circuits, etc., to ensure higher safety.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru