

### 232 Series, 5x20 mm, Medium-Acting Fuse



#### Agency Approvals

| Agency                                                                              | Agency File Number                                         | Ampere Range          |
|-------------------------------------------------------------------------------------|------------------------------------------------------------|-----------------------|
|    | Cartridge:<br>NBK180509-JP1021 A/C<br>NBK020609-JP1021 A/C | 1A – 5A<br>6.3A – 10A |
|                                                                                     | Leaded:<br>NBK180509-JP1021 B/D<br>NBK020609-JP1021 B/D    | 1A – 5A<br>6.3A – 10A |
|    | SU05001-2015                                               | 1A – 10A              |
|  | N/A                                                        | 1A – 10A              |

#### Electrical Characteristics for Series

| % of Ampere Rating | Opening Time       |
|--------------------|--------------------|
| 130%               | 1 hour, Minimum    |
| 160%               | 1 hour, Maximum    |
| 200%               | 2 minutes, Maximum |

#### Electrical Characteristic Specifications by Item

| Amp Code | Amp Rating (A) | Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) | Agency Approvals                                                                      |                                                                                       |                                                                                       |
|----------|----------------|--------------------|---------------------|--------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          |                |                    |                     |                                |                                                       |  |  |  |
| 001.     | 1              | 125/250            | 10 kA @ 125VAC      | 0.0923                         | 1.37300                                               | x                                                                                     | x                                                                                     | x                                                                                     |
| 1.25     | 1.25           | 125/250            |                     | 0.0685                         | 4.11000                                               | x                                                                                     | x                                                                                     | x                                                                                     |
| 01.6     | 1.6            | 125/250            |                     | 0.0537                         | 6.96000                                               | x                                                                                     | x                                                                                     | x                                                                                     |
| 002.     | 2              | 125/250            |                     | 0.0370                         | 8.25000                                               | x                                                                                     | x                                                                                     | x                                                                                     |
| 02.5     | 2.5            | 125/250            |                     | 0.0291                         | 13.87500                                              | x                                                                                     | x                                                                                     | x                                                                                     |
| 003.     | 3              | 125/250            |                     | 0.0226                         | 17.19000                                              | x                                                                                     | x                                                                                     | x                                                                                     |
| 3.15     | 3.15           | 125/250            |                     | 0.0215                         | 21.9500                                               | x                                                                                     | x                                                                                     | x                                                                                     |
| 004.     | 4              | 125/250            |                     | 0.0174                         | 37.73000                                              | x                                                                                     | x                                                                                     | x                                                                                     |
| 005.     | 5              | 125/250            |                     | 0.0134                         | 56.72000                                              | x                                                                                     | x                                                                                     | x                                                                                     |
| 06.3     | 6.3            | 125/250            |                     | 0.0102                         | 151.54000                                             | x                                                                                     | x                                                                                     | x                                                                                     |
| 008.*    | 8              | 125/250            | 300A @ 125VAC       | 0.0076                         | 182.58000                                             | x                                                                                     | x                                                                                     | x                                                                                     |
| 010.*    | 10             | 125/250            |                     | 0.0059                         | 290.66500                                             | x                                                                                     | x                                                                                     | x                                                                                     |

To order 125Vac rated, please add part no. suffix  
 \* Interrupting Rating for 8A & 10A is 100A@250Vac

#### Description

The 232 Series Fuse is a 5x20mm, medium-acting, glass body cartridge fuse. It is specifically designed to meet the requirements of Appendix 3 of DENAN Technical Requirements & Enforcement Regulations (METI).

#### Features

- Available in cartridge and axial lead format
- Approved to DENAN's Appendix 3
- RoHS compliant and lead-free

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

#### Additional Information



**Datasheet**



**Resources**




**Samples**



**Accessories**


For recommended fuse accessories for this product series, see '[Recommended Accessories](#)' section.

### Temperature Re-rating Curve

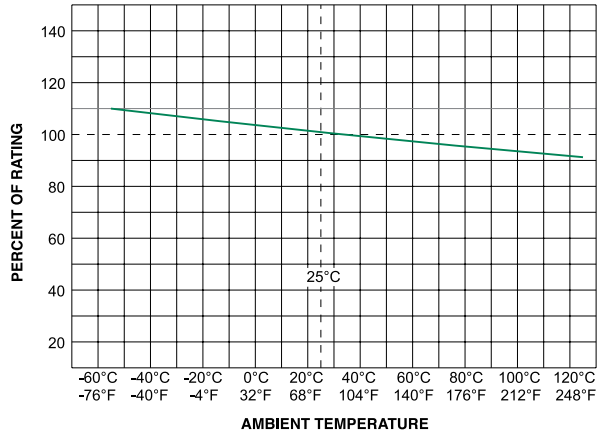


Note:  
Derating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

### Average Time Current Curves

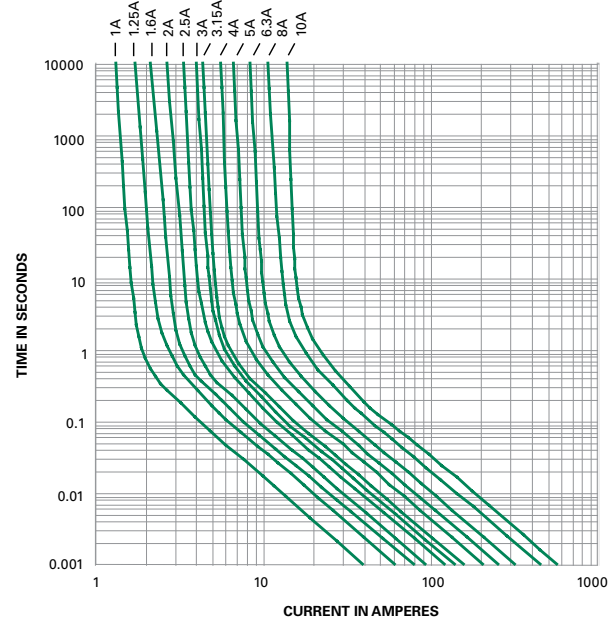

### Soldering Parameters - Wave Soldering

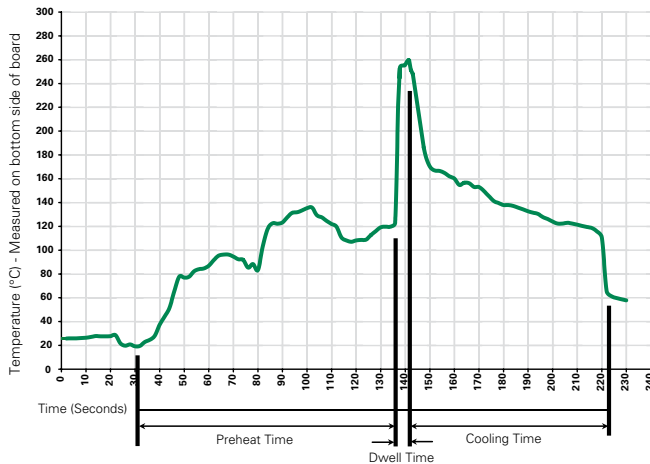

### Recommended Process Parameters:

| Wave Parameter                                    | Lead-Free Recommendation          |
|---------------------------------------------------|-----------------------------------|
| Preheat: (Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                              | 100°C                             |
| Temperature Maximum:                              | 150°C                             |
| Preheat Time:                                     | 60-180 seconds                    |
| Solder Pot Temperature:                           | 260°C Maximum                     |
| Solder Dwell Time:                                | 2-5 seconds                       |

### Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C  
Heating Time: 5 seconds max.

**Note:** These devices are not recommended for IR or Convection Reflow process.

### Packaging

| Packaging Option | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width |
|------------------|-------------------------|----------|---------------------------|--------------|
| 232 Series       |                         |          |                           |              |
| Bulk             | N/A                     | 1000     | MX                        | N/A          |
| Bulk             | N/A                     | 1000     | MXE                       | N/A          |


### Product Characteristics

|                          |                                                                                    |
|--------------------------|------------------------------------------------------------------------------------|
| <b>Materials</b>         | Body: Glass<br>Cap: Nickel-plated brass<br>Leads: Tin-plated Copper                |
| <b>Terminal Strength</b> | MIL-STD-202, Method 211.<br>Test Condition A                                       |
| <b>Solderability</b>     | MIL-STD-202 Method 208                                                             |
| <b>Product Marking</b>   | Cap 1: Brand log, current and voltage ratings, and agency approval<br>Cap 2: Blank |
| <b>Packaging</b>         | Available in Bulk (M=1000 pcs/pkg) or on Tape/Reel (MRET1=1000 pcs/reel)           |


|                              |                                                                                                        |
|------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature</b> | -60°C to +125°C                                                                                        |
| <b>Thermal Shock</b>         | MIL-STD-202, Method 107, Test Condition B: (5 cycles -65°C + 125°C)                                    |
| <b>Vibration</b>             | MIL-STD-202, Method 201                                                                                |
| <b>Humidity</b>              | MIL-STD-202, Method 103, Test Condition A high RH (95%) and elevated temperature (40°C) for 240 hours. |
| <b>Salt Spray</b>            | MIL-STD-202, Method 101, Test Condition B                                                              |

### Dimensions

0232 000P




0232 000 XEP



**Notes:**

\* Ratings above 6.3A have 0.8±0.05 diameter lead. All dimensions in mm

### Part Numbering System

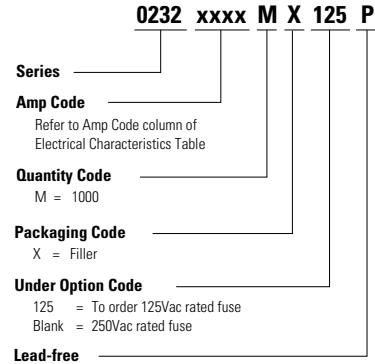

### Recommended Accessories

| Accessory Type | Series                  | Description                                                               | Max Application Voltage | Max Application Amperage |
|----------------|-------------------------|---------------------------------------------------------------------------|-------------------------|--------------------------|
| Holder         | <a href="#">345_ISF</a> | Panel Mount Shock-Safe Fuseholder                                         | 250                     | 10                       |
|                | <a href="#">345</a>     | Shock-Safe Fuseholder with PC Mount, Solder Mount and Panel Mount options |                         | 20                       |
|                | <a href="#">830</a>     | PC Mount Shock-Safe Miniature Fuseholder                                  |                         | 16                       |
| Block          | <a href="#">520</a>     | Metric OMNI-BLOK® Fuse Block                                              |                         | 10                       |
|                | <a href="#">646</a>     | PC Mount Miniature Fuse Block                                             |                         | 6.3                      |
|                | <a href="#">658</a>     | Surface Mount Miniature Fuse Block                                        |                         | 10                       |
| Clip           | <a href="#">520_W</a>   | PC Mount Miniature Fuse Clip                                              |                         | 6.3                      |
|                | <a href="#">111</a>     | PC Board Mount Fuse Clip                                                  |                         | 10                       |
|                | <a href="#">445</a>     | PC Board Mount Fuse Clip                                                  |                         | 10                       |

**Notes:**

- Do not use in applications above rating.
- Please refer to fuseholder data sheet for specific re-rating information.
- Please contact factory for applications greater than the max voltage and amperage shown.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)