


# PD-9500G Family

## 72W/Port Gigabit EEPoE Midspan Family for High Power Terminals

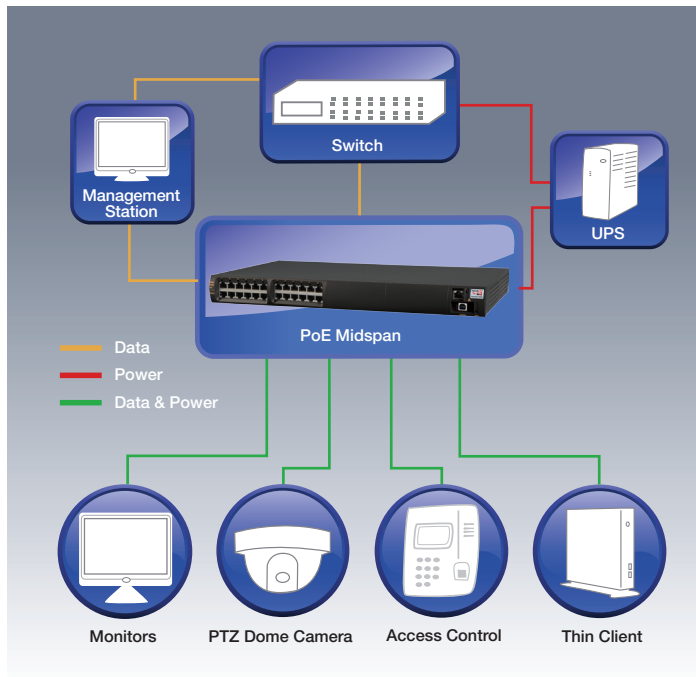

### Overview

Microsemi's PD-9500G EEPoE family is designed to power network devices such as IP cameras, access control systems, thin clients and other Ethernet powered devices (PD) that require up to 51W, while reducing power losses by almost 3W per link for 25.5W devices.

PD-9500G Energy Efficient PoE (EEPoE) Midspans are unique in their ability to deliver power over all 4 pairs of the Cat 5 or better cable, dissipating 50% less power than PoE Switches and 2-pair Midspans, while fully complying with the IEEE802.3at-2009 standard.

EEPoE allows reduced power dissipation to new powered devices and also to the huge installed base of over 100 million existing IEEE standard-compliant PDs worldwide.

With the midspan's plug-and-play installation, they are easily and cost effectively implemented leveraging an existing Ethernet infrastructure while at the same time providing the assurance of a future proof network.

### PD-9500G Features

- High Power over 4-pairs – 72W per port
- IEEE 802.3at Compliant with 2-event classification
- High efficiency, dissipating 50% less power than 2-pair switches and midspans
- PowerView Pro secure, remote SNMPv3 web-based management
- Supports both IPv4 and IPv6 addressing
- Cisco and legacy PoE support
- Plug-and-play installation
- Guaranteed uptime

### PD-9500G EEPoE Specifications

No. of Ports	6/12/24
Pass Through Data Rates	10/100/1000 Mbps
Power over Ethernet Output	Pin Assignment and Polarity: Data Pairs 1/2(-) and 3/6 (+) Spare Pairs 7/8 (-) and 4/5 (+) Output Power Voltage: 54-57Vdc User Port Power: 72W Typ. Aggregate Power: 450W, 1000W
Input Power Requirements	AC Input Voltage: 100 to 240 Vac DC Input: 57V (RPS or another 9500G midspan) ACDC units: RPS or another 9000 midspan AC Input Current: 450W Unit: 5.5A @ 110 Vac; 2.75A @ 220 Vac 1000W Unit: 12A @ 110 Vac; 6A@220 Vac AC Frequency: 50 to 60 Hz
Dimensions	438 mm x 272 mm x 44 mm 17.3 in. x 10.8 in. x 1.75 in or 1U
Weight	14.3 lbs (6.5 kg)
Management	PowerView Pro included
Indicators	System Indicator: AC Power (Green)  Channel Power Indicators: Green—Power supplied over data and spare pairs Yellow—Power supplied over data or spare pairs
Connectors	PoE ports and management port: Shielded RJ-45, EIA 568A and 568B Console Port: USB Connector Type B DC Connector: DC Block Terminal RPS Com Connector: HD-D-sub-15
Environmental Conditions	Operating Ambient Temperature: 32° to 104°F (0 to 40°C)  Operating Humidity: 10% to 90%, Non-condensing  Storage Temperature: -4° to 158°F (-20° to 70°C)  Storage Humidity: 5% to 95%, Non-condensing  Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
Warranty	Limited lifetime (see Terms and Conditions)
Regulatory Compliance	IEEE 802.3af (PoE, PoH Type1) IEEE 802.3at (PoE+ including 2-event, PoH Type 2), RoHS Compliant, VCCI, CE, C-Tick
Electromagnetic Emission & Immunity	FCC Part 15, Class B EN 55022 Class B (Emissions) EN 55024 (Immunity), VCCI
Safety Approvals	UL/cUL Per EN 60950-1 GS Mark Per EN 60950-1

## Ordering Information

Part Number	Name	Ports	Total Watts
PD-9506G/ACDC/M	Microsemi PD-9506G	6-port	450W
PD-9512G/ACDC/M	Microsemi PD-9512G	12-port	1000W
PD-9524G/ACDC/M	Microsemi PD-9524G	24-port	1000W



**Microsemi**

Microsemi Corporate Headquarters  
One Enterprise, Aliso Viejo, CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996  
email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

©2014 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

MSC-PD-9500G/EEPoE 5.14

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)