

## FEATURES

### Dual receivers

**Maximum receiver bandwidth: 200 MHz**

**Fully integrated, fractional-N, RF synthesizers**

**Fully integrated clock synthesizer**

**Multichip phase synchronization for RF LO and baseband clocks**

**JESD204B datapath interface**

**Tuning range (center frequency): 75 MHz to 6000 MHz**

## APPLICATIONS

**3G/4G/5G FDD, macrocell base stations**

**Wideband active antenna systems**

**Massive multiple input, multiple output (MIMO)**

**Phased array radar**

**Electronic warfare**

**Military communications**

**Portable test equipment**

## GENERAL DESCRIPTION

The ADRV9008-1 is a highly integrated, dual radio frequency (RF), agile receiver offering integrated synthesizers and digital signal processing functions. The IC delivers a versatile combination of high performance and low power consumption required by 3G/4G/5G macrocell, frequency division duplex (FDD), base station applications.

The receive path consists of two independent, wide bandwidth, direct conversion receivers with state-of-the-art dynamic range. The complete receive subsystem includes automatic and manual attenuation control, dc offset correction, quadrature error correction (QEC), and digital filtering, eliminating the need for these functions in the digital baseband. RF front-end control and several auxiliary functions, such as analog-to-digital converters (ADCs), digital-to-analog converters (DACs), and general-purpose input/outputs (GPIOs) for the power amplifier (PA), are also integrated.

In addition to automatic gain control (AGC), the ADRV9008-1 also features flexible external gain control modes, allowing dynamic gain control.

The received signals are digitized with a set of four, high dynamic range, continuous time, sigma-delta ( $\Sigma\text{-}\Delta$ ) ADCs that provide inherent antialiasing. The combination of the direct conversion architecture (which does not suffer from out of band image mixing) and the lack of aliasing reduces the requirements of the RF filters compared to the requirements of traditional intermediate frequency (IF) receivers.

The fully integrated phase-locked loop (PLL) provides high performance, low power, fractional-N, RF synthesis for the receiver signal paths. An additional synthesizer generates the clocks needed for the converters, digital circuits, and serial interface. A multichip synchronization mechanism synchronizes the phase of the RF local oscillator (LO) and baseband clocks between multiple ADRV9008-1 chips. The ADRV9008-1 features the isolation that high performance base station applications require. All voltage controlled oscillators (VCOs) and loop filter components are integrated.

The high speed JESD204B interface supports up to 12.288 Gbps lane rates, resulting in a single lane per receiver in the widest bandwidth mode. The interface also supports interleaved mode for lower bandwidths, reducing the total number of high speed data interface lanes to one. Both fixed and floating point data formats are supported. The floating point format allows internal AGC to be invisible to the demodulator device.

The core of the ADRV9008-1 can be powered directly from 1.3 V and 1.8 V regulators and is controlled via a standard 4-wire serial port. Comprehensive power-down modes are included to minimize power consumption during normal use. The ADRV9008-1 is packaged in a 12 mm  $\times$  12 mm, 196-ball chip scale ball grid array (CSP\_BGA).

**TABLE OF CONTENTS**

|                                                   |    |                                                      |    |
|---------------------------------------------------|----|------------------------------------------------------|----|
| Features .....                                    | 1  | Theory of Operation .....                            | 47 |
| Applications.....                                 | 1  | Receivers.....                                       | 47 |
| General Description .....                         | 1  | Clock Input.....                                     | 47 |
| Revision History .....                            | 2  | Synthesizers.....                                    | 47 |
| Functional Block Diagram .....                    | 3  | SPI.....                                             | 47 |
| Specifications.....                               | 4  | JTAG Boundary Scan.....                              | 47 |
| Current and Power Consumption Specifications..... | 8  | Power Supply Sequence .....                          | 47 |
| Timing Diagrams.....                              | 9  | GPIO_x Pins .....                                    | 48 |
| Absolute Maximum Ratings.....                     | 10 | Auxiliary Converters.....                            | 48 |
| Reflow Profile.....                               | 10 | JESD204B Data Interface .....                        | 48 |
| Thermal Management .....                          | 10 | Applications Information .....                       | 49 |
| Thermal Resistance .....                          | 10 | PCB Layout and Power Supply Recommendations.....     | 49 |
| ESD Caution.....                                  | 10 | PCB Material and Stackup Selection .....             | 49 |
| Pin Configuration and Function Descriptions.....  | 11 | Fanout and Trace Space Guidelines .....              | 51 |
| Typical Performance Characteristics .....         | 17 | Component Placement and Routing Guidelines .....     | 52 |
| 75 MHz to 525 MHz Band .....                      | 17 | RF and JESD204B Transmission Line Layout .....       | 58 |
| 650 MHz to 3000 MHz Band.....                     | 25 | Isolation Techniques Used on the ADRV9008-1W/PCBZ... | 60 |
| 3400 MHz to 4800 MHz Band.....                    | 33 | RF Port Interface Information.....                   | 61 |
| 5100 MHz to 5900 MHz Band.....                    | 40 | Outline Dimensions .....                             | 68 |
| Receiver Input Impedance.....                     | 45 | Ordering Guide .....                                 | 68 |
| Terminology .....                                 | 46 |                                                      |    |

**REVISION HISTORY**

9/2018—Revision 0: Initial Version

# FUNCTIONAL BLOCK DIAGRAM

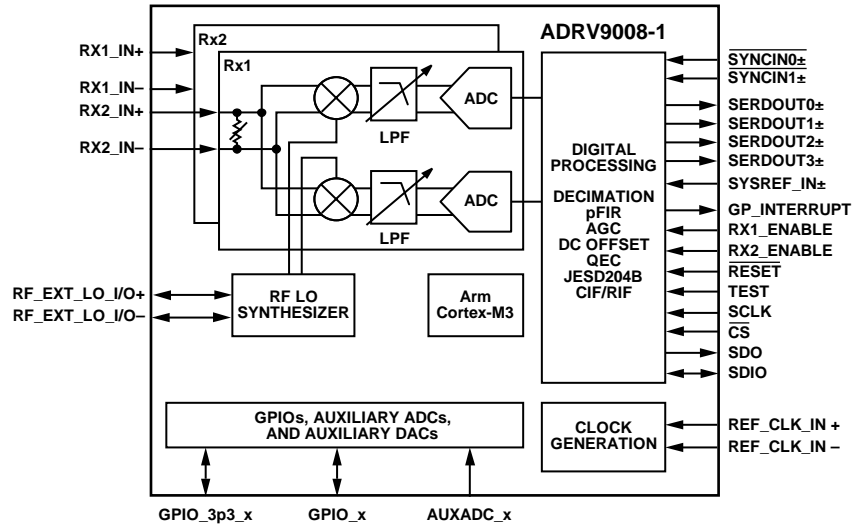


Figure 1.

1683D-001

**SPECIFICATIONS**

Electrical characteristics at  $VDDA1P3^1 = 1.3\text{ V}$ ,  $VDDD1P3\_DIG = 1.3\text{ V}$ ,  $T_j =$  full operating temperature range, and LO frequency ( $f_{LO}$ ) = 1800 MHz, unless otherwise noted. The specifications in Table 1 are not de-embedded. Refer to the Typical Performance Characteristics section for input/output circuit path loss. The device configuration profile for the 75 MHz to 525 MHz frequency range is as follows: receiver = 50 MHz bandwidth (inphase quadrature (I/Q) rate = 61.44 MHz), JESD204B rate = 9.8304 GSPS, and device clock = 245.76 MHz. Unless otherwise specified, the device configuration for all other frequency ranges is as follows: receiver = 200 MHz bandwidth (I/Q rate = 245.76 MHz), JESD204B rate = 9.8304 GSPS, and device clock = 245.76 MHz.

**Table 1.**

| Parameter                         | Symbol     | Min | Typ       | Max  | Unit | Test Conditions/Comments                                                                                                                                    |
|-----------------------------------|------------|-----|-----------|------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>RECEIVERS</b>                  |            |     |           |      |      |                                                                                                                                                             |
| Center Frequency                  |            | 75  |           | 6000 | MHz  |                                                                                                                                                             |
| Gain Range                        |            |     | 30        |      | dB   |                                                                                                                                                             |
| Analog Gain Step                  |            |     | 0.5       |      | dB   | Attenuator steps from 0 dB to 6 dB                                                                                                                          |
| Bandwidth Ripple                  |            |     | 1         |      | dB   | Attenuator steps from 6 dB to 30 dB                                                                                                                         |
|                                   |            |     | $\pm 0.5$ |      | dB   | 200 MHz bandwidth, compensated by programmable finite impulse response (FIR) filter                                                                         |
| Receiver (Rx) Bandwidth           |            |     | $\pm 0.2$ |      | dB   | Any 20 MHz bandwidth span, compensated by programmable FIR filter                                                                                           |
|                                   |            |     |           | 200  | MHz  |                                                                                                                                                             |
| Receiver Alias Band Rejection     |            | 80  |           |      | dB   | Due to digital filters                                                                                                                                      |
| Maximum Useable Input Level       | $P_{HIGH}$ |     |           |      |      | 0 dB attenuation, increases decibel for decibel with attenuation, continuous wave (CW) = 1800 MHz, corresponds to -1 dBFS at ADC                            |
| Noise Figure                      | NF         |     | -11       |      | dBm  | 75 MHz < f ≤ 3000 MHz                                                                                                                                       |
|                                   |            |     | -10.2     |      | dBm  | 3000 MHz < f ≤ 4800 MHz                                                                                                                                     |
|                                   |            |     | -9.5      |      | dBm  | 4800 MHz < f ≤ 6000 MHz                                                                                                                                     |
|                                   |            |     |           |      | dB   | 0 dB attenuation, at receiver port                                                                                                                          |
| Ripple                            |            |     | 11.5      |      | dB   | 75 MHz < f ≤ 600 MHz                                                                                                                                        |
|                                   |            |     | 12        |      | dB   | 600 MHz < f ≤ 3000 MHz                                                                                                                                      |
|                                   |            |     | 13        |      | dB   | 3000 MHz < f ≤ 4800 MHz                                                                                                                                     |
|                                   |            |     | 15.2      |      | dB   | 4800 MHz < f ≤ 6000 MHz                                                                                                                                     |
| Input Third-Order Intercept Point | IIP3       |     | 1.8       |      | dB   | At band edge maximum bandwidth mode                                                                                                                         |
| Difference Product                |            |     | 12        |      | dBm  | 75 MHz < f ≤ 600 MHz, ( $P_{HIGH} - 12$ ) dB per tone; 600 MHz < f ≤ 6000 MHz, ( $P_{HIGH} - 10$ ) dB per tone; two tones near band edge                    |
| Sum Product                       |            |     | 12        |      | dBm  | 75 MHz < f ≤ 600 MHz, ( $P_{HIGH} - 12$ ) dB per tone; 600 MHz < f ≤ 6000 MHz, ( $P_{HIGH} - 10$ ) dB per tone; two tones at bandwidth/6 offset from the LO |
| Third-Order Harmonic Distortion   | HD3        |     |           |      |      | 75 MHz < f ≤ 600 MHz, ( $P_{HIGH} - 6$ ) dB; 600 MHz < f ≤ 6000 MHz, ( $P_{HIGH} - 4$ ) dB; CW tone at bandwidth/6 offset from the LO                       |
|                                   |            |     | -65       |      | dBc  | 75 MHz < f ≤ 600 MHz                                                                                                                                        |
|                                   |            |     | -66       |      | dBc  | 600 MHz < f ≤ 4800 MHz                                                                                                                                      |
|                                   |            |     | -62       |      | dBc  | 4800 MHz < f ≤ 6000 MHz                                                                                                                                     |

| Parameter                                                  | Symbol | Min | Typ    | Max | Unit   | Test Conditions/Comments                                                                                                                            |
|------------------------------------------------------------|--------|-----|--------|-----|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Second-Order Input Intermodulation Intercept Point         | IIP2   |     | 62     |     | dBm    | 75 MHz < f ≤ 600 MHz, (P <sub>HIGH</sub> - 12) dB per tone; 600 MHz < f ≤ 6000 MHz, (P <sub>HIGH</sub> - 10) dB per tone; 0 dB attenuation, complex |
| Image Rejection                                            |        |     | 75     |     | dB     | QEC active, within 200 MHz receiver bandwidth                                                                                                       |
| Input Impedance                                            |        |     | 100    |     | Ω      | Differential (see Figure 168)                                                                                                                       |
| Receiver to Receiver Isolation                             |        |     | 77     |     | dB     | 75 MHz < f ≤ 600 MHz                                                                                                                                |
|                                                            |        |     | 65     |     | dB     | 600 MHz < f ≤ 4800 MHz                                                                                                                              |
|                                                            |        |     | 61     |     | dB     | 4800 MHz < f ≤ 6000 MHz                                                                                                                             |
| Receiver Band Spurs Referenced to RF Input at Maximum Gain |        |     | -95    |     | dBm    | No more than one spur at this level per 10 MHz of receiver bandwidth                                                                                |
| Receiver LO Leakage at Receiver Input at Maximum Gain      |        |     |        |     |        | Leakage decreases decibel for decibel with attenuation for first 12 dB                                                                              |
|                                                            |        |     | -70    |     | dBm    | 75 MHz < f ≤ 600 MHz                                                                                                                                |
|                                                            |        |     | -70    |     | dBm    | 600 MHz < f ≤ 3000 MHz                                                                                                                              |
|                                                            |        |     | -65    |     | dBm    | 3000 MHz < f ≤ 6000 MHz                                                                                                                             |
| <b>LO SYNTHESIZER</b>                                      |        |     |        |     |        |                                                                                                                                                     |
| LO Frequency Step                                          |        |     | 2.3    |     | Hz     | 1.5 GHz to 2.8 GHz, 76.8 MHz phase frequency detector (PFD) frequency                                                                               |
| LO Spur                                                    |        |     | -85    |     | dBc    | Excludes integer boundary spurs                                                                                                                     |
| Integrated Phase Noise                                     |        |     |        |     |        | 2 kHz to 18 MHz                                                                                                                                     |
| 75 MHz LO                                                  |        |     | 0.014  |     | °rms   | Narrow PLL loop bandwidth (50 kHz)                                                                                                                  |
| 1900 MHz LO                                                |        |     | 0.2    |     | °rms   | Narrow PLL loop bandwidth (50 kHz)                                                                                                                  |
| 3800 MHz LO                                                |        |     | 0.36   |     | °rms   | Wide PLL loop bandwidth (300 kHz)                                                                                                                   |
| 5900 MHz LO                                                |        |     | 0.54   |     | °rms   | Wide PLL loop bandwidth (300 kHz)                                                                                                                   |
| Spot Phase Noise                                           |        |     |        |     |        |                                                                                                                                                     |
| 75 MHz LO                                                  |        |     |        |     |        | Narrow PLL loop bandwidth                                                                                                                           |
| 10 kHz Offset                                              |        |     | -126.5 |     | dBc/Hz |                                                                                                                                                     |
| 100 kHz Offset                                             |        |     | -132.8 |     | dBc/Hz |                                                                                                                                                     |
| 1 MHz Offset                                               |        |     | -150.1 |     | dBc/Hz |                                                                                                                                                     |
| 10 MHz Offset                                              |        |     | -150.7 |     | dBc/Hz |                                                                                                                                                     |
| 1900 MHz LO                                                |        |     |        |     |        | Narrow PLL loop bandwidth                                                                                                                           |
| 100 kHz Offset                                             |        |     | -100   |     | dBc/Hz |                                                                                                                                                     |
| 200 kHz Offset                                             |        |     | -115   |     | dBc/Hz |                                                                                                                                                     |
| 400 kHz Offset                                             |        |     | -120   |     | dBc/Hz |                                                                                                                                                     |
| 600 kHz Offset                                             |        |     | -129   |     | dBc/Hz |                                                                                                                                                     |
| 800 kHz Offset                                             |        |     | -132   |     | dBc/Hz |                                                                                                                                                     |
| 1.2 MHz Offset                                             |        |     | -135   |     | dBc/Hz |                                                                                                                                                     |
| 1.8 MHz Offset                                             |        |     | -140   |     | dBc/Hz |                                                                                                                                                     |
| 6 MHz Offset                                               |        |     | -150   |     | dBc/Hz |                                                                                                                                                     |
| 10 MHz Offset                                              |        |     | -153   |     | dBc/Hz |                                                                                                                                                     |
| 3800 MHz LO                                                |        |     |        |     |        | Wide PLL loop bandwidth                                                                                                                             |
| 100 kHz Offset                                             |        |     | -104   |     | dBc/Hz |                                                                                                                                                     |
| 1.2 MHz Offset                                             |        |     | -125   |     | dBc/Hz |                                                                                                                                                     |
| 10 MHz Offset                                              |        |     | -145   |     | dBc/Hz |                                                                                                                                                     |
| 5900 MHz LO                                                |        |     |        |     |        | Wide PLL loop bandwidth                                                                                                                             |
| 100 kHz Offset                                             |        |     | -99    |     | dBc/Hz |                                                                                                                                                     |
| 1.2 MHz Offset                                             |        |     | -119.7 |     | dBc/Hz |                                                                                                                                                     |
| 10 MHz Offset                                              |        |     | -135.4 |     | dBc/Hz |                                                                                                                                                     |
| <b>LO PHASE SYNCHRONIZATION</b>                            |        |     |        |     |        |                                                                                                                                                     |
| Phase Deviation                                            |        |     | 1.6    |     | ps/°C  | Change in LO delay per temperature change                                                                                                           |

| Parameter                                                                      | Symbol      | Min                               | Typ                    | Max                               | Unit           | Test Conditions/Comments                                                                                      |
|--------------------------------------------------------------------------------|-------------|-----------------------------------|------------------------|-----------------------------------|----------------|---------------------------------------------------------------------------------------------------------------|
| EXTERNAL LO INPUT                                                              |             |                                   |                        |                                   |                |                                                                                                               |
| Input Frequency                                                                | $f_{EXTLO}$ | 300                               |                        | 8000                              | MHz            | Input frequency must be 2x the desired LO frequency                                                           |
| Input Signal Power                                                             |             | 0                                 |                        | 12                                | dBm            | 50 $\Omega$ matching at the source                                                                            |
|                                                                                |             |                                   | 3                      |                                   | dBm            | $f_{EXTLO} \leq 2$ GHz, add 0.5 dBm/GHz above 2 GHz                                                           |
| External LO Input Signal Differential                                          |             |                                   | 6                      |                                   | dBm            | $f_{EXTLO} = 8$ GHz<br>To ensure adequate QEC                                                                 |
| Phase Error                                                                    |             |                                   |                        | 3.6                               | ps             |                                                                                                               |
| Amplitude Error                                                                |             |                                   |                        | 1                                 | dB             |                                                                                                               |
| Duty Cycle Error                                                               |             |                                   |                        | 2                                 | %              |                                                                                                               |
| Even Order Harmonics                                                           |             |                                   |                        | -50                               | dBc            |                                                                                                               |
| CLOCK SYNTHESIZER                                                              |             |                                   |                        |                                   |                |                                                                                                               |
| Integrated Phase Noise<br>1966.08 MHz LO                                       |             |                                   | 0.4                    |                                   | $^{\circ}$ rms | 1 kHz to 100 MHz<br>PLL optimized for close in phase noise                                                    |
| Spot Phase Noise<br>1966.08 MHz                                                |             |                                   |                        |                                   |                |                                                                                                               |
| 100 kHz Offset                                                                 |             |                                   | -109                   |                                   | dBc/Hz         |                                                                                                               |
| 1 MHz Offset                                                                   |             |                                   | -129                   |                                   | dBc/Hz         |                                                                                                               |
| 10 MHz Offset                                                                  |             |                                   | -149                   |                                   | dBc/Hz         |                                                                                                               |
| REFERENCE CLOCK<br>(REF_CLK_IN $\pm$ )                                         |             |                                   |                        |                                   |                |                                                                                                               |
| Frequency Range                                                                |             | 10                                |                        | 1000                              | MHz            |                                                                                                               |
| Signal Level                                                                   |             | 0.3                               |                        | 2.0                               | V p-p          | AC-coupled, common-mode voltage ( $V_{CM}$ ) = 618 mV, use <1 V p-p input clock for best spurious performance |
| AUXILIARY CONVERTERS                                                           |             |                                   |                        |                                   |                |                                                                                                               |
| ADC                                                                            |             |                                   |                        |                                   |                |                                                                                                               |
| Resolution                                                                     |             |                                   | 12                     |                                   | Bits           |                                                                                                               |
| Input Voltage                                                                  |             |                                   |                        |                                   |                |                                                                                                               |
| Minimum                                                                        |             |                                   | 0.05                   |                                   | V              |                                                                                                               |
| Maximum                                                                        |             |                                   | VDDA_<br>3P3 -<br>0.05 |                                   | V              |                                                                                                               |
| DAC                                                                            |             |                                   |                        |                                   |                |                                                                                                               |
| Resolution                                                                     |             |                                   | 10                     |                                   | Bits           | Includes four offset levels                                                                                   |
| Output Voltage                                                                 |             |                                   |                        |                                   |                |                                                                                                               |
| Minimum                                                                        |             |                                   | 0.7                    |                                   | V              | 1 V $V_{REF}$                                                                                                 |
| Maximum                                                                        |             |                                   | VDDA_<br>3P3 -<br>0.3  |                                   | V              | 2.5 V $V_{REF}$                                                                                               |
| Output Drive Capability                                                        |             |                                   | 10                     |                                   | mA             |                                                                                                               |
| DIGITAL SPECIFICATIONS<br>(CMOS): SERIAL PERIPHERAL<br>INTERFACE (SPI), GPIO_x |             |                                   |                        |                                   |                |                                                                                                               |
| Logic Inputs                                                                   |             |                                   |                        |                                   |                |                                                                                                               |
| Input Voltage                                                                  |             |                                   |                        |                                   |                |                                                                                                               |
| High Level                                                                     |             | VDD_<br>INTERFACE<br>$\times 0.8$ |                        | VDD_<br>INTERFACE                 | V              |                                                                                                               |
| Low Level                                                                      |             | 0                                 |                        | VDD_<br>INTERFACE<br>$\times 0.2$ | V              |                                                                                                               |
| Input Current                                                                  |             |                                   |                        |                                   |                |                                                                                                               |
| High Level                                                                     |             | -10                               |                        | +10                               | $\mu$ A        |                                                                                                               |

| Parameter                                                                        | Symbol    | Min                               | Typ | Max                               | Unit          | Test Conditions/Comments                             |
|----------------------------------------------------------------------------------|-----------|-----------------------------------|-----|-----------------------------------|---------------|------------------------------------------------------|
| Low Level<br>Logic Outputs<br>Output Voltage<br>High Level                       |           | -10                               |     | +10                               | $\mu\text{A}$ |                                                      |
| Low Level                                                                        |           | VDD_<br>INTERFACE<br>$\times 0.8$ |     | VDD_<br>INTERFACE<br>$\times 0.2$ | V             |                                                      |
| Drive Capability                                                                 |           |                                   | 3   |                                   | mA            |                                                      |
| <b>DIGITAL SPECIFICATIONS (CMOS): GPIO_3p3_x</b>                                 |           |                                   |     |                                   |               |                                                      |
| Logic Inputs<br>Input Voltage<br>High Level                                      |           | VDDA_<br>3P3 $\times 0.8$         |     | VDDA_3P3                          | V             |                                                      |
| Low Level                                                                        |           | 0                                 |     | VDDA_<br>3P3 $\times 0.2$         | V             |                                                      |
| Input Current<br>High Level                                                      |           | -10                               |     | +10                               | $\mu\text{A}$ |                                                      |
| Low Level                                                                        |           | -10                               |     | +10                               | $\mu\text{A}$ |                                                      |
| Logic Outputs<br>Output Voltage<br>High Level                                    |           | VDDA_<br>3P3 $\times 0.8$         |     |                                   | V             |                                                      |
| Low Level                                                                        |           |                                   |     | VDDA_<br>3P3 $\times 0.2$         | V             |                                                      |
| Drive Capability                                                                 |           |                                   | 4   |                                   | mA            |                                                      |
| <b>DIGITAL SPECIFICATIONS, LOW VOLTAGE DIFFERENTIAL SIGNALING (LVDS)</b>         |           |                                   |     |                                   |               |                                                      |
| Logic Inputs (SYSREF_IN $\pm$ , SYNCIN $\times\pm$ )                             |           |                                   |     |                                   |               |                                                      |
| Input Voltage Range                                                              |           | 825                               |     | 1675                              | mV            | Each differential input in the pair                  |
| Input Differential Voltage Threshold                                             |           | -100                              |     | +100                              | mV            |                                                      |
| Receiver Differential Input Impedance                                            |           |                                   | 100 |                                   | $\Omega$      | Internal termination enabled                         |
| <b>SPI TIMING</b>                                                                |           |                                   |     |                                   |               |                                                      |
| SCLK Period                                                                      | $t_{CP}$  | 20                                |     |                                   | ns            | See the <a href="#">UG-1295</a> for more information |
| SCLK Pulse Width                                                                 | $t_{MP}$  | 10                                |     |                                   | ns            |                                                      |
| $\overline{\text{CS}}$ Setup to First SCLK Rising Edge                           | $t_{SC}$  | 3                                 |     |                                   | ns            |                                                      |
| Last SCLK Falling Edge to $\overline{\text{CS}}$ Hold                            | $t_{HC}$  | 0                                 |     |                                   | ns            |                                                      |
| SDIO Data Input Setup to SCLK                                                    | $t_S$     | 2                                 |     |                                   | ns            |                                                      |
| SDIO Data Input Hold to SCLK                                                     | $t_H$     | 0                                 |     |                                   | ns            |                                                      |
| SCLK Rising Edge to Output Data Delay (3-Wire Mode or 4-Wire Mode)               | $t_{CO}$  | 3                                 |     | 8                                 | ns            |                                                      |
| Bus Turnaround Time, Read After Baseband Processor (BBP) Drives Last Address Bit | $t_{HZM}$ | $t_H$                             |     | $t_{CO}$                          | ns            |                                                      |

| Parameter                                                       | Symbol         | Min   | Typ    | Max      | Unit         | Test Conditions/Comments                                                                                                                 |
|-----------------------------------------------------------------|----------------|-------|--------|----------|--------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Bus Turnaround Time, Read After ADRV9008-1 Drives Last Data Bit | $t_{HZS}$      | 0     |        | $t_{CO}$ | ns           |                                                                                                                                          |
| <b>JESD204B DATA OUTPUT TIMING</b>                              |                |       |        |          |              |                                                                                                                                          |
| Unit Interval                                                   | UI             | 81.38 |        | 320      | ps           | AC-coupled                                                                                                                               |
| Data Rate Per Channel (NRZ)                                     |                | 3125  |        | 12288    | Mbps         |                                                                                                                                          |
| Rise Time                                                       | $t_R$          | 24    | 39.5   |          | ps           | 20% to 80% in 100 $\Omega$ load                                                                                                          |
| Fall Time                                                       | $t_F$          | 24    | 39.4   |          | ps           | 20% to 80% in 100 $\Omega$ load                                                                                                          |
| Output Common-Mode Voltage                                      | $V_{CM}$       | 0     |        | 1.8      | V            | AC-coupled                                                                                                                               |
| Differential Output Voltage                                     | $V_{DIFF}$     | 360   | 600    | 770      | mV           |                                                                                                                                          |
| Short-Circuit Current                                           | $I_{DSHORT}$   | -100  |        | +100     | mA           |                                                                                                                                          |
| Differential Termination Impedance                              |                | 80    | 94.2   | 120      | $\Omega$     |                                                                                                                                          |
| Total Jitter                                                    |                |       | 15.13  |          | ps           | Bit error rate (BER) = $10^{-15}$                                                                                                        |
| Uncorrelated Bounded High Probability Jitter                    | UBHPJ          |       | 0.56   |          | ps           |                                                                                                                                          |
| Duty Cycle Distortion                                           | DCD            |       | 0.369  |          | ps           |                                                                                                                                          |
| SYSREF_IN $\pm$ Setup Time to REF_CLK_IN $\pm$                  |                | 2.5   |        |          | ns           | See Figure 2                                                                                                                             |
| SYSREF_IN $\pm$ Hold Time to REF_CLK_IN $\pm$                   |                | -1.5  |        |          | ns           | See Figure 2                                                                                                                             |
| Latency                                                         | $t_{LAT\_FRM}$ |       | 89.4   |          | Clock cycles | REF_CLK_IN $\pm$ = 245.76 MHz<br>Receiver bandwidth = 200 MHz, IQ rate = 245.76 MHz, lane rate = 9830.4 MHz, M = 2, L = 2, N = 16, S = 1 |
|                                                                 |                |       | 364.18 |          | ns           |                                                                                                                                          |

<sup>1</sup> VDDA1P3 refers to all analog 1.3 V supplies, including VDDA1P3\_RF\_SYNTH, VDDA1P3\_BB, VDDA1P3\_RX\_RF, VDDA1P3\_RF\_VCO\_LDO, VDDA1P3\_RF\_LO, VDDA1P3\_SER, VDDA1P3\_CLOCK\_SYNTH, VDDA1P3\_CLOCK\_VCO\_LDO, VDDA1P3\_AUX\_SYNTH, and VDDA1P3\_AUX\_VCO\_LDO.

**CURRENT AND POWER CONSUMPTION SPECIFICATIONS**


Table 2.

| Parameter                          | Min   | Typ  | Max   | Unit | Test Conditions/Comments                                                                                        |
|------------------------------------|-------|------|-------|------|-----------------------------------------------------------------------------------------------------------------|
| <b>SUPPLY CHARACTERISTICS</b>      |       |      |       |      |                                                                                                                 |
| VDDA1P3 <sup>1</sup> Analog Supply | 1.267 | 1.3  | 1.33  | V    |                                                                                                                 |
| VDDD1P3_DIG Supply                 | 1.267 | 1.3  | 1.33  | V    |                                                                                                                 |
| VDDA1P8_AN Supply                  | 1.71  | 1.8  | 1.89  | V    |                                                                                                                 |
| VDDA1P8_BB Supply                  | 1.71  | 1.8  | 1.89  | V    |                                                                                                                 |
| VDD_INTERFACE Supply               | 1.71  | 1.8  | 2.625 | V    | CMOS and LVDS supply, 1.8 V to 2.5 V nominal range                                                              |
| VDDA_3P3 Supply                    | 3.135 | 3.3  | 3.465 | V    |                                                                                                                 |
| <b>POSITIVE SUPPLY CURRENT</b>     |       |      |       |      |                                                                                                                 |
| 200 MHz Receiver Bandwidth         |       |      |       |      | LO at 2600 MHz<br>Two receivers enabled                                                                         |
| VDDA1P3 <sup>1</sup> Analog Supply |       | 1645 |       | mA   |                                                                                                                 |
| VDDD1P3_DIG Supply                 |       | 984  |       | mA   | Receiver QEC active                                                                                             |
| VDDA1P8_AN Supply                  |       | 0.4  |       | mA   |                                                                                                                 |
| VDDA1P8_BB Supply                  |       | 68   |       | mA   |                                                                                                                 |
| VDD_INTERFACE Supply               |       | 8    |       | mA   |                                                                                                                 |
| VDDA_3P3 Supply                    |       | 3    |       | mA   | No Auxiliary DAC x or AUXADC_x enabled (if enabled, AUXADC_x adds 2.7 mA, and each Auxiliary DAC x adds 1.5 mA) |
| Total Power Dissipation            |       | 3.57 |       | W    | Typical supply voltages, receiver QEC active                                                                    |

<sup>1</sup> VDDA1P3 refers to all analog 1.3 V supplies, including VDDA1P3\_RF\_SYNTH, VDDA1P3\_BB, VDDA1P3\_RX\_RF, VDDA1P3\_RX, VDDA1P3\_RF\_VCO\_LDO, VDDA1P3\_RF\_LO, VDDA1P3\_SER, VDDA1P3\_CLOCK\_SYNTH, VDDA1P3\_CLOCK\_VCO\_LDO, VDDA1P3\_AUX\_SYNTH, and VDDA1P3\_AUX\_VCO\_LDO.



TIMING DIAGRAMS

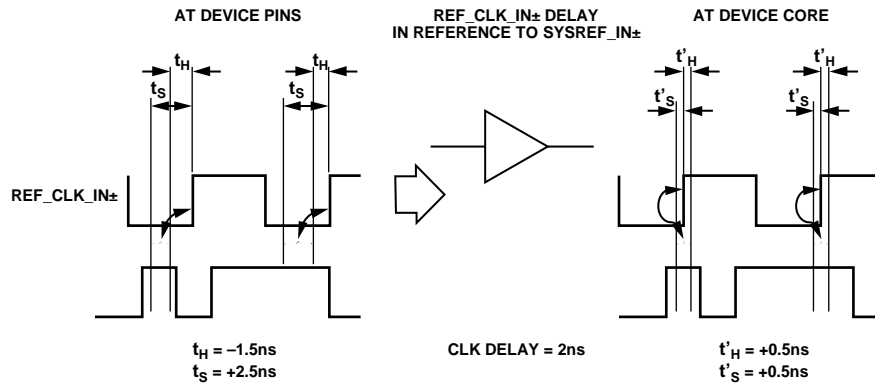


NOTES

1.  $t_H$  AND  $t_S$  ARE THE HOLD AND SETUP TIMES FOR THE REF\_CLK\_IN± PINS.  $t'_H$  AND  $t'_S$  REFER TO THE DELAYED HOLD AND SETUP TIMES AT THE DEVICE CORE IN REFERENCE TO THE SYSREF\_IN± SIGNALS DUE TO AN INTERNAL BUFFER THAT THE SIGNAL PASSES THROUGH.

16830-005

Figure 2. SYSREF\_IN± Setup and Hold Timing

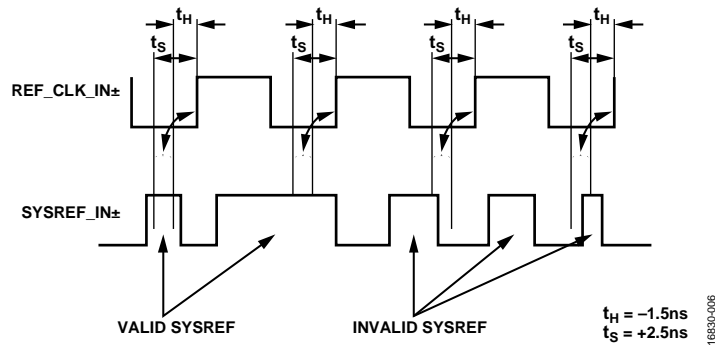

16830-006

Figure 3. SYSREF\_IN± Setup and Hold Timing Examples, Relative to Device Clock

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                                      | Rating                          |
|------------------------------------------------|---------------------------------|
| VDDA1P3 <sup>1</sup> to VSSA                   | -0.3 V to +1.4 V                |
| VDDD1P3_DIG to VSSD                            | -0.3 V to +1.4 V                |
| VDD_INTERFACE to VSSA                          | -0.3 V to +3.0 V                |
| VDDA_3P3 to VSSA                               | -0.3 V to +3.9 V                |
| VDD_INTERFACE Logic Inputs and Outputs to VSSD | -0.3 V to VDD_INTERFACE + 0.3 V |
| JESD204B Logic Outputs to VSSA                 | -0.3 V to VDDA1P3_SER           |
| Input Current to Any Pin Except Supplies       | ±10 mA                          |
| Maximum Input Power into RF Port               | 23 dBm (peak)                   |
| Maximum Junction Temperature                   | 110°C                           |
| Storage Temperature Range                      | -65°C to +150°C                 |

<sup>1</sup> VDDA1P3 refers to all analog 1.3 V supplies, including VDDA1P3\_RF\_SYNTH, VDDA1P3\_BB, VDDA1P3\_RX\_RF, VDDA1P3\_RX, VDDA1P3\_RF\_VCO\_LDO, VDDA1P3\_RF\_LO, VDDA1P3\_CLOCK\_SYNTH, VDDA1P3\_CLOCK\_SYNTH, and VDDA1P3\_CLOCK\_VCO\_LDO.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### REFLOW PROFILE

The ADRV9008-1 reflow profile is in accordance with the JEDEC JESD204B criteria for Pb-free devices. The maximum reflow temperature is 260°C.

### THERMAL MANAGEMENT

The ADRV9008-1 is a high power device that can dissipate over 3 W depending on the user application and configuration. Because of the power dissipation, the ADRV9008-1 uses an

exposed die package to provide the customer with the most effective method of controlling the die temperature. The exposed die allows cooling of the die directly. Figure 4 shows the profile view of the device mounted to a user printed circuit board (PCB) and a heat sink (typically the aluminum case) to keep the junction (exposed die) below the maximum junction temperature shown in Table 3. The device is designed for a lifetime of 10 years when operating at the maximum junction temperature.

### THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages. Thermal resistance data for the ADRV9008-1 mounted on both a JEDEC 2S2P test board and a 10-layer Analog Devices, Inc., evaluation board is listed in Table 4. Do not exceed the absolute maximum junction temperature rating in Table 3. Ten-layer PCB entries refer to the 10-layer Analog Devices evaluation board, which more accurately reflects the PCB used in customer applications.

Table 4. Thermal Resistance<sup>1,2</sup>

| Package Type | $\theta_{JA}$ | $\theta_{JC\_TOP}$ | $\theta_{JB}$ | $\Psi_{JT}$ | $\Psi_{JB}$ | Unit |
|--------------|---------------|--------------------|---------------|-------------|-------------|------|
| BC-196-13    | 21.1          | 0.04               | 4.9           | 0.3         | 4.9         | °C/W |

<sup>1</sup> For the  $\theta_{JC}$  test, 100  $\mu$ m thermal interface material (TIM) is used. TIM is assumed to have 3.6 thermal conductivity watts/(meter  $\times$  Kelvin).

<sup>2</sup> Using enhanced heat removal techniques such as PCB, heat sink, and airflow improves the thermal resistance values.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

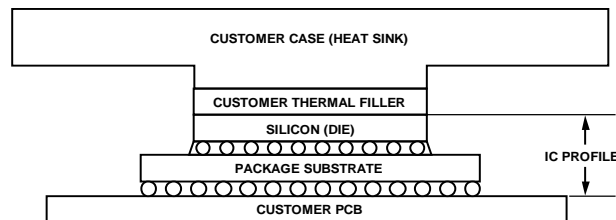


Figure 4. Typical Thermal Management Solution

### PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

|   | 1                     | 2          | 3          | 4          | 5                   | 6                  | 7                | 8                 | 9              | 10                  | 11          | 12            | 13          | 14          |
|---|-----------------------|------------|------------|------------|---------------------|--------------------|------------------|-------------------|----------------|---------------------|-------------|---------------|-------------|-------------|
| A | VSSA                  | VSSA       | VSSA       | VSSA       | RX2_IN+             | RX2_IN-            | VSSA             | VSSA              | RX1_IN+        | RX1_IN-             | VSSA        | VSSA          | VSSA        | VSSA        |
| B | VDDA1P3_RX_RF-        | VSSA       | VSSA       | VSSA       | VSSA                | VSSA               | RF_EXT_LO_I/O-   | RF_EXT_LO_I/O+    | VSSA           | VSSA                | VSSA        | VSSA          | VSSA        | VSSA        |
| C | GPIO_3p3_0            | GPIO_3p3_3 | VDDA1P3_RX | VSSA       | VDDA1P3_RF_VCO_LDO  | VDDA1P3_RF_VCO_LDO | VDDA1P1_RF_VCO   | VDDA1P3_RF_LO     | VSSA           | VDDA1P3_AUX_VCO_LDO | VSSA        | VDDA_3P3      | GPIO_3p3_9  | RBIAS       |
| D | GPIO_3p3_1            | GPIO_3p3_4 | VSSA       | VSSA       | VSSA                | VSSA               | VSSA             | VSSA              | VSSA           | VDDA1P1_AUX_VCO     | VSSA        | VSSA          | GPIO_3p3_8  | GPIO_3p3_10 |
| E | GPIO_3p3_2            | GPIO_3p3_5 | GPIO_3p3_6 | VDDA1P8_BB | VDDA1P3_BB          | VSSA               | REF_CLK_IN+      | REF_CLK_IN-       | VSSA           | AUX_SYNTH_OUT       | AUXADC_3    | VDDA1P8_AN    | GPIO_3p3_7  | GPIO_3p3_11 |
| F | VSSA                  | VSSA       | AUXADC_0   | AUXADC_1   | VSSA                | VSSA               | VSSA             | VSSA              | VSSA           | VSSA                | AUXADC_2    | VSSA          | VSSA        | VSSA        |
| G | VSSA                  | VSSA       | VSSA       | VSSA       | VDDA1P3_CLOCK_SYNTH | VSSA               | VDDA1P3_RF_SYNTH | VDDA1P3_AUX_SYNTH | RF_SYNTH_VTUNE | VSSA                | VSSA        | VSSA          | VSSA        | VSSA        |
| H | DNC                   | VSSA       | VSSA       | VSSA       | VSSA                | VSSA               | VSSA             | VSSA              | VSSA           | VSSA                | GPIO_12     | GPIO_11       | VSSA        | DNC         |
| J | DNC                   | VSSA       | GPIO_18    | RESET      | GP_INTERRUPT        | TEST               | GPIO_2           | GPIO_1            | SDIO           | SDO                 | GPIO_13     | GPIO_10       | VSSA        | DNC         |
| K | VSSA                  | VSSA       | SYSREF_IN+ | SYSREF_IN- | GPIO_5              | GPIO_4             | GPIO_3           | GPIO_0            | SCLK           | CS                  | GPIO_14     | GPIO_9        | VSSA        | VSSA        |
| L | VSSA                  | VSSA       | SYNCIN1-   | SYNCIN1+   | GPIO_6              | GPIO_7             | VSSD             | VDDD1P3_DIG       | VDDD1P3_DIG    | VSSD                | GPIO_15     | GPIO_8        | VDDA1P3_SER | VDDA1P3_SER |
| M | VDDA1P1_CLOCK_VCO     | VSSA       | SYNCIN0-   | SYNCIN0+   | RX1_ENABLE          | VSSD               | RX2_ENABLE       | VSSD              | VSSA           | GPIO_17             | GPIO_16     | VDD_INTERFACE | VDDA1P3_SER | VDDA1P3_SER |
| N | VDDA1P3_CLOCK_VCO_LDO | VSSA       | SERDOUT3-  | SERDOUT3+  | SERDOUT2-           | SERDOUT2+          | VSSA             | VDDA1P3_SER       | VDDA1P3_SER    | VDDA1P3_SER         | VDDA1P3_SER | VDDA1P3_SER   | VDDA1P3_SER | VSSA        |
| P | AUX_SYNTH_VTUNE       | VSSA       | VSSA       | SERDOUT1-  | SERDOUT1+           | SERDOUT0-          | SERDOUT0+        | VDDA1P3_SER       | VDDA1P3_SER    | VSSA                | VDDA1P3_SER | VDDA1P3_SER   | VDDA1P3_SER | VDDA1P3_SER |

ADRV9008-1

Figure 5. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No.                                                                                                                                                                                                                                  | Type  | Mnemonic | Description                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|-------------------------------------------|
| A1 to A4, A7, A8, A11 to A14, B2 to B6, B9 to B14, C4, C9, C11, D3 to D9, D11, D12, E6, E9, F1, F2, F5 to F10, F12 to F14, G1 to G4, G6, G10 to G14, H2 to H10, H13, J2, J13, K1, K2, K13, K14, L1, L2, M2, M9, N2, N7, N14, P2, P3, P10 | Input | VSSA     | Analog Supply Voltage (V <sub>SS</sub> ). |

| Pin No. | Type             | Mnemonic                          | Description                                                                                                                                                                                                                                                                                                                                             |
|---------|------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A5, A6  | Input            | RX2_IN+, RX2_IN-                  | Differential Input for Receiver 1. When unused, connect these pins to ground.                                                                                                                                                                                                                                                                           |
| A9, A10 | Input            | RX1_IN+, RX1_IN-                  | Differential Input for Receiver 2. When unused, connect these pins to ground.                                                                                                                                                                                                                                                                           |
| B1      | Input            | VDDA1P3_RX_RF                     | Receiver Mixer Supply.                                                                                                                                                                                                                                                                                                                                  |
| B7, B8  | Input            | RF_EXT_LO_I/O-,<br>RF_EXT_LO_I/O+ | Differential External LO Input/Output. If these pins are used for external LO, the input frequency must be 2× the desired carrier frequency. When unused, do not connect these pins.                                                                                                                                                                    |
| C1      | Input/<br>output | GPIO_3p3_0                        | GPIO Pin Referenced to 3.3 V Supply. The alternate function is Auxiliary DAC 4. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low.   |
| C2      | Input/<br>output | GPIO_3p3_3                        | GPIO Pin Referenced to 3.3 V Supply. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low.                                              |
| C3      | Input            | VDDA1P3_RX                        | 1.3 V Supply for Receiver Baseband Circuits, Transimpedance Amplifier (TIA), Baseband Filters, and Auxiliary DACs.                                                                                                                                                                                                                                      |
| C5, C6  | Input            | VDDA1P3_RF_VCO_LDO                | RF VCO Low Dropout (LDO) Supply Inputs. Connect Pin C5 to Pin C6. Use a separate trace to a common supply point.                                                                                                                                                                                                                                        |
| C7      | Input            | VDDA1P1_RF_VCO                    | 1.1 V VCO Supply. Decouple this pin with 1 µF.                                                                                                                                                                                                                                                                                                          |
| C8      | Input            | VDDA1P3_RF_LO                     | 1.3 V LO Generator for RF Synthesizer. This pin is sensitive to aggressors.                                                                                                                                                                                                                                                                             |
| C10     | Input            | VDDA1P3_AUX_VCO_LDO               | 1.3 V Supply.                                                                                                                                                                                                                                                                                                                                           |
| C12     | Input            | VDDA_3P3                          | General-Purpose Output Pull-Up Voltage and Auxiliary DAC Supply Voltage.                                                                                                                                                                                                                                                                                |
| C13     | Input/<br>output | GPIO_3p3_9                        | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 9. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| C14     | Input/<br>output | RBIAS                             | Bias Resistor. Tie this pin to ground using a 14.3 kΩ resistor. This pin generates an internal current based on an external 1% resistor.                                                                                                                                                                                                                |
| D1      | Input/<br>output | GPIO_3p3_1                        | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 5. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| D2      | Input/<br>output | GPIO_3p3_4                        | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 6. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| D10     | Input            | VDDA1P1_AUX_VCO                   | 1.1 V VCO Supply. Decouple with 1 µF.                                                                                                                                                                                                                                                                                                                   |
| D13     | Input/<br>output | GPIO_3p3_8                        | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 1. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |

| Pin No.          | Type             | Mnemonic                 | Description                                                                                                                                                                                                                                                                                                                                             |
|------------------|------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D14              | Input/output     | GPIO_3p3_10              | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 0. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| E1               | Input/output     | GPIO_3p3_2               | GPIO Pin Referenced to 3.3 V Supply. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low.                                              |
| E2               | Input/output     | GPIO_3p3_5               | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 7. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| E3               | Input/output     | GPIO_3p3_6               | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 8. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| E4               | Input            | VDDA1P8_BB               | 1.8 V Supply for the ADC and DAC.                                                                                                                                                                                                                                                                                                                       |
| E5               | Input            | VDDA1P3_BB               | 1.3 V Supply for the ADC, DAC, and Auxiliary ADCs.                                                                                                                                                                                                                                                                                                      |
| E7, E8           | Input            | REF_CLK_IN+, REF_CLK_IN- | Device Clock Differential Input.                                                                                                                                                                                                                                                                                                                        |
| E10              | Output           | AUX_SYNTH_OUT            | Auxiliary PLL Output. When unused, do not connect this pin.                                                                                                                                                                                                                                                                                             |
| E11, F3, F4, F11 | Input            | AUXADC_0 to AUXADC_3     | Auxiliary ADC Input. When unused, connect these pins to ground with a pull-down resistor, or connect directly to ground.                                                                                                                                                                                                                                |
| E12              | Input            | VDDA1P8_AN               | 1.8 V Bias Supply for Analog Circuitry.                                                                                                                                                                                                                                                                                                                 |
| E13              | Input/output     | GPIO_3p3_7               | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 2. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as an output, and driven low. |
| E14              | Input/output     | GPIO_3p3_11              | GPIO Pin Referenced to 3.3 V Supply. The alternative function is Auxiliary DAC 3. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or this pin can be left floating, programmed as outputs, and driven low.   |
| G5               | Input            | VDDA1P3_CLOCK_SYNTN      | 1.3 V Supply Input for Clock Synthesizer. Use a separate trace on the PCB back to a common supply point.                                                                                                                                                                                                                                                |
| G7               | Input            | VDDA1P3_RF_SYNTN         | 1.3 V RF Synthesizer Supply Input. This pin is sensitive to aggressors.                                                                                                                                                                                                                                                                                 |
| G8               | Input            | VDDA1P3_AUX_SYNTN        | 1.3 V Auxiliary Synthesizer Supply Input.                                                                                                                                                                                                                                                                                                               |
| G9               | Output           | RF_SYNTN_VTUNE           | RF Synthesizer $V_{TUNE}$ Output.                                                                                                                                                                                                                                                                                                                       |
| H1, J1, H14, J14 | DNC <sup>1</sup> | DNC                      | Do Not Connect. Do not connect these pins.                                                                                                                                                                                                                                                                                                              |
| H11              | Input/output     | GPIO_12                  | Digital GPIO, 1.8 V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                           |
| H12              | Input/output     | GPIO_11                  | Digital GPIO, 1.8 V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                           |

| Pin No. | Type         | Mnemonic                  | Description                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| J3      | Input/output | GPIO_18                   | Digital GPIO, 1.8V to 2.5 V. The joint test action group (JTAG) function is test clock (TCLK). Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low. |
| J4      | Input        | $\overline{\text{RESET}}$ | Active Low Chip Reset.                                                                                                                                                                                                                                                                                                                                         |
| J5      | Output       | GP_INTERRUPT              | General-Purpose Digital Interrupt Output Signal. When unused, do not connect this pin.                                                                                                                                                                                                                                                                         |
| J6      | Input        | TEST                      | Pin Used for JTAG Boundary Scan. When unused, connect this pin to ground.                                                                                                                                                                                                                                                                                      |
| J7      | Input/output | GPIO_2                    | Digital GPIO, 1.8 V to 2.5 V. The user sets the JTAG function to 0. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                            |
| J8      | Input/output | GPIO_1                    | Digital GPIO, 1.8V to 2.5 V. The user sets the JTAG function to 0. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                             |
| J9      | Input/output | SDIO                      | Serial Data Input in 4-Wire Mode or Input/Output in 3-Wire Mode.                                                                                                                                                                                                                                                                                               |
| J10     | Output       | SDO                       | Serial Data Output. In SPI 3-Wire mode, do not connect this pin.                                                                                                                                                                                                                                                                                               |
| J11     | Input/output | GPIO_13                   | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                                   |
| J12     | Input/output | GPIO_10                   | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                                   |
| K3, K4  | Input        | SYSREF_IN+, SYSREF_IN-    | LVDS Input.                                                                                                                                                                                                                                                                                                                                                    |
| K5      | Input/output | GPIO_5                    | Digital GPIO, 1.8 V to 2.5 V. The JTAG function is test data output (TDO). Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                     |
| K6      | Input/output | GPIO_4                    | Digital GPIO, 1.8 V to 2.5 V. The JTAG function is test rest ( $\overline{\text{TRST}}$ ). Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.     |
| K7      | Input/output | GPIO_3                    | Digital GPIO, 1.8V to 2.5 V. The user sets the JTAG function to 1. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                             |
| K8      | Input/output | GPIO_0                    | Digital GPIO, 1.8V to 2.5 V. The user sets the JTAG function to 1. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                             |
| K9      | Input        | SCLK                      | Serial Data Bus Clock.                                                                                                                                                                                                                                                                                                                                         |
| K10     | Input        | $\overline{\text{CS}}$    | Serial Data Bus Chip Select, Active Low.                                                                                                                                                                                                                                                                                                                       |

| Pin No.                                              | Type             | Mnemonic                                                 | Description                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| K11                                                  | Input/<br>output | GPIO_14                                                  | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                    |
| K12                                                  | Input/<br>output | GPIO_9                                                   | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                    |
| L3, L4                                               | Input            | $\overline{\text{SYNCIN1-}}, \overline{\text{SYNCIN1+}}$ | LVDS Input. When unused, connect these pins to ground with a pull-down resistor, or connect directly to ground.                                                                                                                                                                                                                                 |
| L5                                                   | Input/<br>output | GPIO_6                                                   | Digital GPIO, 1.8V to 2.5 V. The JTAG function is test data input (TDI). Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.        |
| L6                                                   | Input/<br>output | GPIO_7                                                   | Digital GPIO, 1.8V to 2.5 V. The JTAG function is test mode select input (TMS). Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low. |
| L7, L10, M6, M8<br>L8, L9                            | Input<br>Input   | VSSD<br>VDDD1P3_DIG                                      | Digital V <sub>SS</sub> .<br>1.3 V Digital Core. Connect Pin L8 to Pin L9. Use a separate trace to a common supply point.                                                                                                                                                                                                                       |
| L11                                                  | Input/<br>output | GPIO_15                                                  | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                    |
| L12                                                  | Input/<br>output | GPIO_8                                                   | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                    |
| L13, L14, M13, M14, N8 to N13,<br>P8, P9, P11 to P14 | Input            | VDDA1P3_SER                                              | 1.3 V Supply for JESD204B Serializer.                                                                                                                                                                                                                                                                                                           |
| M1                                                   | Input            | VDDA1P1_CLOCK_VCO                                        | 1.1 V VCO Supply. Decouple this pin with 1 $\mu\text{F}$ .                                                                                                                                                                                                                                                                                      |
| M3, M4                                               | Input            | $\overline{\text{SYNCIN0-}}, \overline{\text{SYNCIN0+}}$ | JESD204B Receiver Channel 0. These pins form the synchronization signal associated with receiver channel data on the JESD204B interface. When unused, connect these pins to ground with a pull-down resistor, or connect directly to ground.                                                                                                    |
| M5                                                   | Input            | RX1_ENABLE                                               | Receiver 1 Enable Pin. When unused, connect this pin to ground with a pull-down resistor, or connect directly to ground.                                                                                                                                                                                                                        |
| M7                                                   | Input            | RX2_ENABLE                                               | Receiver 2 Enable Pin. When unused, connect this pin to ground with a pull-down resistor, or connect directly to ground.                                                                                                                                                                                                                        |
| M10                                                  | Input/<br>output | GPIO_17                                                  | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                    |
| M11                                                  | Input/<br>output | GPIO_16                                                  | Digital GPIO, 1.8V to 2.5 V. Because this pin contains an input stage, the voltage on the pin must be controlled. When unused, this pin can be tied to ground through a resistor to safeguard against misconfiguration, or it can be left floating, programmed as an output, and driven low.                                                    |
| M12                                                  | Input            | VDD_INTERFACE                                            | Input/Output Interface Supply, 1.8V to 2.5 V.                                                                                                                                                                                                                                                                                                   |
| N1                                                   | Input            | VDDA1P3_CLOCK_VCO_LDO                                    | 1.3 V Supply. Use a separate trace to a common supply point.                                                                                                                                                                                                                                                                                    |

| Pin No. | Type   | Mnemonic             | Description                                                                                |
|---------|--------|----------------------|--------------------------------------------------------------------------------------------|
| N3, N4  | Output | SERDOUT3-, SERDOUT3+ | RF Current Mode Logic (CML) Differential Output 3. When unused, do not connect these pins. |
| N5, N6  | Output | SERDOUT2-, SERDOUT2+ | RF CML Differential Output 2. When unused, do not connect these pins.                      |
| P1      | Output | AUX_SYNTH_VTUNE      | Auxiliary Synthesizer $V_{TUNE}$ Output.                                                   |
| P4, P5  | Output | SERDOUT1-, SERDOUT1+ | RF CML Differential Output 1. When unused, do not connect these pins.                      |
| P6, P7  | Output | SERDOUT0-, SERDOUT0+ | RF CML Differential Output 0. When unused, do not connect these pins.                      |

<sup>1</sup> DNC means do not connect.



# TYPICAL PERFORMANCE CHARACTERISTICS

The temperature settings refer to the die temperature.

## 75 MHz TO 525 MHz BAND

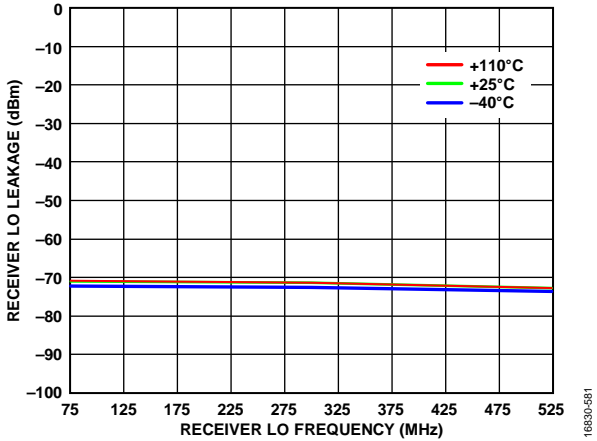


Figure 6. Receiver LO Leakage vs. Receiver LO Frequency, 75 MHz, 300 MHz, 525 MHz; Receiver Attenuation = 0 dB, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS

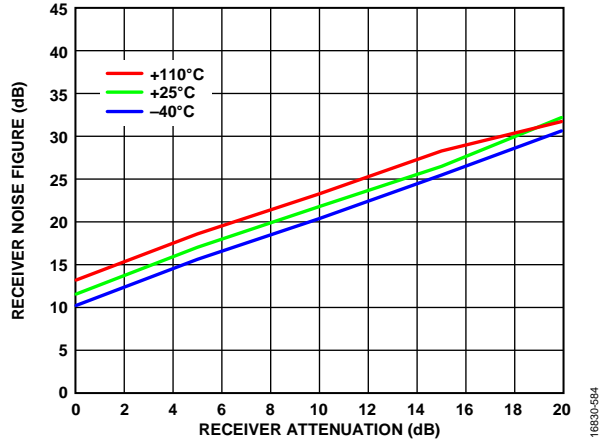


Figure 9. Receiver Noise Figure vs. Receiver Attenuation, LO = 525 MHz, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, Integration Bandwidth = 1 MHz to 25 MHz

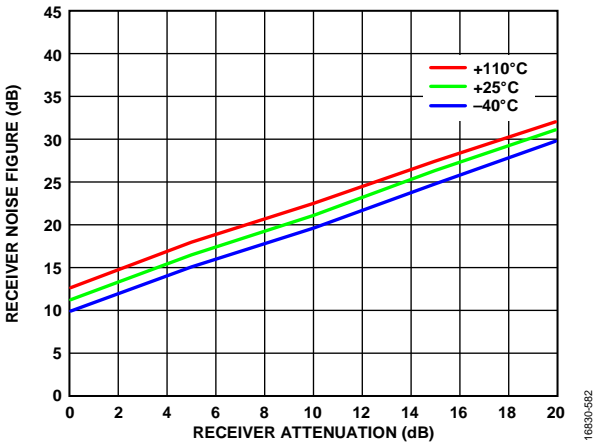


Figure 7. Receiver Noise Figure vs. Receiver Attenuation, LO = 75 MHz, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, Integration Bandwidth = 1 MHz to 25 MHz

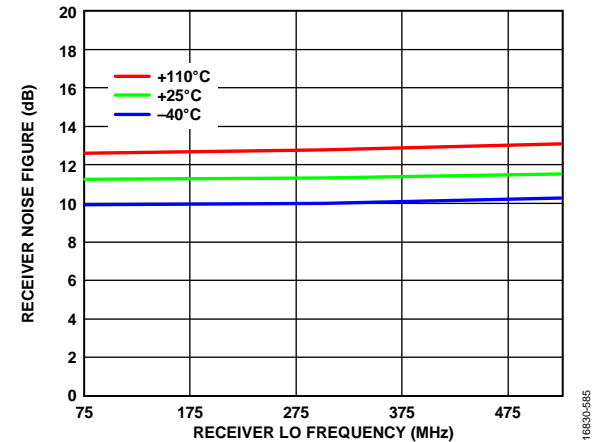


Figure 10. Receiver Noise Figure vs. Receiver LO Frequency, Receiver Attenuation = 0 dB, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, Integration Bandwidth =  $\pm 25$  MHz

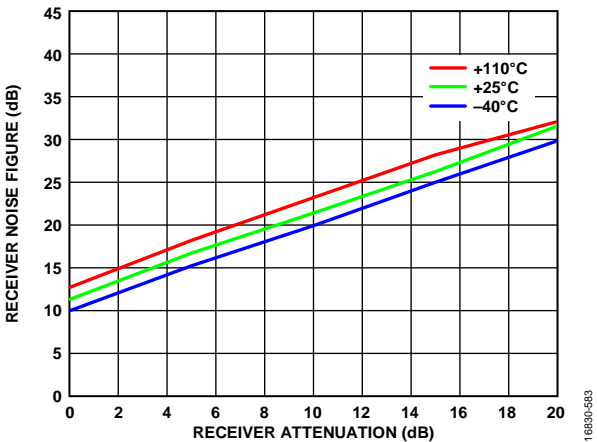


Figure 8. Receiver Noise Figure vs. Receiver Attenuation, LO = 300 MHz, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, Integration Bandwidth = 1 MHz to 25 MHz

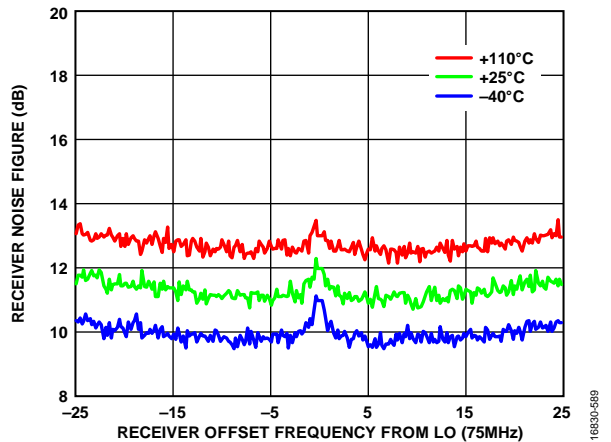


Figure 11. Receiver Noise Figure vs. Receiver Offset Frequency from LO, Integration Bandwidth = 200 kHz, LO = 75 MHz

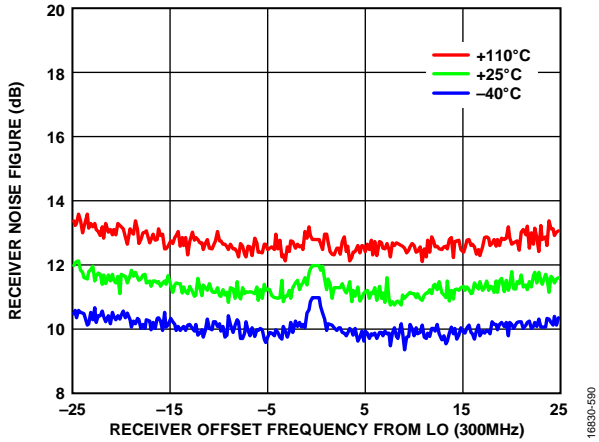


Figure 12. Receiver Noise Figure vs. Receiver Offset Frequency from LO, Integration Bandwidth = 200 kHz, LO = 300 MHz

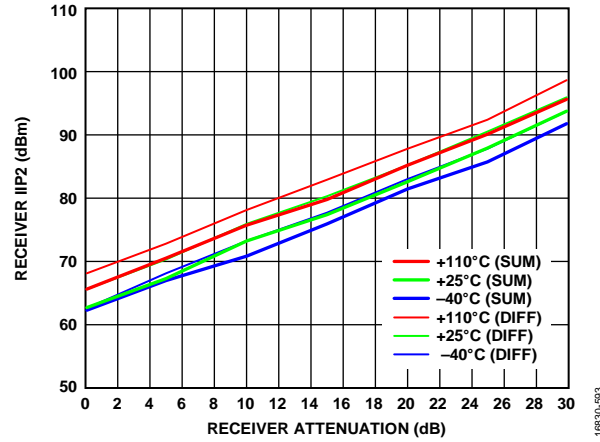


Figure 15. Receiver IIP2 vs. Receiver Attenuation, LO = 300 MHz, Tones Placed at 310 MHz and 311 MHz, -23.5 dBm Plus Attenuation

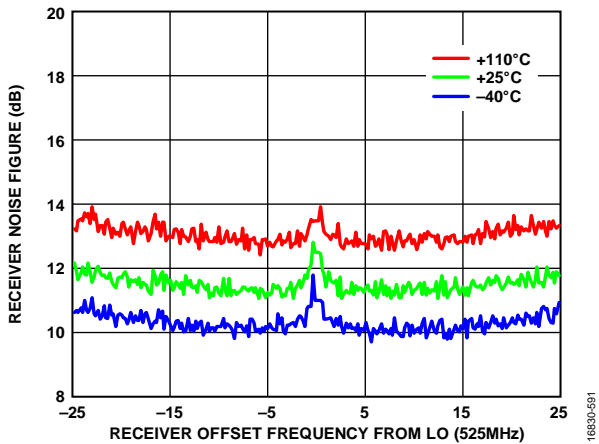


Figure 13. Receiver Noise Figure vs. Receiver Offset Frequency from LO, Integration Bandwidth = 200 kHz, LO = 525 MHz

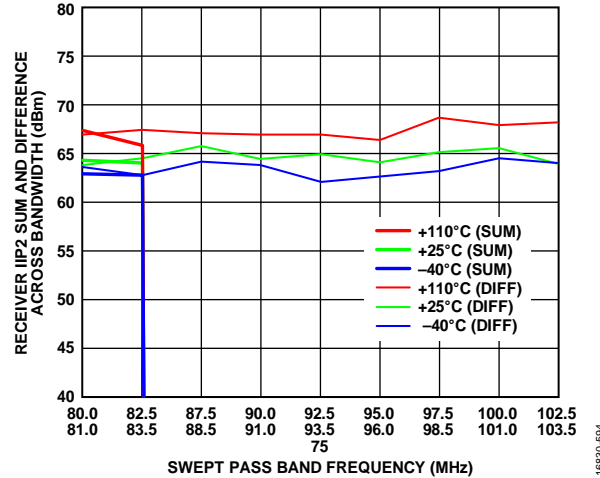


Figure 16. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 75 MHz, 10 Tone Pairs, -23.5 dBm Each

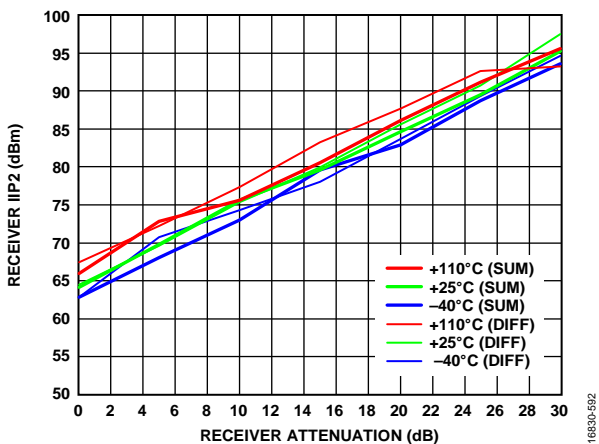


Figure 14. Receiver IIP2 vs. Receiver Attenuation, LO = 75 MHz, Tones Placed at 82.5 MHz and 83.5 MHz, -23.5 dBm Plus Attenuation

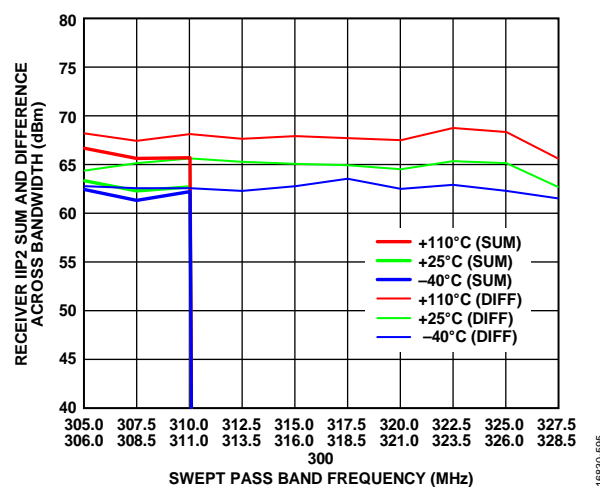


Figure 17. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 300 MHz, 10 Tone pairs, -23.5 dBm Each

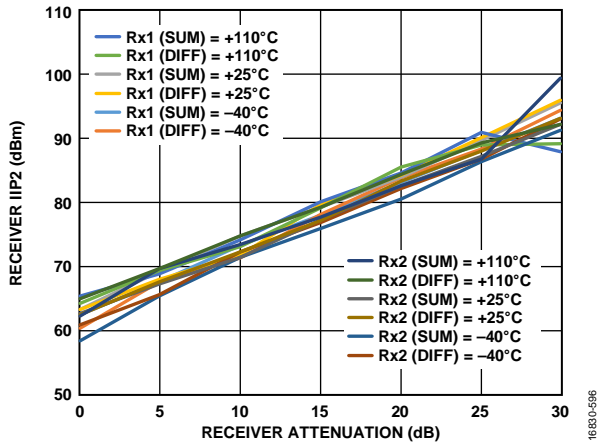


Figure 18. Receiver IIP2 vs. Receiver Attenuation, LO = 75 MHz, Tones Placed at 77 MHz and 97 MHz, -23.5 dBm Plus Attenuation

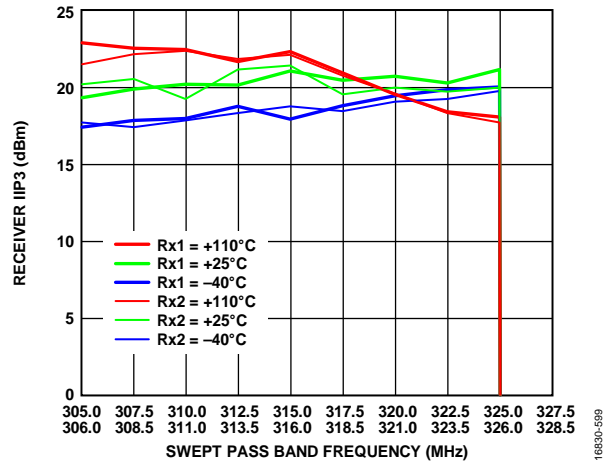


Figure 21. Receiver IIP3, Receiver Attenuation = 0 dB, LO = 300 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

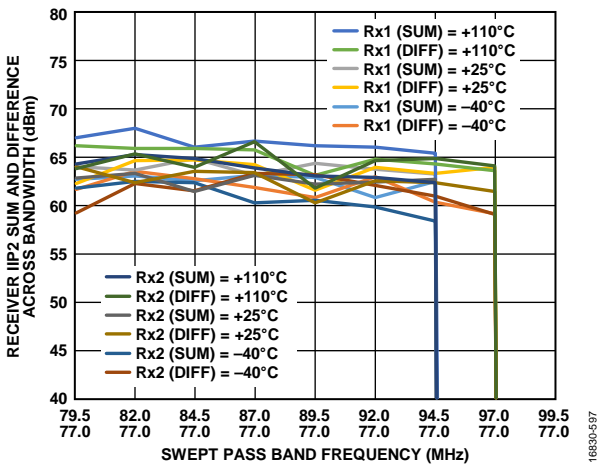


Figure 19. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 75 MHz, Tone 1 = 77 MHz, Tone 2 Swept, -23.5 dBm Each

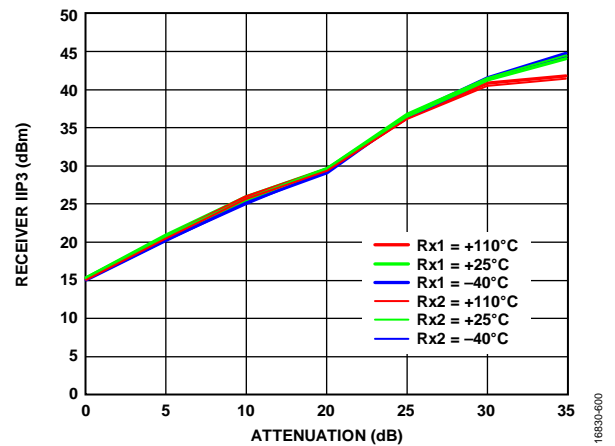


Figure 22. Receiver IIP3 vs. Attenuation, LO = 300 MHz, Tone 1 = 302 MHz, Tone 2 = 322 MHz, -19 dBm Plus Attenuation

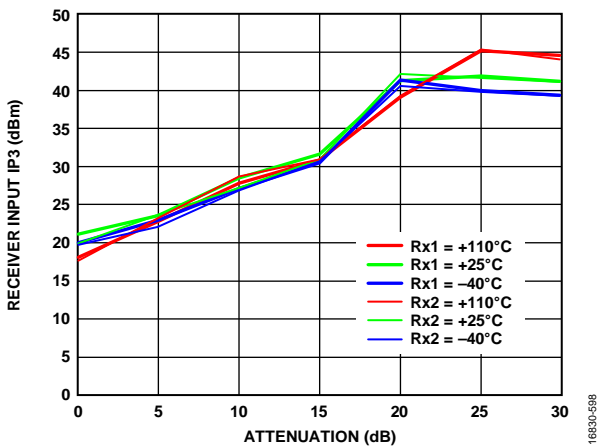


Figure 20. Receiver IIP3 vs. Attenuation, LO = 300 MHz, Tone 1 = 325 MHz, Tone 2 = 326 MHz, -21 dBm Plus Attenuation



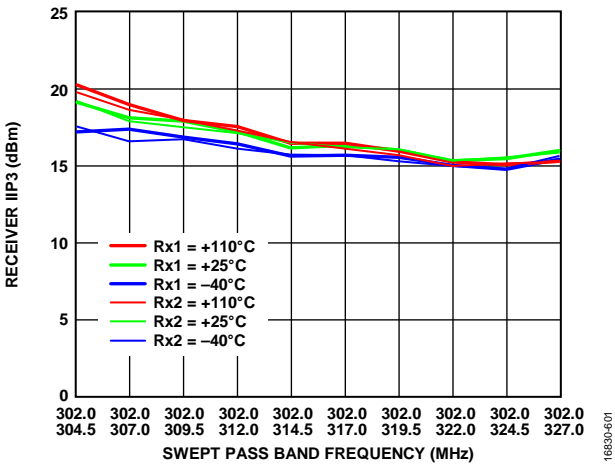


Figure 23. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 300 MHz, Tone 1 = 302 MHz, Tone 2 Swept Across Pass Band, -19 dBm Each

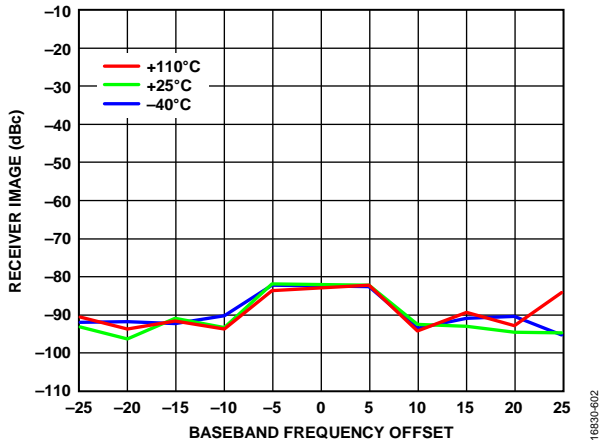


16830-602

Figure 24. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 50 MHz, Tracking Calibration Active, Sample Rate = 61.44 MSPS, LO = 75 MHz

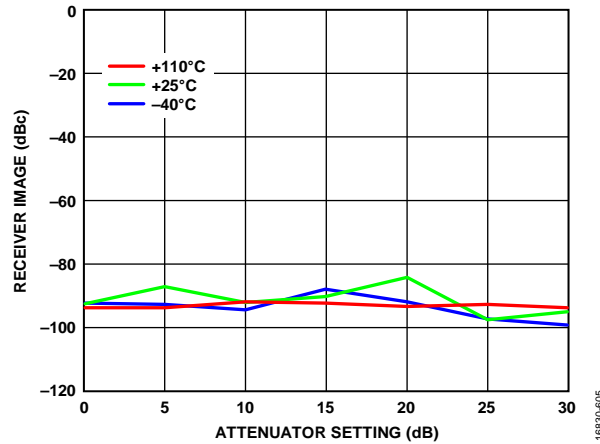


16830-605

Figure 27. Receiver Image vs. Attenuator Setting, RF Bandwidth = 25 MHz, Tracking Calibration Active, Sample Rate = 61.44 MSPS, LO = 75 MHz, Baseband Frequency = 25 MHz

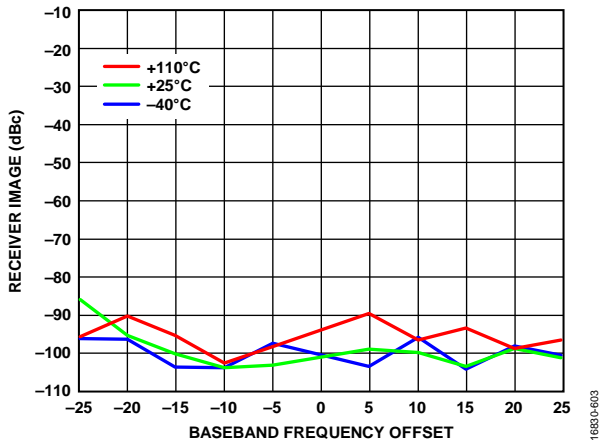


16830-603

Figure 25. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 50 MHz, Tracking Calibration Active, Sample Rate = 61.44 MSPS, LO = 300 MHz

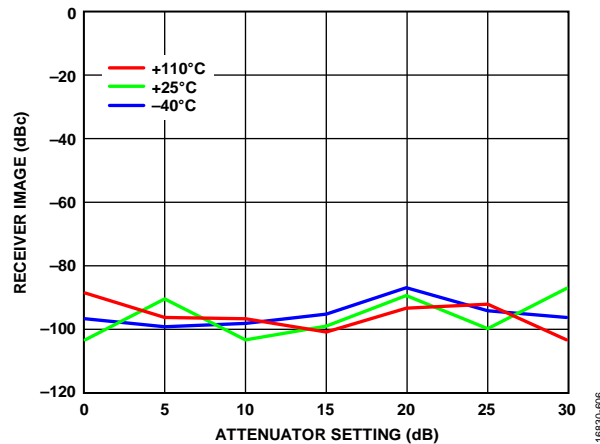


16830-606

Figure 28. Receiver Image vs. Attenuator Setting, RF Bandwidth = 25 MHz, Tracking Calibration Active, Sample Rate = 61.44 MSPS, LO = 325 MHz, Baseband Frequency = 25 MHz

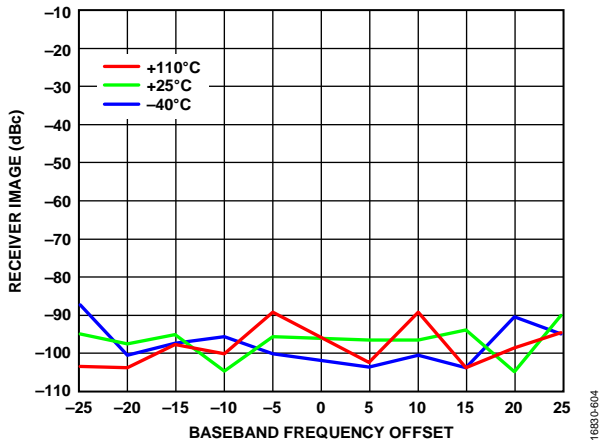

16830-604

Figure 26. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 50 MHz, Tracking Calibration Active, Sample Rate = 61.44 MSPS, LO = 525 MHz

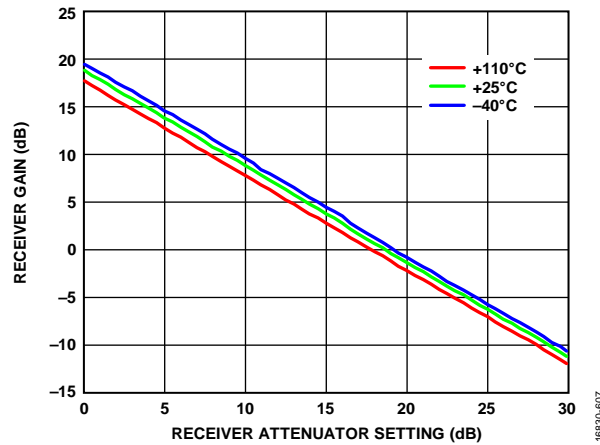

16830-607

Figure 29. Receiver Gain vs. Receiver Attenuator Setting, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, LO = 75 MHz

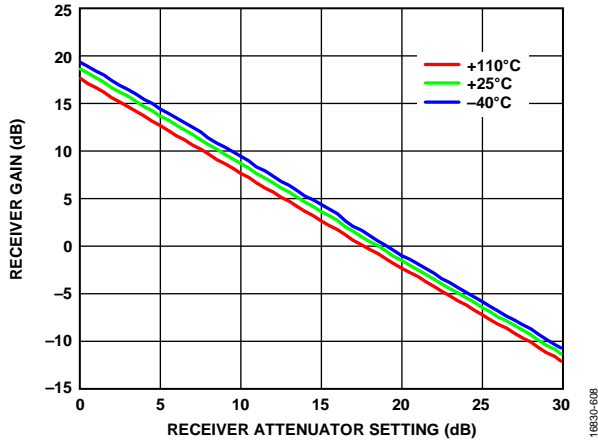


Figure 30. Receiver Gain vs. Receiver Attenuator Setting, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, LO = 325 MHz

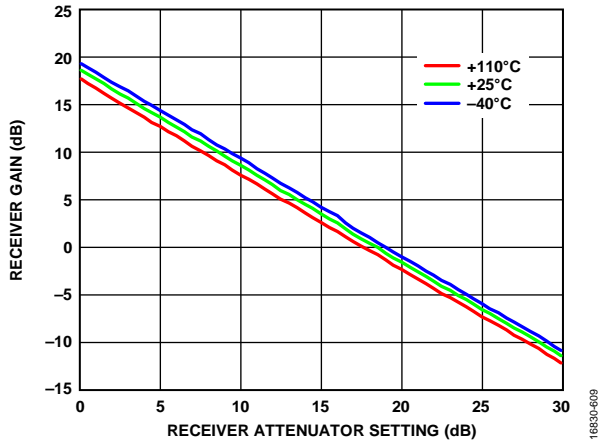


Figure 31. Receiver Gain vs. Receiver Attenuator Setting, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS, LO = 525 MHz

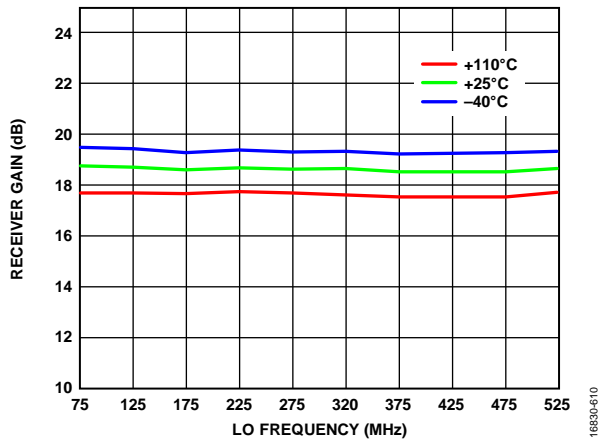


Figure 32. Receiver Gain vs. LO Frequency, RF Bandwidth = 50 MHz, Sample Rate = 61.44 MSPS

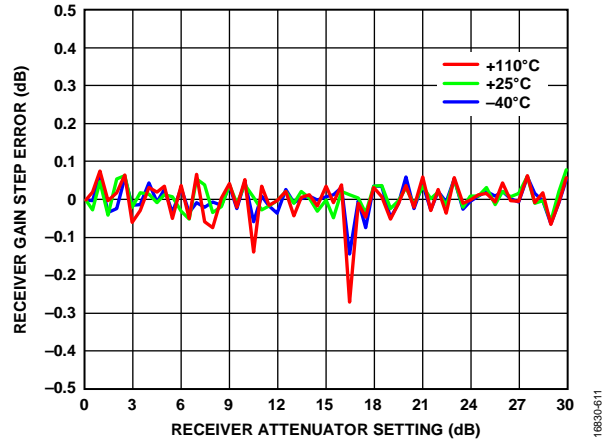


Figure 33. Receiver Gain Step Error vs. Receiver Attenuator Setting, LO = 75 MHz

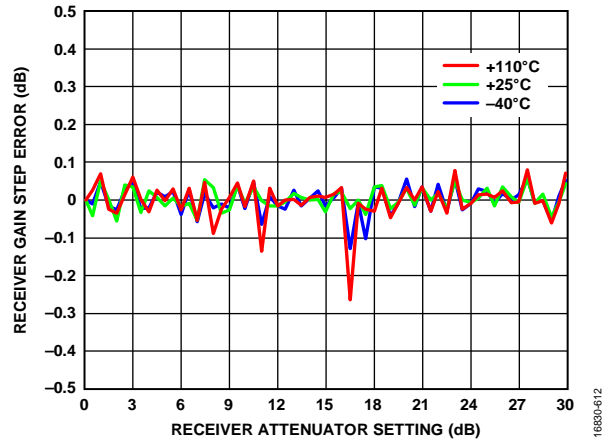


Figure 34. Receiver Gain Step Error vs. Receiver Attenuator Setting, LO = 325 MHz

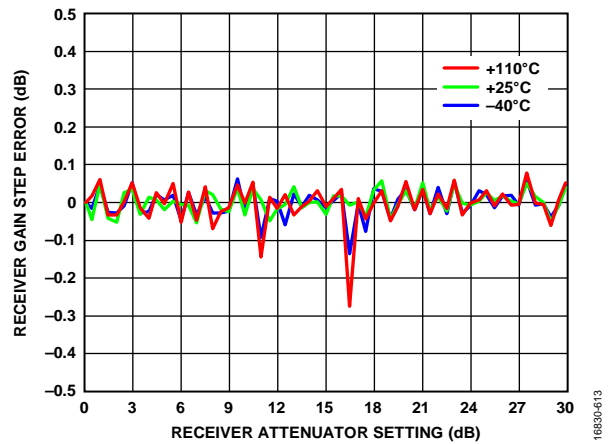


Figure 35. Receiver Gain Step Error vs. Receiver Attenuator Setting, LO = 525 MHz

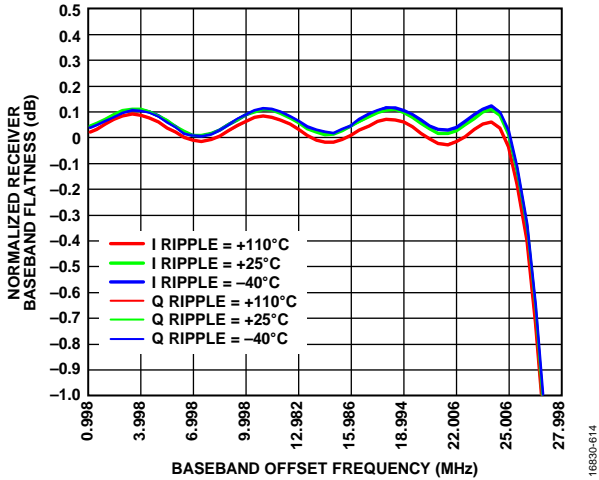


Figure 36. Normalized Receiver Baseband Flatness vs. Baseband Offset Frequency (Receiver Flatness), LO = 75 MHz

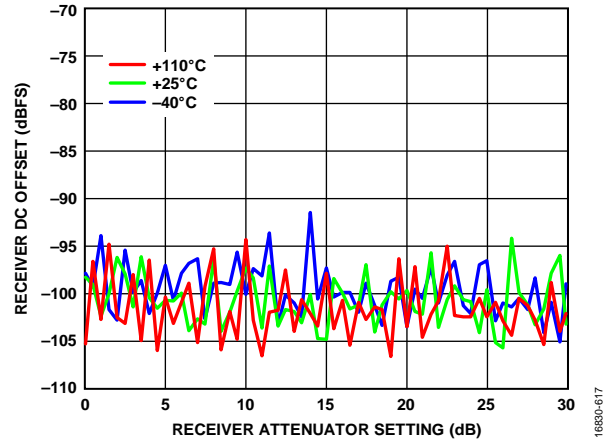


Figure 39. Receiver DC Offset vs. Receiver Attenuator Setting, LO = 525 MHz

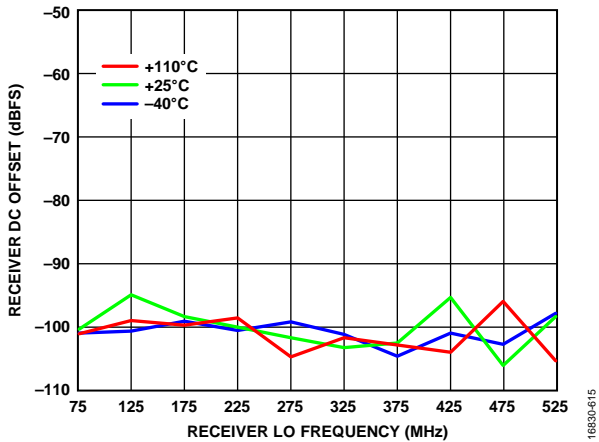


Figure 37. Receiver DC Offset vs. Receiver LO Frequency

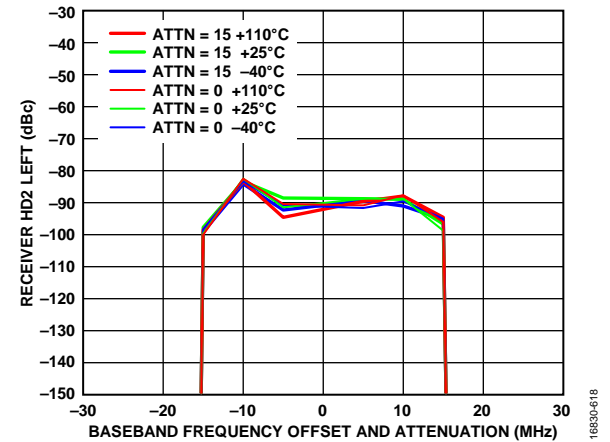


Figure 40. Receiver Second-Order Harmonic Distortion (HD2) Left vs. Baseband Frequency Offset and Attenuation, Tone Level = -21 dBm at Attenuation = 0 dB, X-Axis Is Baseband Frequency Offset of Fundamental Tone, Not Frequency of HD2 Product (HD2 Product is 2x Baseband Frequency), HD2 Canceller Disabled, LO = 75 MHz

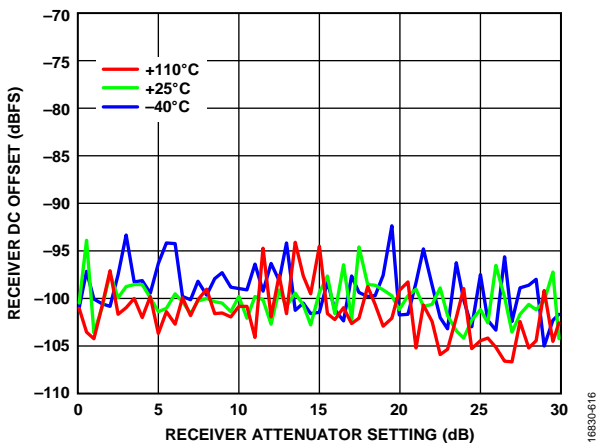


Figure 38. Receiver DC Offset vs. Receiver Attenuator Setting, LO = 75 MHz

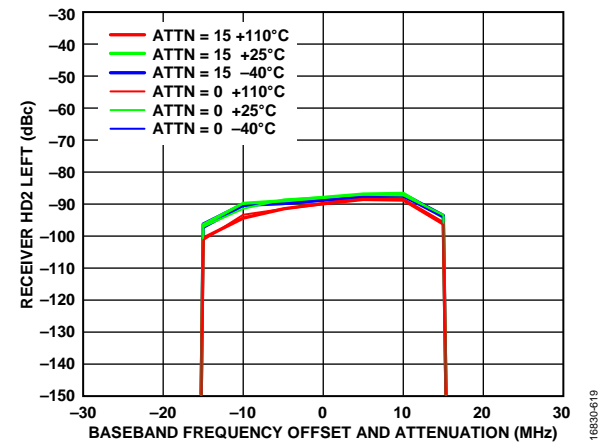


Figure 41. Receiver HD2 Left vs. Baseband Frequency Offset and Attenuation, Tone Level -21 dBm at Attenuation = 0 dB, X-Axis Is Baseband Frequency Offset of Fundamental Tone, Not Frequency of HD2 Product (HD2 Product Is 2x Baseband Frequency), HD2 Canceller Disabled, LO = 300 MHz

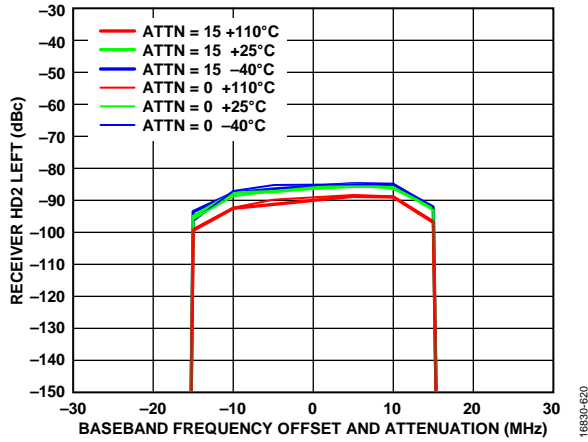


Figure 42. Receiver HD2 Left vs. Baseband Frequency Offset and Attenuation, Tone Level  $-21$  dBm at Attenuation =  $0$  dB, X-Axis Is Baseband Frequency Offset of Fundamental Tone, Not Frequency of HD2 Product (HD2 Product Is  $2 \times$  Baseband Frequency), HD2 Canceller Disabled, LO =  $525$  MHz

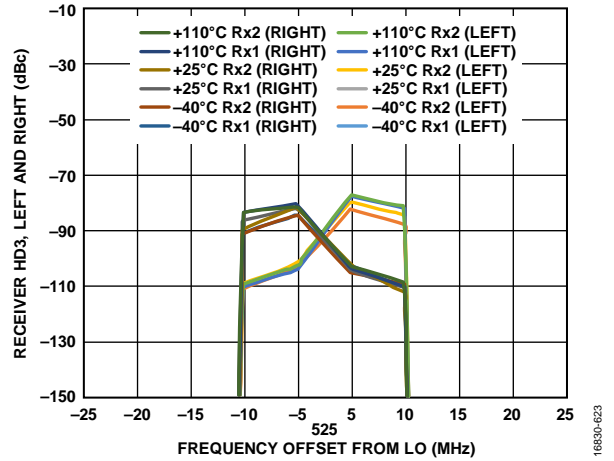


Figure 45. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level  $-17$  dBm at Attenuation =  $0$  dB, LO =  $525$  MHz

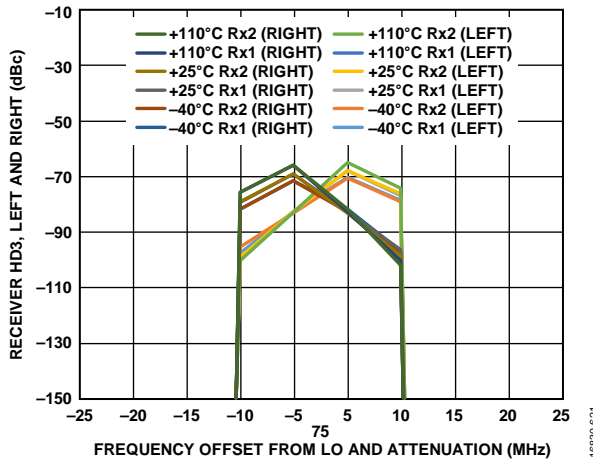


Figure 43. Receiver HD3, Left and Right vs. Frequency Offset from LO and Attenuation, Tone Level =  $-16$  dBm at Attenuation =  $0$  dB, LO =  $75$  MHz

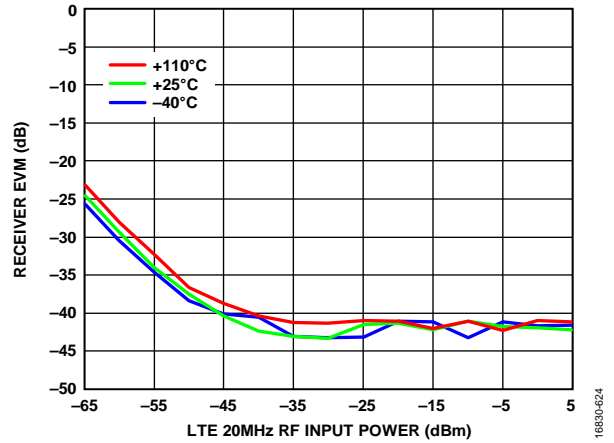


Figure 46. Receiver Error Vector Magnitude (EVM) vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO =  $75$  MHz, Default AGC Settings

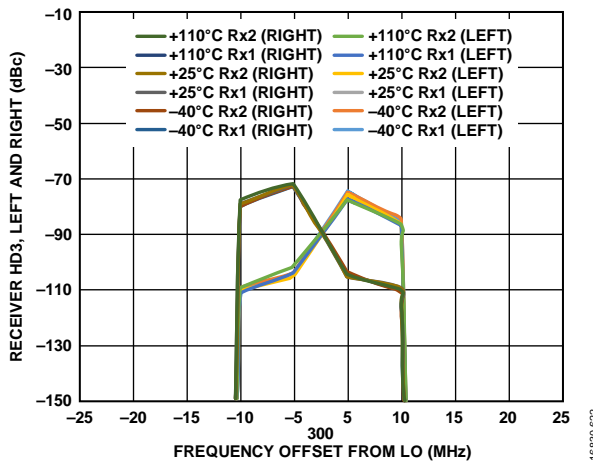


Figure 44. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level  $-17$  dBm at Attenuation =  $0$  dB, LO =  $300$  MHz

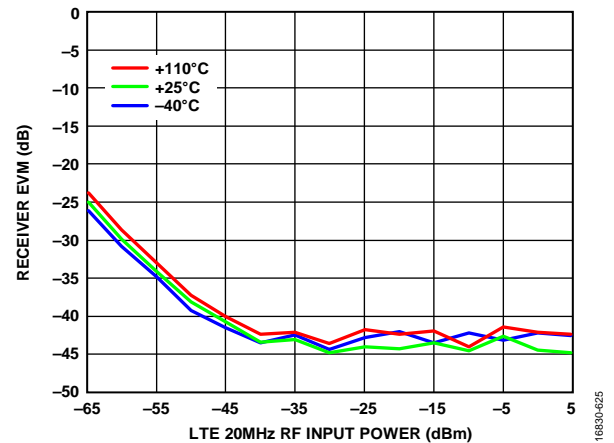


Figure 47. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO =  $300$  MHz, Default AGC Settings

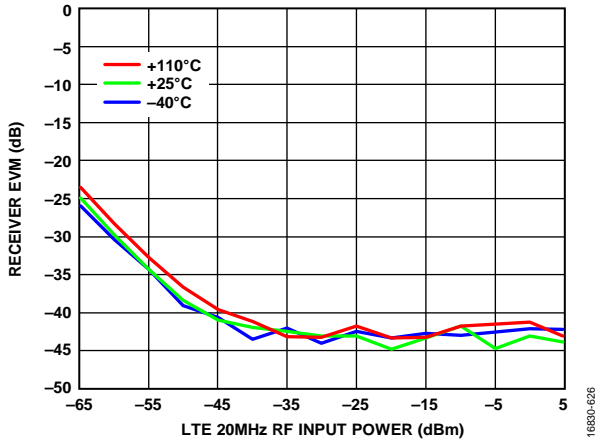


Figure 48. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 525 MHz, Default AGC Settings

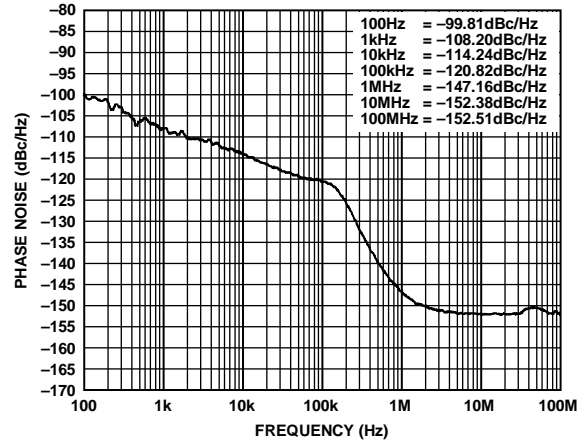


Figure 51. LO Phase Noise vs. Frequency Offset, LO = 300 MHz, PLL Loop Bandwidth = 50 kHz

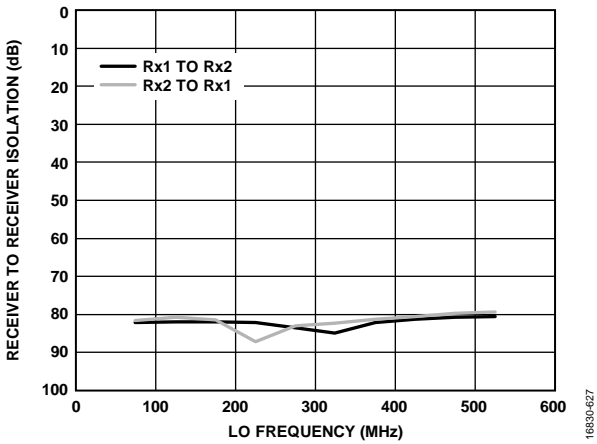


Figure 49. Receiver to Receiver Isolation vs. LO Frequency, Baseband Frequency = 10 MHz

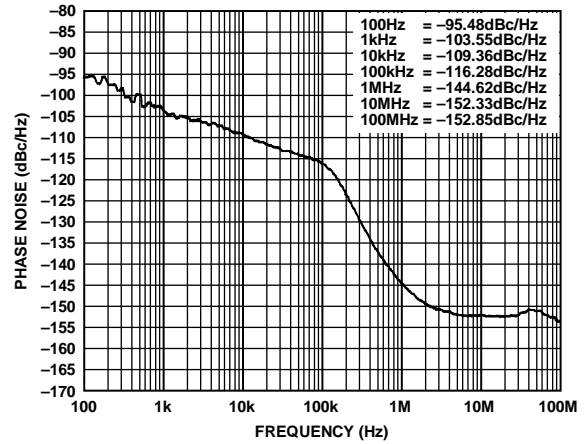


Figure 52. LO Phase Noise vs. Frequency Offset, LO = 525 MHz, PLL Loop Bandwidth = 50 kHz

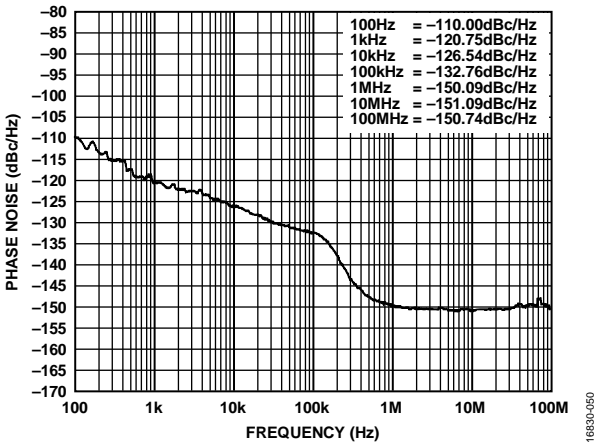


Figure 50. LO Phase Noise vs. Frequency Offset, LO = 75 MHz, PLL Loop Bandwidth = 50 kHz



650 MHz TO 3000 MHz BAND

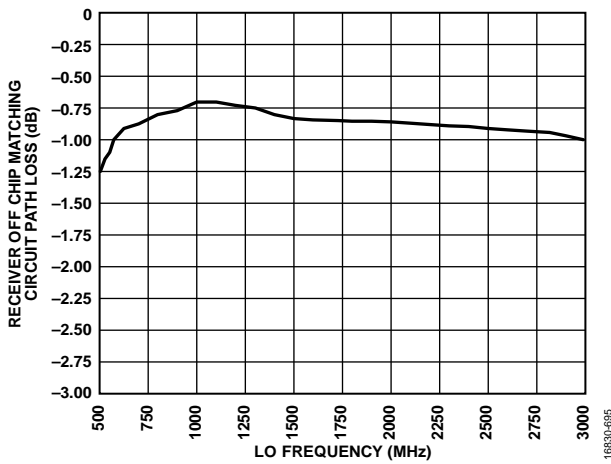


Figure 53. Receiver Off Chip Matching Circuit Path Loss vs. LO Frequency, Can Be Used for De-Embedding Performance Data

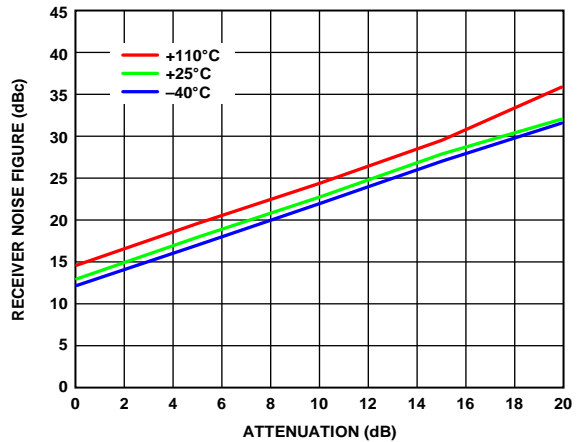


Figure 56. Receiver Noise Figure vs. Attenuation, LO = 1850 MHz, 200 MHz Bandwidth, Sample Rate = 245.76 MSPS, Integration Bandwidth = 500 kHz to 100 MHz

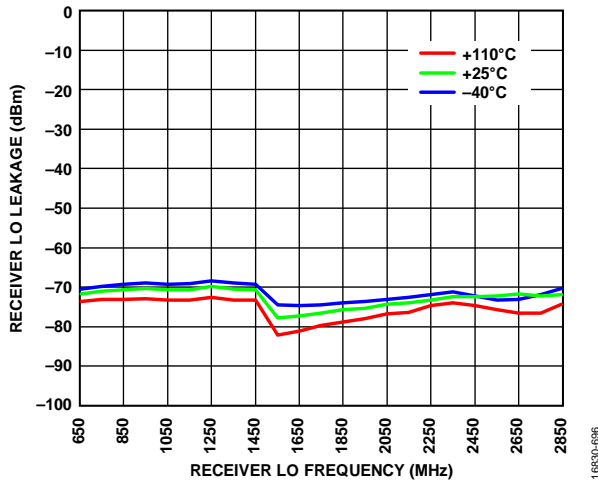


Figure 54. Receiver LO Leakage vs. Receiver LO Frequency, Receiver Attenuation = 0 dB, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS

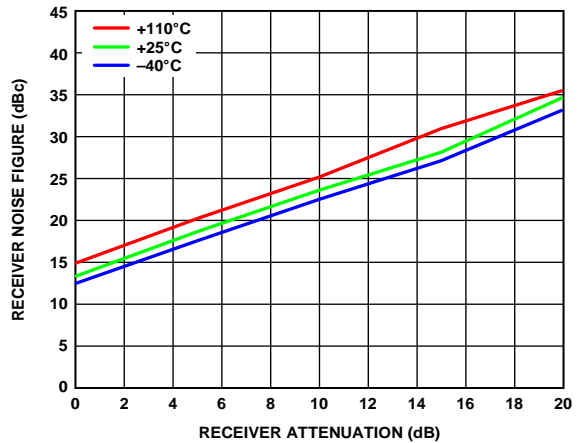


Figure 57. Receiver Noise Figure vs. Receiver Attenuation, 2850 MHz LO, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS, Integration Bandwidth = 500 kHz to 100 MHz

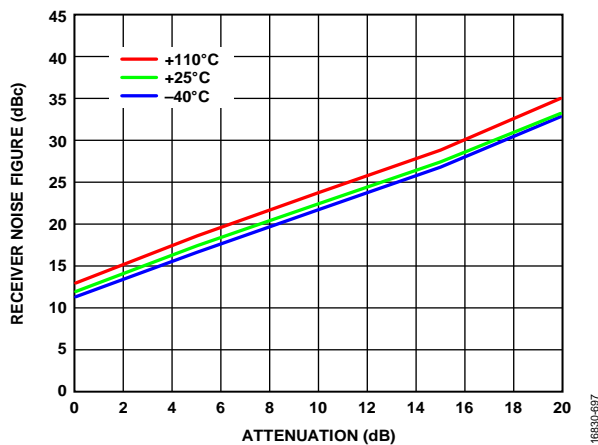


Figure 55. Receiver Noise Figure vs. Attenuation, LO = 650 MHz, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS, Integration Bandwidth = 500 kHz to 100 MHz

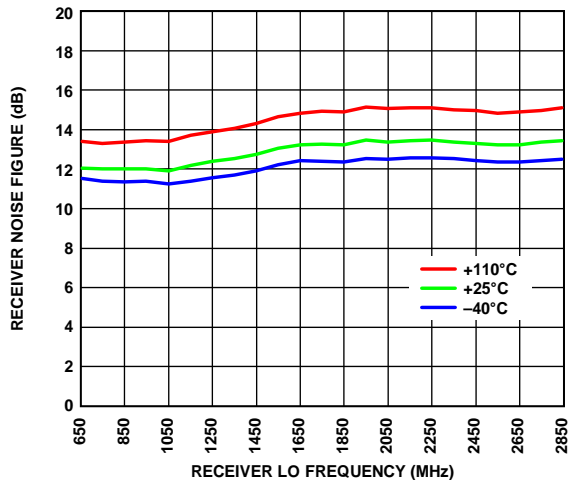


Figure 58. Receiver Noise Figure vs. Receiver LO Frequency, Receiver Attenuation = 0 dB, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS, Integration Bandwidth = ±100 MHz

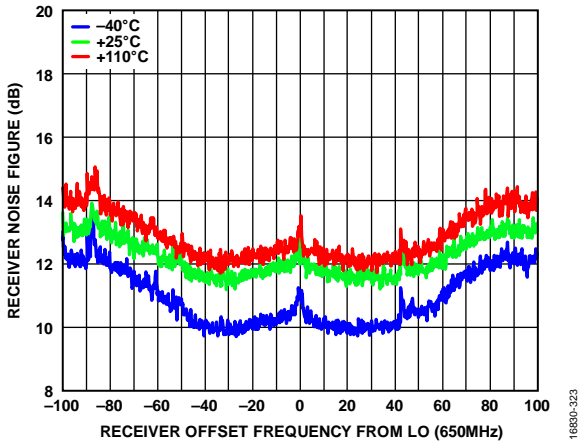


Figure 59. Receiver Noise Figure vs. Receiver Offset Frequency from LO, Integration Bandwidth = 200 kHz, LO = 650 MHz

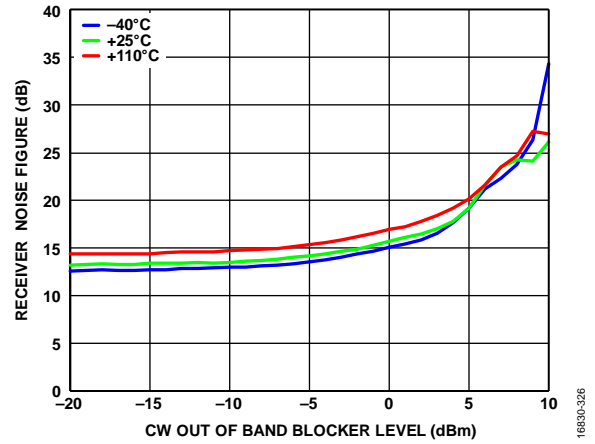


Figure 62. Receiver Noise Figure vs. CW Out of Band Blocker Level, LO = 1685 MHz, Blocker = 2085 MHz

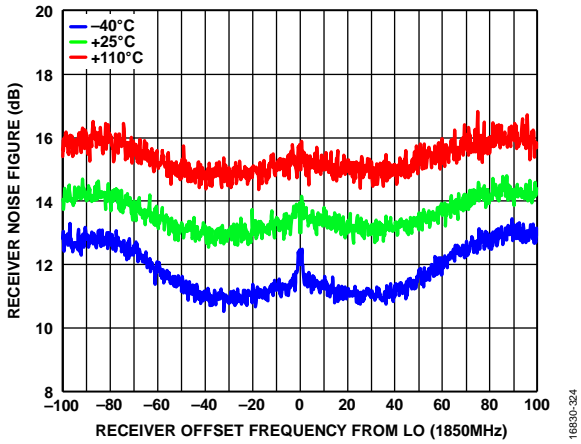


Figure 60. Receiver Noise Figure vs. Receiver Offset Frequency from LO, Integration Bandwidth = 200 kHz, LO = 1850 MHz

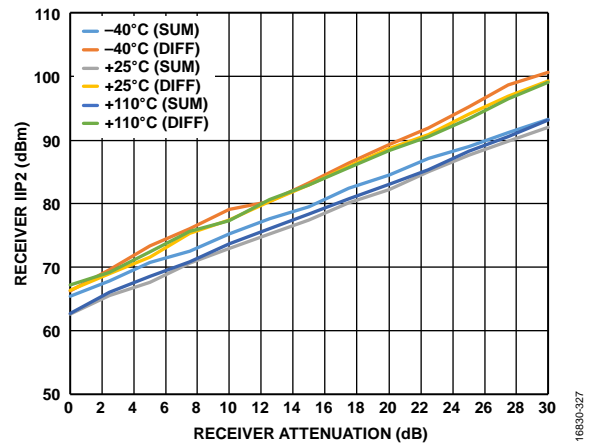


Figure 63. Receiver IIP2 vs. Receiver Attenuation, LO = 1800 MHz, Tones Placed at 1845 MHz and 1846 MHz, -21 dBm Each at Attenuation = 0 dB

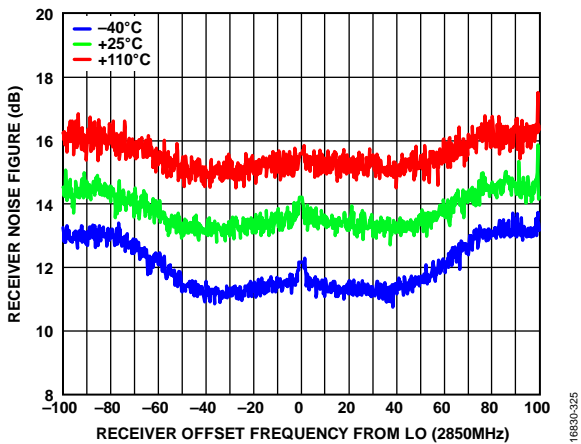


Figure 61. Receiver Noise Figure vs. Receiver Offset Frequency from LO, Integration Bandwidth = 200 kHz, LO = 2850 MHz

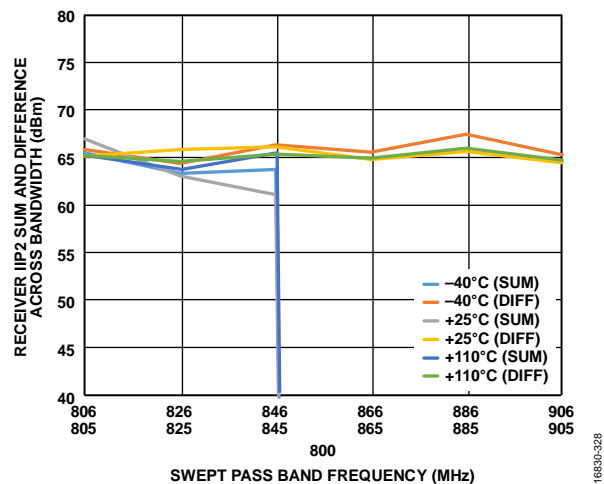


Figure 64. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 800 MHz, Six Tone Pairs, -21 dBm Each

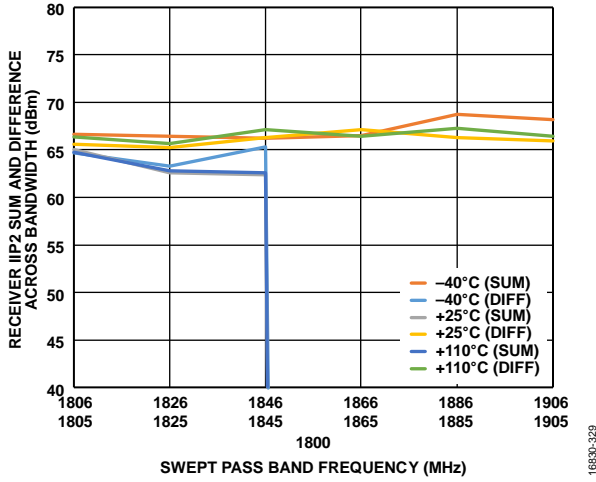


Figure 65. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 1800 MHz, Six Tone Pairs, -21 dBm Each

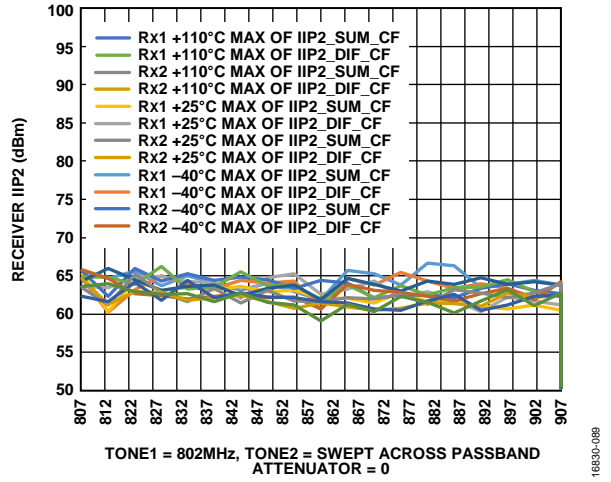


Figure 68. Receiver IIP2 Sum and Difference Across Bandwidth, Receiver Attenuation = 0 dB, LO = 800 MHz, Tone 1 = 802 MHz, Tone 2 Swept, -21 dBm Each, IIP2\_SUM\_CF and IIP2\_DIF\_CF Indicate Sum and Difference Products

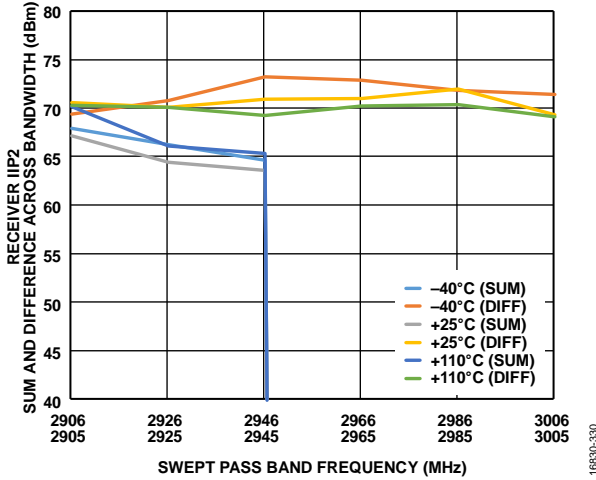


Figure 66. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 2900 MHz, Six Tone Pairs, -21 dBm Each

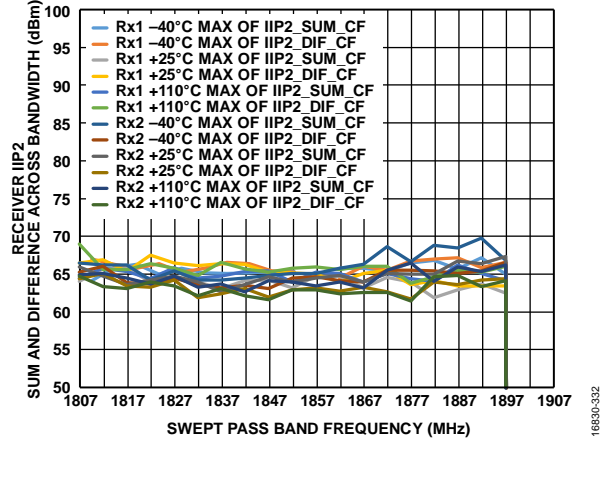


Figure 69. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 1800 MHz, Tone 1 = 1802 MHz, Tone 2 Swept, -21 dBm Each, IIP2\_SUM\_CF and IIP2\_DIF\_CF Indicate Sum and Difference Products

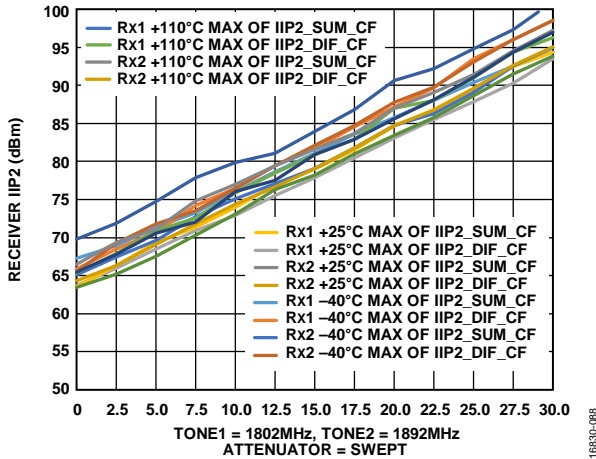


Figure 67. Receiver IIP2, LO = 1800 MHz, Tones Placed at 1802 MHz and 1892 MHz, -21 dBm Each at Attenuation = 0 dB, IIP2\_SUM\_CF and IIP2\_DIF\_CF Indicate Sum and Difference Products

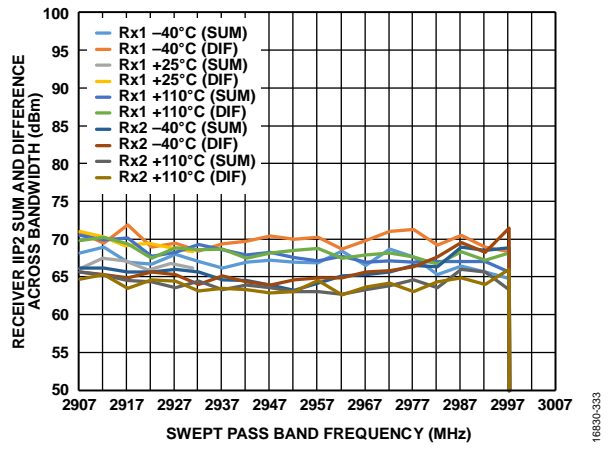


Figure 70. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 2900 MHz, Tone 1 = 2902 MHz, Tone 2 Swept, -21 dBm Each

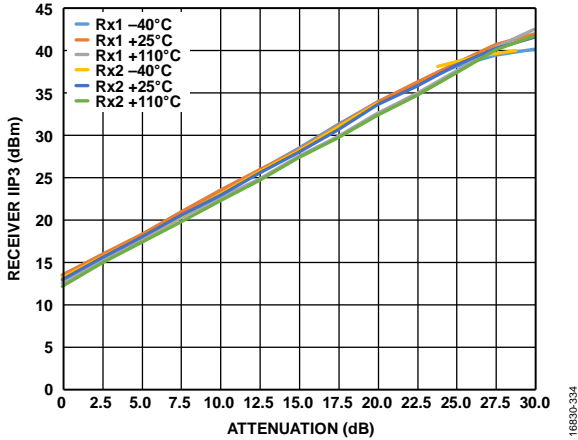


Figure 71. Receiver IIP3 vs. Attenuation, LO = 1800 MHz, Tone 1 = 1890 MHz, Tone 2 = 1891 MHz, -21 dBm Each at Attenuation = 0 dB

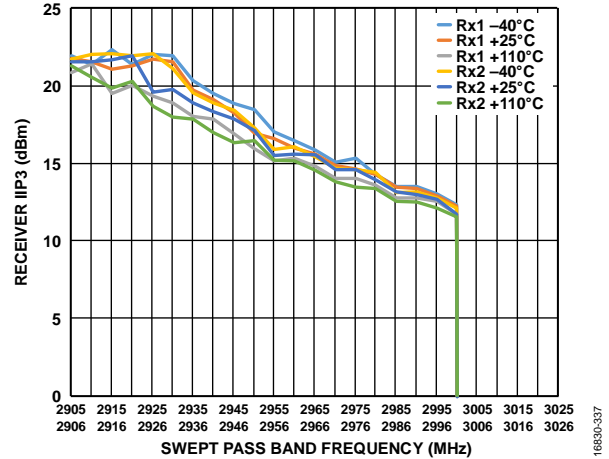


Figure 74. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 2900 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

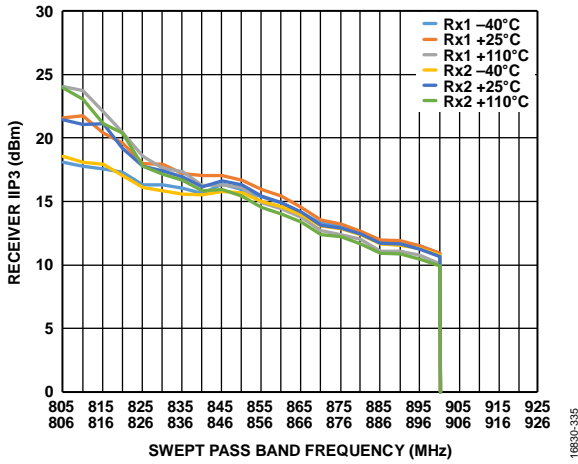


Figure 72. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 800 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

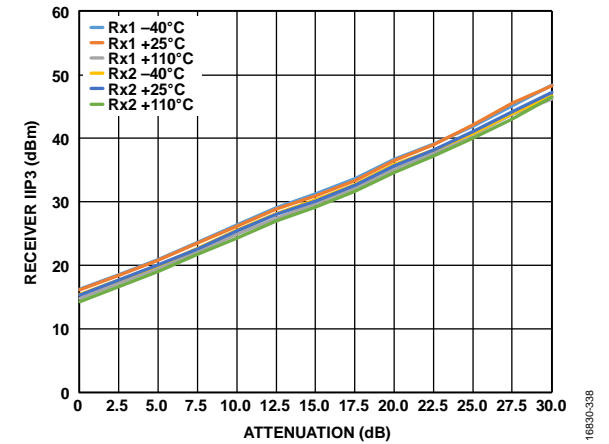


Figure 75. Receiver IIP3 vs. Attenuation, LO = 1800 MHz, Tone 1 = 1802 MHz, Tone 2 = 1892 MHz, -21 dBm Each at Attenuation = 0 dB

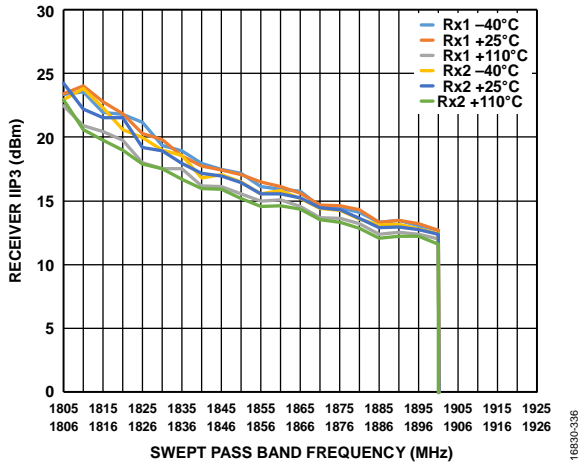


Figure 73. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 1800 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

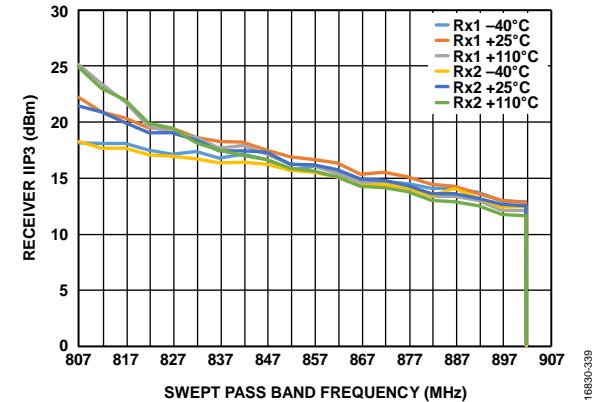


Figure 76. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 800 MHz, Tone 1 = 802 MHz, Tone 2 Swept Across Pass Band, -21 dBm Each

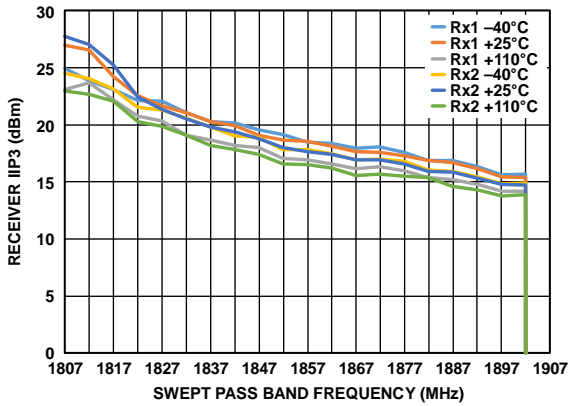


Figure 77. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 1800 MHz, Tone 1 = 1802 MHz, Tone 2 Swept Across Pass Band, -21 dBm Each

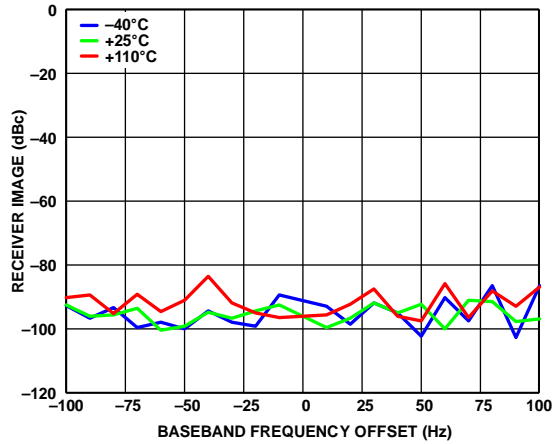


Figure 80. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 1850 MHz

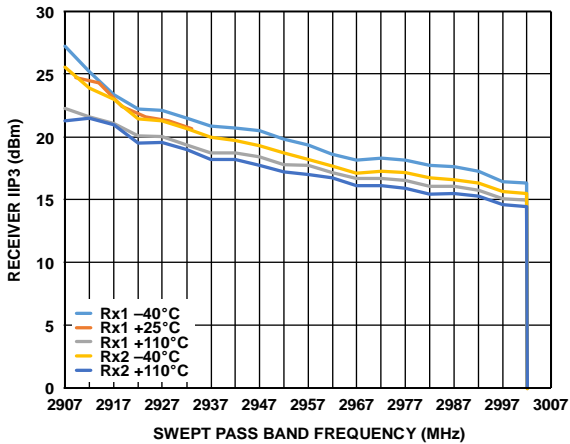


Figure 78. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 2900 MHz, Tone 1 = 2902 MHz, Tone 2 Swept Across Pass Band, -21 dBm Each

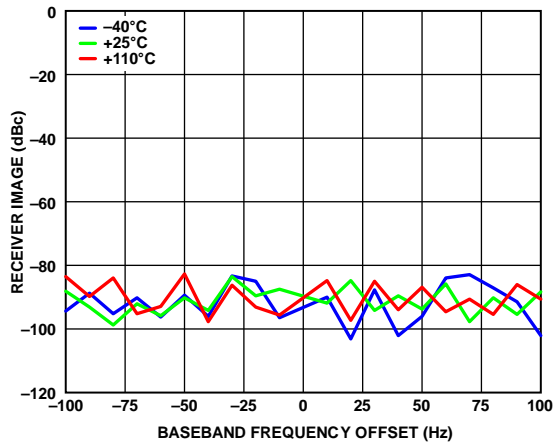


Figure 81. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 2850 MHz

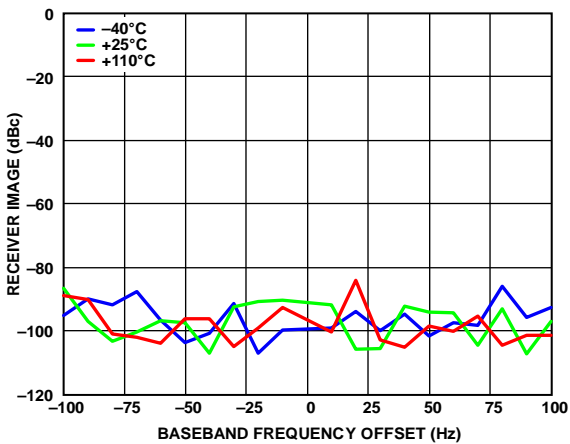


Figure 79. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, 200 MHz RF Bandwidth, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 650 MHz

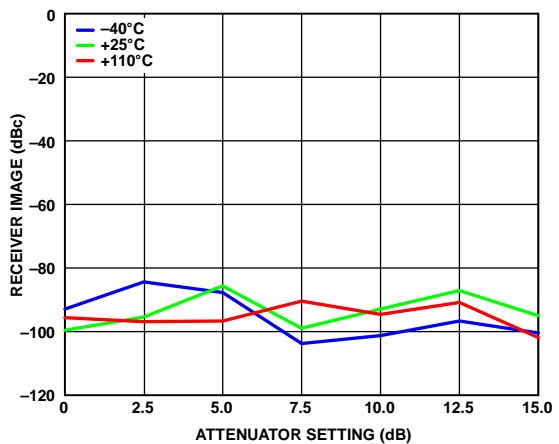


Figure 82. Receiver Image vs. Attenuator Setting, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 1850 MHz

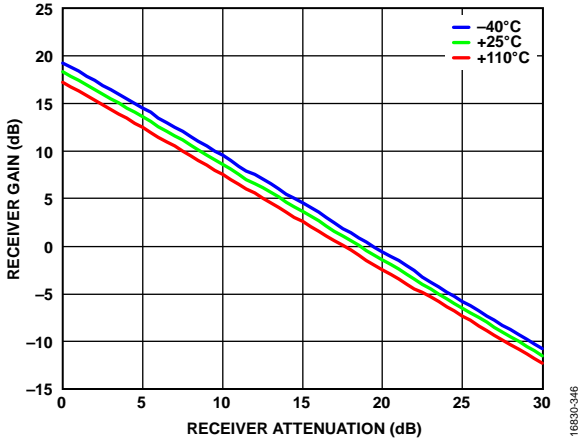


Figure 83. Receiver Gain vs. Receiver Attenuation, RF Bandwidth = 20 MHz, Sample Rate = 245.76 MSPS, LO = 1850 MHz

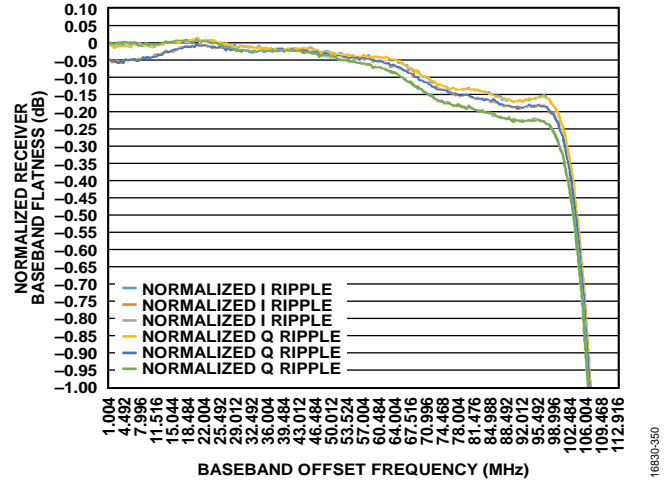


Figure 86. Normalized Receiver Baseband Flatness vs. Baseband Offset Frequency, LO = 2600 MHz

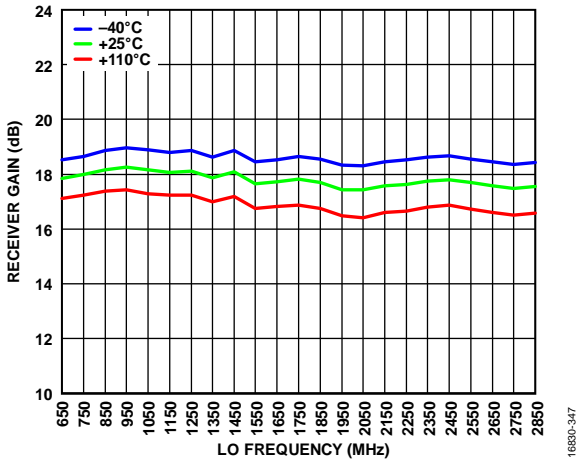


Figure 84. Receiver Gain vs. LO Frequency, RF Bandwidth = 20 MHz, Sample Rate = 245.76 MSPS

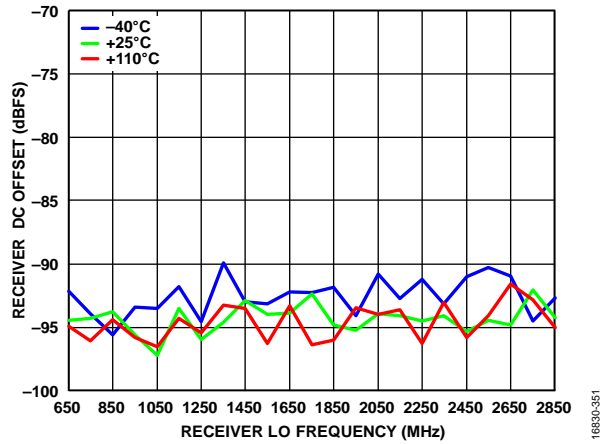


Figure 87. Receiver DC Offset vs. Receiver LO Frequency

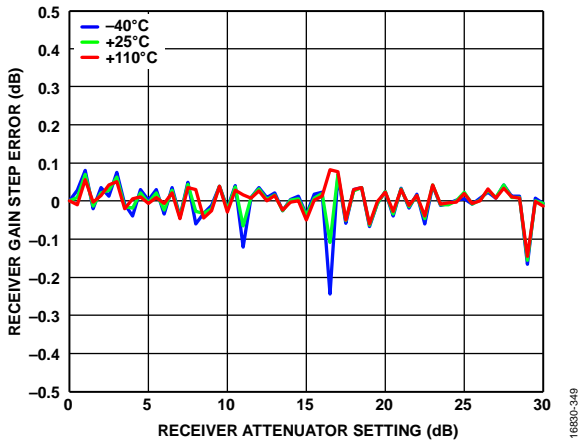


Figure 85. Receiver Gain Step Error vs. Receiver Attenuator Setting over Temperature

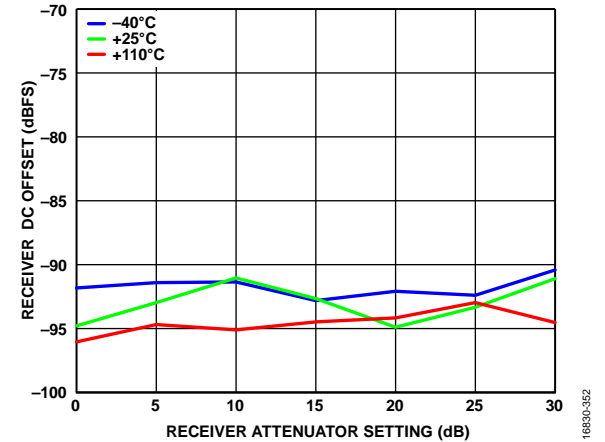


Figure 88. Receiver DC Offset vs. Receiver Attenuator Setting, LO = 1850 MHz

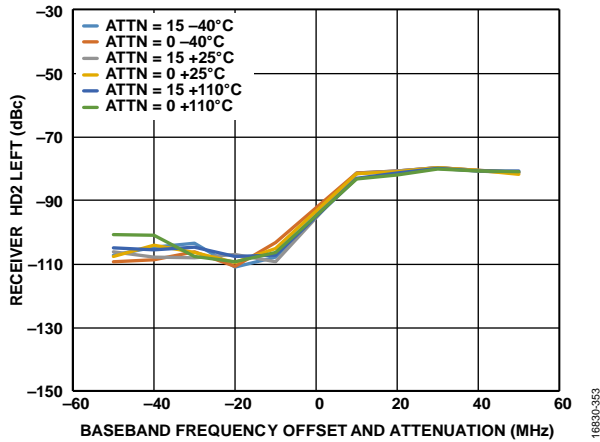


Figure 89. Receiver HD2 Left vs. Baseband Frequency Offset and Attenuation, Tone Level = -15 dBm at Attenuation = 0 dB, HD2 Correction Configured for Low-Side Optimization, X-Axis = Baseband Frequency Offset of Fundamental Tone and Not the Frequency of the HD2 Product (HD2 Product = 2x Baseband Frequency), LO = 650 MHz

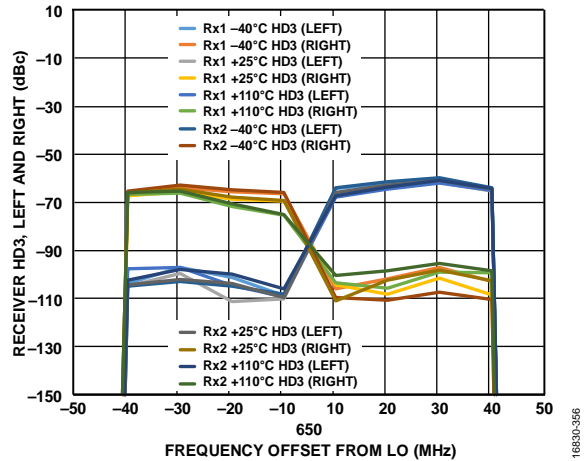


Figure 92. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 650 MHz

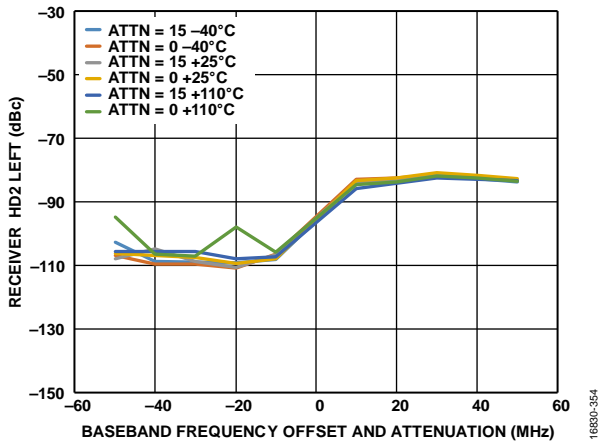


Figure 90. Receiver HD2 Left vs. Baseband Frequency Offset and Attenuation, Tone Level = -15 dBm at Attenuation = 0 dB, HD2 Correction Configured for Low-Side Optimization, X-Axis = Baseband Frequency Offset of the Fundamental Tone and Not the Frequency of the HD2 Product (HD2 Product = 2x the Baseband Frequency), LO = 1850 MHz

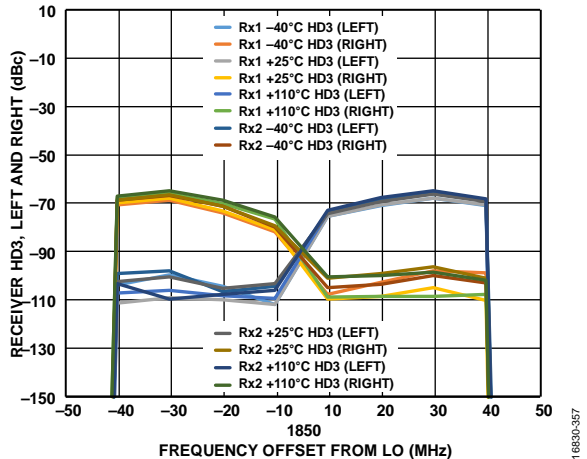


Figure 93. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 1850 MHz

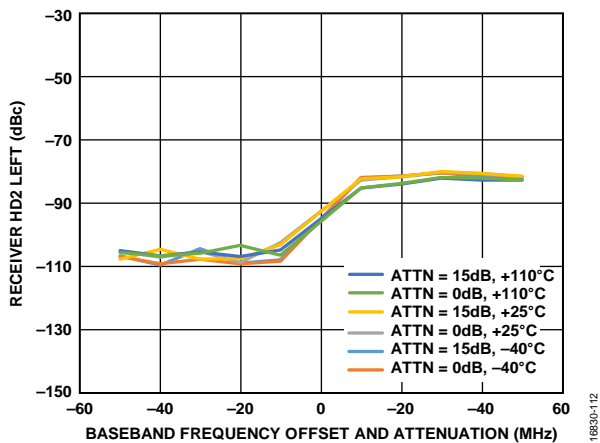


Figure 91. Receiver HD2 Left vs. Baseband Frequency Offset and Attenuation, Tone Level = -15 dBm at Attenuation = 0 dB, HD2 Correction Configured for Low-Side Optimization, X-Axis = Baseband Frequency Offset of the Fundamental Tone and Not the Frequency of the HD2 Product (HD2 Product = 2x the Baseband Frequency), LO = 2850 MHz

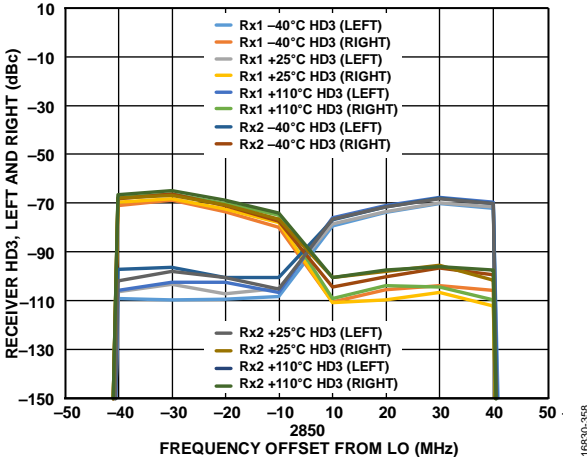


Figure 94. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 2850 MHz

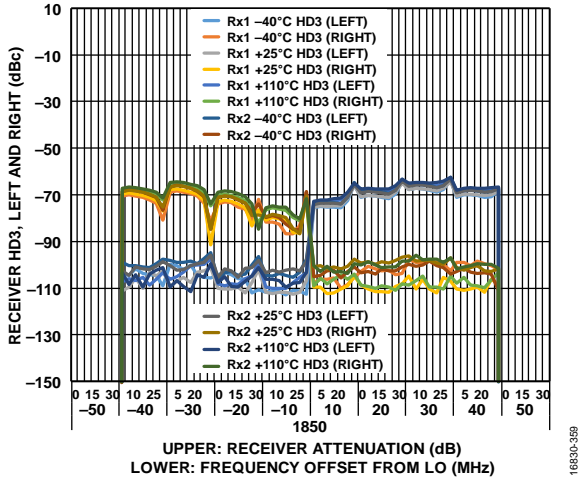


Figure 95. Receiver HD3, Left and Right vs. Receiver Attenuation and Frequency Offset from LO, Baseband Tone Held Constant, Tone Level Increased 1 for 1 as Attenuator is Swept from 0 dB to 30 dB, HD3 Right (High Side): Tone on Same Side as HD3 Product; HD3 Left (Low Side): Tone on Opposite Side as HD3 Product, CW Signal, LO = 1850 MHz, Tone Level = -15 dBm at Attenuation = 0 dB

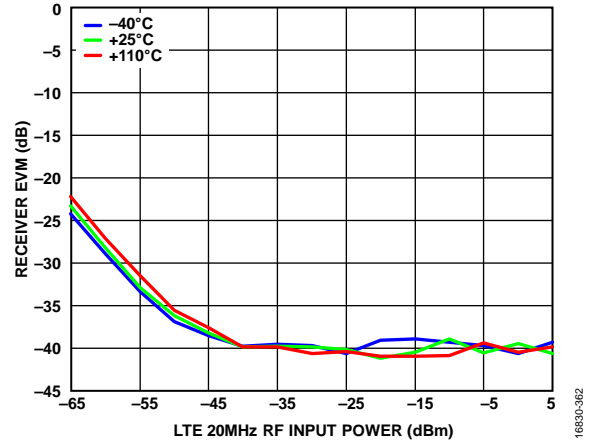


Figure 98. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 2700 MHz

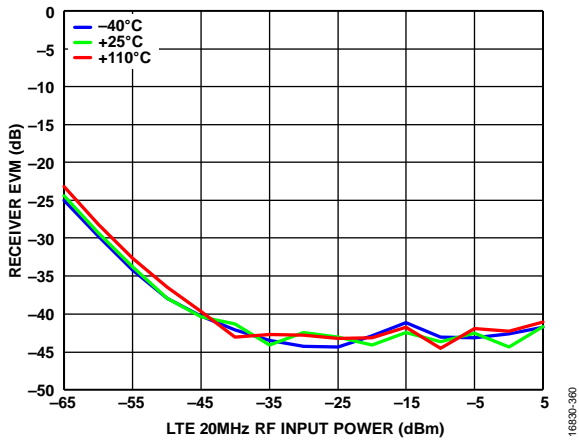


Figure 96. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 600 MHz

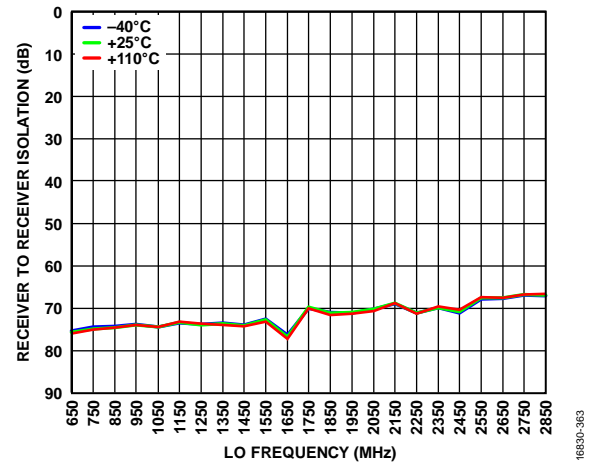


Figure 99. Receiver to Receiver Isolation (dB) vs. LO Frequency (MHz)

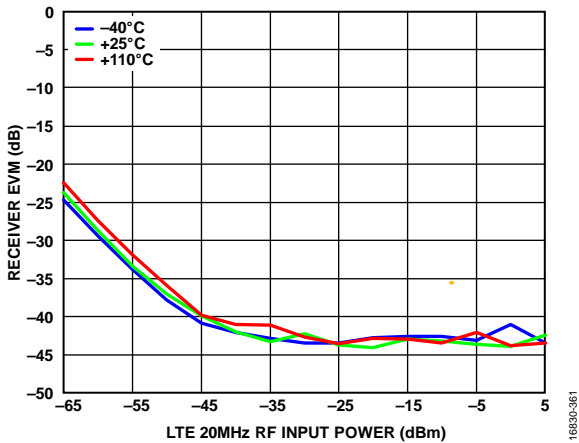


Figure 97. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 1800 MHz

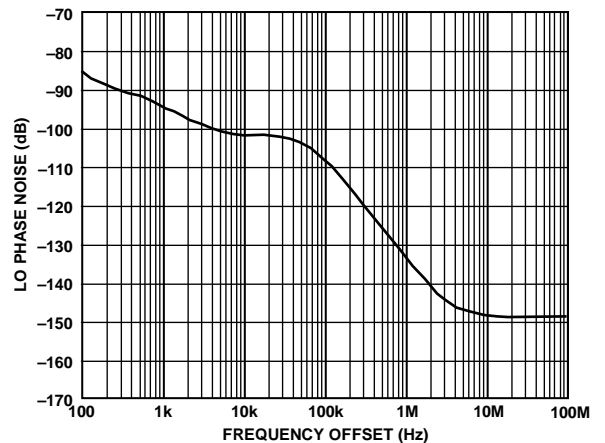


Figure 100. LO Phase Noise vs. Frequency Offset, LO = 1900 MHz, Spectrum Analyzer Limits Far Out Noise



3400 MHz TO 4800 MHz BAND

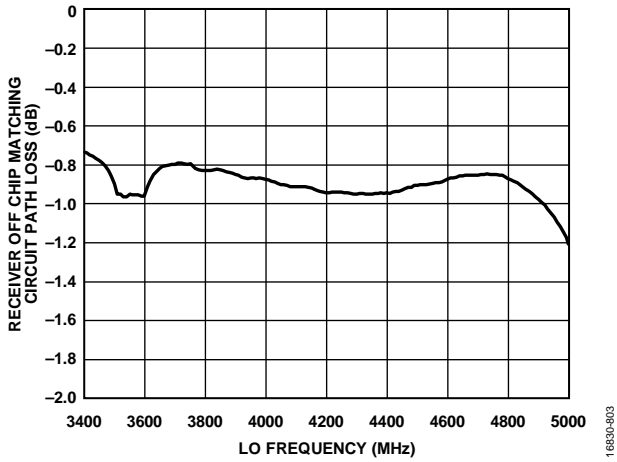


Figure 101. Receiver Off Chip Matching Circuit Path Loss vs. LO Frequency (Simulation), Can Be Used for De-Embedding Performance Data

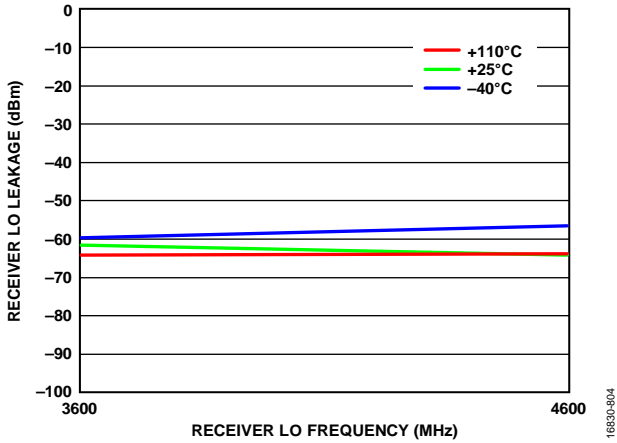


Figure 102. Receiver LO Leakage from 3600 MHz to 4600 MHz, 0 dB Attenuation, 200 MHz RF Bandwidth, 245.76 MSPS Sample Rate

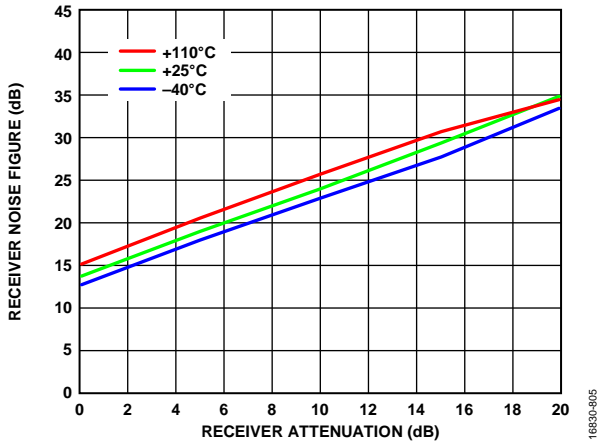


Figure 103. Receiver Noise Figure vs. Receiver Attenuation, LO = 3600 MHz, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS, Integration Bandwidth = 500 kHz to 100 MHz

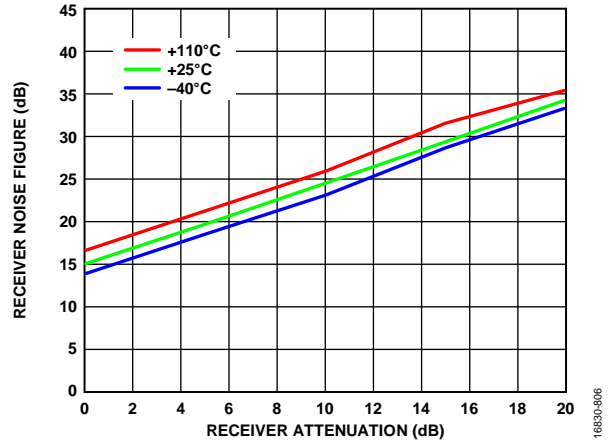


Figure 104. Receiver Noise Figure vs. Receiver Attenuation, LO = 4600 MHz, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS, Integration Bandwidth = 500 kHz to 100 MHz

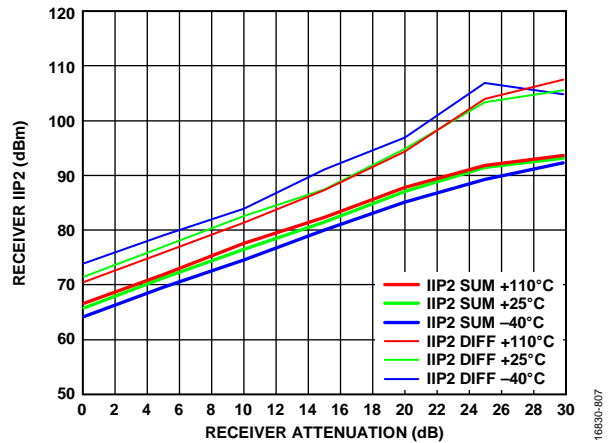


Figure 105. Receiver IIP2 vs. Receiver Attenuation, LO = 3600 MHz, Tones Placed at 3645 MHz and 3646 MHz, -21 dBm Plus Attenuation

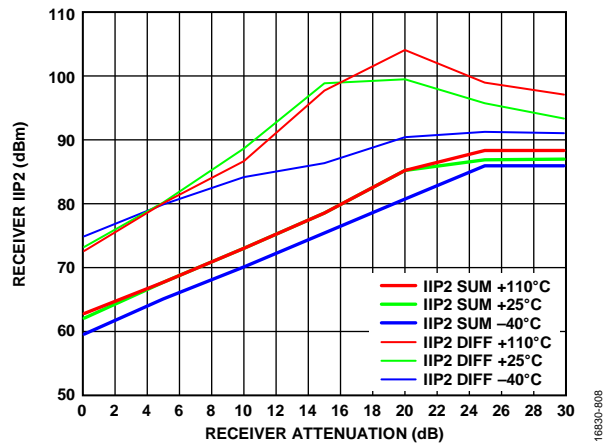


Figure 106. Receiver IIP2 vs. Receiver Attenuation, LO = 4600 MHz, Tones Placed at 4645 MHz and 4646 MHz, -21 dBm Plus Attenuation

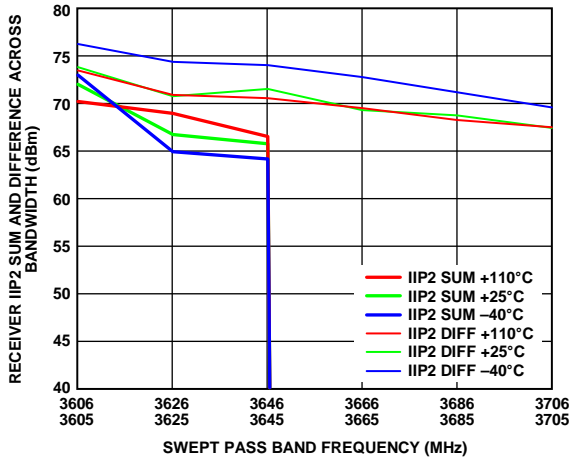


Figure 107. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 3600 MHz, Six Tone Pairs, -21 dBm Plus Attenuation Each

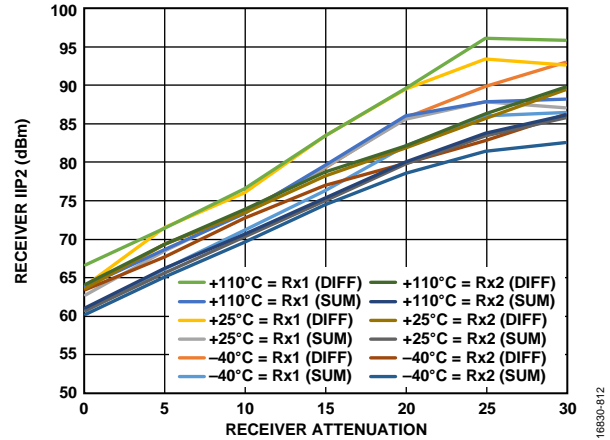


Figure 110. Receiver IIP2 vs. Receiver Attenuation, LO = 4600 MHz, Tones Placed at 4602 MHz and 4692 MHz, -21 dBm Plus Attenuation

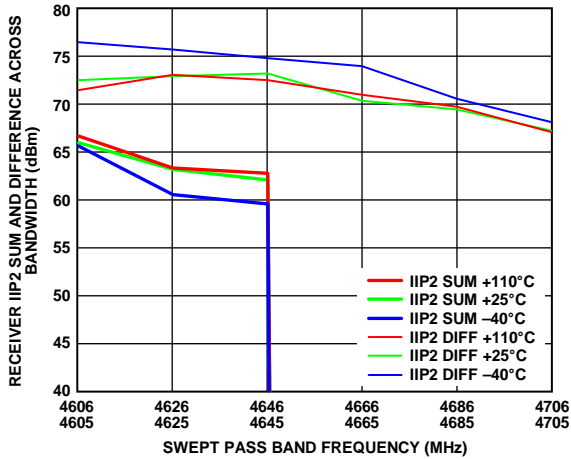


Figure 108. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 4600 MHz, Six Tone Pairs, -21 dBm Each

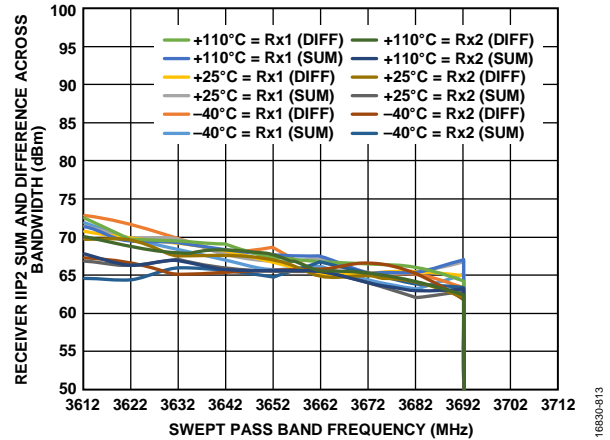


Figure 111. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 3600 MHz, Tone 1 = 3602 MHz, Tone 2 Swept, -21 dBm Each

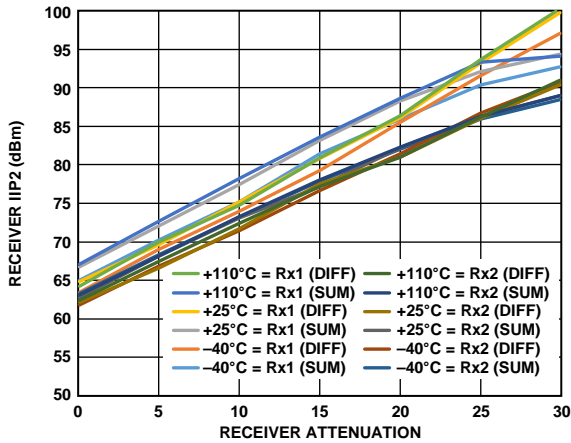


Figure 109. Receiver IIP2 vs. Receiver Attenuation, LO = 3600 MHz, Tone 1 = 4602 MHz and Tone 2 = 4692 MHz, -21 dBm Plus Attenuation

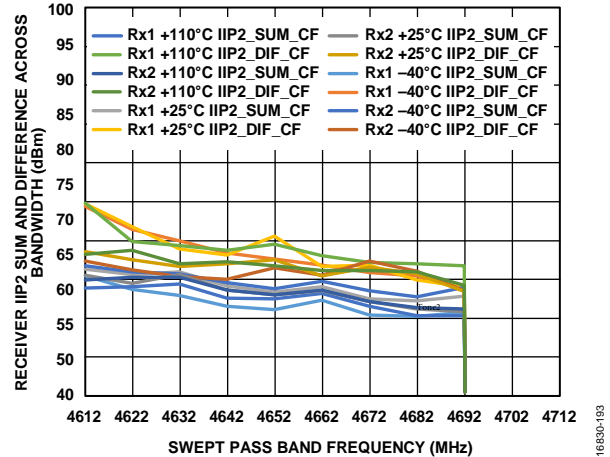


Figure 112. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 4600 MHz, Tone 1 = 4602 MHz, Tone 2 Swept, -21 dBm Each, IIP2\_SUM\_CF and IIP2\_DIF\_CF Indicate Sum and Difference Products

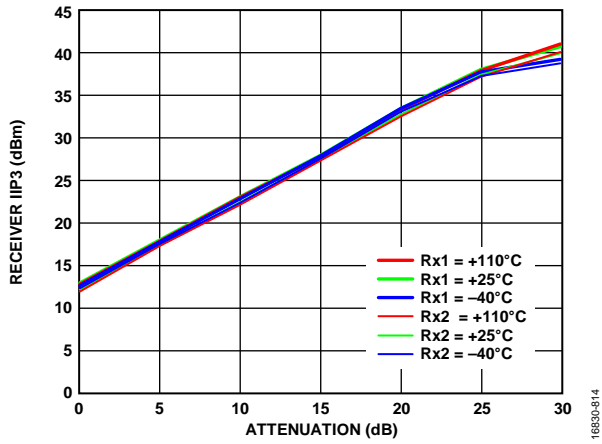


Figure 113. Receiver IIP3 vs. Attenuation, LO = 3600 MHz, Tone 1 = 3695 MHz, Tone 2 = 3696 MHz, -21 dBm Plus Attenuation

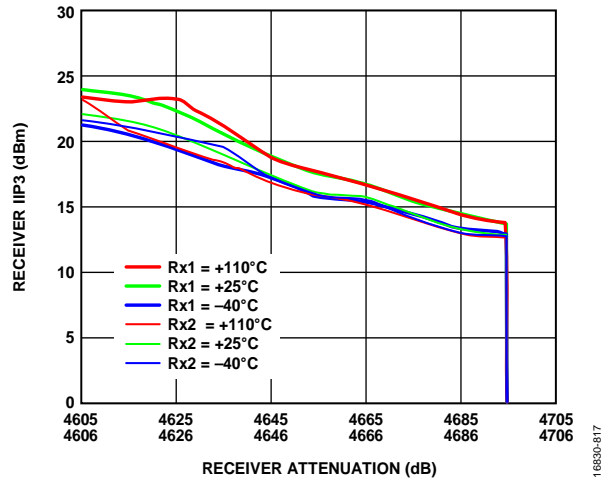


Figure 116. Receiver IIP3 vs. Receiver Attenuation, Receiver Attenuation = 0 dB, LO = 4600 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

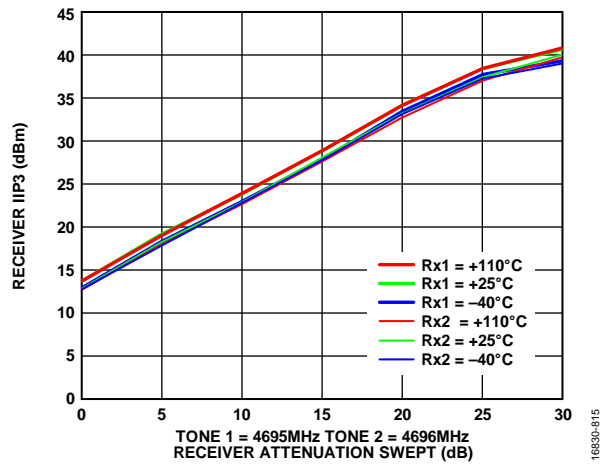


Figure 114. Receiver IIP3 vs. Receiver Attenuation Swept, LO = 4600 MHz, Tone 1 = 4695 MHz, Tone 2 = 4696 MHz, -21 dBm Plus Attenuation

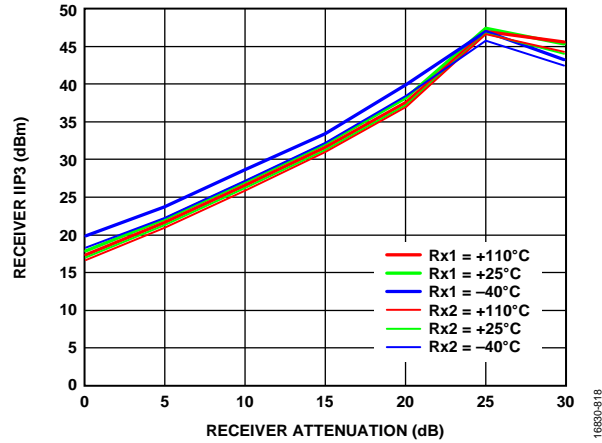


Figure 117. Receiver IIP3 vs. Receiver Attenuation, LO = 3600 MHz, Tone 1 = 3602 MHz, Tone 2 = 3692 MHz, -21 dBm Plus Attenuation

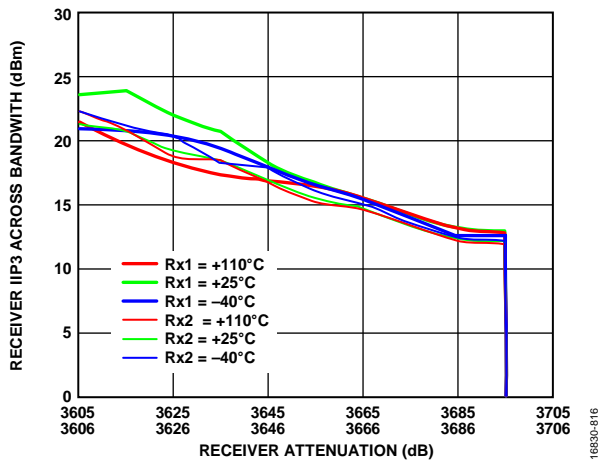


Figure 115. Receiver IIP3 Across Bandwidth, Receiver Attenuation = 0 dB, LO = 3600 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

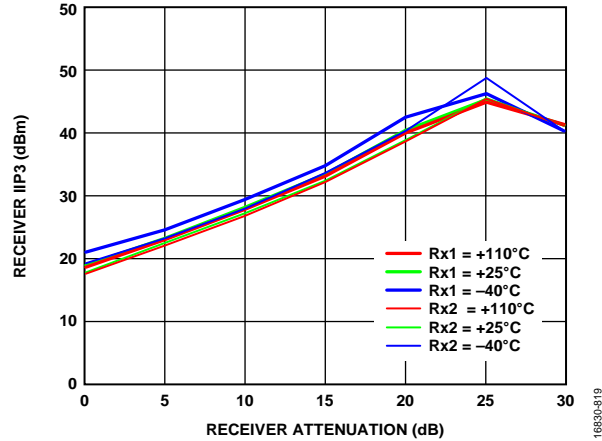


Figure 118. Receiver IIP3 vs. Receiver Attenuation, LO = 4600 MHz, Tone 1 = 4602 MHz, Tone 2 = 4692 MHz, -21 dBm Plus Attenuation

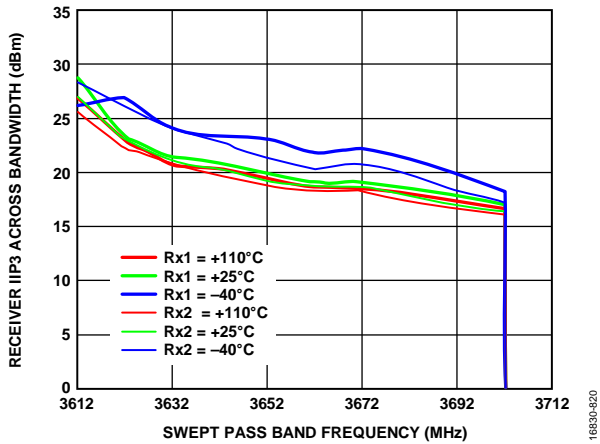


Figure 119. Receiver IIP3 Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 3600 MHz, Tone 1 = 3602 MHz, Tone 2 Swept Across Pass Band, -21 dBm Each

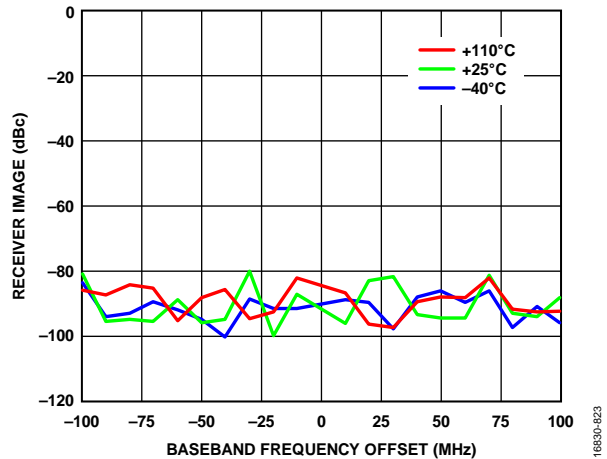


Figure 122. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 4600 MHz

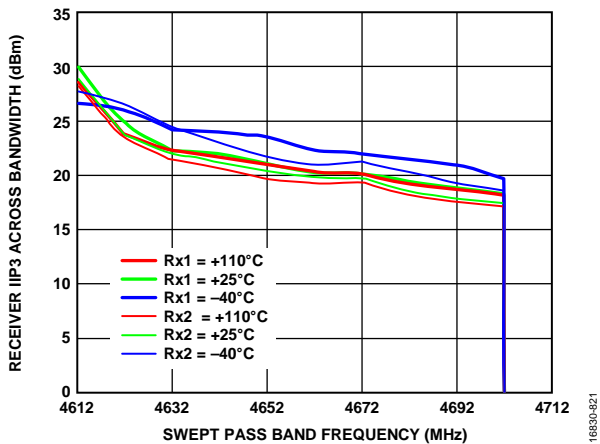


Figure 120. Receiver IIP3 Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 4600 MHz, Tone 1 = 4602 MHz, Tone 2 Swept Across Pass Band, -21 dBm Each

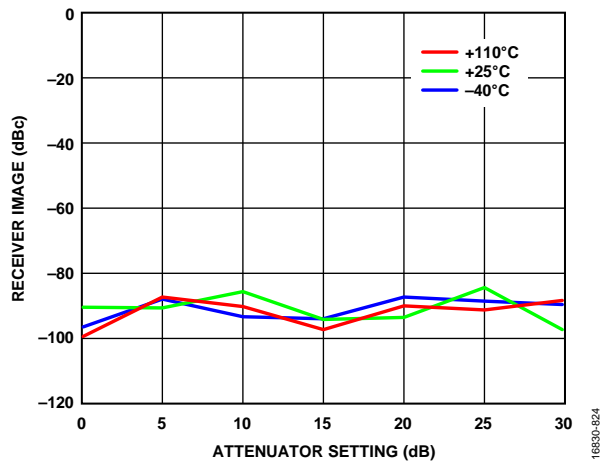


Figure 123. Receiver Image vs. Attenuator Setting, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 3600 MHz, Baseband Frequency = 10 MHz

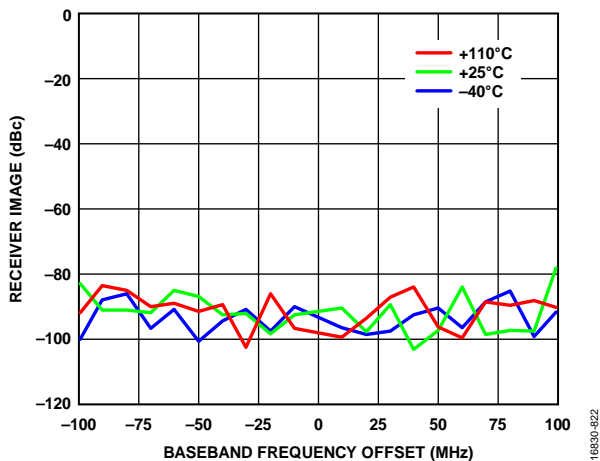


Figure 121. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 3600 MHz

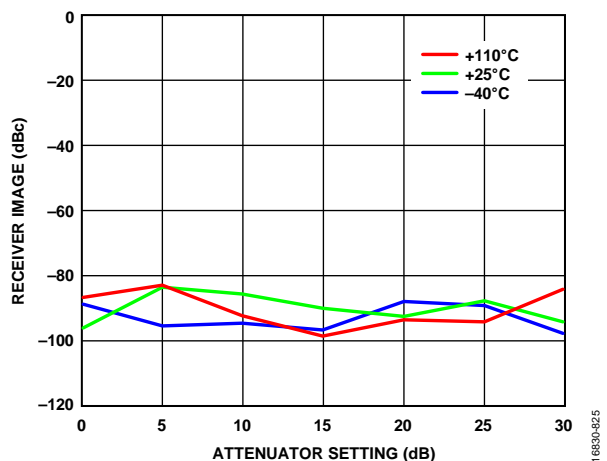


Figure 124. Receiver Image vs. Attenuator Setting, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 4600 MHz, Baseband Frequency = 10 MHz

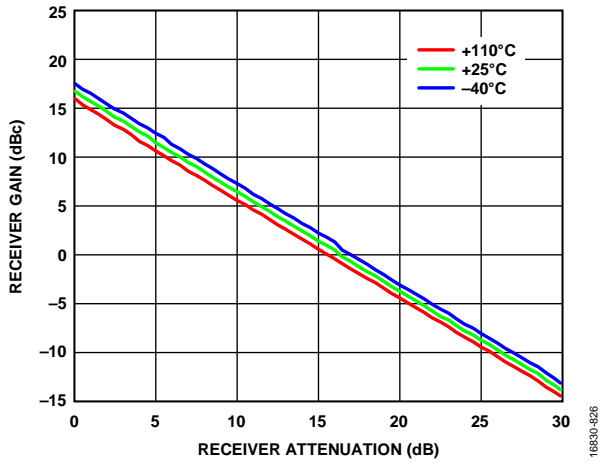


Figure 125. Receiver Gain vs. Receiver Attenuation, RF Bandwidth = 20 MHz, Sample Rate = 245.76 MSPS, LO = 3600 MHz

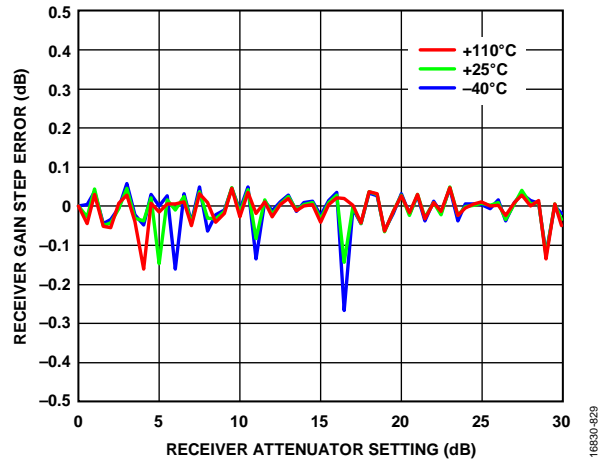


Figure 128. Receiver Gain Step Error vs. Receiver Attenuator Setting, LO = 3600 MHz

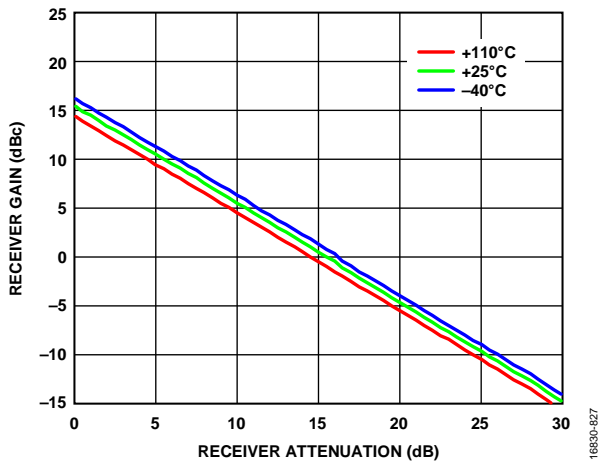


Figure 126. Receiver Gain vs. Receiver Attenuation, RF Bandwidth = 20 MHz, Sample Rate = 245.76 MSPS, LO = 4600 MHz

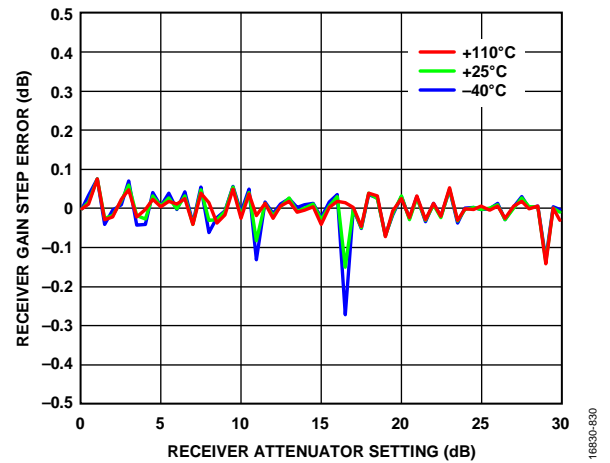


Figure 129. Receiver Gain Step Error vs. Receiver Attenuator Setting, LO = 4600 MHz

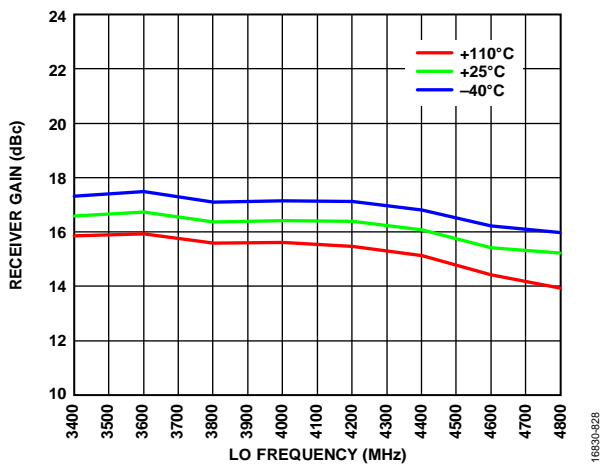


Figure 127. Receiver Gain vs. LO Frequency, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS

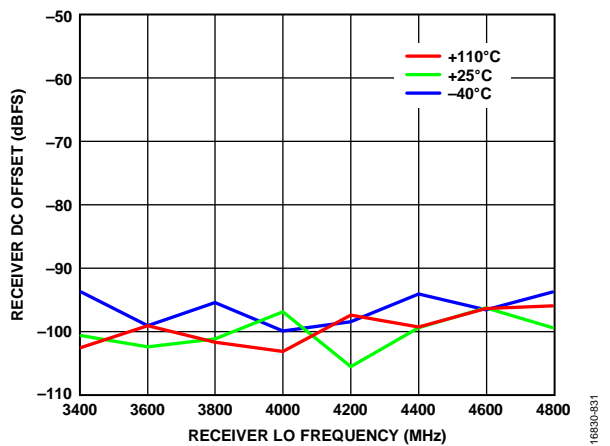


Figure 130. Receiver DC Offset vs. Receiver LO Frequency

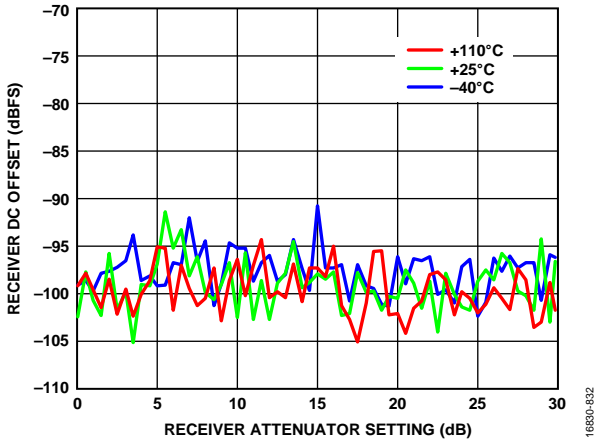


Figure 131. Receiver DC Offset vs. Receiver Attenuator Setting, LO = 3600 MHz

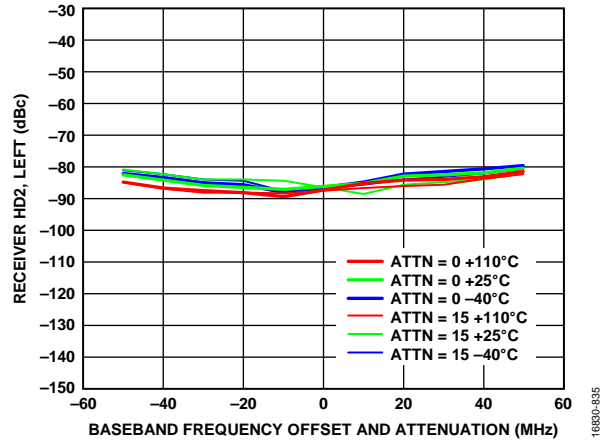


Figure 134. Receiver HD2, Left vs. Baseband Frequency Offset and Attenuation, Tone Level = -15 dBm at Attenuation = 0 dB, X-Axis = Baseband Frequency Offset of the Fundamental Tone, Not the Frequency of the HD2 Product (HD2 Product = 2x the Baseband Frequency), HD2 Canceller Disabled, LO = 4600 MHz

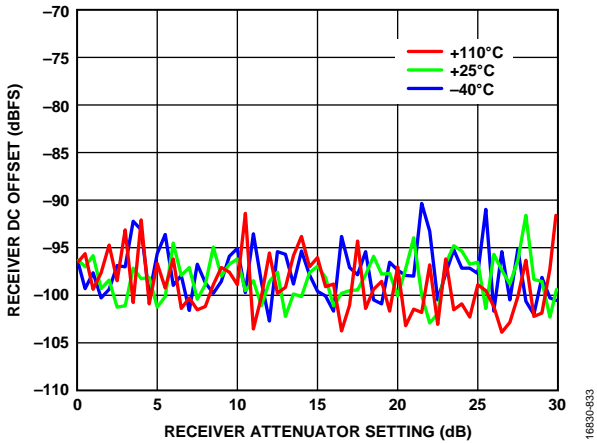


Figure 132. Receiver DC Offset vs. Receiver Attenuator Setting, LO = 4600 MHz

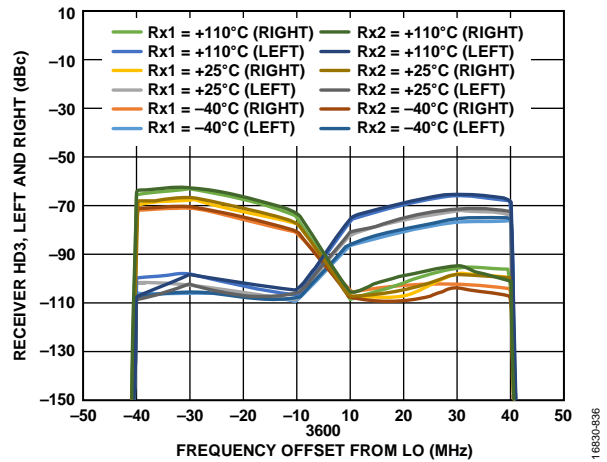


Figure 135. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 3600 MHz

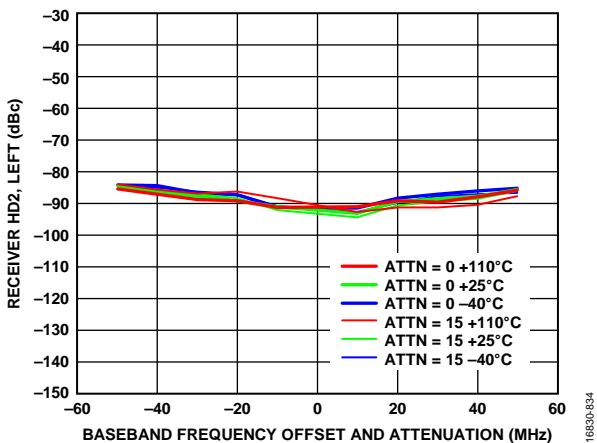


Figure 133. Receiver HD2, Left vs. Baseband Frequency Offset and Attenuation, Tone Level = -15 dBm at Attenuation = 0 dB, X-Axis = Baseband Frequency Offset of the Fundamental Tone Not the Frequency of the HD2 Product (HD2 Product = 2x the Baseband Frequency), HD2 Canceller Disabled, LO = 3600 MHz

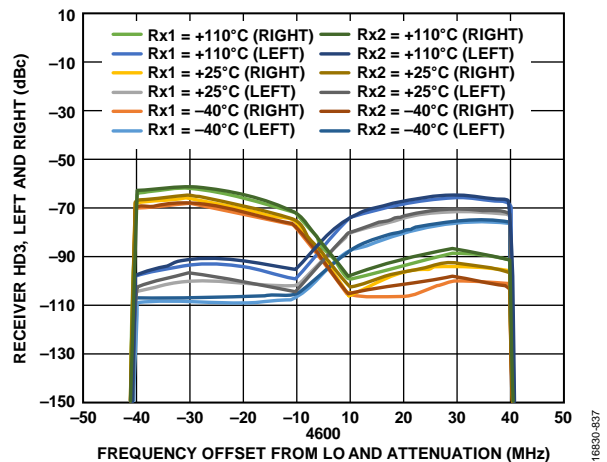


Figure 136. Receiver HD3, Left and Right vs. Frequency Offset from LO and Attenuation, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 4600 MHz

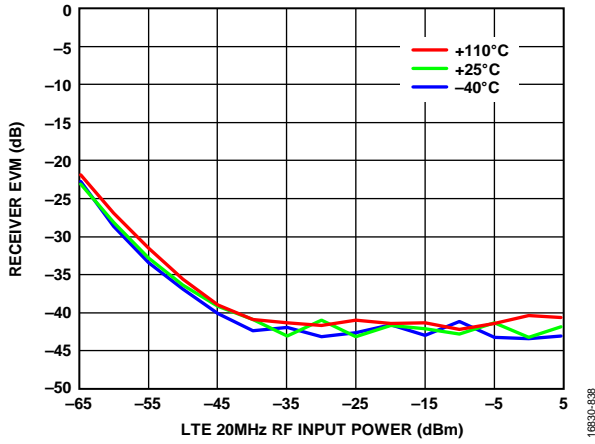


Figure 137. Receiver EVM vs. LTE 20 MHz RF Input Power, RF Signal = LTE 20 MHz, LO = 3600 MHz, Default AGC Settings

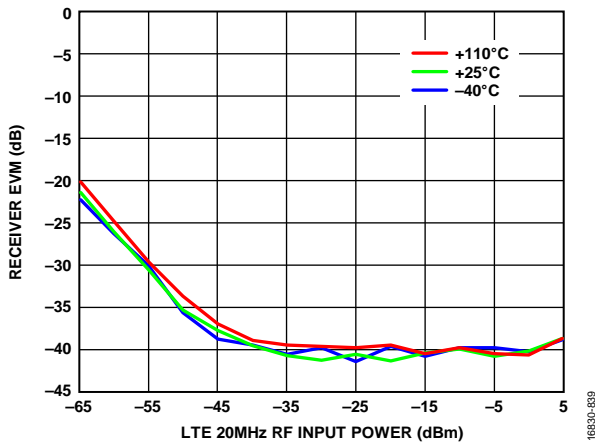


Figure 138. Receiver EVM vs. LTE 20 MHz RF Input Power, RF Signal = LTE 20 MHz, LO = 4600 MHz, Default AGC Settings

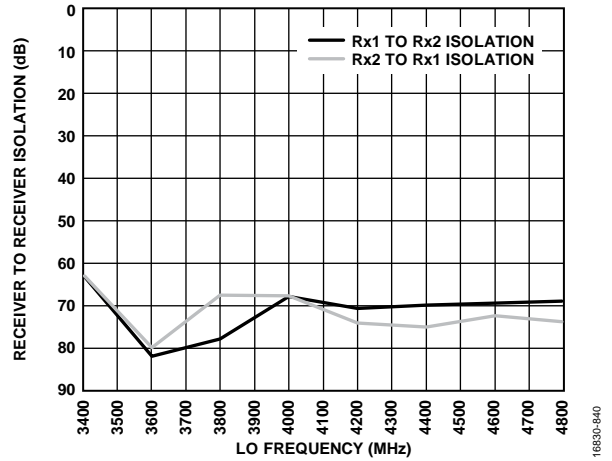


Figure 139. Receiver to Receiver Isolation vs. LO Frequency

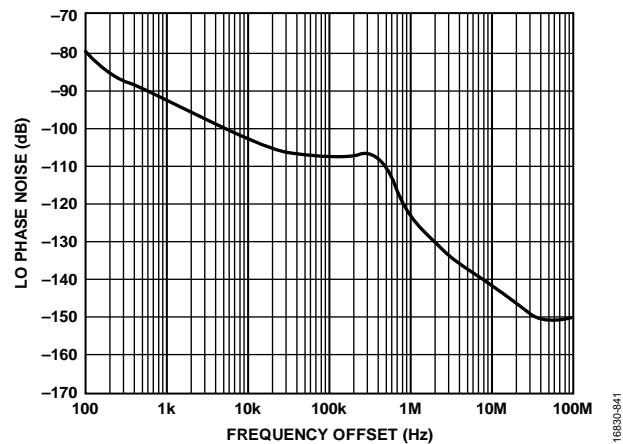


Figure 140. LO Phase Noise vs. Frequency Offset, LO = 3800 MHz, PLL Loop Bandwidth = 300 kHz, Spectrum Analyzer Limits Far Out Noise

5100 MHz TO 5900 MHz BAND

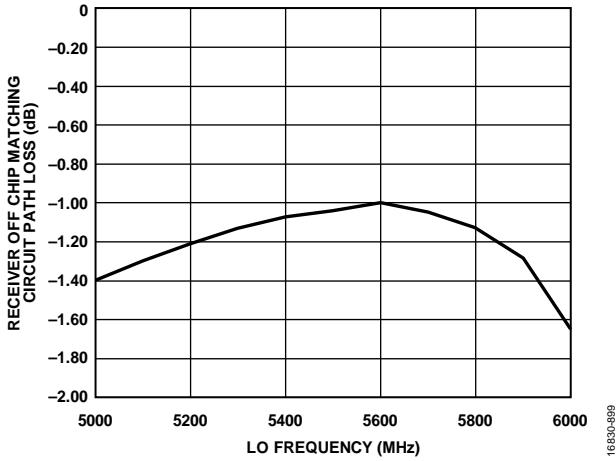


Figure 141. Receiver Off Chip Matching Circuit Path Loss vs. LO Frequency (Simulation), Can Be Used for De-Embedding Performance Data

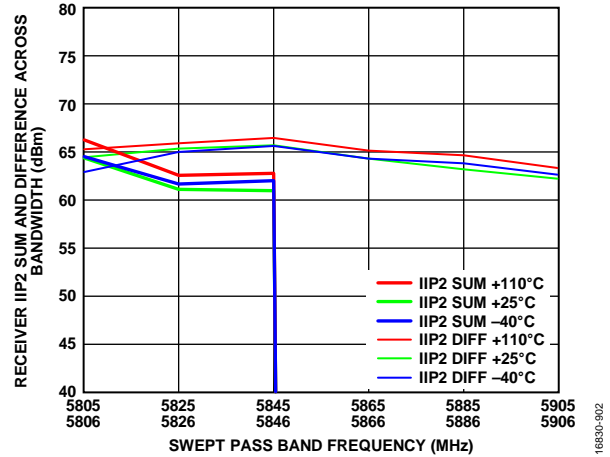


Figure 144. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 5800 MHz, Six Tone Pairs, -21 dBm Plus Attenuation Each

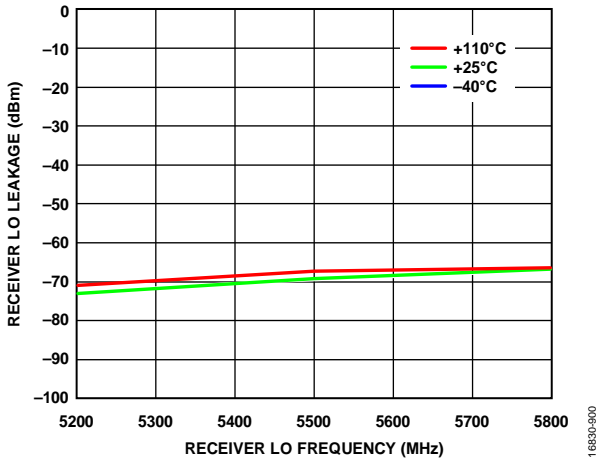


Figure 142. Receiver LO Leakage vs. Receiver LO Frequency, 5200 MHz, 5500 MHz, and 5800 MHz, Receiver Attenuation = 0 dB, RF Bandwidth = 200 MHz, Sample Rate = 245.76 MSPS

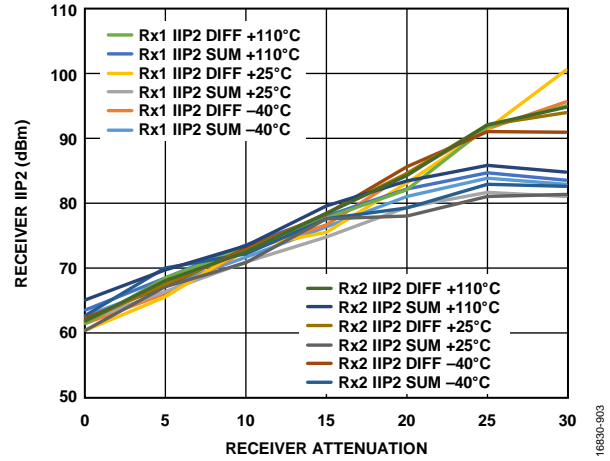


Figure 145. Receiver IIP2 vs. Receiver Attenuation, LO = 5800 MHz, Tones Placed at 5802 MHz and 5892 MHz, -21 dBm Plus Attenuation

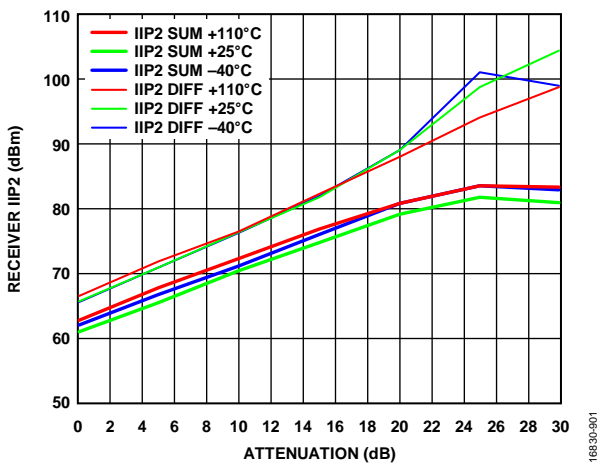


Figure 143. Receiver IIP2 vs. Attenuation, LO = 5800 MHz, Tones Placed at 5845 MHz and 5846 MHz, -21 dBm Plus Attenuation

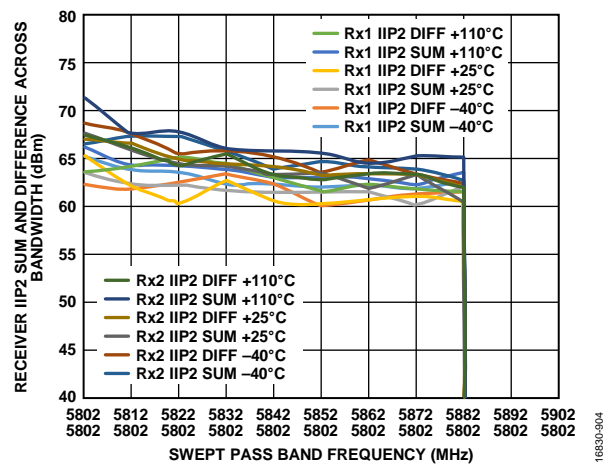


Figure 146. Receiver IIP2 Sum and Difference Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 5800 MHz, Tone 1 = 5802 MHz, Tone 2 Swept, -21 dBm Each



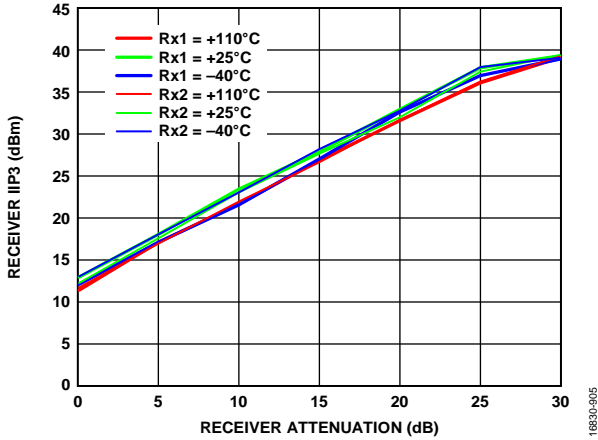


Figure 147. Receiver IIP3 vs. Receiver Attenuation, LO = 5800 MHz, Tone 1 = 5895 MHz, Tone 2 = 5896 MHz, -21 dBm Plus Attenuation

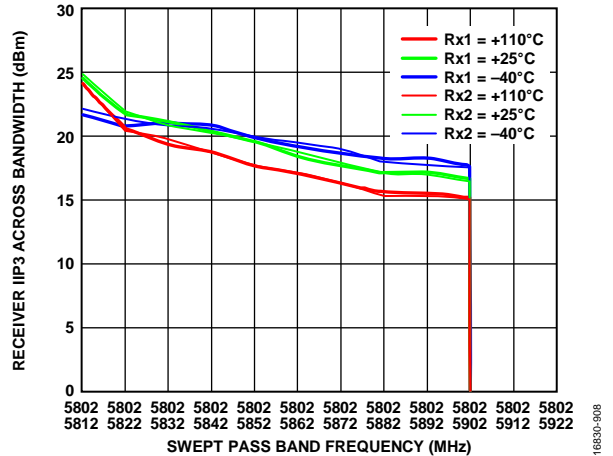


Figure 150. Receiver IIP3 Across Bandwidth vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 5800 MHz, Tone 1 = 5802 MHz, Tone 2 Swept Across Pass Band, -21 dBm Each

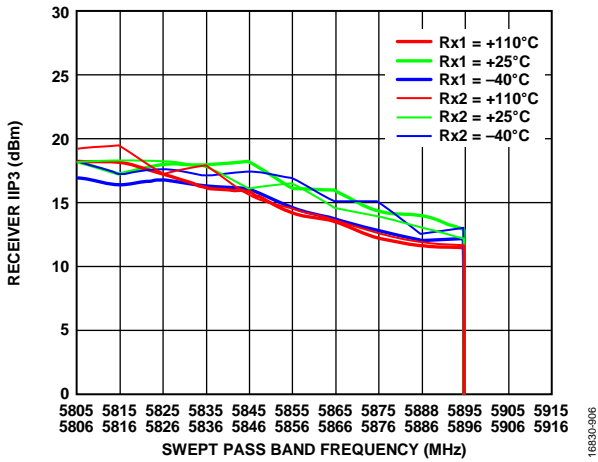


Figure 148. Receiver IIP3 vs. Swept Pass Band Frequency, Receiver Attenuation = 0 dB, LO = 5800 MHz, Tone 2 = Tone 1 + 1 MHz, -21 dBm Each, Swept Across Pass Band

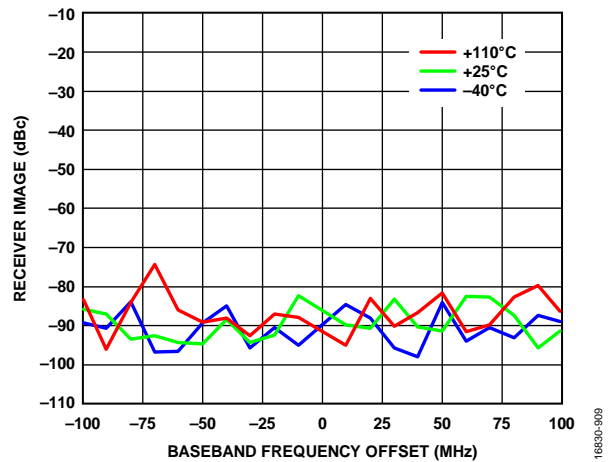


Figure 151. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 5200 MHz

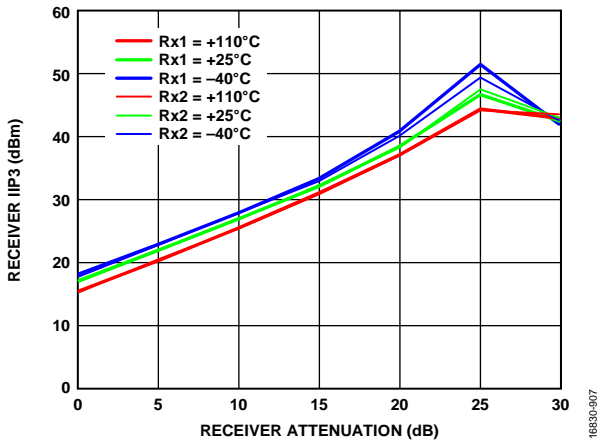


Figure 149. Receiver IIP3 vs. Receiver Attenuation, LO = 5800 MHz, Tone 1 = 5802 MHz, Tone 2 = 5892 MHz, -21 dBm Plus Attenuation

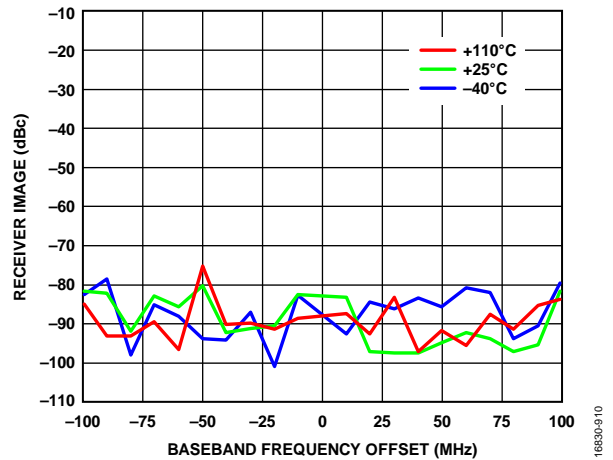


Figure 152. Receiver Image vs. Baseband Frequency Offset, Attenuation = 0 dB, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 5900 MHz

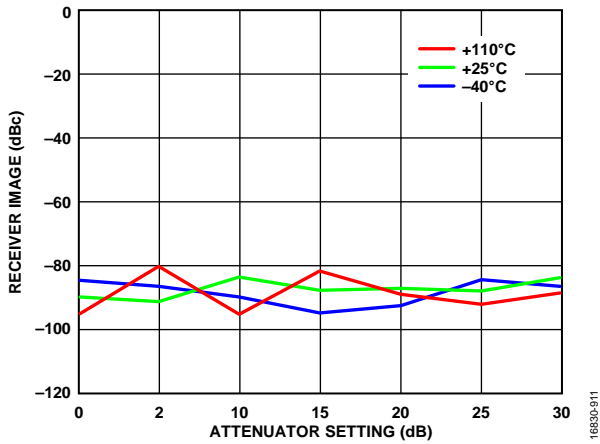


Figure 153. Receiver Image vs. Attenuator Setting, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 5200 MHz, Baseband Frequency = 10 MHz

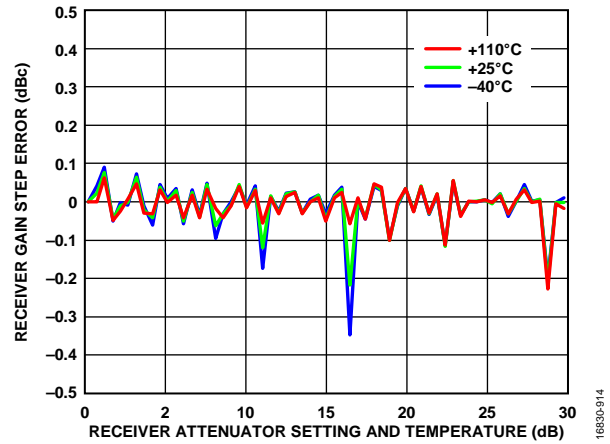


Figure 156. Receiver Gain Step Error vs. Receiver Attenuator Setting and Temperature, LO = 56000 MHz

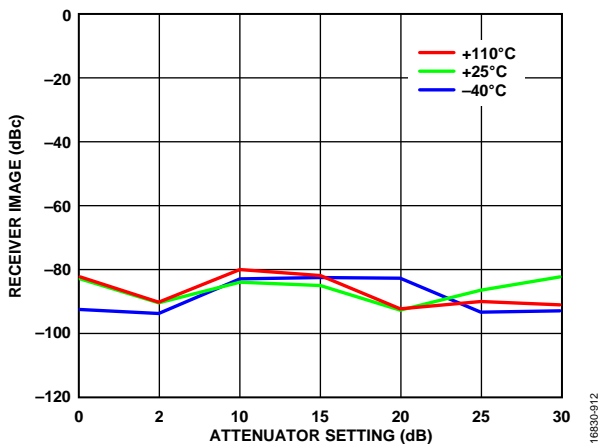


Figure 154. Receiver Image vs. Attenuator Setting, RF Bandwidth = 200 MHz, Tracking Calibration Active, Sample Rate = 245.76 MSPS, LO = 5900MHz, Baseband Frequency = 10 MHz

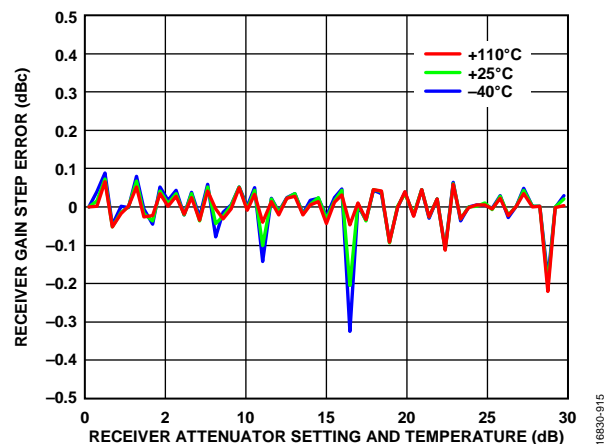


Figure 157. Receiver Gain Step Error vs. Receiver Attenuator Setting and Temperature, LO = 60000 MHz

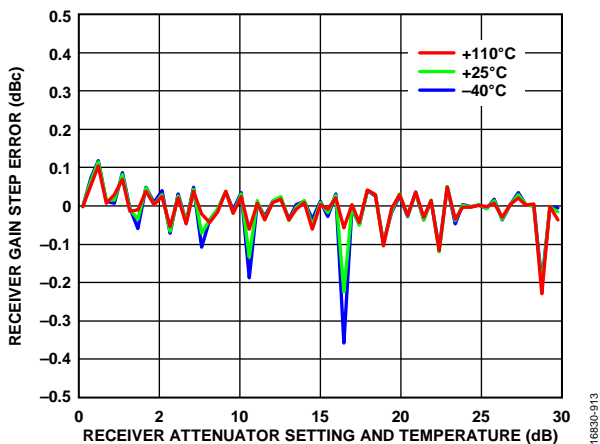


Figure 155. Receiver Gain Step Error vs. Receiver Attenuator Setting and Temperature, LO = 52000 MHz

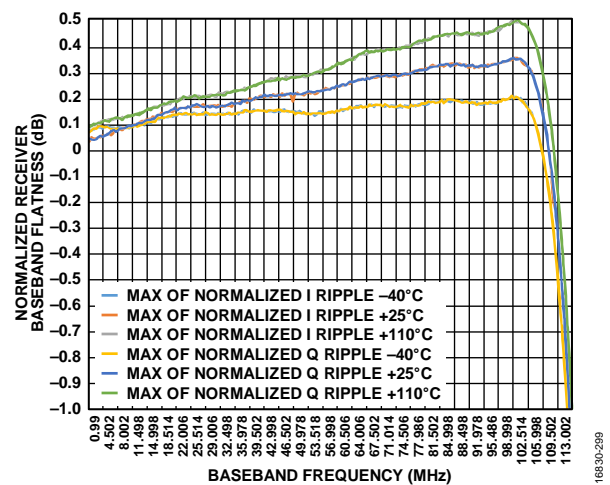


Figure 158. Normalized Receiver Baseband Flatness vs. Baseband Frequency (Receiver Flatness)

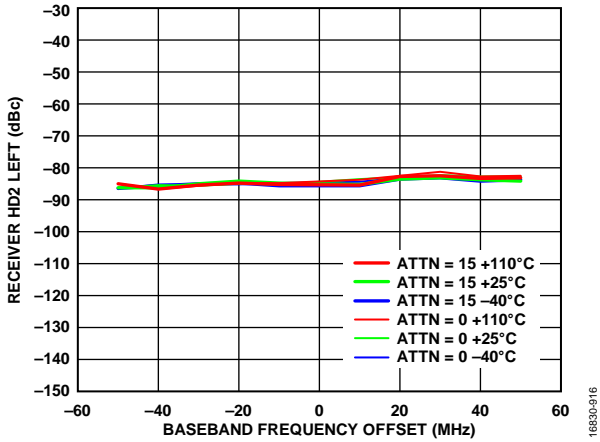


Figure 159. Receiver HD2 Left vs. Baseband Frequency Offset, Tone Level = -15 dBm at Attenuation = 0 dB, X-Axis = Baseband Frequency Offset of the Fundamental Tone Not the Frequency of the HD2 Product (HD2 Product = 2x the Baseband Frequency), HD2 Canceller Disabled, LO = 5200 MHz

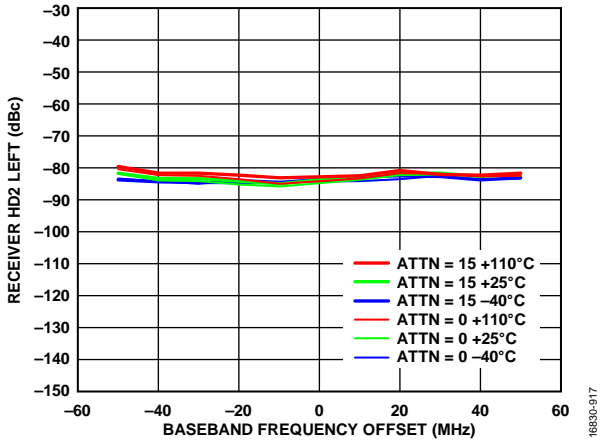


Figure 160. Receiver HD2 Left vs. Baseband Frequency Offset, Tone Level = -15 dBm at Attenuation = 0 dB, X-Axis = Baseband Frequency Offset of the Fundamental Tone Not the Frequency of the HD2 Product (HD2 Product = 2x the Baseband Frequency), HD2 Canceller Disabled, LO = 5900 MHz

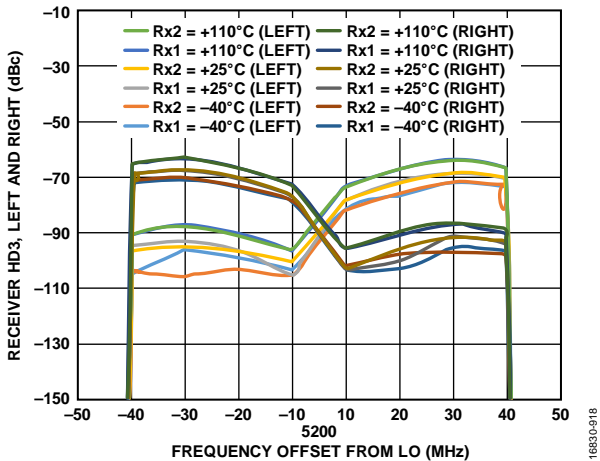


Figure 161. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 5200 MHz

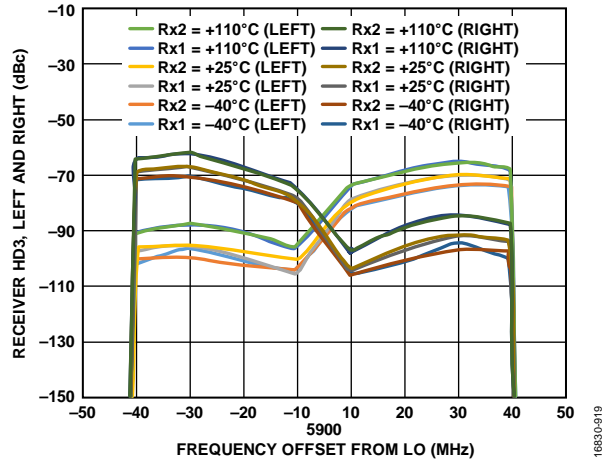


Figure 162. Receiver HD3, Left and Right vs. Frequency Offset from LO, Tone Level = -15 dBm at Attenuation = 0 dB, LO = 5900 MHz

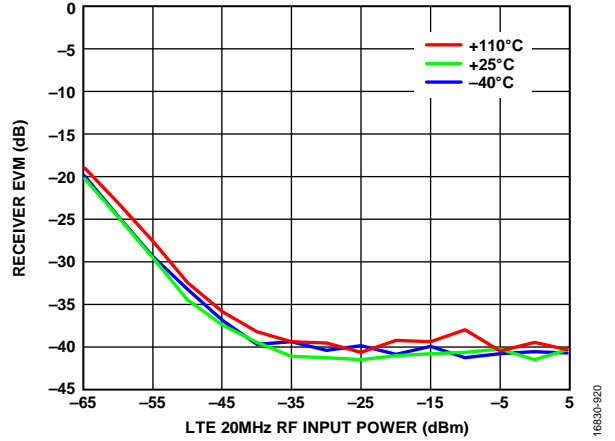


Figure 163. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 5200 MHz, Default AGC Settings

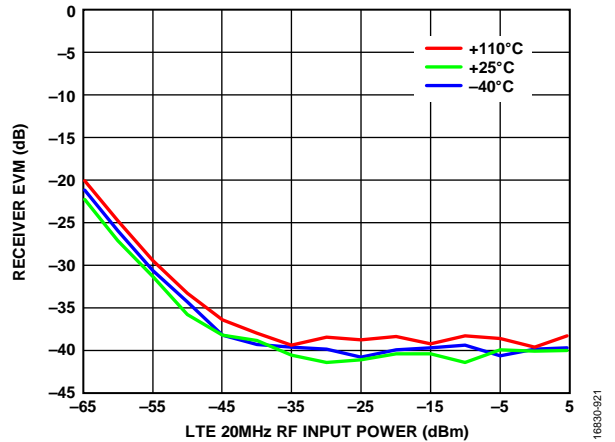


Figure 164. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 5500 MHz, Default AGC Settings

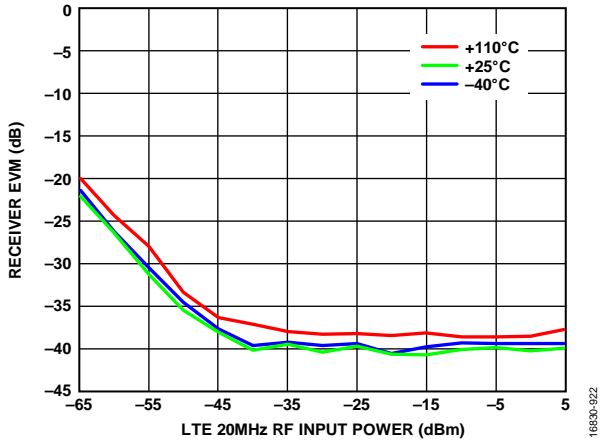


Figure 165. Receiver EVM vs. LTE 20 MHz RF Input Power, LTE 20 MHz RF Signal, LO = 5800 MHz, Default AGC Settings

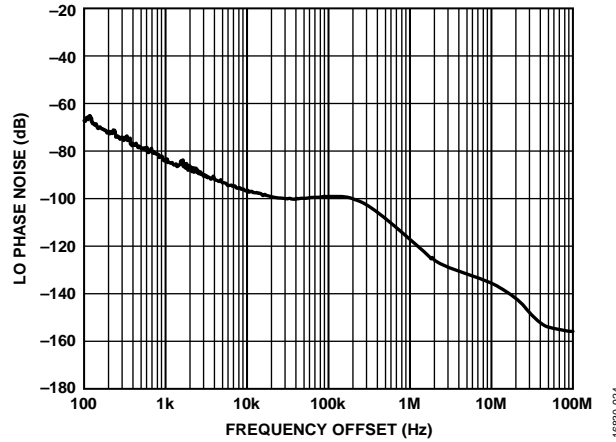


Figure 167. LO Phase Noise vs. Frequency Offset, LO = 5900 MHz, PLL Loop Bandwidth > 300 kHz, Spectrum Analyzer Limits Far Out Noise


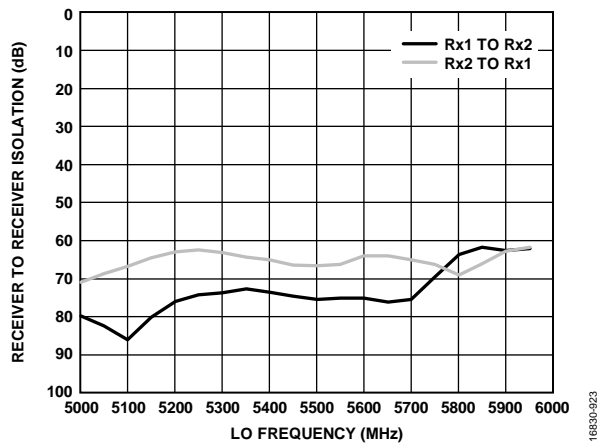


Figure 166. Receiver to Receiver Isolation vs. LO Frequency

RECEIVER INPUT IMPEDANCE

RX PORT SIMULATED IMPEDANCE: SEDZ

|                                                                                           |
|-------------------------------------------------------------------------------------------|
| M15<br>FREQUENCY = 100.0MHz<br>S (1,1) = 0.390 / -1.819<br>IMPEDANCE = 113.933 - j3.331   |
| M16<br>FREQUENCY = 300.0MHz<br>S (1,1) = 0.390 / -5.495<br>IMPEDANCE = 112.803 - j9.931   |
| M17<br>FREQUENCY = 500.0MHz<br>S (1,1) = 0.388 / -9.198<br>IMPEDANCE = 110.398 - j16.107  |
| M18<br>FREQUENCY = 1.000GHz<br>S (1,1) = 0.377 / -18.643<br>IMPEDANCE = 100.377 - j28.250 |
| M19<br>FREQUENCY = 2.000GHz<br>S (1,1) = 0.336 / -39.123<br>IMPEDANCE = 74.966 - j35.800  |

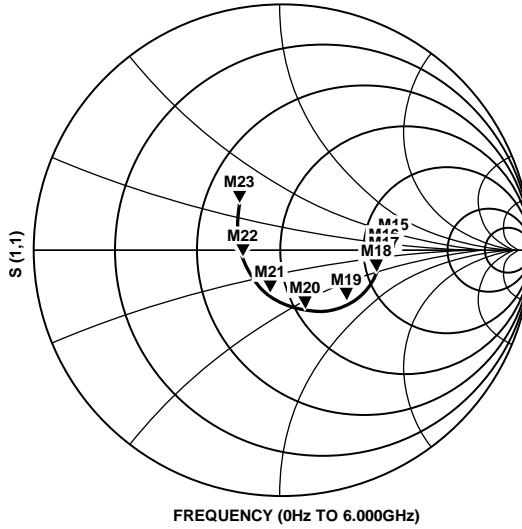

|                                                                                           |
|-------------------------------------------------------------------------------------------|
| M20<br>FREQUENCY = 3.000GHz<br>S (1,1) = 0.267 / -64.650<br>IMPEDANCE = 55.102 - j28.685  |
| M21<br>FREQUENCY = 4.000GHz<br>S (1,1) = 0.186 / -104.336<br>IMPEDANCE = 42.821 - j16.026 |
| M22<br>FREQUENCY = 5.000GHz<br>S (1,1) = 0.164 / -173.106<br>IMPEDANCE = 35.977 - j1.455  |
| M23<br>FREQUENCY = 6.000GHz<br>S (1,1) = 0.266 / 130.063<br>IMPEDANCE = 32.890 + j14.399  |

Figure 168. Receiver Input Impedance, Series Equivalent Differential Impedance (SEDZ)

1683D-004

## TERMINOLOGY

### Large Signal Bandwidth

Large signal bandwidth, otherwise known as instantaneous bandwidth or signal bandwidth, is the bandwidth over which there are large signals. For example, for Band 42 LTE, the large signal bandwidth is 200 MHz.

### Occupied Bandwidth

Occupied bandwidth is the total bandwidth of the active signals. For example, three 20 MHz carriers have a 60 MHz occupied bandwidth, regardless of the placement of the carriers within the large signal bandwidth.

### Backoff

Backoff is the difference (in dB) between full-scale signal power and the rms signal power.

### $P_{\text{HIGH}}$

$P_{\text{HIGH}}$  is the largest signal that can be applied without overloading the ADC for the receiver input. This input level results in slightly less than full scale at the digital output because of the nature of the continuous-time,  $\Sigma$ - $\Delta$  ADCs, which, for example, exhibit a soft overload in contrast to the hard clipping of pipeline ADCs.

## THEORY OF OPERATION

The ADRV9008-1 is a highly integrated, RF, agile receiver subsystem capable of configuration for a wide range of applications. The device integrates all RF, mixed-signal, and digital blocks necessary to provide all receiver functions in a single device. Programmability allows the receiver to be adapted for use in many TDD and 3G/4G/5G cellular standards. The ADRV9008-1 contains two high speed links each for the receiver chain. These links are JESD204B, Subclass 1 compliant.

The ADRV9008-1 also provides tracking correction of dc offset QEC errors to maintain high performance under varying temperatures and input signal conditions. The device also includes test modes that allow system designers to debug designs during prototyping and optimize radio configurations.

### RECEIVERS

The ADRV9008-1 receivers contain all the blocks necessary to receive RF signals and convert them to digital data used by a BBP. Each receiver can be configured as a direct conversion system that supports up to a 200 MHz bandwidth. Each receiver contains a programmable attenuator stage and matched I and Q mixers that downconvert received signals to baseband for digitization.

Achieve gain control by using the on-chip AGC or by allowing the BBP to make gain adjustments in a manual gain control mode. Optimize performance by mapping each gain control setting to specific attenuation levels at each adjustable gain block in the receiver signal path. Additionally, each channel contains independent receive signal strength indicator (RSSI) measurement capability, dc offset tracking, and all circuitry necessary for self calibration.

The receivers include ADCs and adjustable sample rates that produce data streams from the received signals. The signals can be conditioned further by a series of decimation filters and a programmable FIR filter with additional decimation settings. The sample rate of each digital filter block is adjustable by changing decimation factors to produce the desired output data rate.

### CLOCK INPUT

The ADRV9008-1 requires a differential clock connected to the REF\_CLK\_IN\_x pins. The frequency of the clock input must be between 10 MHz and 1000 MHz, and the frequency must have low phase noise because this signal generates the RF LO and internal sampling clocks.

### SYNTHESIZERS

#### RF PLL

The ADRV9008-1 contains a fractional-N PLL to generate the RF LO for the signal paths. The PLL incorporates an internal VCO and loop filter, requiring no external components. The LOs on multiple chips can be phase synchronized to support active antenna systems and beam forming applications.

#### Clock PLL

The ADRV9008-1 contains a PLL synthesizer that generates all the baseband related clock signals and serialization/deserialization (SERDES) clocks. This PLL is programmed based on the data rate and sample rate requirements of the system.

#### SPI

The ADRV9008-1 uses an SPI interface to communicate with the BBP. This interface can be configured as a 4-wire interface with a dedicated receiver port and transmitter port. The interface can also be configured as a 3-wire interface with a bidirectional data communications port. This bus allows the BBP to set all device control parameters using a simple address data serial bus protocol.

Write commands follow a 24-bit format. The first five bits set the bus direction and the number of bytes to transfer. The next 11 bits set the address where the data is written. The final eight bits are the data transferred to the specific register address.

Read commands follow a similar format with the exception that the first 16 bits are transferred on the SDIO pin and the final eight bits are read from the ADRV9008-1, either on the SDO pin in 4-wire mode or on the SDIO pin in 3-wire mode.

### JTAG BOUNDARY SCAN

The ADRV9008-1 provides support for the JTAG boundary scan. There are five dual-function pins associated with the JTAG interface. These pins, listed in Figure 5, are used to access the on-chip test access port. To enable the JTAG functionality, set the GPIO\_3 pin through the GPIO\_0 pin to 1001 and pull the TEST pin high.

### POWER SUPPLY SEQUENCE

The ADRV9008-1 requires a specific power-up sequence to avoid undesired power-up currents. In the optimal power-up sequence, the VDDD1P3\_DIG supply and the VDDA1P3\_x supply (VDDA1P3\_x includes all 1.3 V domains) power up together first. If these supplies cannot be powered up simultaneously, then the VDDD1P3\_DIG supply must power up first. Power up the VDDA\_3P3 supply, the VDDA1P8\_x supply, and the VDDA1P3\_SER supply after powering up the 1.3 V supplies. The VDD\_INTERFACE supply can be powered up at any time. No device damage occurs if this sequence is not followed, but failing to follow this sequence may result in higher than expected power-up currents. Toggle the RESET signal after the power stabilizes, prior to configuration. The power-down sequence is not critical. If a power-down sequence is followed, remove the VDDD1P3\_DIG supply last to avoid any back biasing of the digital control lines.

**GPIO\_x PINS**

The ADRV9008-1 provides nineteen 1.8 V to 2.5 V GPIO signals that can be configured for numerous functions. When configured as outputs, certain pins can provide real-time signal information to the BBP, allowing the BBP to determine receiver performance. A pointer register selects the information that is output to these pins. Signals used for manual gain mode, calibration flags, state machine states, and various receiver parameters are among the outputs that can be monitored on these pins. Additionally, certain pins can be configured as inputs and used for various functions, such as setting the receiver gain in real time.

Twelve 3.3 V GPIO\_x pins are also included on the device. These pins provide control signals to external components.

**AUXILIARY CONVERTERS**

**AUXADC\_x**

The ADRV9008-1 contains an auxiliary ADC that is multiplexed to four input pins (AUXADC\_x). The auxiliary ADC is 12 bits with an input voltage range of 0.05 V to VDDA\_3P3 – 0.05 V. When

enabled, the auxiliary ADC is free running. The SPI reads provide the last value latched at the ADC output. The auxiliary ADC can also be multiplexed to a built in, diode-based temperature sensor.

**Auxiliary DAC x**

The ADRV9008-1 contains 10 identical auxiliary DACs that can be used for bias or other system functionality. The auxiliary DACs are 10 bits, have an output voltage range of approximately 0.7 V to VDDA\_3P3 – 0.3 V, and have a current drive of 10 mA.

**JESD204B DATA INTERFACE**

The digital data interface for the ADRV9008-1 uses JEDEC JESD204B Subclass 1. The serial interface operates at speeds of up to 12.288 Gbps. The benefits of the JESD204B interface include a reduction in required board area for data interface routing, resulting in smaller total system size. Four high speed serial lanes are provided for the receiver. The ADRV9008-1 supports single-lane and dual-lane interfaces and supports fixed and floating point data formats for receiver.

Table 6. Example Receiver Interface Rates (Other Output Rates, Bandwidths, and JESD204B Lanes Also Supported)

| Bandwidth (MHz) | Output Rate (MSPS) | Single-Channel Operation  |                          | Dual-Channel Operation    |                          |
|-----------------|--------------------|---------------------------|--------------------------|---------------------------|--------------------------|
|                 |                    | JESD204B Lane Rate (Mbps) | JESD204B Number of Lanes | JESD204B Lane Rate (Mbps) | JESD204B Number of Lanes |
| 80              | 122.88             | 4915.2                    | 1                        | 9830.4                    | 1                        |
| 100             | 153.6              | 6144                      | 1                        | 12288                     | 1                        |
| 100             | 245.76             | 9830.4                    | 1                        | 9830.4                    | 2                        |
| 200             | 245.76             | 9830.4                    | 1                        | 9830.4                    | 2                        |
| 200             | 245.76             | 4915.2                    | 2                        | 4915.2                    | 4                        |

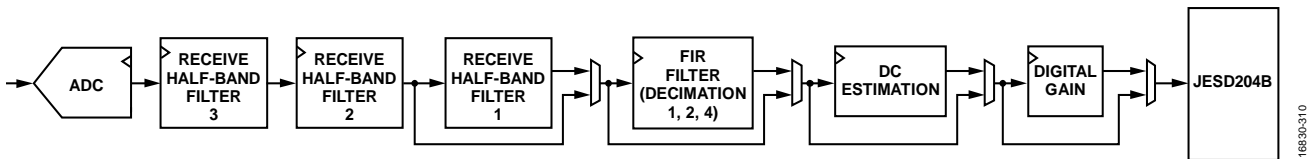


Figure 169. Receiver Datapath Filter Implementation



# APPLICATIONS INFORMATION

## PCB LAYOUT AND POWER SUPPLY RECOMMENDATIONS

### Overview

The ADRV9008-1 is a highly integrated, RF, agile receiver with significant signal conditioning integrated on one chip. Due to the increased complexity of the device and its high pin count, careful PCB layout is important to achieve optimal performance. This data sheet provides a checklist of issues to look for and guidelines on how to optimize the PCB to mitigate performance issues. The goal of this data sheet is to help achieve optimal performance of the ADRV9008-1 while reducing board layout effort. This data sheet assumes that the reader is an experienced analog and RF engineer with an understanding of RF PCB layout and RF transmission lines. This data sheet discusses the following issues and provides guidelines for system designers to achieve optimal performance of the ADRV9008-1:

- PCB material and stackup selection
- Fanout and trace space layout guidelines
- Component placement and routing guidelines
- RF and JESD204B transmission line layout
- Isolation techniques used on the [ADRV9008-1W/PCBZ](#)
- Power management considerations
- Unused pin instructions

### PCB MATERIAL AND STACKUP SELECTION

Figure 170 shows the PCB stackup used for the [ADRV9008-1W/PCBZ](#). Table 7 and Table 8 list the single-ended and differential impedance for the stackup shown in Figure 170. The dielectric material used on the top and the bottom layers is 8 mil Rogers 4350B. The remaining dielectric layers are FR4-370 HR. The board design uses the Rogers laminate for the top and the bottom layers for the low loss tangent at high frequencies. The ground planes under the Rogers laminate (Layer 2 and Layer 13) are the reference planes for the transmission lines routed on the outer surfaces. These layers are solid copper planes without any splits under the RF traces. Layer 2 and Layer

13 are crucial to maintaining the RF signal integrity and, ultimately, the ADRV9008-1 performance. Layer 3 and Layer 12 are used to route power supply domains. To keep the RF section of the ADRV9008-1 isolated from the fast transients of the digital section, the JESD204B interface lines are routed on Layer 5 and Layer 10. These layers have impedance control set to a 100 Ω differential. The remaining digital lines from ADRV9008-1 are routed on Inner Layer 7 and Inner Layer 8. RF traces on the outer layers must be a controlled impedance for optimal performance of the device. The inner layers in this board use 0.5 ounce copper or 1 ounce copper. The outer layers use 1.5 ounce copper so that the RF traces are less prone to peeling. Ground planes on this board are full copper floods with no splits except for vias, through-hole components, and isolation structures. The ground planes must route entirely to the edge of the PCB under the Surface-Mount Type A (SMA) connectors to maintain signal launch integrity. Power planes can be pulled back from the board edge to decrease the risk of shorting from the board edge.

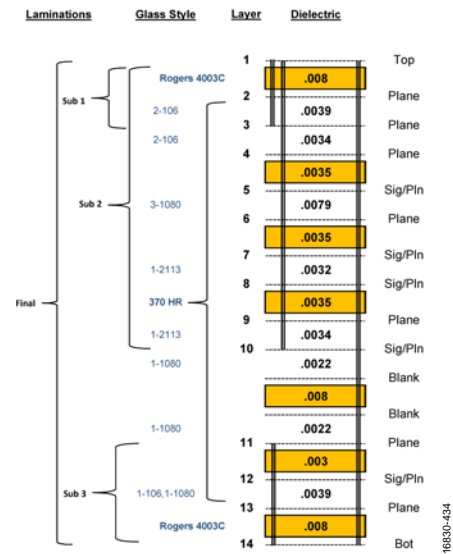


Figure 170. ADRV9008-1W/PCBZ Trace Impedance and Stackup

Table 7. Evaluation Board Single-Ended Impedance and Stackup<sup>1</sup>

| Layer | Board Copper (%) | Starting Copper (oz.) | Finished Copper (oz.) | Single-Ended Impedance | Designed Trace Single-Ended (Inches) | Finished Trace Single-Ended (Inches) | Calculated Impedance (Ω) | Single-Ended Reference Layers |
|-------|------------------|-----------------------|-----------------------|------------------------|--------------------------------------|--------------------------------------|--------------------------|-------------------------------|
| 1     | N/A              | 0.5                   | 1.71                  | 50 Ω ±10%              | 0.0155                               | 0.0135                               | 49.97                    | 2                             |
| 2     | 65               | 1                     | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 3     | 50               | 0.5                   | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 4     | 65               | 1                     | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 5     | 50               | 0.5                   | 0.5                   | 50 Ω ±10%              | 0.0045                               | 0.0042                               | 49.79                    | 4, 6                          |
| 6     | 65               | 1                     | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 7     | 50               | 0.5                   | 0.5                   | 50 Ω ±10%              | 0.0049                               | 0.0039                               | 50.05                    | 6, 9                          |
| 8     | 50               | 0.5                   | 0.5                   | 50 Ω ±10%              | 0.0049                               | 0.0039                               | 50.05                    | 6, 9                          |
| 9     | 65               | 1                     | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 10    | 50               | 0.5                   | 1                     | 50 Ω ±10%              | 0.0045                               | 0.0039                               | 49.88                    | 9, 11                         |
| 11    | 65               | 0.5                   | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 12    | 50               | 1                     | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 13    | 65               | 1                     | 1                     | N/A                    | N/A                                  | N/A                                  | N/A                      | N/A                           |
| 14    |                  | 0.5                   | 1.64                  | 50 Ω ±10%              | 0.0155                               | 0.0135                               | 49.97                    | 13                            |

<sup>1</sup> N/A means not applicable.

Table 8. Evaluation Board Differential Impedance and Stackup<sup>1</sup>

| Layer | Differential Impedance | Designed Trace (Inches) | Gap Differential for Designed Trace (Inches) | Finished Trace (Inches) | Gap Differential for Finished Trace (Inches) | Calculated Impedance (Ω) | Differential Reference Layers |
|-------|------------------------|-------------------------|----------------------------------------------|-------------------------|----------------------------------------------|--------------------------|-------------------------------|
| 1     | 100 Ω ± 10%            | 0.008                   | 0.006                                        | 0.007                   | 0.007                                        | 99.55                    | 2                             |
|       | 50 Ω ± 10%             | 0.0032                  | 0.004                                        | 0.0304                  | 0.0056                                       | 50.11                    | 2                             |
| 2     | N/A <sup>1</sup>       | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 3     | N/A                    | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 4     | N/A                    | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 5     | 100 Ω ±10%             | 0.0036                  | 0.0064                                       | 0.0034                  | 0.0065                                       | 99.95                    | 4, 6                          |
| 6     | N/A                    | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 7     | 100 Ω ±10%             | 0.0036                  | 0.0064                                       | 0.0034                  | 0.0066                                       | 100.51                   | 6, 9                          |
| 8     | 100 Ω ±10%             | 0.0038                  | 0.0062                                       | 0.0034                  | 0.0066                                       | 100.51                   | 6, 9                          |
| 9     | N/A                    | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 10    | 100 Ω ±10%             | 0.0036                  | 0.0064                                       | 0.003                   | 0.007                                        | 100.80                   | 9, 11                         |
| 11    | N/A                    | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 12    | N/A                    | N/A                     | N/A                                          | N/A                     | N/A                                          | N/A                      | N/A                           |
| 13    | 100 Ω ±10%             | 0.008                   | 0.006                                        | 0.007                   | 0.007                                        | 99.55                    | 13                            |
| 14    | 50 Ω ±10%              | 0.032                   | N/A                                          | 0.004                   | N/A                                          | 50.11                    | 13                            |

<sup>1</sup> N/A means not applicable.

### FANOUT AND TRACE SPACE GUIDELINES

The ADRV9008-1 uses a 196-ball chip scale ball grid array (CSP\_BGA), 12 mm × 12 mm package. The pitch between the pins is 0.8 mm. This small pitch makes it impractical to route all signals on a single layer. RF pins are placed on the outer edges of the ADRV9008-1 package. The location of the pins helps route the critical signals without a fanout via. Each digital signal is routed from the BGA pad using a 4.5 mil trace. The trace is connected to the BGA using a via in the pad structure. The signals are buried in the inner layers of the board for routing to other parts of the system.

The JESD204B interface signals are routed on two signal layers that use impedance control (Layer 5 and Layer 10). The spacing between the BGA pads is 17.5 mil. After the signal is on the inner layers, a 3.6 mil trace (50 Ω) connects the JESD204B signal to the field programmable gate array (FPGA) mezzanine card (FMC) connector. The recommended BGA land pad size is 15 mil.

Figure 171 shows the fanout scheme of the [ADRV9008-1W/PCBZ](#). As mentioned before, the [ADRV9008-1W/PCBZ](#) uses a via in the pad technique. This routing approach can be used for the ADRV9008-1 if there are no issues with manufacturing capabilities.

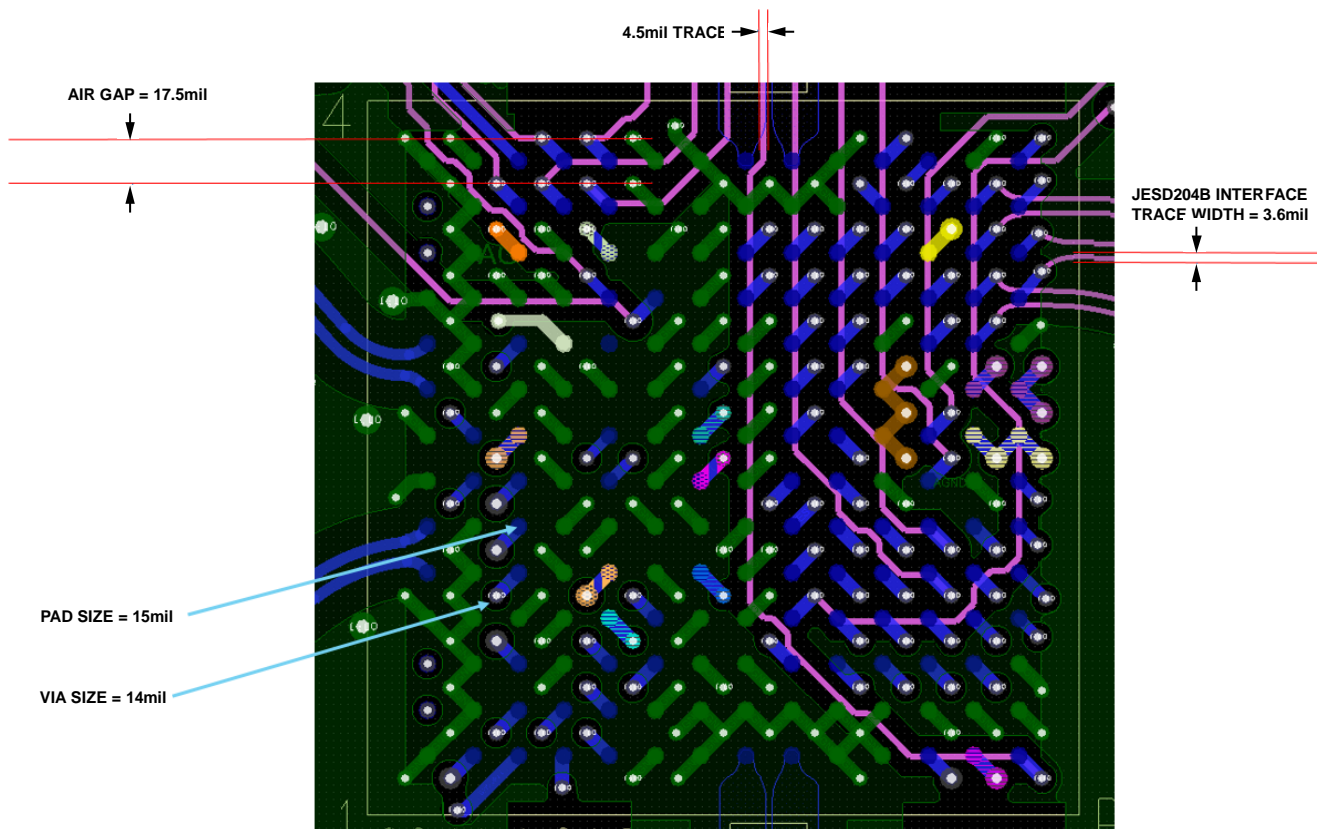


Figure 171. Trace Fanout Scheme on the [ADRV9008-1W/PCBZ](#) (PCB Layer Top and Layer 5 Enabled)

**COMPONENT PLACEMENT AND ROUTING GUIDELINES**

The ADRV9008-1 receiver requires few external components to function, but those that are used require careful placement and routing to optimize performance. This section provides a checklist for properly placing and routing critical signals and components.

**Signals with Highest Routing Priority**

RF lines and JESD204B interface signals are the signals that are most critical and must be routed with the highest priority.

Figure 170 shows the general directions in which each of the signals must be routed so that they can be properly isolated from noisy signals.

The receiver baluns and the matching circuits affect the overall RF performance of the ADRV9008-1 receiver. Make every effort to optimize the component selection and placement to avoid performance degradation. The RF Routing Guidelines section describes proper matching circuit placement and routing in more detail. Refer to the RF Port Interface Information section for more information.

To achieve the desired level of isolation between RF signal paths, use the technique described in the Isolation Techniques Used on the ADRV9008-1W/PCBZ section in customer designs.

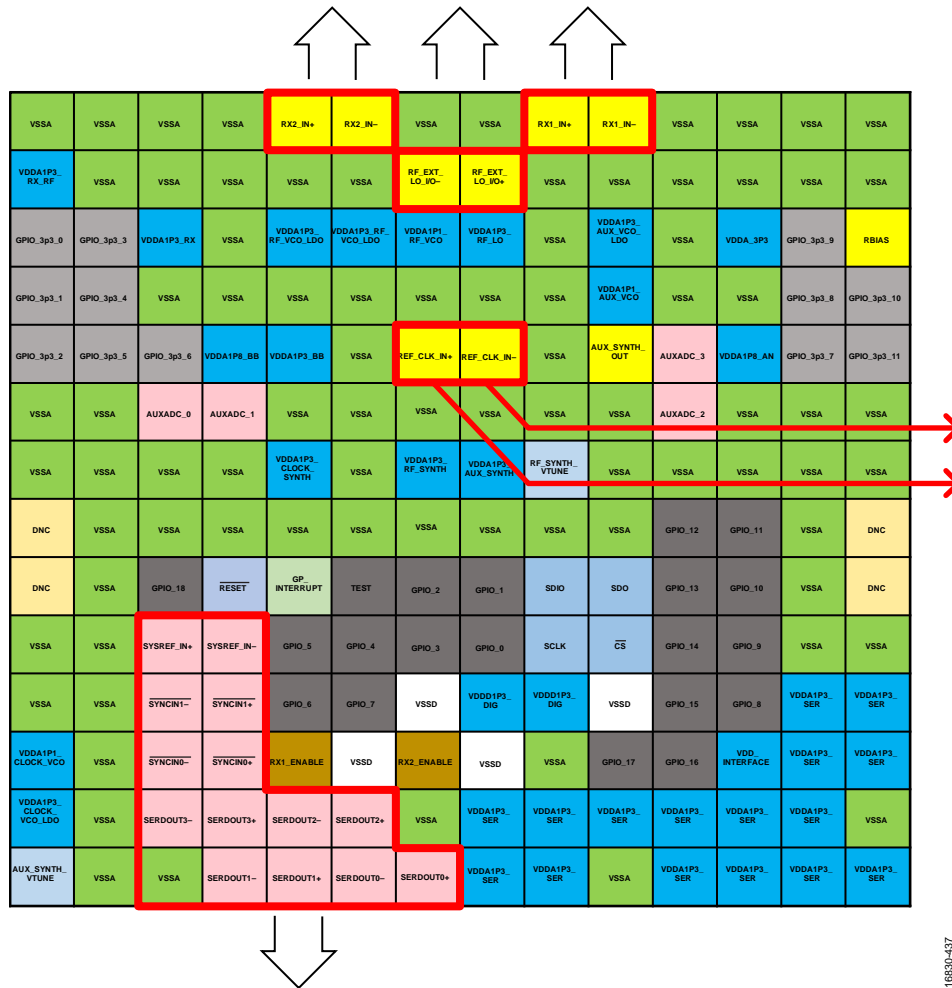


Figure 172. RF Input/Output, REF\_CLK\_IN±, and JESD204B Signal Routing Guidelines

16830-437

Figure 173 shows placement for ac coupling capacitors and a 100  $\Omega$  termination resistor near the ADRV9008-1 REF\_CLK\_IN $\pm$  pins. Shield the traces with ground flooding that is surrounded with vias staggered along the edge of the trace pair. The trace pair creates a shielded channel that shields the reference clock from any interference from other signals. Refer to the [ADRV9008-1W/PCBZ](#) layout and board support files included with the evaluation board software for exact details.

Route the JESD204B interface at the beginning of the PCB design and with the same priority as the RF signals.

The JESD204B Trace Routing Recommendations section outlines recommendations for JESD204B interface routing. Provide appropriate isolation between interface differential pairs. The Isolation Between JESD204B Lines section provides guidelines for optimizing isolation.

The RF\_EXT\_LO\_I/O- pin (B7) and RF\_EXT\_LO\_I/O+ pin (B8) on the ADRV9008-1 are internally dc biased. If an external LO is used, connect the LO to the device via ac coupling capacitors.

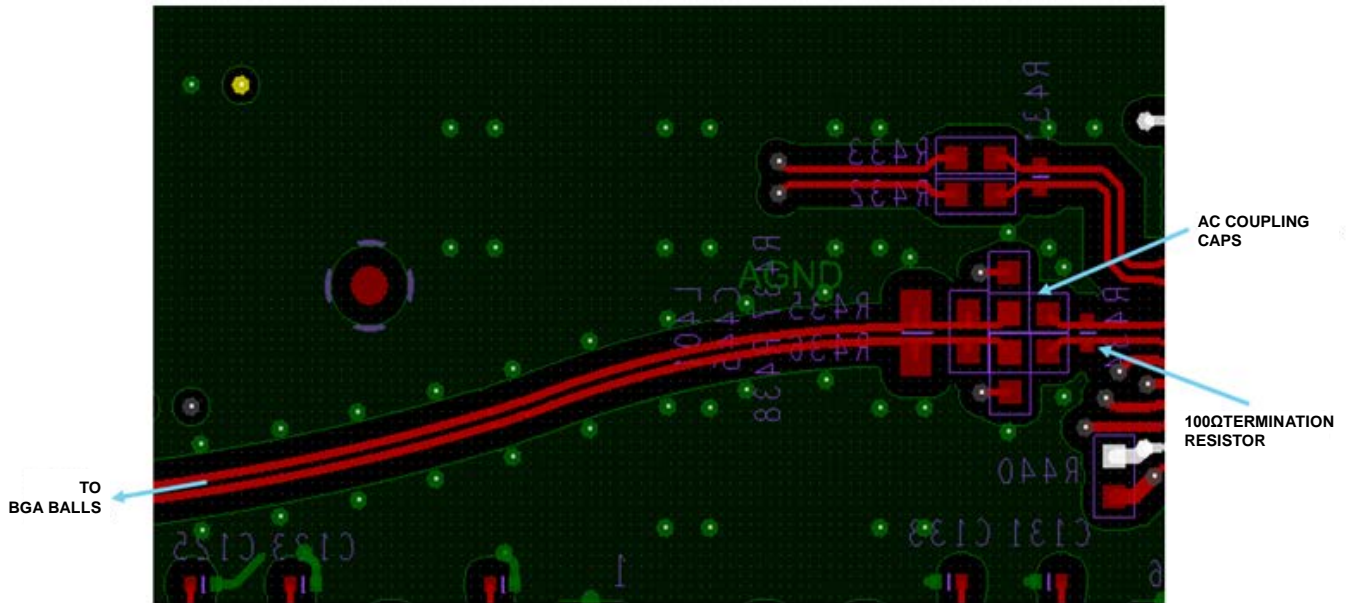


Figure 173. REF\_CLK\_IN $\pm$  Routing Recommendation

**Signals with Second Routing Priority**

Power supply quality has a direct impact on overall system performance. To achieve optimal performance, follow recommendations for ADRV9008-1 power supply routing. The following recommendations outline how to route different power domains that can be connected together directly and to the same supply, but are separated by a 0 Ω placeholder resistor or ferrite bead.

When the recommendation is to use a trace to connect power to a particular domain, ensure that this trace is surrounded by ground.

Figure 174 shows an example of such traces routed on the [ADRV9008-1W/PCBZ](#) on Layer 12. Each trace is separated from any other signal by the ground plane and vias. Separating the traces from other signals is essential to providing necessary isolation between the ADRV9008-1 power domains.

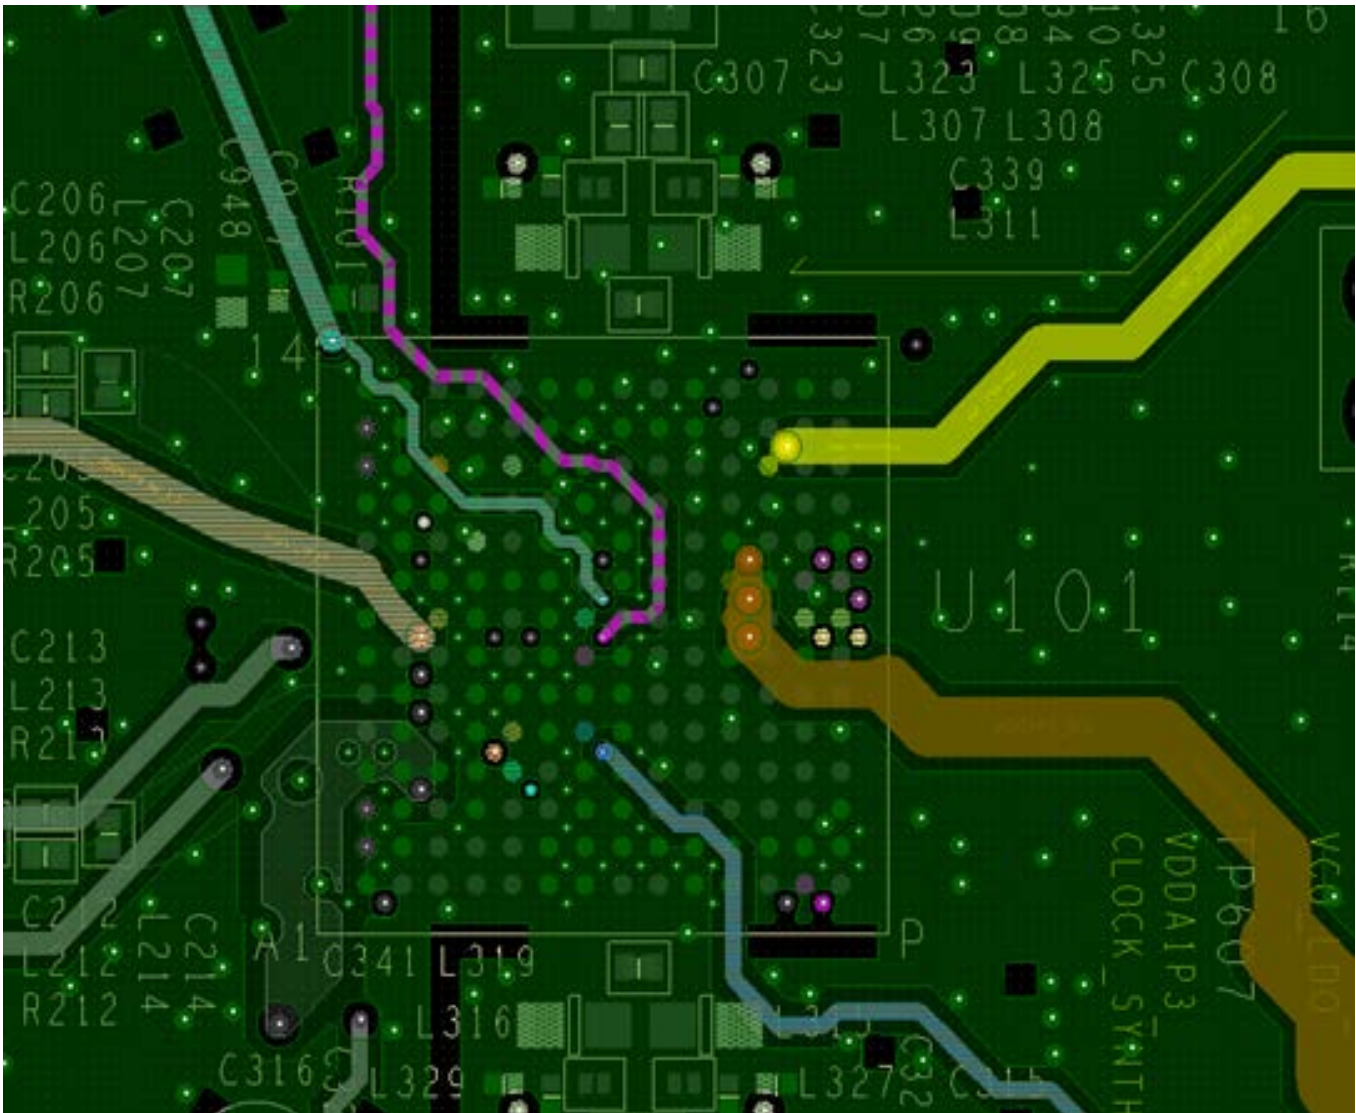


Figure 174. Layout Example of Power Supply Domains Routed with Ground Shielding (Layer 12 to Power)

16830-440

Each power supply pin requires a 0.1  $\mu\text{F}$  bypass capacitor near the pin at a minimum. Place the ground side of the bypass capacitor so that ground currents flow away from other power pins and the bypass capacitors.

For domains shown in Figure 175, like the domains powered through a 0  $\Omega$  placeholder resistor or ferrite bead (FB), place the 0  $\Omega$  placeholder resistors or ferrite beads further away from the device. Space 0  $\Omega$  placeholder resistors or ferrite beads apart from each other to ensure the electric fields on the ferrite beads do not influence each other. Figure 176 shows an example of how the ferrite beads, reservoir capacitors, and decoupling capacitors are

placed. The recommendation is to connect a ferrite bead between a power plane and the ADRV9008-1 at a distance away from the device. The ferrite bead and the reservoir capacitor provide stable voltage to the ADRV9008-1 during operation by isolating the pin or pins that the network is connected to from the power plane. Then, shield this trace with ground and provide power to the power pins on the ADRV9008-1. Place a 100 nF capacitor near the power supply pin with the ground side of the bypass capacitor placed so that ground currents flow away from other power pins and the bypass capacitors.

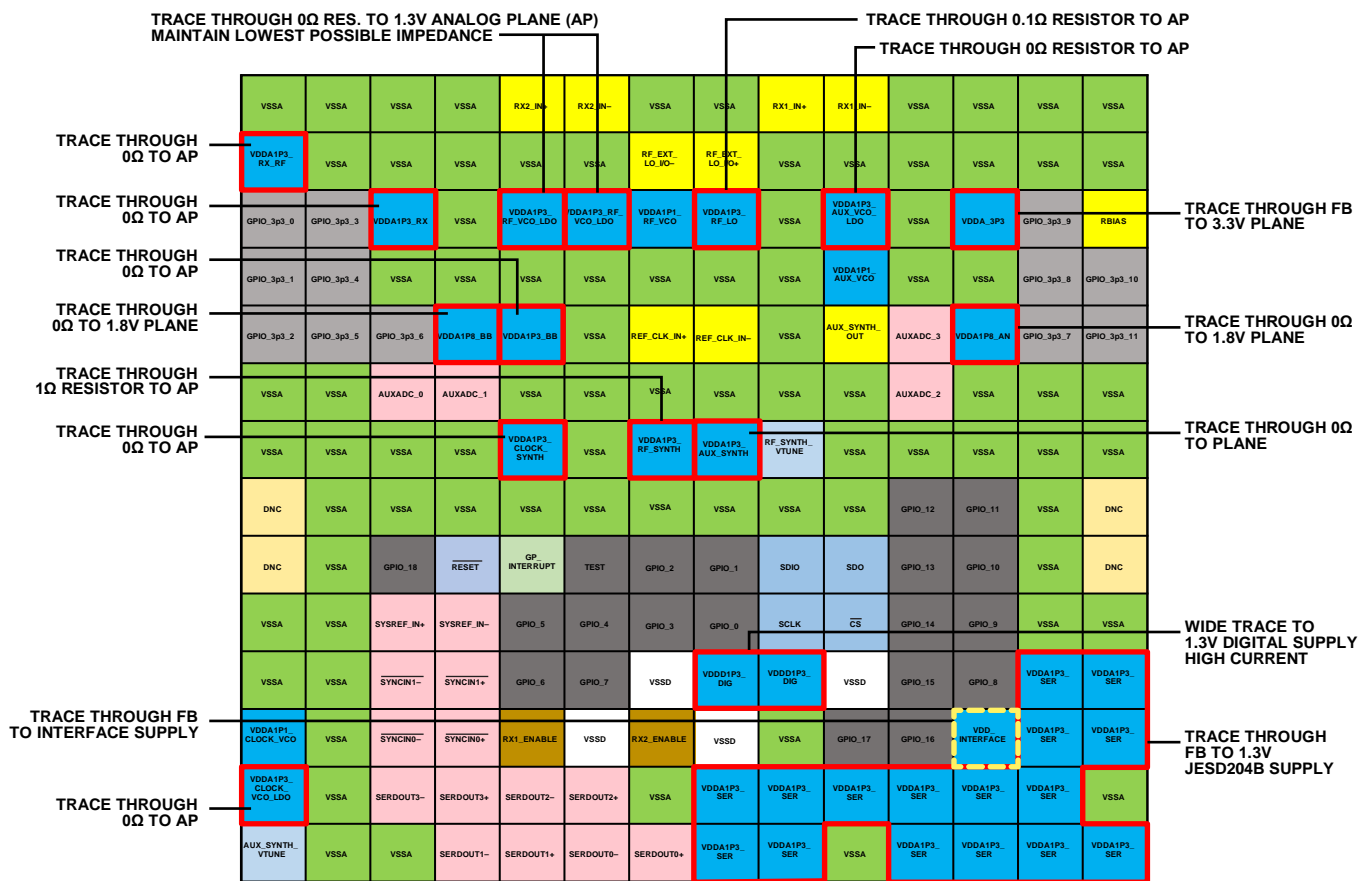


Figure 175. Power Supply Domains Interconnection Guidelines

18830-441

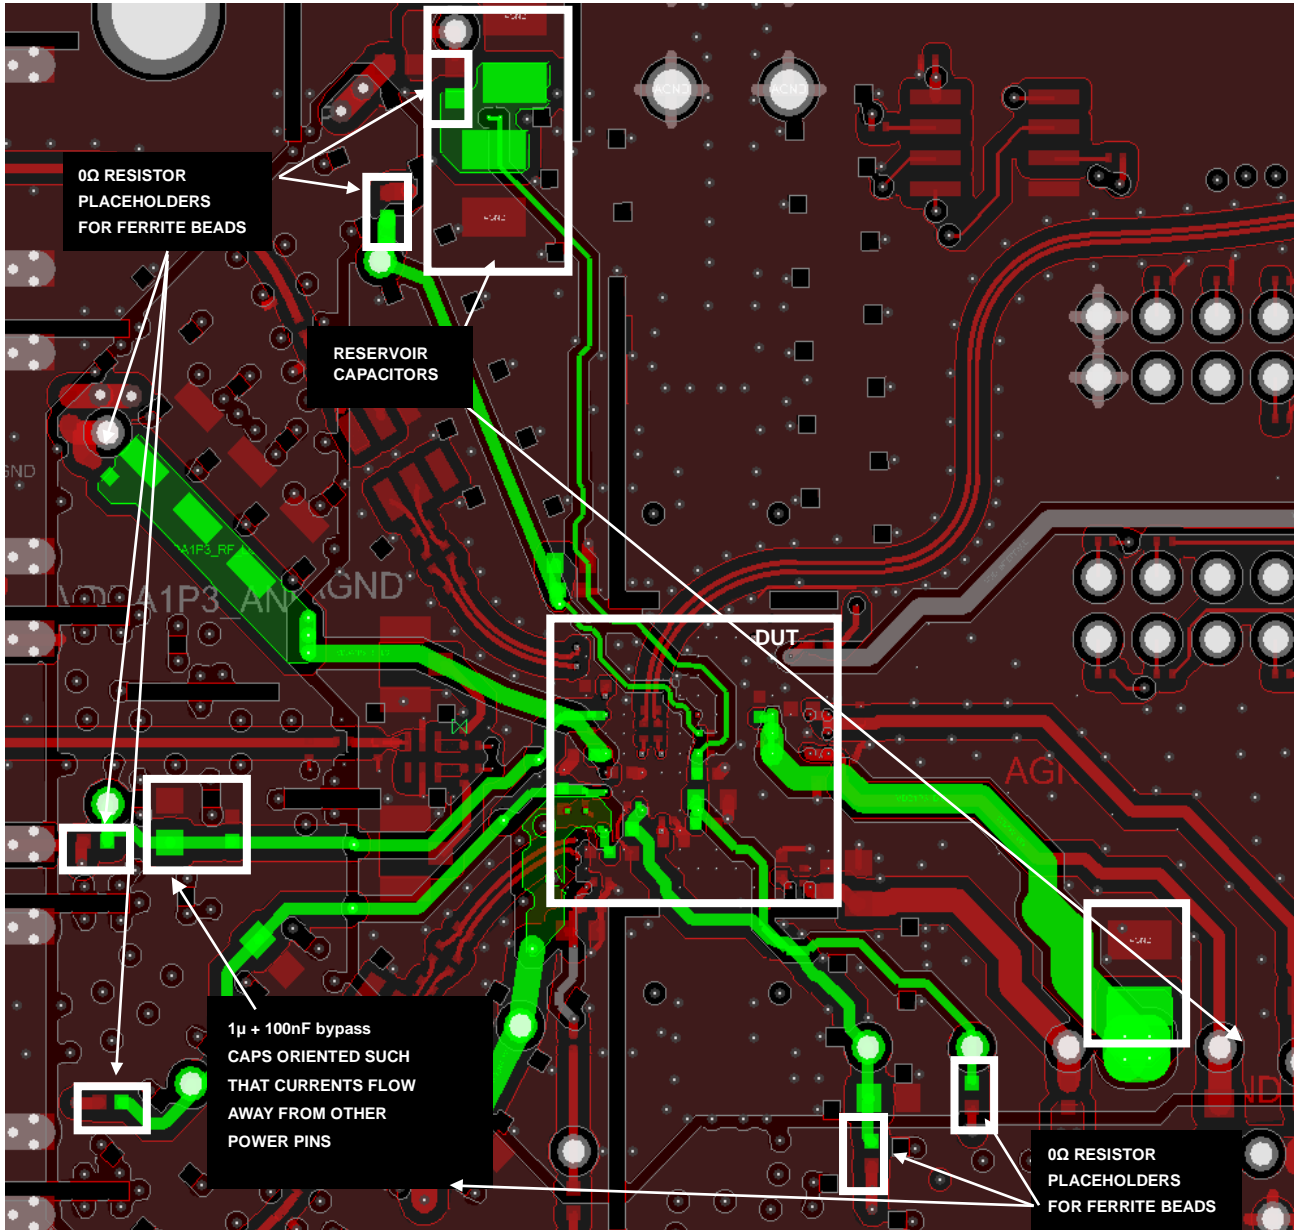


Figure 176. Placement Example of 0 Ω Resistor Placeholders for Ferrite Beads, Reservoir and Bypass Capacitors on the ADRV9008-1W/PCBZ (Layer 12 to Power and Bottom)

16630-444



**Signals with Lowest Routing Priority**

As a last step while designing the PCB layout, route the signals shown in Figure 177. The following list outlines the recommended order of signal routing:

1. Use ceramic 1  $\mu$ F bypass capacitors at the VDDA1P1\_RF\_VCO, VDDA1P1\_AUX\_VCO, and VDDA1P1\_CLOCK\_VCO pins. Place these pins as close as possible to the ADRV9008-1 device with the ground side of the bypass capacitor placed so that ground currents flow away from other power pins and the bypass capacitors, if possible.
2. Connect a 14.3 k $\Omega$  resistor to the RBIAS pin (C14). This resistor must have a 1% tolerance.
3. Pull the TEST pin (J6) to ground for normal operation. The device supports JTAG boundary scan, and this pin is used to access that function. Refer to the JTAG Boundary Scan section for JTAG boundary scan information.

4. Pull the RESET pin (J4) high with a 10 k $\Omega$  resistor to VDD\_INTERFACE for normal operation. To reset the device, drive the RESET pin low.

When routing analog signals such as GPIO\_3p3\_x or AUXADC\_x, it is recommended to route the signals away from the digital section (Row H through Row P). Do not cross the analog section of the ADRV9008-1, highlighted by a red dotted line in Figure 177, by any digital signal routing.

When routing digital signals from Row H and below, it is important to route the signals away from the analog section (Row A through Row G). Do not cross the analog section of the ADRV9008-1, highlighted by a red dotted line in Figure 177, by any digital signal routing.

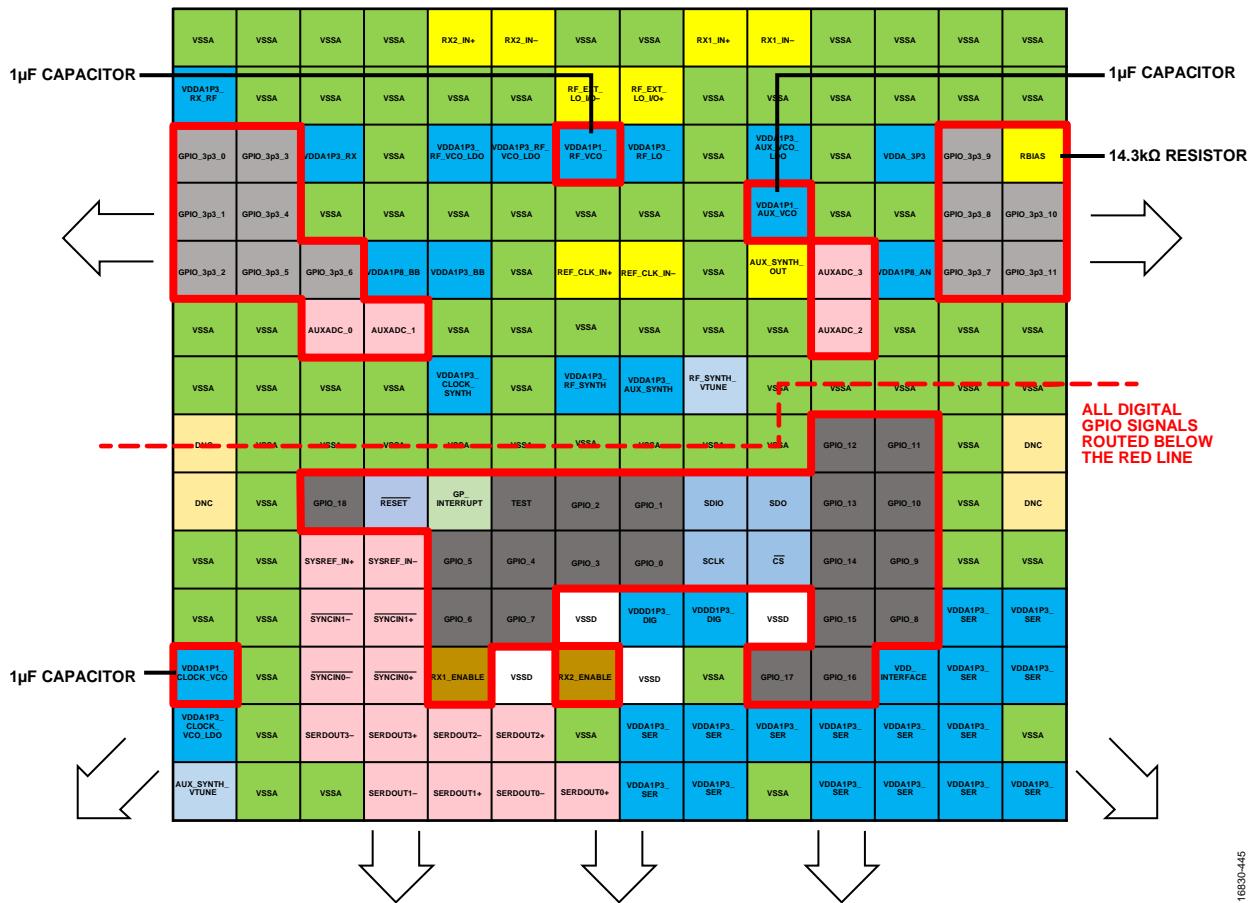


Figure 177. AUXADC\_x, Analog, and Digital GPIO Signals Routing Guidelines

16830-445

**RF AND JESD204B TRANSMISSION LINE LAYOUT**

**RF Routing Guidelines**

The ADRV9008-1W/PCBZ uses microstrip type lines for receiver traces. In general, Analog Devices does not recommend using vias to route RF traces unless a direct line route is not possible. Differential lines from the balun to the receiver pins must be as short as possible. Keep the length of the single-ended transmission line short to minimize the effects of parasitic coupling. It is important to note that these traces are the most critical when optimizing performance and are, therefore, routed before any other routing. These traces have the highest priority if trade-offs are needed.

Figure 178 shows pi matching networks on the single-ended side of the baluns. The receiver front end is dc biased internally. Therefore, the differential side of the balun is ac-coupled. The system designer can optimize the RF performance with a proper selection of the balun, matching components, and ac coupling capacitors. The external LO traces and the REF\_CLK\_IN± traces may also require matching components to ensure optimal performance.

All the RF signals mentioned previously must have a solid ground reference under each trace. Do not run any of the critical traces over a section of the reference plane that is discontinuous. The ground flood on the reference layer must extend all the way to the edge of the board. This flood length ensures signal integrity for the SMA launch when an edge launch connector is used.

Refer to the RF Port Interface Information section for more information on RF matching recommendations for the ADRV9008-1.

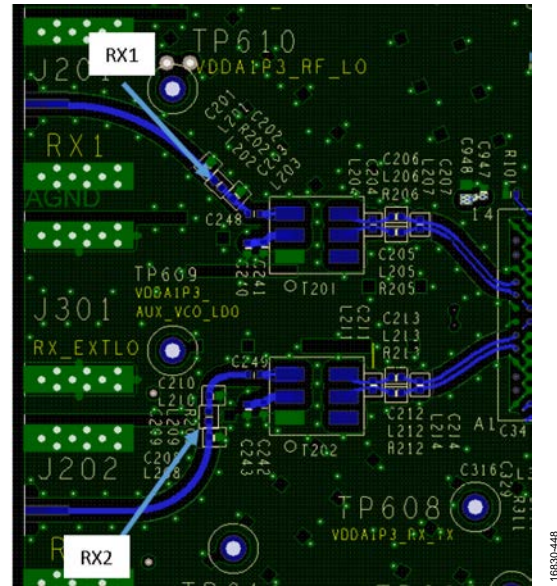


Figure 178. Pi Network Matching Components Available on Different RF Nets

**JESD204B Trace Routing Recommendations**

The ADRV9008-1 receiver uses the JESD204B, high speed serial interface. To ensure optimal performance of this interface, keep the differential traces as short as possible by placing the ADRV9008-1 as close as possible to the FPGA or BBP, and route the traces directly between the devices. Use a PCB material with a low dielectric constant ( $< 4$ ) to minimize loss. For distances greater than 6 inches, use a premium PCB material, such as RO4350B or RO4003C.

**Routing Recommendations**

Route the differential pairs on a single plane using a solid ground plane as a reference on the layers above and/or below these traces.

All JESD204B lane traces must be impedance controlled to achieve  $50 \Omega$  to ground. It is recommended that the differential pair be coplanar and loosely coupled. An example of a typical configuration is 5 mil trace width and 15 mil edge to edge spacing, with the trace width maximized as shown in Figure 179.

Match trace widths with pin and ball widths as closely as possible while maintaining impedance control. If possible, use 1 oz. copper trace widths of at least 8 mil ( $200 \mu\text{m}$ ). The coupling capacitor pad size must match JESD204B lane trace widths as closely as possible. If trace width does not match pad size, use a smooth transition between different widths.

The pad area for all connector and passive component choices must be minimized due to a capacitive plate effect that leads to problems with signal integrity.

Reference planes for impedance controlled signals must not be segmented or broken for the entire length of a trace.

The REF\_CLK\_IN± signal trace and the SYSREF signal trace are impedance controlled for character impedance ( $Z_0$ ) =  $50 \Omega$ .

**Stripline Transmission Lines vs. Microstrip Transmission Lines**

Stripline transmission lines have less signal loss and emit less electromagnetic interference than microstrip transmission lines. However, stripline transmission lines require the use of vias that add line inductance, increasing the difficulty of controlling the impedance.

Microstrip transmission lines are easier to implement if the component placement and density allow routing on the top layer. Microstrip transmission lines make controlling the impedance easier.

If the top layer of the PCB is used by other circuits or signals, or if the advantages of stripline are more desirable over the advantages of microstrip, follow these recommendations:

- Minimize the number of vias.
- Use blind vias where possible to eliminate via stub effects, and use micro vias to minimize via inductance.
- When using standard vias, use a maximum via length to minimize the stub size. For example, on an 8-layer board, use Layer 7 for the stripline pair.
- Place a pair of ground vias near each via pair to minimize the impedance discontinuity.

Route the JESD204B lines on the top side of the board as a differential  $100 \Omega$  pair (microstrip). For the [ADRV9008-1W/PCBZ](#), the JESD204B differential signals are routed on inner layers of the board (Layer 5 and Layer 10) as differential  $100 \Omega$  pairs (stripline). To minimize potential coupling, these signals are placed on an inner layer using a via embedded in the component footprint pad where the ball connects to the PCB. The ac coupling capacitors ( $100 \text{ nF}$ ) on these signals are placed near the connector and away from the chip to minimize coupling. The JESD204B interface can operate at frequencies of up to 12 GHz. Ensure that signal integrity from the chip to the connector is maintained.

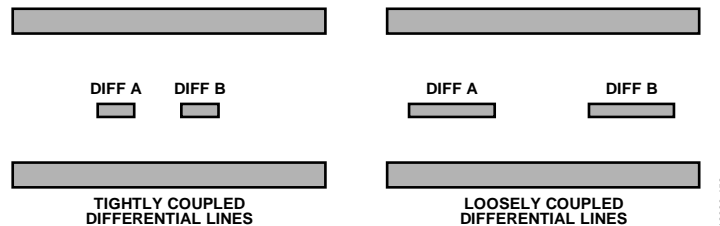


Figure 179. Routing JESD204B, Diff A and Diff B Correspond to Differential Positive Signals or Negative Signals (One Differential Pair)

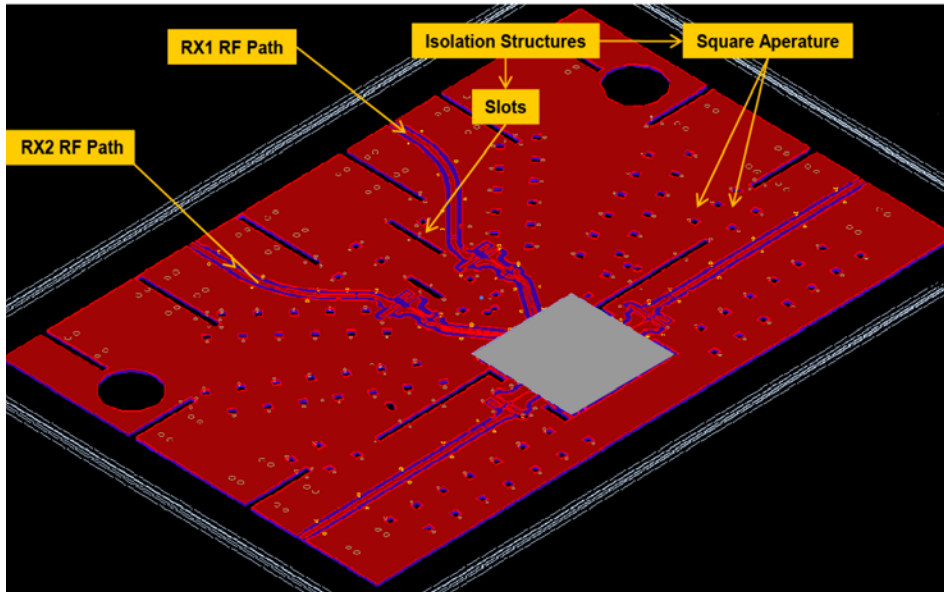


Figure 180. Isolation Structures on the ADRV9008-1W-PCBZ

## ISOLATION TECHNIQUES USED ON THE ADRV9008-1W/PCBZ

### Isolation Goals

Significant isolation challenges were overcome in designing the ADRV9008-1W/PCBZ. The following isolation requirement is used to accurately evaluate the ADRV9008-1 receiver performance: receiver to receiver, 65 dB out to 6 GHz.

To meet these isolation goals with significant margin, isolation structures are introduced.

Figure 180 shows the isolation structures used on the ADRV9008-1W/PCBZ. These structures consist of a combination of slots and square apertures. These structures are present on every copper layer of the PCB stack. The advantage of using square apertures is that signals can be routed between the openings without affecting the isolation benefits of the array of apertures. When using these isolation structures, make sure to place ground vias around the slots and apertures.

Figure 181 outlines the methodology used on the ADRV9008-1W/PCBZ. When using slots, ground vias must be placed at the ends of the slots and along the sides of the slots. When using square apertures, at least one single ground via must be placed adjacent to each square. These vias must be through-hole vias from the top to the bottom layer. The function of these vias is to steer return current to the ground planes near the apertures.

For accurate slot spacing and square apertures layout, use simulation software when designing a PCB for the ADRV9008-1

receivers. Spacing between square apertures must be no more than 1/10 of a wavelength. Calculate the wavelength using Equation 1:

$$\text{Wavelength (m)} = \frac{300}{\text{Frequency (MHz)} \times \sqrt{E_R}} \quad (1)$$

where  $E_R$  is the dielectric constant of the isolator material. For RO4003C material, microstrip structure (+ air)  $E_R = 2.8$ . For FR4-370HR material, stripline structure  $E_R = 4.1$ .

For example, if the maximum RF signal frequency is 6 GHz, and  $E_R = 2.8$  for RO4003C material, microstrip structure (+ air), the minimum wavelength is approximately 29.8 mm.

To follow the 1/10 wavelength spacing rule, square aperture spacing must be 2.98 mm or less.

### Isolation Between JESD204B Lines

The JESD204B interface uses eight line pairs that can operate at speeds of up to 12 GHz. When configuring the PCB layout, ensure that these lines are routed according to the rules outlined in the JESD204B Trace Routing Recommendations section. In addition, use isolation techniques to prevent crosstalk between different JESD204B lane pairs.

Figure 182 shows a technique used on the ADRV9008-1W/PCBZ that involves via fencing. Placing ground vias around each JESD204B pair provides isolation and decreases crosstalk. The spacing between vias is 1.2 mm.

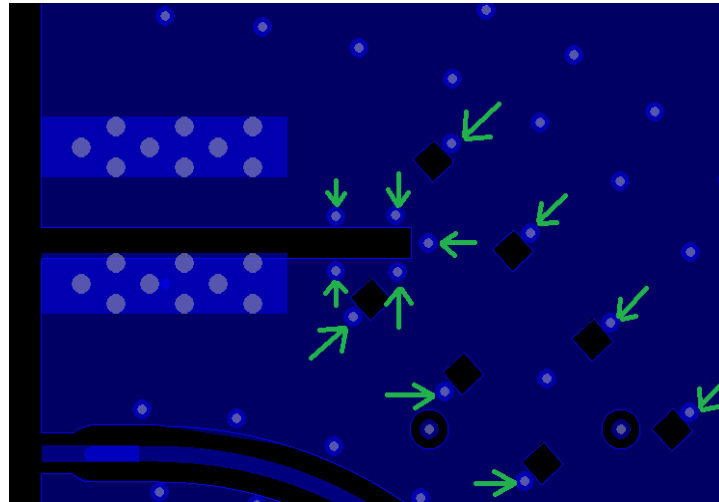


Figure 181. Current Steering Vias Placed Next to Isolation Structures

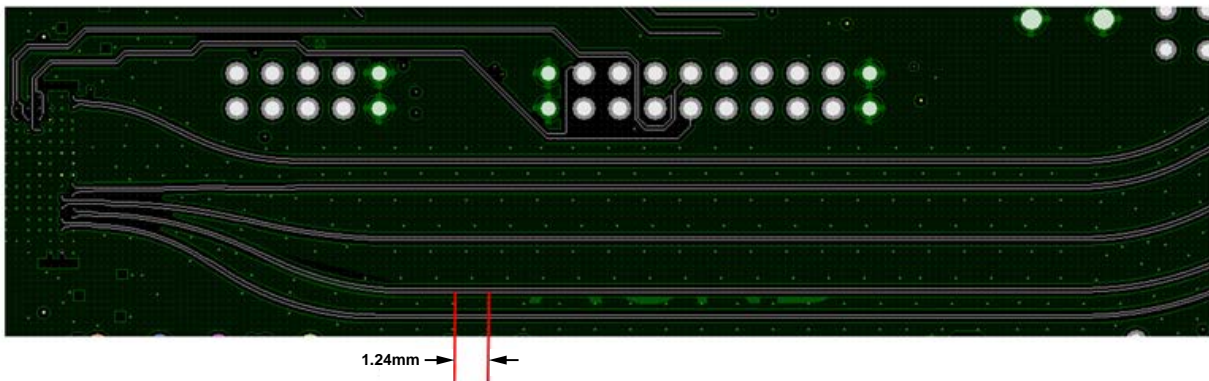


Figure 182. Via Fencing Around JESD204B Lines, PCB Layer 10

Figure 182 shows the rule provided in Equation 1. JESD204B lines are routed on Layer 5 and Layer 10 so that the lines use stripline structures. The dielectric material used in the inner layers of the [ADRV9008-1W/PCBZ](#) PCB is FR4-370HR.

For accurate spacing of the JESD204B fencing vias, use layout simulation software. Input the following data into Equation 1 to calculate the wavelength and square aperture spacing:

- Maximum JESD204B signal frequency is approximately 12 GHz.
- For FR4-370HR material, stripline structure,  $E_r = 4.1$ , the minimum wavelength is approximately 12.4 mm.

To follow the 1/10 wavelength spacing rule, spacing between vias must be 1.24 mm or less. The minimum spacing recommendation according to transmission line theory is 1/4 wavelength.

## RF PORT INTERFACE INFORMATION

This section details the RF receiver interfaces for optimal device performance. This section also includes data for the anticipated ADRV9008-1 RF port impedance values and examples of impedance matching networks used in the evaluation platform. This section also provides information on board layout techniques and balun selection guidelines.

The ADRV9008-1 is a highly integrated receiver device. External impedance matching networks are required on the receiver port to achieve performance levels indicated in the Specifications section.

Analog Devices recommends the use of simulation tools in the design and optimization of impedance matching networks. To achieve the closest match between computer simulated results and measured results, accurate models of the board environment, SMD components (including baluns and filters), and ADRV9008-1 port impedances are required.

### RF Port Impedance Data

This section provides the port impedance data for the receivers in the ADRV9008-1 integrated receiver. Note the following:

- $Z_o$  is defined as 50  $\Omega$ .
- The ADRV9008-1 ball pads are the reference plane for this data.
- Single-ended mode port impedance data is not available. However, a rough assessment is possible by taking the differential mode port impedance data and dividing both the real and imaginary components by 2.

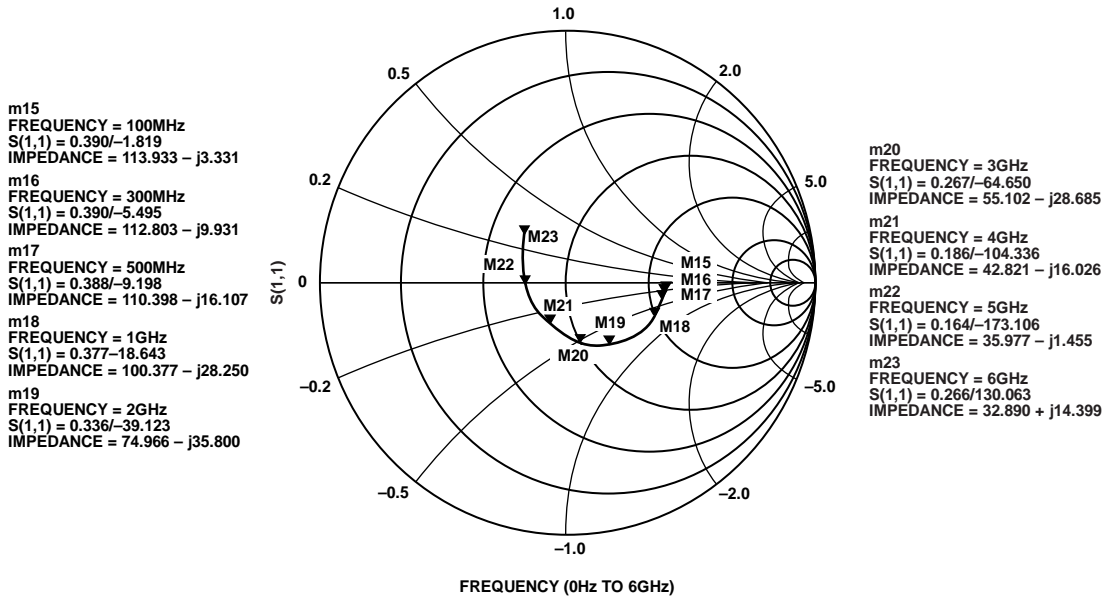


Figure 183. Receiver 1 and Receiver 2 SEDZ and Parallel Equivalent Differential Impedance (PEDZ) Data

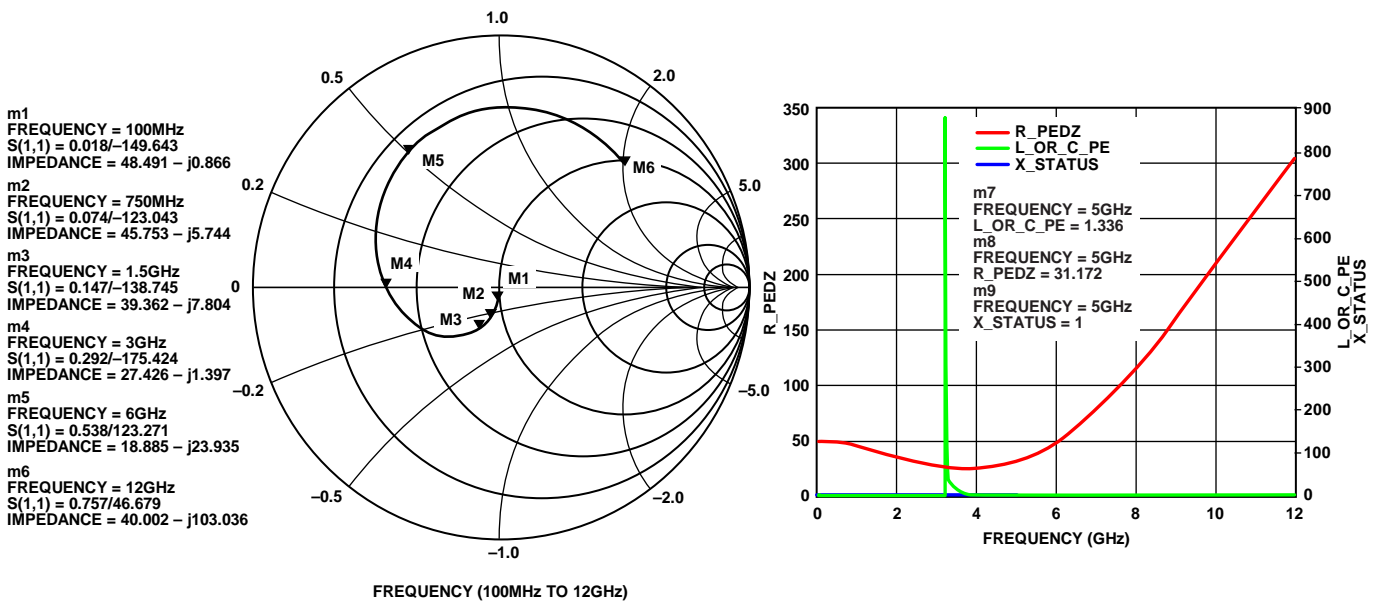


Figure 184. RF\_EXT\_LO\_I/O± SEDZ and PEDZ Data

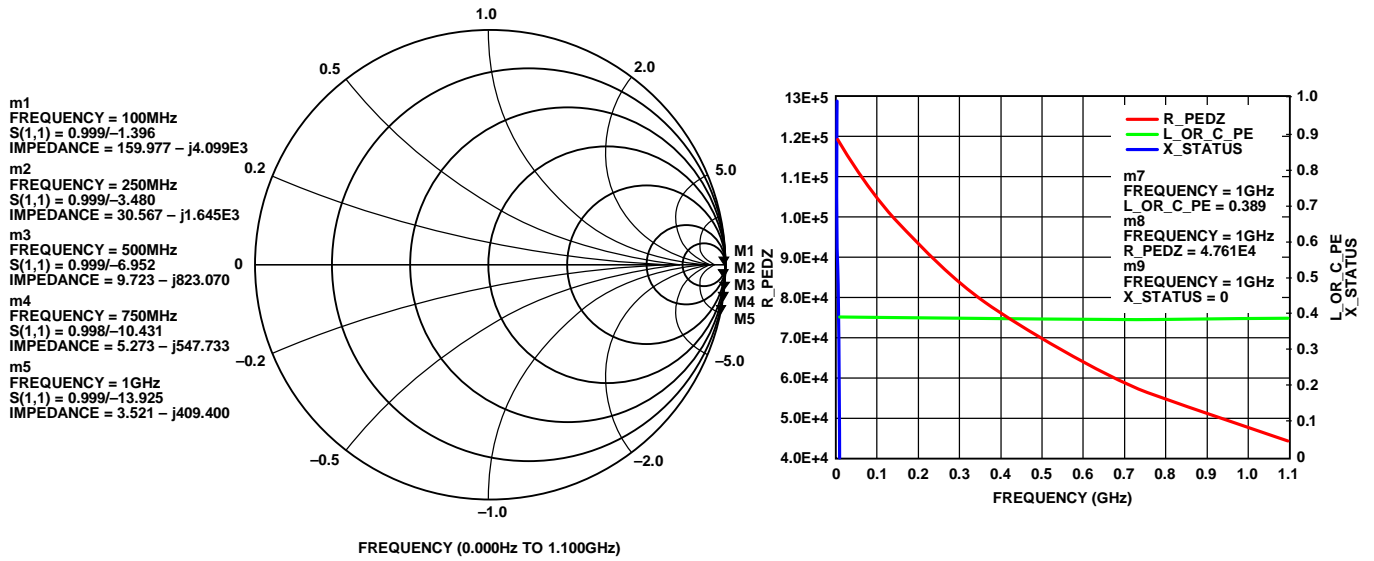


Figure 185. REF\_CLK\_IN± SEDZ and PEDZ Data—On Average, the Real Part of Parallel Equivalent Differential Impedance ( $R_p$ ) = ~70 kΩ

1683X-462

**Advanced Design System (ADS) Setup Using the DataAccessComponent and SEDZ File**

Analog Devices supplies the port impedance as an **.s1p** file that can be downloaded from the ADRV9008-1 product page. This format allows simple interfacing to the ADS by using the data access component. In Figure 186, Term1 is the single-ended input or output, and Term2 is the differential input or output RF port on the ADRV9008-1. The pi on the single-ended side and the differential pi configuration on the differential side allow maximum flexibility in designing matching circuits. The pi configuration is suggested for all design layouts because the pi configuration can step the impedance up or down as needed with appropriate component population.

The mechanics of setting up a simulation for impedance measurement and impedance matching is as follows:

1. The data access component block reads the RF port **.s1p** file. This file is the device RF port reflection coefficient.
2. The two equations convert the RF port reflection coefficient to a complex impedance. The result is the RX\_SEDZ variable.
3. The RF port calculated complex impedance (RX\_SEDZ) is used to define the Term2 impedance.
4. Term2 is used in a differential mode, and Term1 is used in a single-ended mode.

Setting up the simulation this way allows one to measure the input reflection (S11), output reflection (S22), and through reflection (S21) of the three port system without complex math operations within the display page.

For the highest accuracy, the electromagnetic momentum (EM) modeling result of the PCB artwork and S parameters (S11, S22, and S21) of the matching components and balun must be used in the simulations.

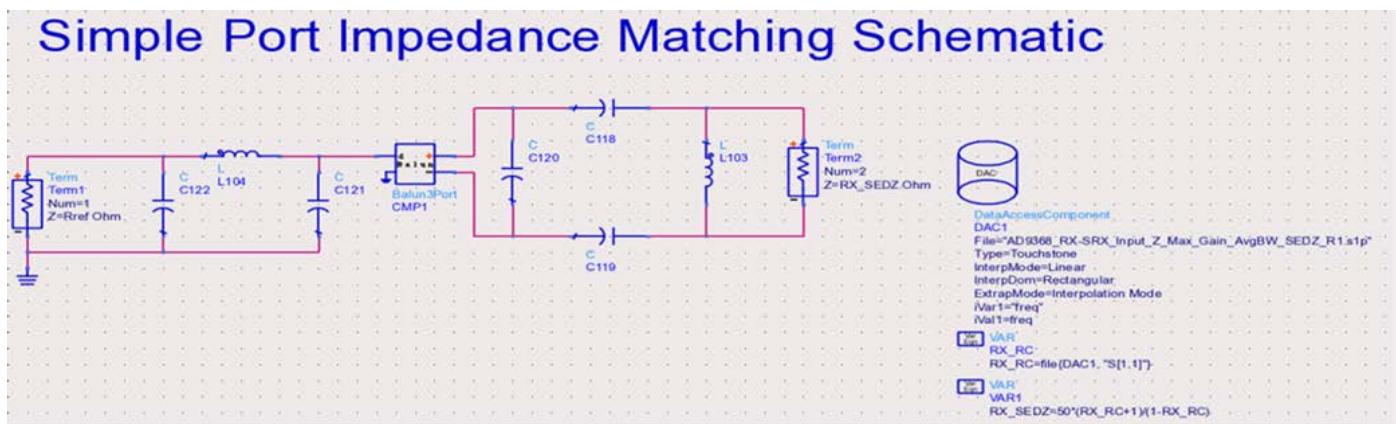


Figure 186 Simulation Setup in ADS with SEDZ .s1p Files and DataAccessComponent

16830-463



### General Receiver Path Interface

The ADRV9008-1 receivers can support up to a 200 MHz bandwidth.

The ADRV9008-1 receivers support a wide range of operation frequencies. In the case of the receiver channels, the differential signals interface to an integrated mixer. The mixer input pins have a dc bias of approximately 0.7 V and may need to be ac-coupled, depending on the common-mode voltage level of the external circuit.

Important considerations for the receiver port interface are as follows:

- The device to be interfaced (filter, balun, transmit/receive (T/R) switch, external low noise amplifier (LNA), external PA, and so on).
- The receiver maximum safe input power is 23 dBm (peak).
- The receiver optimum dc bias voltage is 0.7 V bias to ground.
- The board design (reference planes, transmission lines, impedance matching, and so on).

Figure 187 and Figure 188 show possible differential receiver port interface circuits. The options in Figure 187 and Figure 188 are valid for all receiver inputs operating in differential mode, though only the Receiver 1 signal names are indicated. Impedance matching may be necessary to obtain data sheet performance levels.

Given wide RF bandwidth applications, SMD balun devices function well. Decent loss and differential balance are available in a relatively small (0603, 0805) package.

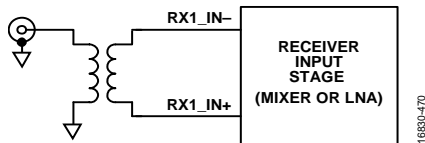


Figure 187. Differential Receiver Interface Using a Transformer

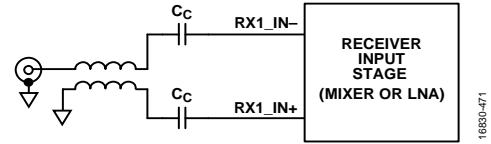


Figure 188. Differential Receiver Interface Using a Transmission Line Balun

### Impedance Matching Network Examples

Impedance matching networks are required to achieve the ADRV9008-1 data sheet performance levels. This section provides a description of the matching network topology and components used on the [ADRV9008-1W/PCBZ](#).

Device models, board models, and balun and SMD component models are required to build an accurate system level simulation. The board layout model can be obtained from an EM simulator. The balun and SMD component models can be obtained from the device vendors or built locally. Contact Analog Devices applications engineering for ADRV9008-1 modeling details.

The impedance matching network provided in this section is not evaluated in terms of mean time to failure (MTTF) in high volume production. Consult with component vendors for long-term reliability concerns. Consult with balun vendors to determine appropriate conditions for dc biasing.

Figure 190 shows three elements in parallel marked do not install (DNI). However, only one set of SMD component pads is placed on the board. For example, the R202, L202, and C202 components only have one set of SMD pads for one SMD component. Figure 190 shows that, in a generic port impedance matching network, the shunt or series elements may be a resistor, inductor, or capacitor.

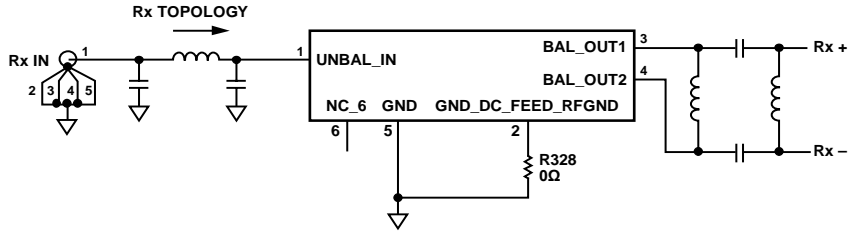


Figure 189. Impedance Matching Topology

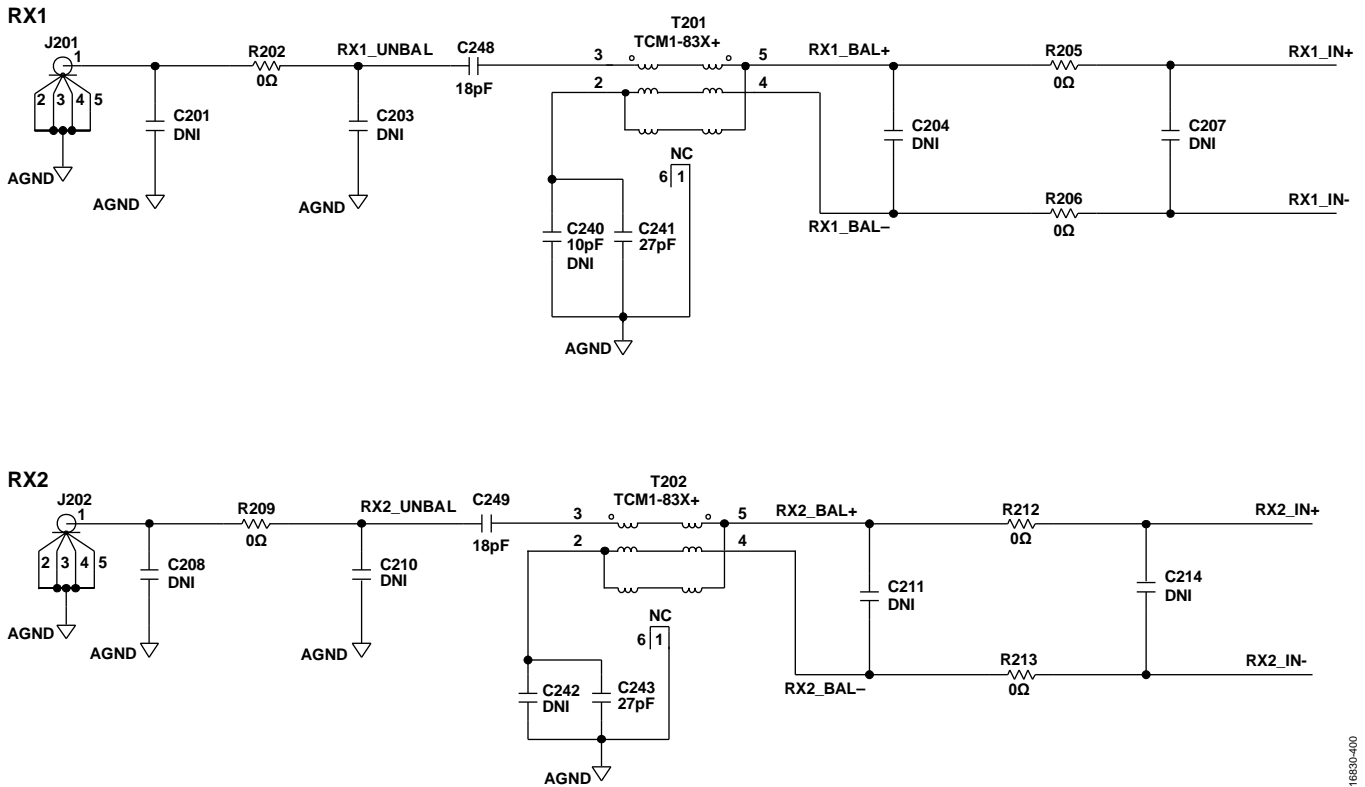


Figure 190. Receiver 1 (RX1) and Receiver 2 (RX2) Generic Matching Network Topology


Table 9 and shows the selected balun and component values used for three matching network sets. Refer to the ADRV9008-1 schematics for a wideband matching example that operates across the entire device frequency range with somewhat reduced performance.

The RF matching used in the [ADRV9008-1W/PCBZ](#) allows the ADRV9008-1 to operate across the entire chip frequency range with slightly reduced performance.

**Table 9. Receiver 1 and Receiver 2 Evaluation Board Matching Components for Frequency Band 75 MHz to 6000 MHz**

| Component            | Value                   |
|----------------------|-------------------------|
| C201, C208           | Do not install (DNI)    |
| R202, R209           | 0 $\Omega$              |
| C203, C210           | DNI                     |
| C248, C249           | 18 pF                   |
| C204, C211           | DNI                     |
| R205/R206, R212/R213 | 0 $\Omega$              |
| C207, C214           | DNI                     |
| T201, T202           | Mini circuits TMC1-83X+ |

OUTLINE DIMENSIONS

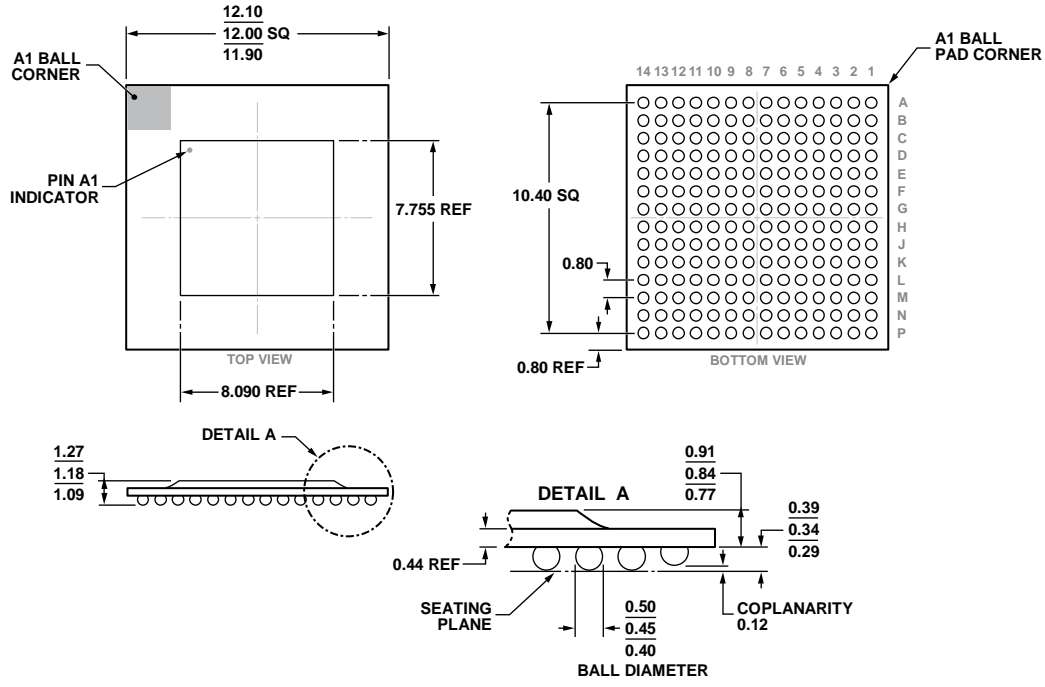

COMPLIANT TO JEDEC STANDARDS MO-275-GGAB-1.

Figure 191. 196-Ball Chip Scale Package Ball Grid Array [CSP\_BGA] (BC-196-13)

Dimensions shown in millimeters

ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range <sup>2</sup> | Package Description                                   | Package Option |
|--------------------|--------------------------------|-------------------------------------------------------|----------------|
| ADRV9008BBCZ-1     | -40°C to +85°C                 | 196-Ball Chip Scale Package Ball Grid Array [CSP_BGA] | BC-196-13      |
| ADRV9008BBCZ-1REEL | -40°C to +85°C                 | 196-Ball Chip Scale Package Ball Grid Array [CSP_BGA] | BC-196-13      |
| ADRV9008-1W/PCBZ   |                                | Pb-Free Evaluation Board, 75 MHz to 6000 MHz          |                |

<sup>1</sup> Z = RoHS Compliant Part.  
<sup>2</sup> See the Thermal Management section.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)