



Amphenol

The Company

Amphenol Commercial Products Group of Amphenol Canada Corp., a subsidiary of Amphenol Corporation, is an ISO 9001 certified facility located in Toronto, Canada. Our activities are dedicated to the design, development, and manufacturing of interconnect products intended for use in the data communications and telecommunications markets. Our expertise in understanding and supporting our customers' interconnect needs has earned Amphenol Canada a reputation of quality and excellence among the world's leading users of electronic components.

About the Catalogue

This modular jack catalogue represents some of our more popular products within this product category. Other product categories include, but are not limited to: D-Sub, Micro-Ribbon, USB, Headers and Sockets, CoolPower connectors, VHDCI, Capacitively Decoupled BNC, filtered connectors (D-Subs and micro-ribbon), and rugged connectors (RJ, USB, D-Subs, and bulkhead adapters).

All of our modular jacks are RoHS compliant.
All drawings in this document are measured in inches [mm], unless otherwise indicated.



Notice: Specifications are subject to change without notice. Contact your nearest Amphenol sales office for the latest specifications. All statements, information, and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed, or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement, and are not recommended to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Amphenol and RJ vista are registered trademarks.

CONTENTS

Right Angle (Side Entry)

	> THROUGH-HOLE	
RJHSE	Tab Up, Multiport	5-8
RJESE	Tab Up, Standard Profile	9-11
RJE29	Tab Up, Slim Profile	12-13
RJE37	Tab Up, Single Port, Low Profile	14-15
RJE39	Tab Up, Narrow, 2 and 8 Port	16-17
RJE01	Tab Up, RJ11 (Six Position)	18-19
RJSBE	Tab Down, 1, 2 and 4 Port	20-22
FRJAE	Tab Down, Filtered and Shielded	23-25
RJE02	Tab Down, Single Port, High Profile	26-27
RJE03	Tab Down, Single Port, Low Profile	28-29
RJE05	Tab Down, Ultra Low Profile	30-31
RJE09	Tab Down, Standard Profile	32-34
RJULE	Tab Down, Recessed, Low Profile	35-36
RJE73	Tab Down, Single Port, Low Profile	37-38
	> SURFACE MOUNT	
RJSSE	Tab Up, with Light Pipes	39-40
RJCSE	Tab Up, Standard Profile	42-43
RJLSE	Tab Down, Ultra Low Profile	45-46
RJE07	Tab Down, Single Port	46-47
RJE15	Tab Down, Single Port, Low Profile	48-49
	➤ PRESS FIT	
RJE56	Tab Down, RJ45	50-51
	▶ STACKED	
RJE36	Stacked, RJ45 Over USB	66-67
RJSAE	Stacked, 2, 4 and 8 Ports	68-69
RJSNE	Stacked, 4 over 4 Ports	70-71
Add	ditional Products	

RJE17	RJ45 Coupler	99-100
Coming	Soon & Other	100-103

Vertical (Top Entry)

)	THROUGH-HOLE		
RJHSE	Multiport, Standard Profile		5-8
RJE06	Single Port, Slim Profile	52	2-53
RJE08	Single/Dual Port, Standard Profile	54	4-55
RJE74	Single Port, Standard Profile	56	6-57
RJE88	Single Port, Low Profile	58	8-59
RJE1J	Single Port, Narrow Profile	60	0-61
RJE4N	Vertical, 2x4 Port	62	2-63
)	SURFACE MOUNT		

Single Port, Surface Mount Category 5e (1G, 2.5G)

RJE23

RJE48	Right Angle, Low Profile	72-73
RJE58	Right Angle, Standard Profile	74-76
RJE72	Right Angle, Recessed, Low Profile	77-78
RJSGE	Stacked, Press Fit, 2 over 2 Ports	79-80
RJE1R	Stacked, 1 over 1 Ports	90-91

Category 6 (5G, 10G)

RJE45	Vertical, Single Port, Low Profile	81-82
RJE49	Right Angle, Low Profile	83-84
RJE59	Right Angle, Standard Profile	85-87
RJE71	Right Angle, Recessed, Low Profile	88-89
RJE1R	Stacked, 1 over 1 Ports	90-91

Category 6A (10G)

RJE4A	Vertical, Single Port, Low Profile	92-93
RJE7B	Right Angle, Recessed, Low Profile	94-95
RJE60	Right Angle, Standard Profile	96-97

LED OPTIONS

Note: Denotes LEDs are available for connectors in the series

64-65

LED OPTIONS

LED Designation


LED	LED 2		LE	D 1
Code	Left		Right	
0	Bloc	cked	Blocked	
1	Yel	low	Gre	een
2	Bloc	cked	Gre	een
3	Yel	low	Bloo	cked
4	Gre	een	Yel	low
5	Gre	een	Gre	een
6	Yel	low	Yel	low
7	R	ed	Gre	een
8	Gre	een	R	ed
9	Gre	een	Bloo	cked
Α	Green	Yellow	Green	Yellow
В	Red	Green	Red	Green
С	Red	Green	Green	Yellow
D	Green		Green	Yellow
Е	Yellow		Green	Yellow
F	Green	Yellow	Yel	low
G	Green	Orange	Green	Orange
Н	Green	Yellow	Gre	een
J	Red	Green	Yel	low
K	Yel	low	Green	Orange
L	Green	Yellow	R	ed
M	R	ed	Yellow	
N	Green	Red	Green	Yellow
Р	Gre	een	Red	Green
R	Green	Orange	Green	
Т	Red		Red	
V	Red Green		Green	

Ex. RJHSE - 538X*


*LED Designation Code

Note: A black X in the part number refers to the LED designation code for all drawings in this catalogue.


Tab Up Connectors:



Tab Down Connectors:

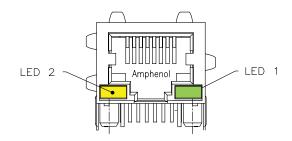


Stacked Connectors:

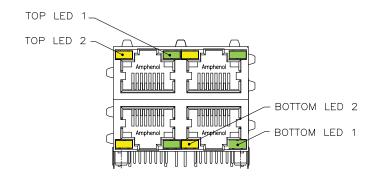

Other LED options are available. If you do not see what you're looking for, please email sales@amphenolcanada.com to request the complete the LED ordering options.

WAVE SOLDER PROFILE

Typical Wave Solder Profile for Leaded and Lead-Free Through-Hole Package

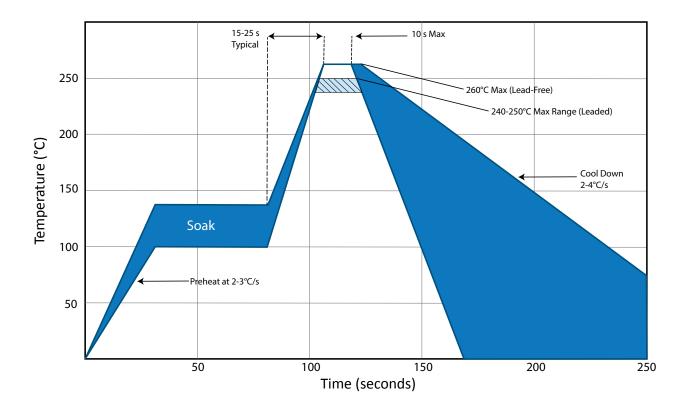

RJHSE TAB UP, MULTIPORT, WITH LEDS

TAB UP, MULTIPORT, WITH LEDS

A series of EMI Quiet Modular Jack connectors with built-in LEDs. This product is ideal for LAN applications such as adapter cards and routers. Shielded and non-shielded versions are available, with a variety of LED colors and ports.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails
Mackania	.1

Mechanical		
Insertion Force:	5 lbs max.	
Pull Retention Force:	20 lbs min.	
Durability:	750 mating & unmating cycles	
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.	
Operating Temperature:	-55°C to + 85°C	
UL File #:	E135615	
CSA File #:	LR685398	
Note: Connectors without LEDs are suitable for IR Reflow		

Electrical	
Contact Resistance:	$20\text{m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
Standard LEDs:	For 5.0 V Systems
Forward Voltage:	2.1 Volts typical
Reverse Voltage:	6 Volts min.
Luminous Intensity:	0.5 mcd min. at 2mA
Low Current LEDs:	For 3.3 V Systems
Forward Voltage:	2 Volts typical
Reverse Voltage:	6 Volts min.
Luminous Intensity:	1 mcd min. at 2mA

Note: Vertical version is only available in single port

ORDERING INFORMATION

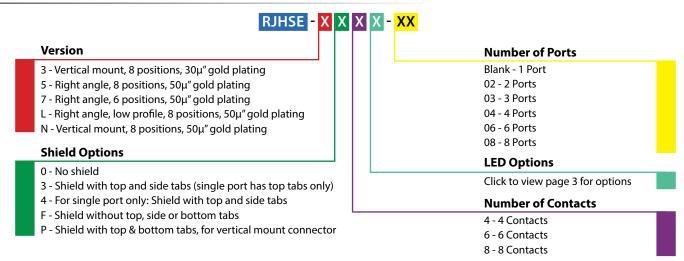

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

RJHSE TAB UP, MULTIPORT, WITH LEDS

Single Port

RJHSE-508X


Non-Shielded

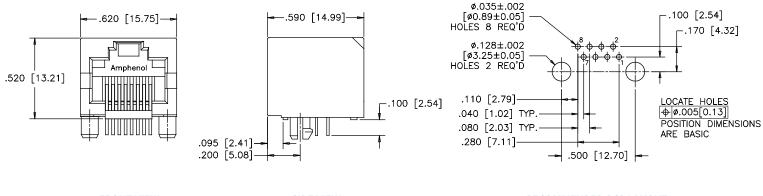


FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Shielded - With Top & Side Ground Tabs

RJHSE-548X

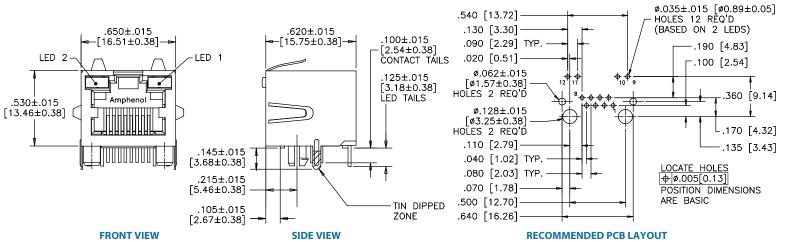

Vertical Mount RJHSE-338X

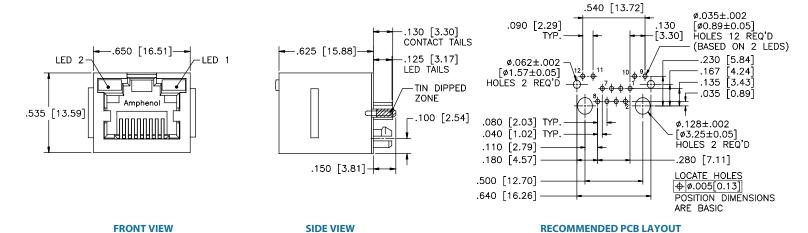


RJHSE TAB UP, MULTIPORT, WITH LEDS

Single Port

Shielded - Low Profile


RJHSE-L38X

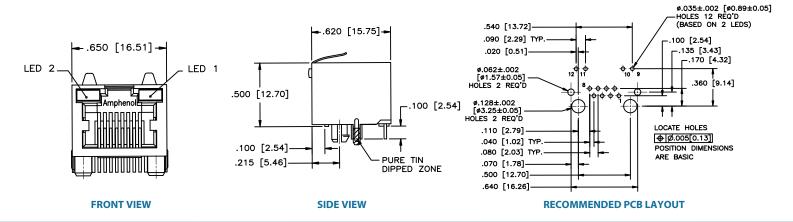


Multi Port

Non-Shielded

RJHSE-508X-04

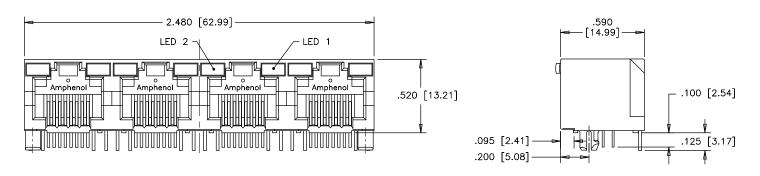


FRONT VIEW SIDE VIEW

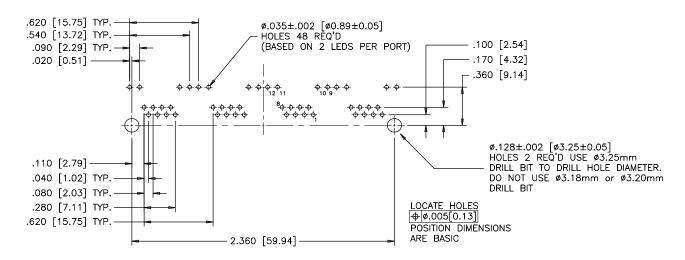


RECOMMENDED PCB LAYOUT

Multi Port RJHSE-538X-04

Shielded

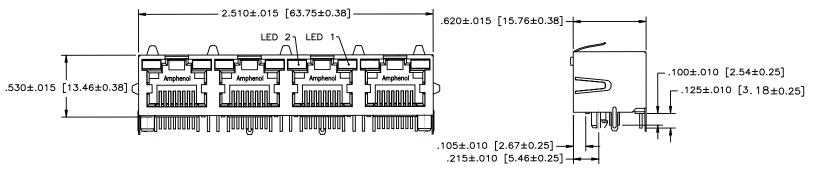

FRONT VIEW SIDE VIEW

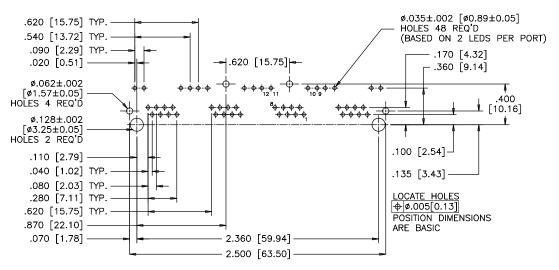

RECOMMENDED PCB LAYOUT

Notes

RJESE

TAB UP, RJ45 & RJ11, STANDARD PROFILE

TAB UP, RJ45 & RJ11, STANDARD PROFILE

This family of EMI quiet modular jack connectors with integrated LEDs features the same data transfer capabilities as our existing series of LED-integrated modular jacks. This product is an economical solution ideal for LAN applications and is intended for use with low temperature soldering processes. Shielded and non-shielded versions are available with a variety of LED options. Also offered in both single and multi port configurations.




SPECIFICATIONS

Material	
Insulator:	Engineering thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails

Till platting	Till plating off LLD talls	
Mechanical		
Insertion Force:	5 lbs max.	
Pull Retention Force:	20 lbs min.	
Durability:	750 mating & unmating cycles	
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.	
Operating Temperature:	-55°C to + 85°C	
UL File:	E135615	

Electrical	
Contact Resistance:	$20 \text{ m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 2mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

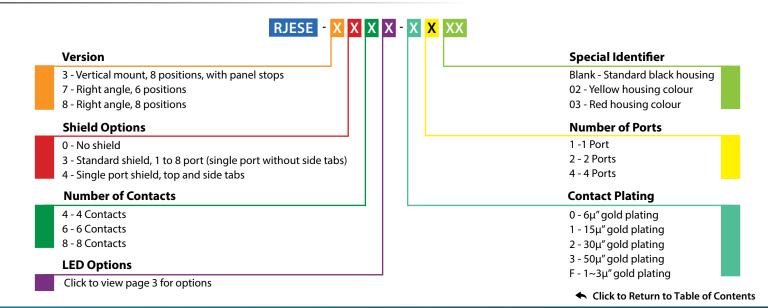


RJESE

TAB UP, RJ45 & RJ11, STANDARD PROFILE


Single Port

RJESE-808X-X1

Non-Shielded

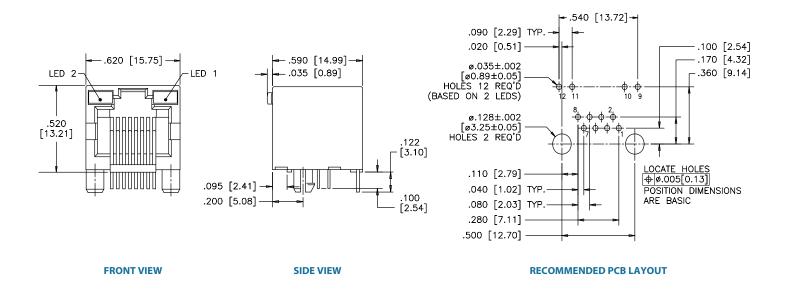

Shielded RJESE-848X-X1

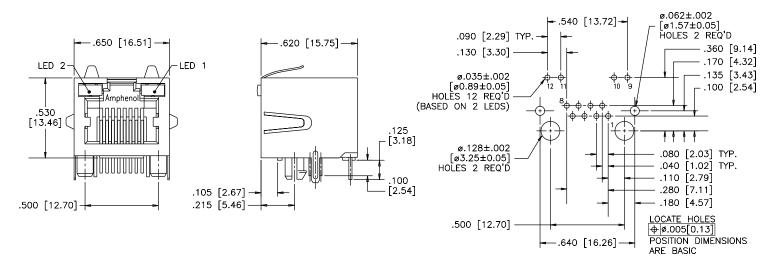

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

RJESE


TAB UP, RJ45 & RJ11, STANDARD PROFILE

Multi Port RJESE-808X-X4

Non-Shielded

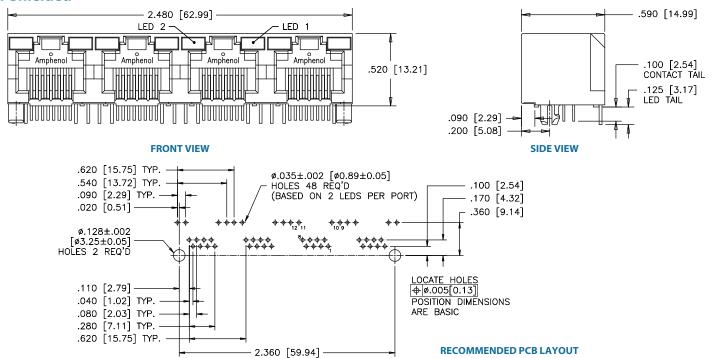

Shielded RJESE-838**X**-X4

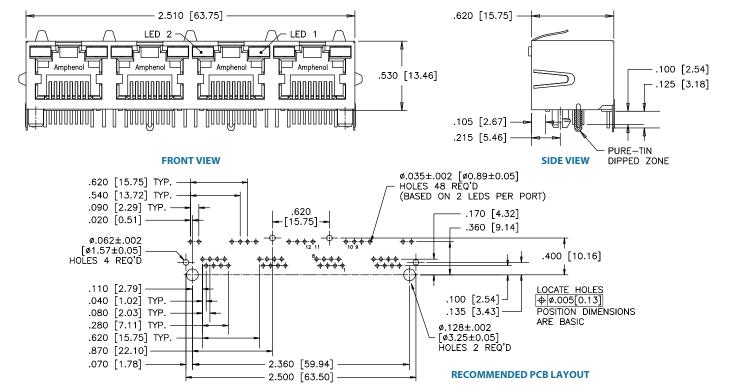

TAB UP, SLIM PROFILE

TAB UP, SLIM PROFILE

RJE29 series is designed to meet a wide variety of applications. Available in multiple positions and contacts to support basic telecom and Ethernet protocols. Shielding is available for increased EMI performance.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; 100µ" min. matte tin plating on soldering tail
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails

Electrical	
Contact Resistance:	40 m $Ω$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 100V DC
Current Rating:	1.5 Amps
Voltage Rating:	150 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	4 contacts: 1.8 Kgf Max 6 contacts: 2.1 Kgf Max 8 contacts: 2.3 Kgf Max 10 contacts: 2.5Kgf Max
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles with 50u"
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-40°C to + 85°C
UL File Number:	E136228

ORDERING INFORMATION

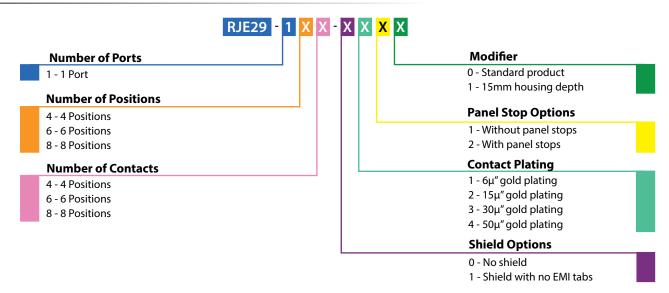


Didn't find what you were looking for?

 $Please\ contact\ sales@amphenolcanada.com\ and\ let\ us\ know\ what\ you\ need.$


TAB UP, SLIM PROFILE

Single Port


Non-Shielded









RJE29-144-0X10

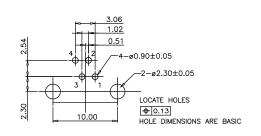


RECOMMENDED PCB LAYOUT

Non-Shielded






RJE29-166-0X10

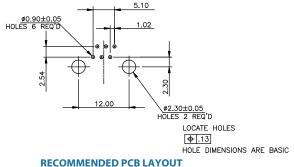

Non-Shielded




FRONT VIEW




SIDE VIEW

RJE29-188-0X10

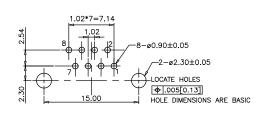


RECOMMENDED PCB LAYOUT

Shielded




FRONT VIEW



SIDE VIEW

RJE29-188-1X10



RECOMMENDED PCB LAYOUT

TAB UP, SINGLE PORT, LOW PROFILE, WITH LEDS

TAB UP, SINGLE PORT, LOW PROFILE, WITH LEDS

Single port through-hole (THT) series with multiple shield and LED options. Similar to our single port RJHSE series, but with a slightly lower profile and longer body. Inverted latch orientation for easy mating with industry standard plugs.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615
Note: Connectors without LEDs are suitable for IR Reflow	

Electrical	
Electrical	
Contact Resistance:	$20 \text{ m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current :	20mA typical
LED Forward Voltage:	2.6 Volts max. at 2mA
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 585 ± 7 nm measured at 20mA Green: 568 ± 6 nm measured at 20mA Red: 640 ± 5 nm measured at 20mA

ORDERING INFORMATION

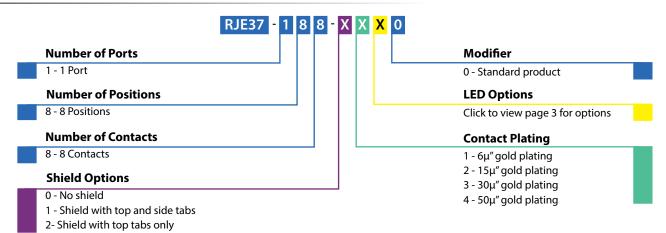


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

TAB UP, SINGLE PORT, LOW PROFILE, WITH LEDS

Single Port

Non-Shielded

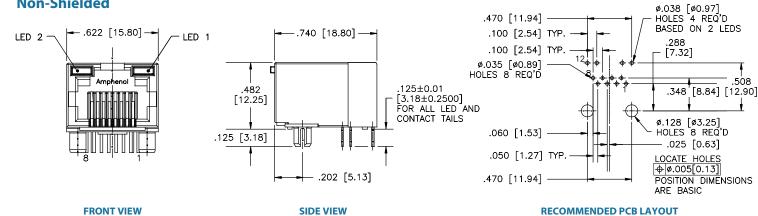

Shielded - With Full Tabs

.760 [19.30] .642 [16.31] --IFD 2 -· LFD 1 125±0.01 [3.18±0.25] FOR ALL LED AND CONTACT .492 [12.50] TAILS .125 [3.18] TIN DIPPED ZONE .212 [5.38]


FRONT VIEW SIDE VIEW

RJE37-188-1XX0

RJE37-188-0XX0


4 REQ'D

.508

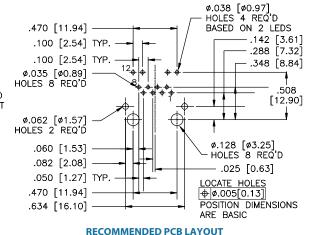

Shielded - With Top Tabs Only

RJE37-188-2XX0

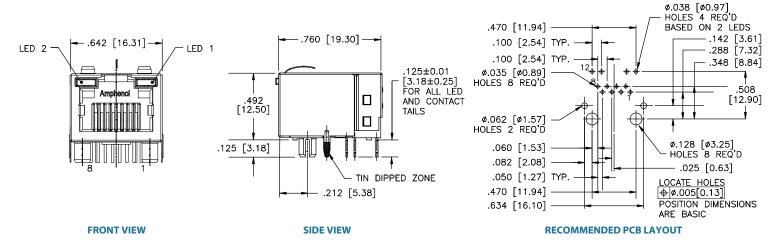

TAB UP, NARROW, TWO AND EIGHT PORT

TAB UP, NARROW, TWO AND EIGHT PORT

Single and eight port through-hole (THT) series with multiple shield and LED options. Similar to the RJHSE series, but with a narrower profile. This series is ideal for programs that need multiple connectors, but have limited PCB space.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	2.6 Volts max. at 2mA (for single colour)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	4.5 to 6.0 mcd min. at 20mA (for single colours)
LED Wave Length:	Yellow: 588 ± 7 nm measured at 20mA Green: 570 ± 6 nm measured at 20mA Red: 628 ± 5 nm measured at 20mA

ORDERING INFORMATION

Note: Connectors without LEDs are suitable for IR Reflow

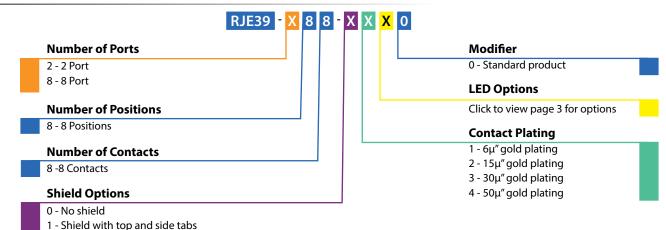

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

SIDE VIEW

TAB UP, NARROW, TWO AND EIGHT PORT


Two Port


RJE39-288-1XX0

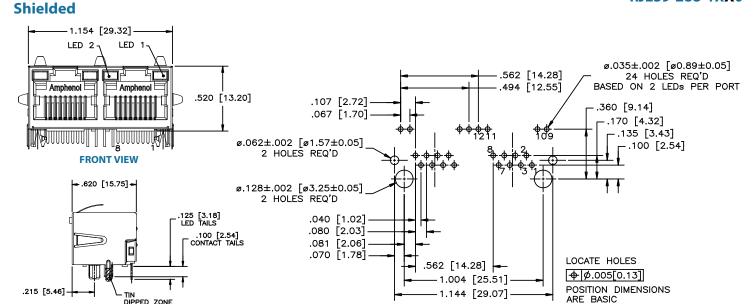

Eight Port Shielded 4.527 [115.00] LED 2 \ LED 1 \ 1 \ 125 [3.18]

RECOMMENDED PCB LAYOUT

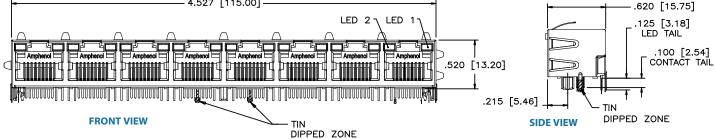

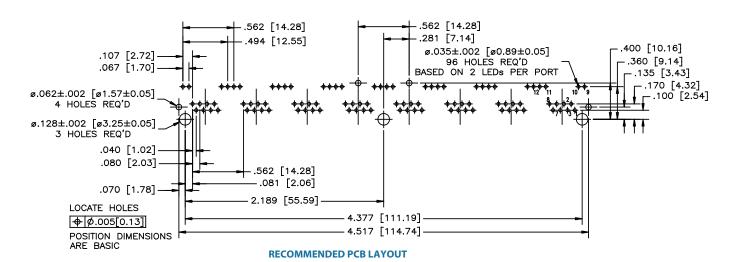

TAB UP, RJ11 (SIX POSITION)

TAB UP, RJ11 (SIX POSITION)

The RJE01 series of 6-position jacks are designed for superior EMI performance. The inverted connector provides shorter leads, eliminating the EMI antenna effect of the standard connector footprint. Typical performance improvement over their standard connector counterparts is 5-10 dB over the frequency range.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Stainless steel with tin dipped tails

Electrical	
Contact Resistance:	$20 \text{ m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File #:	E135615
CSA File #:	LR685398


ORDERING INFORMATION

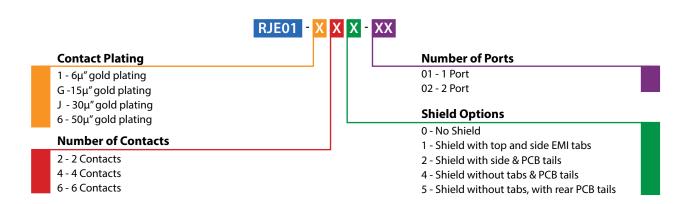



Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

TAB UP, RJ11 (SIX POSITION)

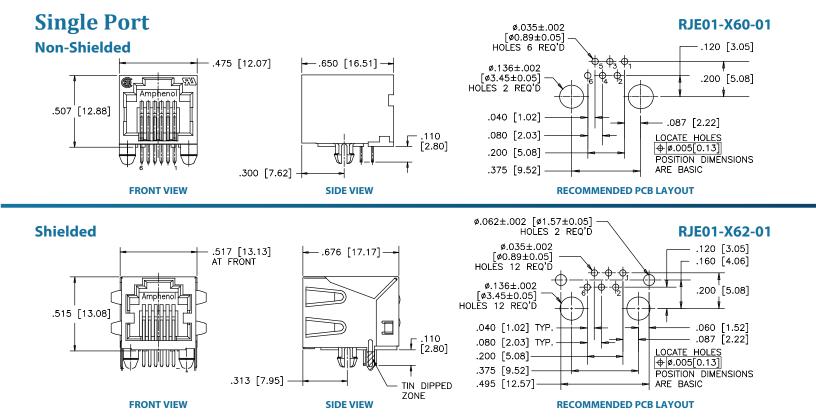

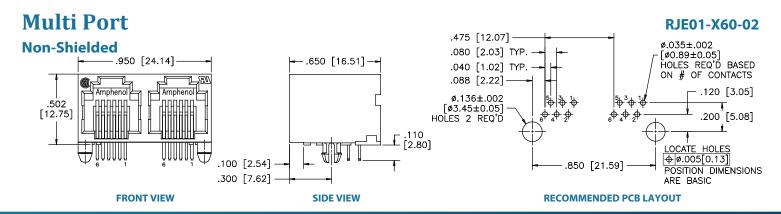

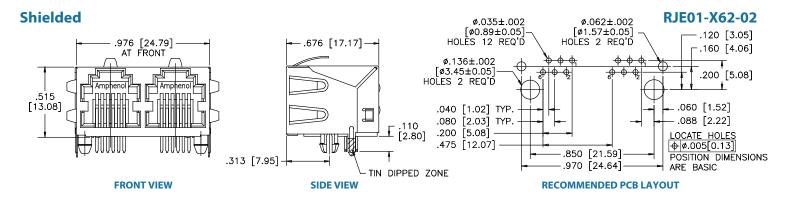

RJSBE

TAB DOWN, 1, 2 AND 4 PORT WITH LEDs

TAB DOWN, 1, 2 AND 4 PORT WITH LEDs

The RJSBE series of modular jacks supports Ethernet Protocols. Shielding is available with or without a ferrite filter for increased EMI performance and LEDs for link activity and network speed verification.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Copper alloy; nickel plated with tin dipped tails
LED:	Tin plating on LED tails

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File #:	E135615
CSA File #:	LR685398
Note: Connectors without LE	Ds are suitable for IR Reflow

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 2mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

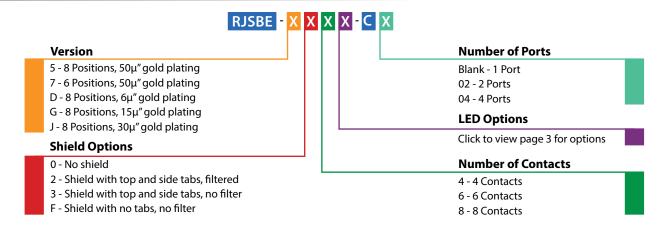

Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


RJSBE


TAB DOWN, 1, 2 AND 4 PORT WITH LEDS

Single Port

RJSBE-508X-C1


Non-Shielded



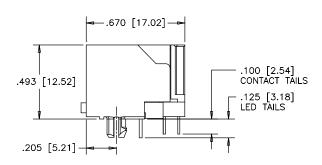


SIDE VIEW

FRONT VIEW .C

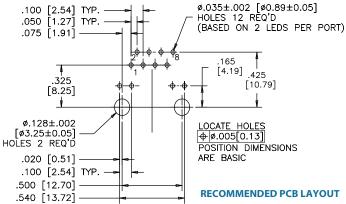

Shielded

RJSBE-538X-C1

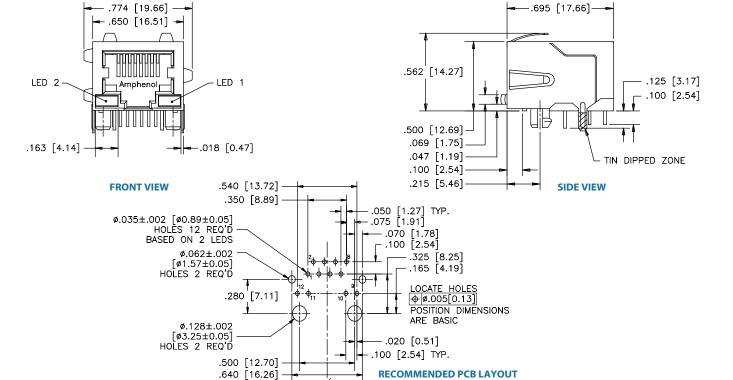



RJSBE


TAB DOWN, 1, 2 AND 4 PORT WITH LEDs


Multi Port

RJSBE-508X-C4

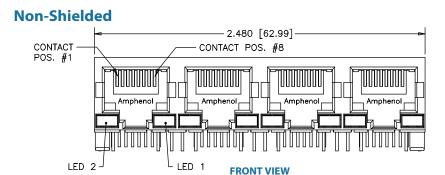

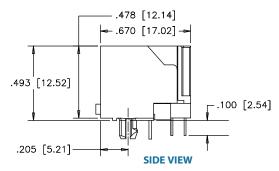

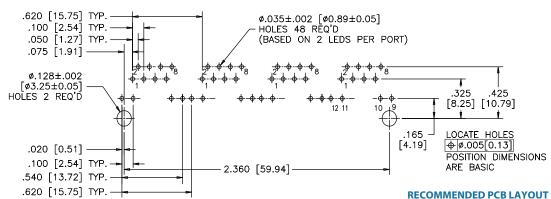

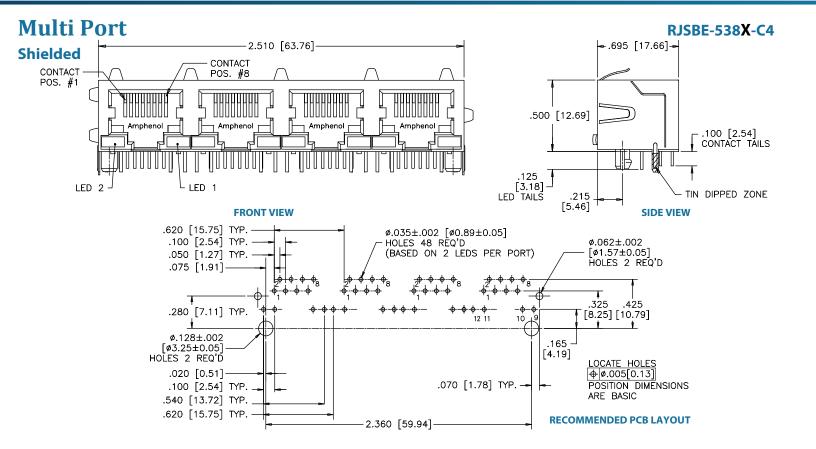

FRJAE

TAB DOWN, FILTERED AND SHIELDED

TAB DOWN, FILTERED AND SHIELDED

The FRJAE series of shielded and filtered modular jacks offer low cost and effective EMC control within standard RJ11 & RJ45 connector footprints. EMC control is offered by a completely shielded connector and/or with the use of a high resistivity, high impedance ferrite filter. No board layout changes are required for its use. Simply replace the standard non-filtered connector for superior EMC performance.



SPECIFICATIONS

Material

Insulator: High temp. thermoplastic;

Complies with UL 94V-0; Black

Contacts: Phosphor bronze hard temper with gold thickness


> options (6μ", 15μ", 30μ", 50μ") over 50μ" min. nickel on contact mating area; 100µ" min. matte tin plating on

soldering tail

Shield: Copper alloy; nickel plated with tin dipped tails

Filter: High impedance, high resistivity ferrite filter

IMPEDANCE CHARACTERISTICS

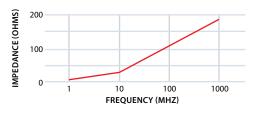

Electrical

Contact Resistance: $20 \text{ m}\Omega \text{ max}$.

Insulation resistance: $500 \text{ M}\Omega$ min. at 500 V DC for 2 mins max.

Current Rating: 1.5 Amps per contact

Voltage Rating: 125 Volts AC

DWV: 1000 VAC, 60 Hz. 1 min.

Mechanical

Insertion Force: 5 lbs max. **Pull Retention Force:** 20 lbs min.

Durability: 750 mating & unmating cycles

Recommended Wave soldering peaked at 260°C for 5

Soldering Temperature: secs max.

Operating Temperature: -55°C to +85°C

UL File #: E135615

CSA File #: LR68598

ORDERING INFORMATION

FRJAE - X X X - XX Version 4 - 8 Positions 6 - 6 Positions **Shield Options** 0 - Non-filtered without shield 1 - Filtered with front tab shield 3 - Non-filtered with front tab shield 4 - Filtered without shield 6 - Filtered with rear tab shield 7 - Filtered without PCB tails shield 8 - Non-filtered with rear tab shield

Number of Ports Blank - 1 Port

02 - 2 Ports 04 - 4 Ports

06 - 6 Ports 08 - 8 Ports

Number of Contacts

2 - 2 Contacts

4 - 4 Contacts 6 - 6 Contacts


8 - 8 Contacts


Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

FRJAE

TAB DOWN, FILTERED AND SHIELDED

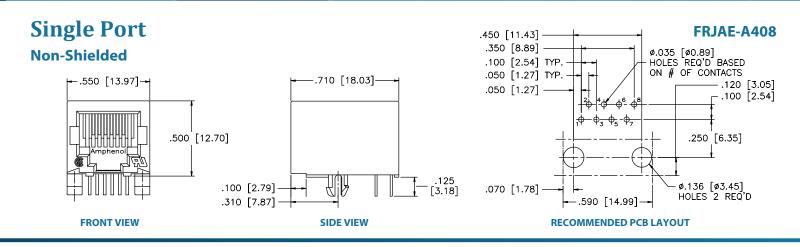

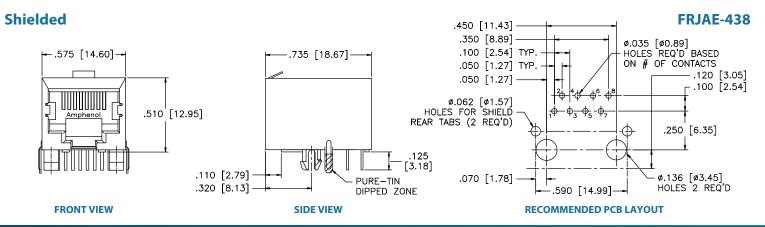

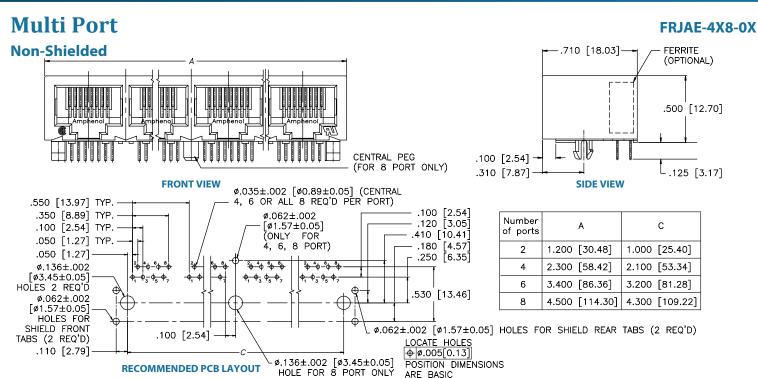


FRJAE

TAB DOWN, FILTERED AND SHIELDED

Multi Port FRJAE-418-0X

Shielded

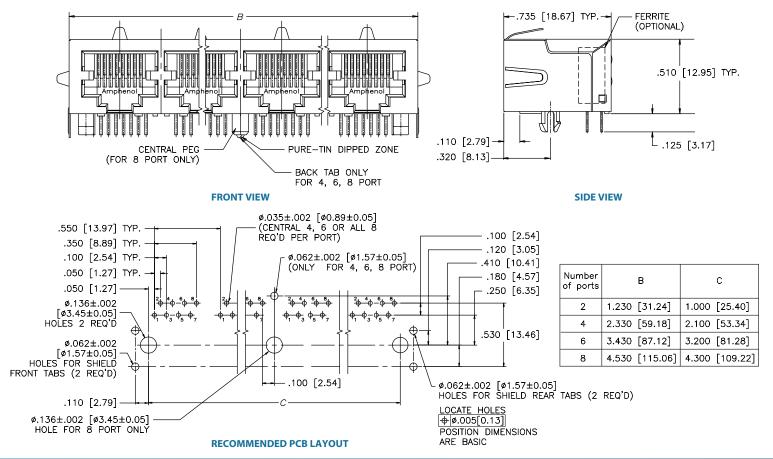

Notes

TAB DOWN, SINGLE PORT, HIGH PROFILE

TAB DOWN, SINGLE PORT, HIGH PROFILE

RJE02 series is a group of products within a family of standard modular jacks designed to meet requirements for a variety of applications options within the RJE02 family include options with and without a panel stops, and RJ11 & RJ45 configurations.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; 100μ " min. matte tin plating on soldering tail
Shield:	Copper alloy; nickel plated with tin dipped tail

Electrical	
Contact Resistance:	$20\ m\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1500 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	- 40°C to + 85°C
UL File Number:	E136228

Note: Connectors with high temp. material are suitable for IR Reflow

ORDERING INFORMATION

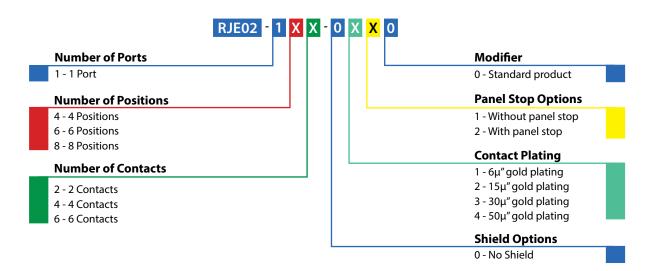

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

TAB DOWN, SINGLE PORT, HIGH PROFILE

Single Port

Non-Shielded

RJE02-1XX-0X20

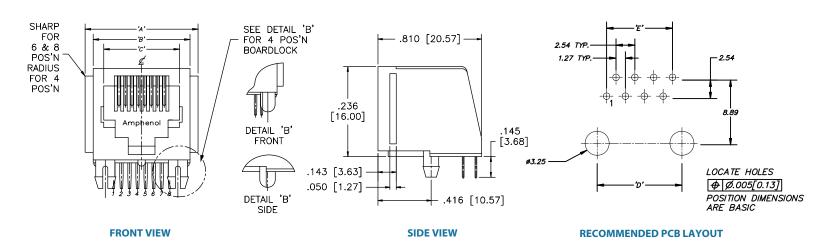

Part # No. of No.		No. of	Dimensions				
Furt #	Positions	Contacts	Α	В	С	D	E
RJE02-142-0X20	4	2	.540 [13.72]	.440 [11.18]	.309 [7.85]	.300 [7.62]	.050 [1.27]
RJE02-144-0X20	4	4	.540 [13.72]	.440 [11.18]	.309 [7.85]	.300 [7.62]	.150 [3.81]
RJE02-162-0X20	6	2	.620 [15.75]	.520 [13.21]	.389 [9.88]	.400 [10.16]	.050 [1.27]
RJE02-164-0X20	6	4	.620 [15.75]	.520 [13.21]	.389 [9.88]	.400 [10.16]	.150 [3.81]
RJE02-166-0X20	6	6	.620 [15.75]	.520 [13.21]	.389 [9.88]	.400 [10.16]	.150 [3.81]
RJE02-188-0X20	8	8	.700 [17.78]	.600 [15.24]	.469 [11.91]	.450 [11.43]	.350 [8.89]

Notes

TAB DOWN, SINGLE PORT, LOW PROFILE

TAB DOWN, SINGLE PORT, LOW PROFILE

RE03 series is a group of products within a family of standard modular jacks designed to meet requirements for a variety of applications. Options within the RJE03 family include shielded and non-shielded, and RJ11 & RJ45 configurations.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; 100μ " min. matte tin plating on soldering tail
Shield:	Copper alloy; nickel plated with tin dipped tail

Electrical	
Contact Resistance:	20 m $Ω$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	- 40°C to + 85°C
UL File Number:	E136228

Note: Connectors with high temp. material are suitable for IR Reflow

ORDERING INFORMATION

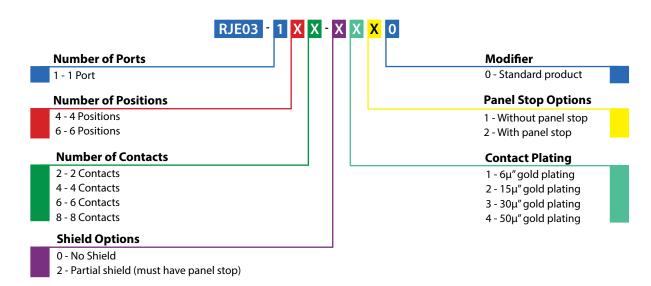


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


TAB DOWN, SINGLE PORT, LOW PROFILE


Single Port

Non-Shielded



FRONT VIEW

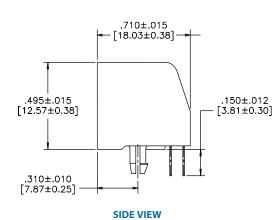

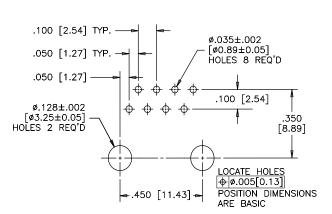


RJE03-188-0X10


RJE03-188-2X20


RECOMMENDED PCB LAYOUT

Shielded with Panel Stop



FRONT VIEW

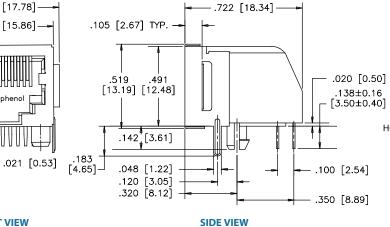

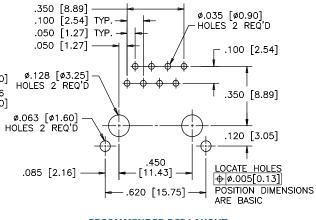

RECOMMENDED PCB LAYOUT

Notes

RJE05 TAB DOWN, ULTRA LOW PROFILE

TAB DOWN, ULTRA LOW PROFILE

RJE05 series is a group of products within a family of standard modular jacks designed to meet requirements for a variety of applications. Options within the RJE05 family include shielded or non-shielded, and RJ11 & RJ45 configurations.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail
Shield:	Copper alloy: nickel plated with tip dipped tail

Electrical	
Contact Resistance:	$20 \text{ m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	- 40°C to + 85°C
UL File #:	E135615

Note: Connectors with high temp material are suitable for IR Reflow

ORDERING INFORMATION

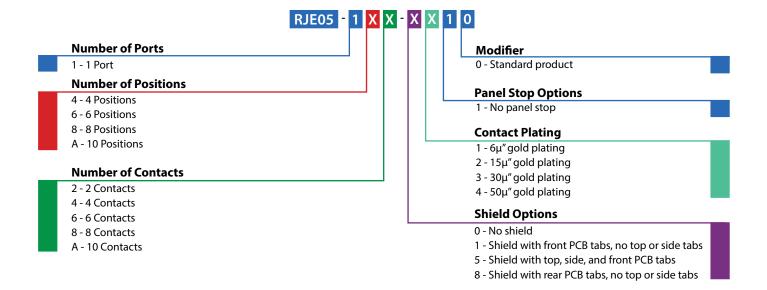


Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.


TAB DOWN, ULTRA LOW PROFILE

Single Port

Non-Shielded



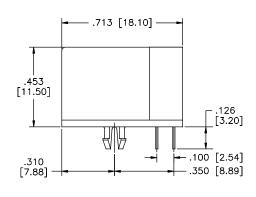

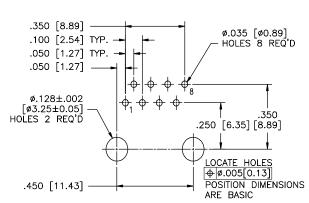



FRONT VIEW

SIDE VIEW

RECOMMENDED PCB LAYOUT

Shielded with Front PCB Tabs





RJE05-188-1X10 .350 [8.89] .100 [2.54] TYP. ø.035 [ø0.89] HOLES 8 REQ'D .050 [1.27] TYP. .050 [1.27] ø.128 [ø3.25] HOLES 2 REQ'D .350 .250 [6.35] [8.89] ø.063 [ø1.60] HOLES 2 REQ'D .117 [2.97] .081 [2.06] LOCATE HOLES ф ø.005[0.13] .450 [11.43] POSITION DIMENSIONS - .612 [15.54] -

FRONT VIEW

FRONT VIEW

SIDE VIEW


RECOMMENDED PCB LAYOUT

Shielded with Top, Side, and Front PCB Tabs

.626 [15.90] .482 [12.25] .321 [8.15] .321 [8.15]

RJE05-188-5X10

RJE05-188-0X10

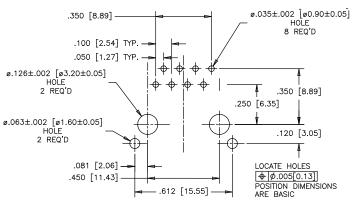

RECOMMENDED PCB LAYOUT

SIDE VIEW

TAB DOWN, STANDARD PROFILE

TAB DOWN, STANDARD PROFILE

RJE09 series is a group of products within a family of standard modular jacks designed to meet requirements for a variety of applications. Options with the RJE09 family include shielded & non-shielded, and RJ11 & RJ45.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options $(6\mu'', 15\mu'', 30\mu'', 50\mu'')$ over $50\mu''$ min. nickel on contact mating area; $100\mu''$ min. matte tin or gold flash plating on soldering tail
Shield:	Copper alloy; nickel plated allover

Electrical	
Contact Resistance:	$20 \ m\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 to 8 secs max.
Operating Temperature:	- 40°C to + 70°C
UL File #:	E136228

ORDERING INFORMATION

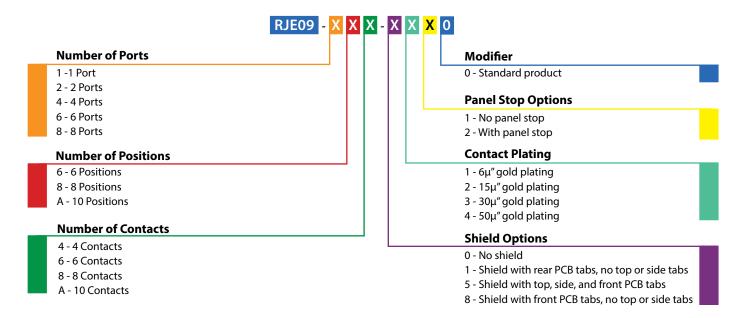


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

TAB DOWN, STANDARD PROFILE

Single Port

Non-Shielded



.415 --[10.55] -- .135 [3.44] ### 100 [2.54] TYP.

0.035±.002

0.050 [1.27] TYP.

100 [2.54] TYP.

0.050 [1.27] TYP.

100 [2.54] TYP.

100 [2

RJE09-1AA-0X10


RJE09-188-1X10

SIDE VIEW RECOMMENDED PCB LAYOUT

Shielded

.630 SEE DETAIL 'X' .031 [0.80] .031 [0.80] .020 .050 [0.50] .104 .2.65] .148 .3.75 .130 [3.76] .130 [3.30] .130 [3.30]

FRONT VIEW

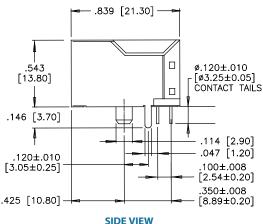



.612 [15.55] ø.063±.002 .350 [8.89] [ø1.60±0.05] ø.035±.002 HOLES 2 REQ'D [ø0.90±0.05] .100 [2.54] .050 [1.27] 0 0 0 0 0 .35 [8.89] \bigcirc .120 [3.05] 450 OCATE HOLES [11.43] $|\phi|$ ø.005[0.13] ø.126±.002 [ø3.20±0.05] POSITION DIMENSIONS HOLES 2 REQ'D ARE BASIC


FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Shielded

RJE09-188-5X10





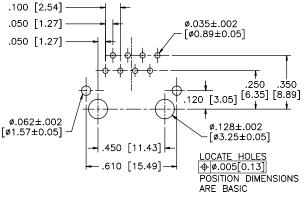


FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT


TAB DOWN, STANDARD PROFILE

Multi Port

Non-Shielded

RJE09-288-0X10

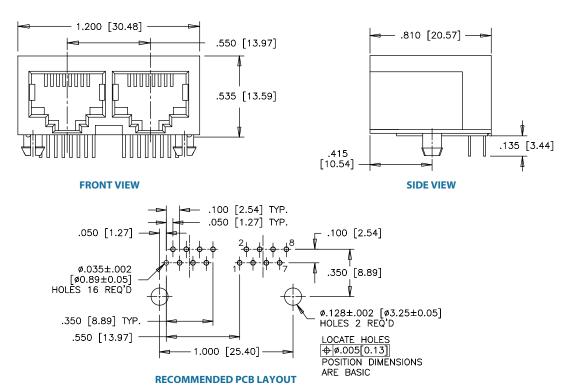

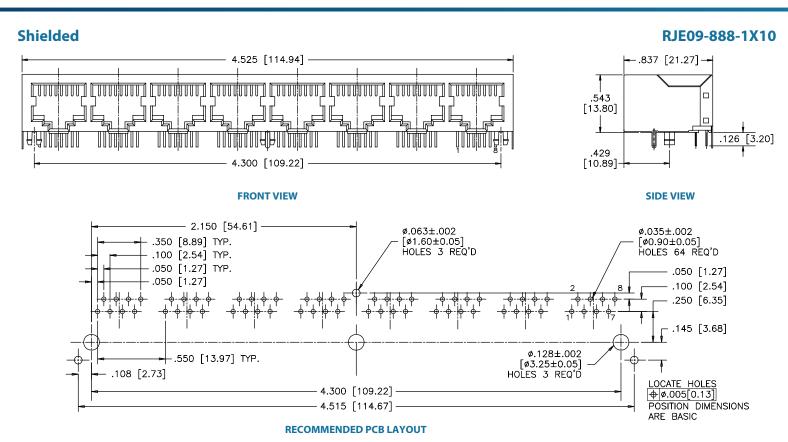

RJULE

TAB DOWN, RECESSED, LOW PROFILE

TAB DOWN, RECESSED, LOW PROFILE

RJULE is a series of single port RJ45 modular jacks designed for slim profile applications. With a profile height of less than 10 millimeters, this connector is perfect where vertical space is limited. Standard and rear mount shield options for superior EMI performance makes this part ideal for LAN and router applications.



SPECIFICATIONS


Material	
Housing:	High temp. thermoplastic; Flammability rating UL94-0; RoSH compliant
Contacts:	Phosphor bronze
Plating:	Gold plated on mating surfaces over $50\mu''$ (1.27 microns) min. nickel under plate; $100\mu''$ (2.54 microns) min. matte tin on contact tails
Shield:	Copper alloy; nickel plated

Electrical	
Contact Resistance:	$20 \text{ m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File #:	E135615

Note: Suitable for IR Reflow

ORDERING INFORMATION

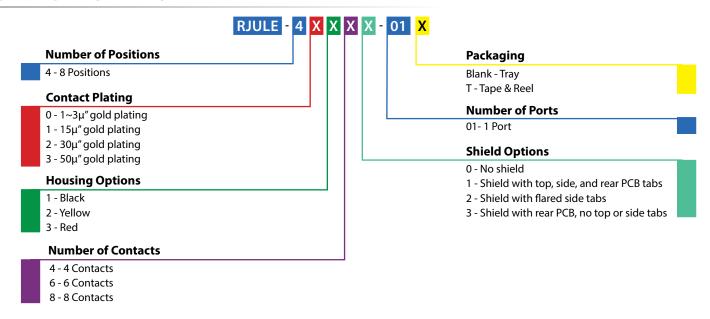

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

RJULE


TAB DOWN, RECESSED, LOW PROFILE

Single Port


Non-Shielded



FRONT VIEW

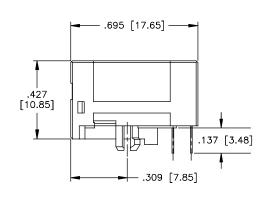


RJULE-4X180-01

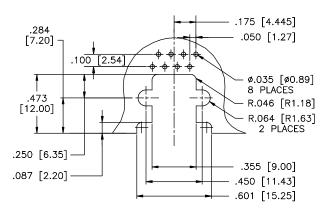


SIDE VIEW RECOMMENDED PCB LAYOUT

Shielded with Side Ground Tabs






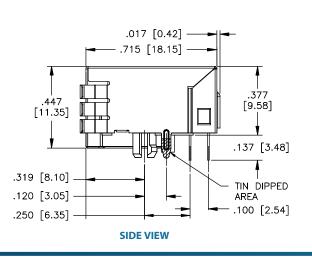


RJULE-4X182-01


RJULE-4X181-01

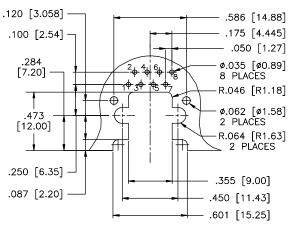

RECOMMENDED PCB LAYOUT

Standard Shield



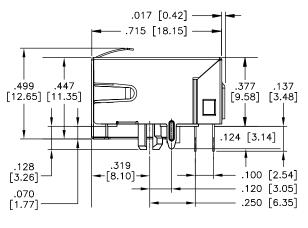

.586 [14.88] .175 [4.445] ø.035±0.002 [ø0.89±0.05] .050 [1.27] ⊕ 0.003[0.08]W .386 [9.80] R.046 [R1.18] ø.062±0.002 .100 [2.54] [ø1.58±0.05] 1 .120 [3.05] R.064±0.002 [R1.63±0.05] .197 [5.00] .355 [9.00] .450 [11.43] .250 [6.35] -W-

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

TAB DOWN, SINGLE PORT, LOW PROFILE, WITH LEDS

TAB DOWN, SINGLE PORT, LOW PROFILE

The RJE73 modular jack is a low profile RJ45 with LEDs and superior EMI shielding with a small footprint for space sensitive designs. This connector features built-in LEDs that provide link activity and network verification. This product is ideal for LAN applications such as adapter cards and routers.




SPECIFICATIONS

Material		
Insulator:	High temp. thermoplastic; Complies with UL94-0; Black	
Contacts:	Phosphor bronze hard temper with gold plating options over $50\mu''$ min. nickel on contact mating area; $100\mu''$ min. matte tin plating on solder tails	
Shield:	Stainless steel with tin dipped tails	
LED:	Tin plating	on LED tails
Mechanica	ıl	
Insertion Ford	:e:	5 lbs max.
Pull Retention	n Force:	20 lbs min.
Durability:		750 mating & unmating cycles
Recommende Soldering Ten	- 	Wave soldering peaked at 245°C for 8 to 10 secs max.
Operating Ter	nperature:	-55°C to + 85°C
UL File #:		E135615

Electrical	
Contact Resistance:	$20~\text{m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.0 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 2mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

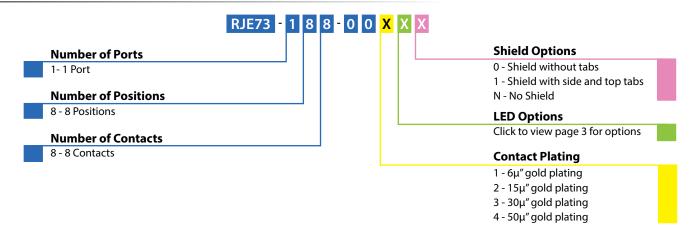

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.


TAB DOWN, SINGLE PORT, LOW PROFILE, WITH LEDS

Single Port

RJE73-188-00XX0

Shielded - No Top or Side Tabs

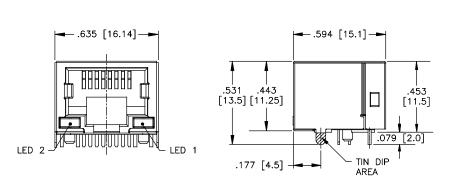


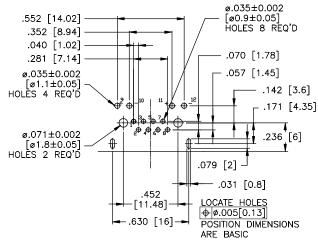



FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Shielded - With Top and Side Tabs

RJE73-188-00XX1





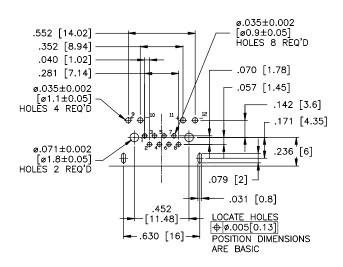

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

RJSSE TAB UP, WITH LIGHT PIPES

TAB UP, WITH LIGHT PIPES

The RJSSE series represents an expansion of Amphenol Canada's current RJHSE series connector. The RJSSE offers all the benefits of the RJHSE series in SMT with light pipes. Shielded and non-shielded versions are available with or without light pipes.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL94-0; Black
Contacts:	Phosphor bronze hard temper with gold plating options over $50\mu''$ min. nickel on contact mating area; $100\mu''$ min. matte tin plating on solder tails
Shield:	Copper alloy; nickel or matte tin plating
Light Pipe:	Optical polycarbonate; UL 94V-0

Electrical	
Contact Resistance:	$20 \text{ m}\Omega$ max.
Insulation resistance:	$500\mbox{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1500 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	IR Reflow peaked at 260°C for 5 to 10 secs max.
Operating Temperature:	-55°C to + 85°C
UL File #:	E135615

Note: Light Pipes to be installed after soldering

ORDERING INFORMATION

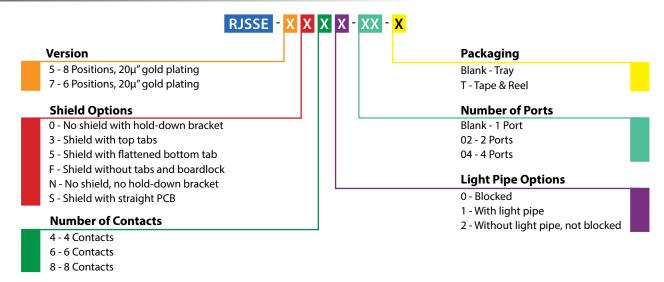

Note: The light pipes are available to be purchased on their own.


Part Number: RJSSE-2485-01

Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


RJSSE

TAB UP, WITH LIGHT PIPES

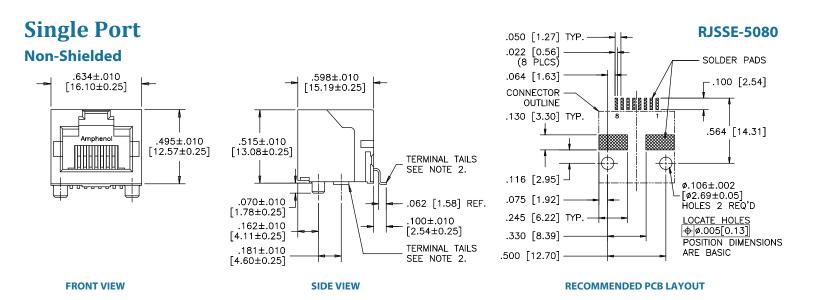



Standard Shield - With Top & Side Ground Tabs

RJSSE-5381

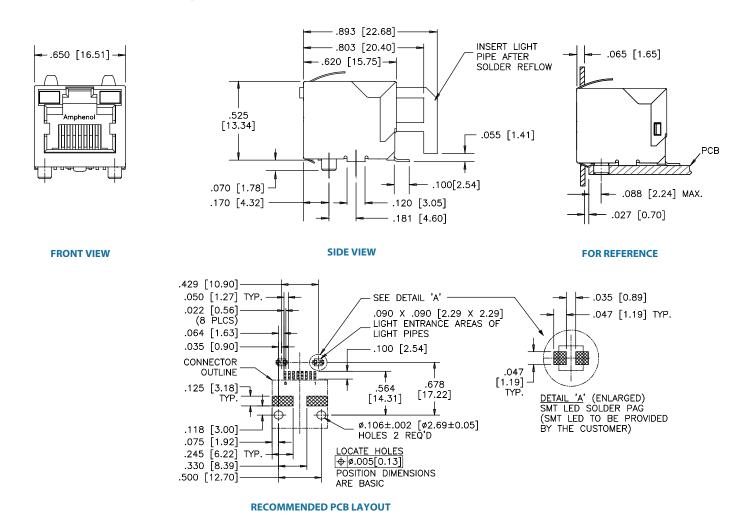

RJSSE TAB UP, WITH LIGHT PIPES

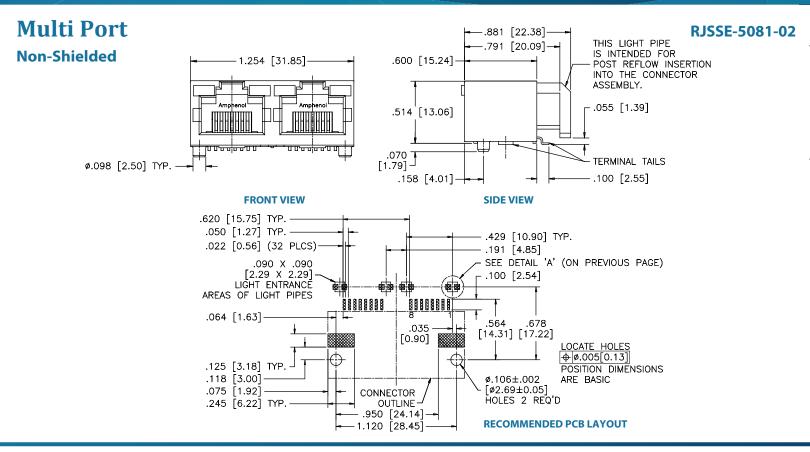

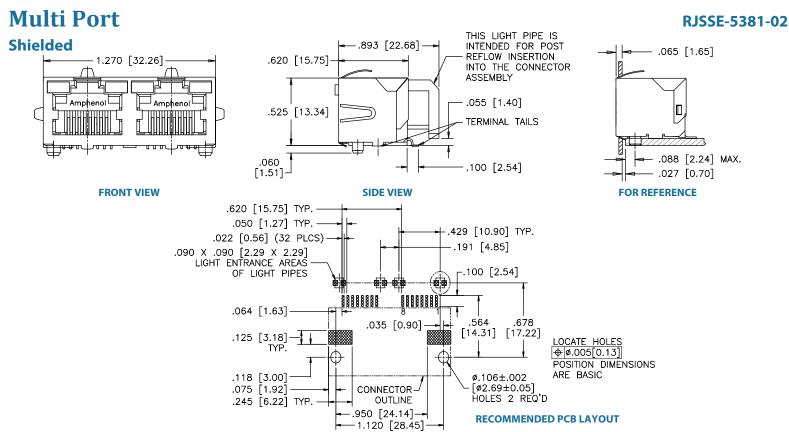



TAB UP, STANDARD PROFILE, WITH LEDS

The RJCSE is a right angle surface mount connector. Shielding is available for increased EMI performance as well as built-in LEDs for link activity and network verification. This product is ideal for LAN applications such as adapter cards and routers.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; 100µ" min. matte tin plating on soldering tail
Shield:	Stainless steel with matte-tin plating

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Suitable for IR Reflow at 260°C for 10 secs max.
Operating Temperature:	- 55°C to + 85°C
UL File #:	E135615
CSA File #:	LR685398

Electrical	
Contact Resistance:	$20\ m\Omega$ max.
Insulation resistance:	$500\mbox{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 2mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

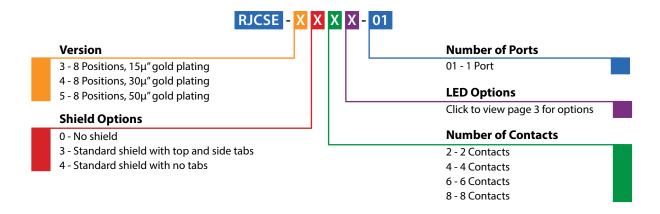

Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


RJCSE

TAB UP, STANDARD PROFILE, WITH LEDs


Single Port

Non-Shielded

RJCSE-508X-01

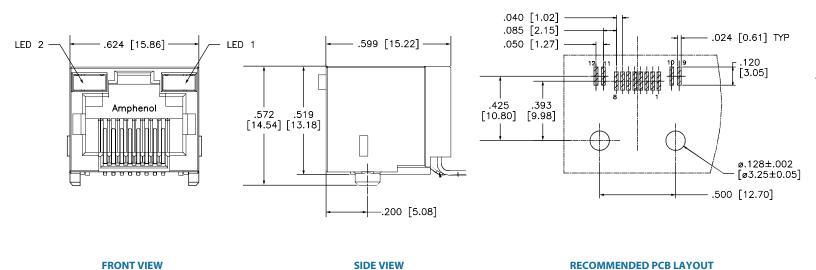

Shielded RJCSE-538X-01

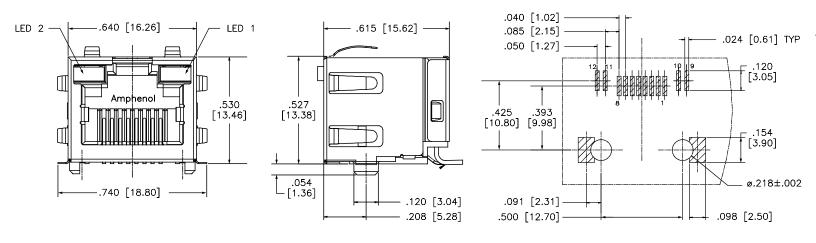

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

RJLSE

TAB DOWN, ULTRA LOW PROFILE

TAB DOWN, ULTRA LOW PROFILE

The RJLSE series contains surface mount modular jacks with superior EMI performance that supports Ethernet Protocols. This low profile connector is built to meet your high volume RJ requirements. This series is a true pick and place compatible SMT connector and is available with different shielding, contacts, gold plating thickness, and color options. This connector is built with high temperature engineering thermoplastic and suitable for the IR Reflow solder process.



SPECIFICATIONS

Material

Insulator: High temp. thermoplastic; Complies with UL 94V-0; Black **Contacts:** Phosphor bronze hard temper with gold thickness

options (6μ", 15μ", 30μ", 50μ") over 50μ" min. nickel on contact mating area; Gold flash over palladium nickel also available; 100µ" min. matte tin plating on

soldering tail


Shield: Copper alloy; nickel or matte tin plated

Note: Other insulator colour options available


Electrical	
Contact Resistance:	20 m $Ω$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical Insertion Force: 5 lbs max. **Pull Retention Force:** 20 lbs min. 750 mating & unmating cycles **Durability:** Recommended Lead free reflow soldering up to 260°C for 10 secs max. 3 reflow passes max. **Soldering Temperature: Operating Temperature:** - 55°C to + 85°C UL File #: E135615 CSA File #: LR685398

300 -260°C max 250 -230°C 4°C/s max 4°C/s max 200 150~180°C 4°C/s max

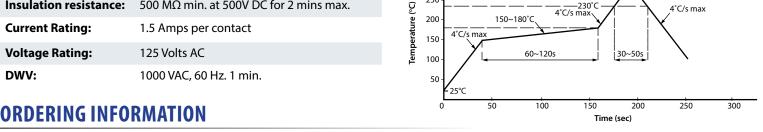

Recommended reflow profile below

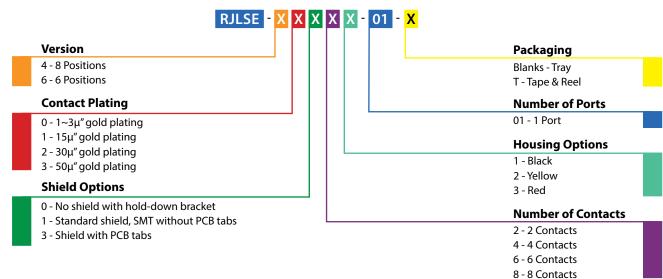


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


Single Port

Non-Shielded

RJLSE-6X061-01

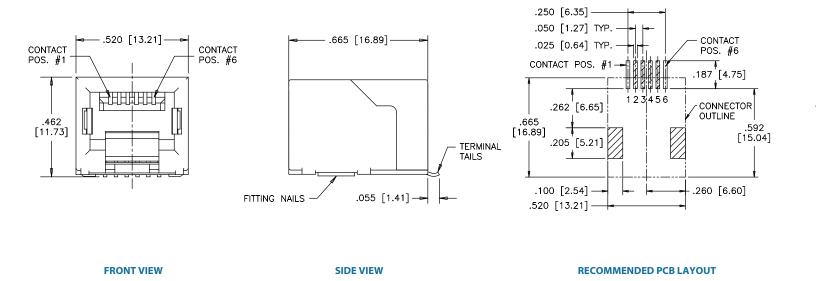

Shielded RJLSE-4X381-01

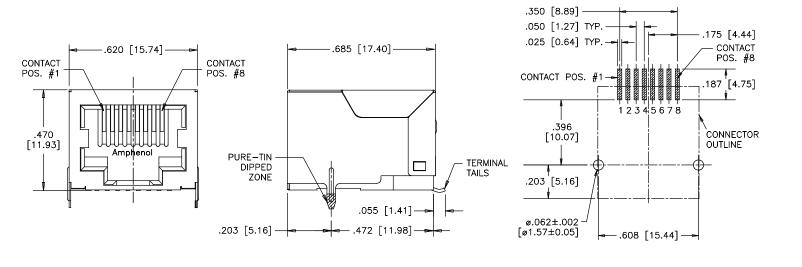

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

RJE07 TAB DOWN, SINGLE PORT

TAB DOWN, SINGLE PORT

RJE07 products belong to a family of standard modular jacks designed to meet requirements for a variety of applications. Options within the FRJAE series offer low cost and effective EMC control within standard RJ11 & RJ45 connector footprints. EMC control is offered by a completely shielded connector and/or with the use of a high resistivity, high impedance ferrite filter. No board layout changes are required for its use. Simply replace the standard non-filtered connector for superior EMC performance.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6μ ", 15μ ", 30μ ", 50μ ") over 50μ " min. nickel on contact mating area; Gold flash over palladium nickel also available; 100μ " min. matte tin plating on soldering tail
Shield:	Copper alloy; nickel or matte tin plated

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500\mbox{M}\Omega$ min. at $500\mbox{V}$ DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Reflow soldering peaked at 260°C for 6 to 8 secs max
Operating Temperature:	- 40°C to + 85°C
UL File Number:	E136228

ORDERING INFORMATION

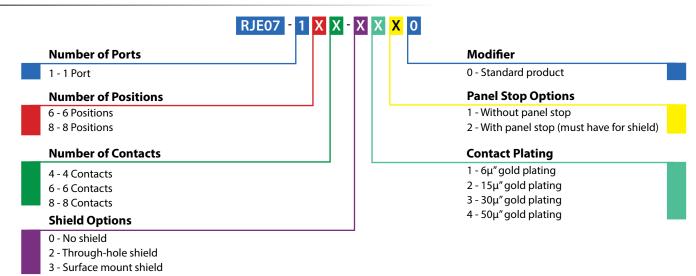


Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.


TAB DOWN, SINGLE PORT

Single Port

Non-Shielded



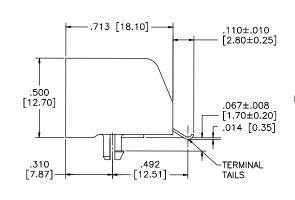


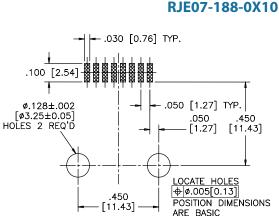


FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Surface Mount Shield


.700 [17.78]

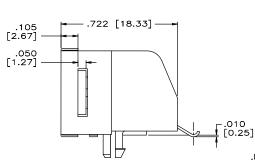

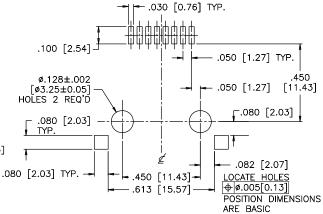


FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Through-Hole Shield




FRONT VIEW

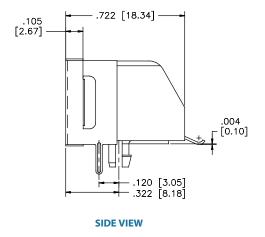

RJE07-188-2X20

RJE07-188-3X20

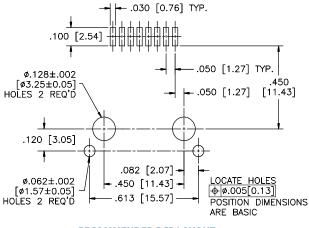

RECOMMENDED PCB LAYOUT

TAB DOWN, SINGLE PORT, LOW PROFILE

TAB DOWN, SINGLE PORT, LOW PROFILE

The RJE15 low profile connector is built to meet your high volume RJ requirements. This is a true pick and place compatible SMT connector and is available with or without shielding, as well as with a variety of options including number of contacts, plating thickness, and color. This connector is built with high temperature engineering thermoplastic and suitable for IR Reflow solder process.



SPECIFICATIONS


Material

Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6μ ", 15μ ", 30μ ", 50μ ") over 50μ " min. nickel on contact mating area; 100μ " min. matte tin plating or gold flash on tail area
Shield:	Copper alloy; nickel plating overall

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering at 260°C for 6 to 8 secs max
Operating Temperature:	- 40°C to + 70°C

Electrical		
Contact Resistance:	$25\ \text{m}\Omega$ max.	
Insulation resistance:	$1000\ M\Omega$ min. at 500V DC for 2 mins max.	
Current Rating:	1.5 Amps per contact	
Voltage Rating:	125 Volts AC	
DWV:	1000 VAC, 60 Hz. 1 min.	

ORDERING INFORMATION

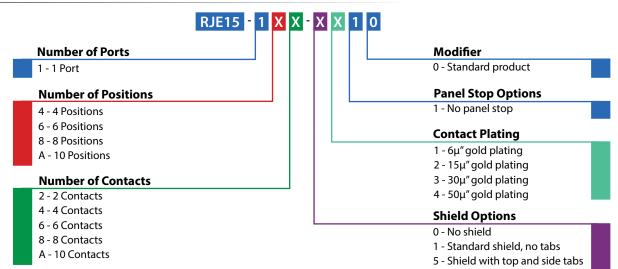


Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

TAB DOWN, SINGLE PORT, LOW PROFILE

Single Port

Non-Shielded



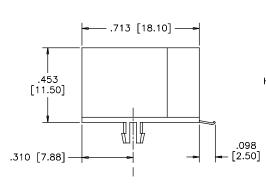

SIDE VIEW

.450 [11.43] .050 [1.27] TYP. .030 [0.76] TYP. .125 [3.18] Ø.128 [Ø3.25] HOLES 2 REQ'D .452 [11.47]

RJE15-1AA-0X10

RJE15-1AA-1X10


RECOMMENDED PCB LAYOUT


.450 -[11.43]


FRONT VIEW

Shielded

Sillelueu



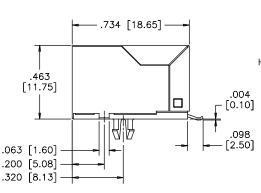

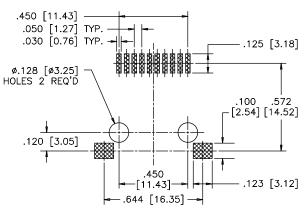

FRONT VIEW

SIDE VIEW

RECOMMENDED PCB LAYOUT

Notes

RJE56 PRESS FIT, TAB DOWN, RJ45

TAB DOWN, RJ45

The RJE56 series is designed for applications where soldering is not an option. The press fit contacts and shield tabs have the "eye of the needle" design and provide good PCB retention as well as reliable electrical performance.




SPECIFICATIONS

Material	
Insulator:	PBT material; complies with UL 940-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on press fit tail
Shield:	Stainless steel

Electrical	
Contact Resistance:	$20\ \text{m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 to 8 secs max
Operating Temperature:	- 55°C to + 85°C
Note: Suitable for IR Reflow	

ORDERING INFORMATION

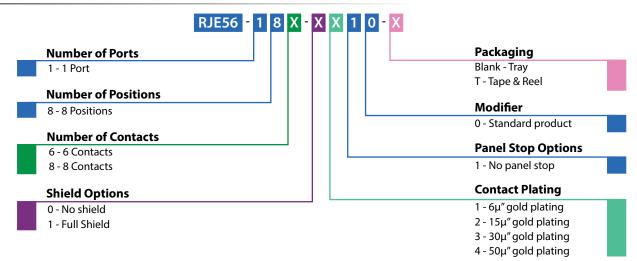


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

PRESS FIT, TAB DOWN, RJ45

Single Port RJE56-188-1X10

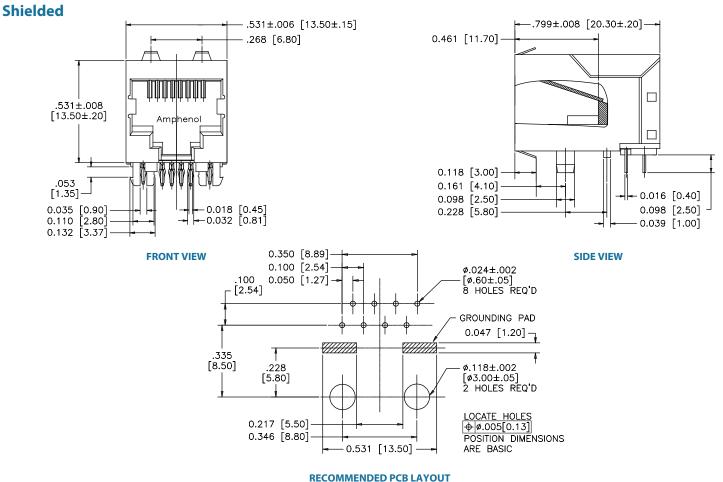

Notes

RJE06 SINGLE PORT, SLIM PROFILE

SINGLE PORT, SLIM PROFILE

RJE06 series is a group of products within a family of standard modular jacks designed to meet requirements for a variety of applications. Options within the RJE06 family include shielded & non-shielded, and 8P8C configurations.



SPECIFICATIONS


materiai	
Insulator:	Engineering theromplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin or gold flash plating on tail area
Shield:	Copper alloy; nickel plating overall

Electrical	
Contact Resistance:	$20\ m\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-40°C to + 70°C
UL File #:	E136228

Note: Connectors with high temp. material are suitable for IR Reflow

ORDERING INFORMATION

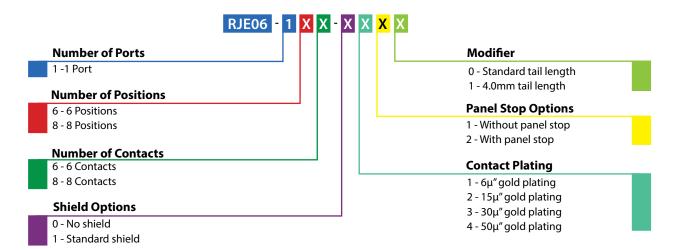


Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.


SINGLE PORT, SLIM PROFILE

Single Port

Non-Shielded







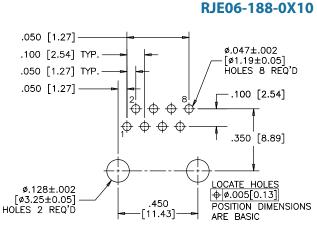


FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Non-Shielded







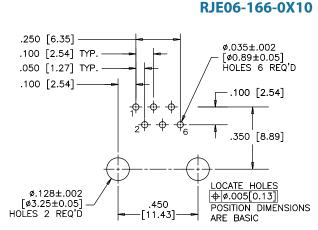

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Standard Shield



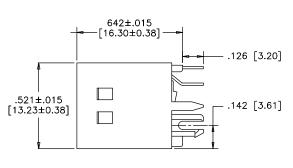

.350 [8.89] .050 [1.27] .100 [2.54] POSITION DIMENSIONS .050 [1.27] ARE BASIC - .100 [2.54] ø.047±.002 Φ (+ [ø1.57±0.05] HOLES 8 REQ'D \oplus .350 [8.89] ø.062±.002 [ø1.57±0.05] HOLES 2 REQ'D .116 [2.95] .450 ø.128±.002 [11.43] .085 [2.16] [ø3.25±0.05] HOLES 2 REQ'D .620 [15.75] -

FRONT VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

RJE06-188-1X10

SINGLE AND DUAL PORT, STANDARD PROFILE

SINGLE AND DUAL PORT, STANDARD PROFILE

RJE08 series is a group of products within a family of standard modular jacks designed to meet requirements for a variety of applications. Options within the RJE08 include with and without panel stops, and RJ11 & RJ45 configurations.



SPECIFICATIONS


Material

Insulator:	Engineering theromplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin or gold flash plating on tail area

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 seconds max.
Operating Temperature:	-40°C to + 70°C
UL File #:	E136228

ORDERING INFORMATION

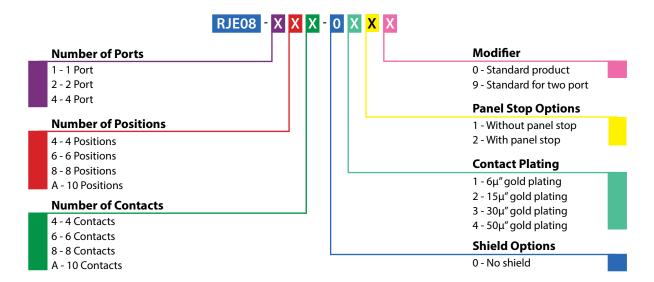

Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

RJE08-188-0X10


RJE08-288-0X19


RJE08


SINGLE AND DUAL PORT, STANDARD PROFILE

Single Port

Non-Shielded



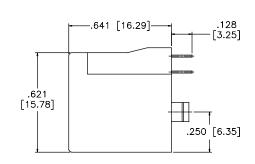


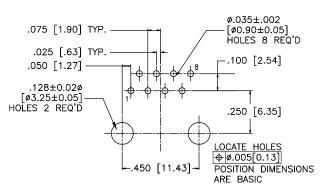



TOP VIEW SIDE VIEW RECOMMENDED PCB LAYOUT

Dual Port

Non-Shielded



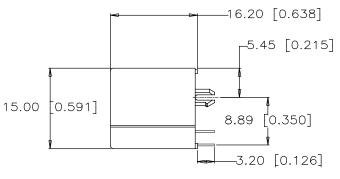




SIDE VIEW BOTTOM VIEW

POSITION DIMENSIONS

ARE BASIC

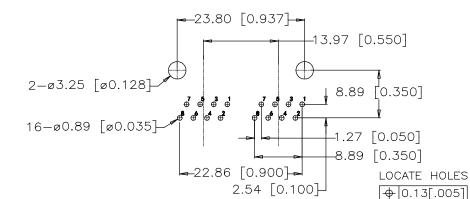

RECOMMENDED PCB LAYOUT

RJE74 SINGLE PORT, STANDARD PROFILE

SINGLE PORT, STANDARD PROFILE

The RJE74 series, with superior EMI shielding, is built to fit your RJ requirements. The vertical 10P10C version is available with an RMK4 key interface to prevent 8P8C plug from entering and damaging the connector. Includes optional Mylar cover for automated assembly equpiment.



SPECIFICATIONS


Material	
Insulator:	High temp. theromplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with $30\mu''$ min. gold thickness over $50\mu''$ min. nickel on contact mating area; $100\mu''$ min. matte tin plating on soldering tail
Shield:	Stainless steel; pure tin dipped tail

Electrical	
Contact Resistance:	$20\ m\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Note: Suitable for IR Reflow

ORDERING INFORMATION

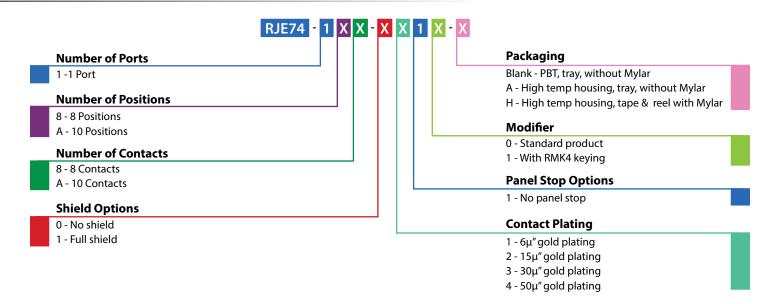

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.


RJE74-1AA-0X10


SINGLE PORT, STANDARD PROFILE

Single Port

Non-Shielded





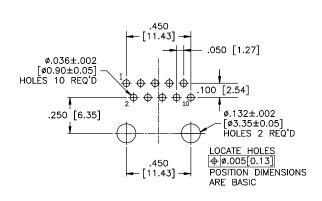


FRONT VIEW

SIDE VIEW

RECOMMENDED PCB LAYOUT

Non-Shielded with Keying






.125 [3.18] **-** .646 [16.40] -.100 [2.54] .250 [6.35] .014 [0.35] - .125 [3.18]

SIDE VIEW

RJE74-1AA-0X11

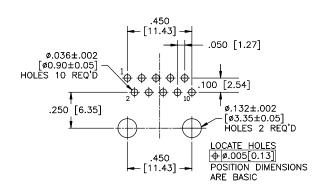


RECOMMENDED PCB LAYOUT

Shielded with Keying


630 [16.00] .658 [16.70]

FRONT VIEW



SIDE VIEW

RJE74-1AA-1X11

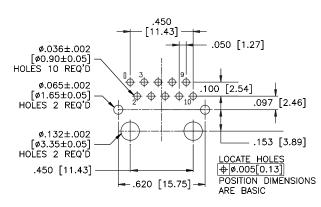

RECOMMENDED PCB LAYOUT

SINGLE PORT, LOW PROFILE, WITH LEDS

SINGLE PORT, LOW PROFILE, WITH LEDS

Vertical through-hole (THT) in single port RJ45 configurations with full shield or superior EMI protection. A variety of LED options for link activity and network verification are available. Made with high temperature composite and when accompanied with our high temperature resistant LEDs, these connectors are well suited for the IR Reflow process.




SPECIFICATIONS

Material	
Insulator:	High temp. theromplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; 100μ " min. matte tin plating on soldering tail
Shield:	Stainless steel; pure tin dipped tail
LED:	Tin plating on LED tails

		′ '	• •	
LED:	Tin plating	on LED tails		
Mechanica	al			
Insertion For	ce:	5 lbs max.		
Pull Retentio	n Force:	20 lbs min.		
Durability:		750 mating	g & unmating cycles	
Recommende Soldering Ter		Wave solde secs max.	ering peaked at 260°C for 5	į
Operating Te	mperature:	-55°C to +	85°C	
Note: Connectors without LEDs are suitable for IR Reflow				

Electrical	
Contact Resistance:	20 m $Ω$ max.
Insulation resistance:	$500\mbox{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours)2.6 Volts max. at 2mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mAw

ORDERING INFORMATION

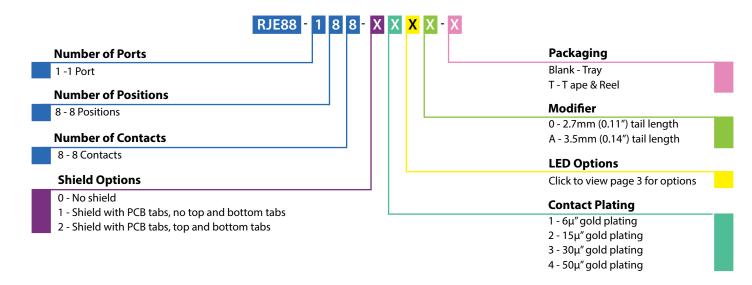


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

RJE88-188-0X0X

UNPLAT HOLES 2 REQ'D

SINGLE PORT, LOW PROFILE, WITH LEDS

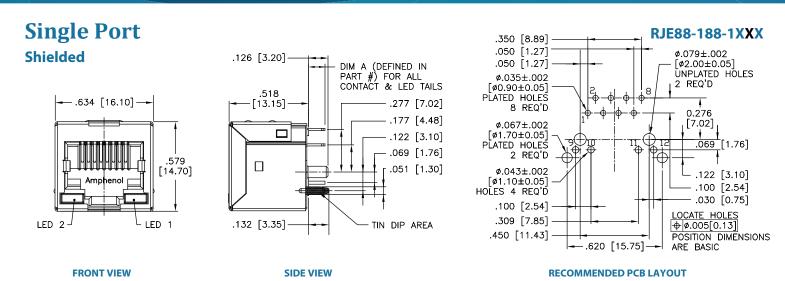

DEFINE IN 3.20 [.126] PART NUMBER 8.89 [.350] DIM A 1.27 [.050] 1.27 [.050] FOR ALL CONTACT 7.02 [.277] & LED TAILS 2.54[.100] ø0.90±0.05 [ø.035±.002] PLATED HOLES 8 REQ'D 4.48 [.177] 12.85 [.506] 7.02 14.10 [.555] LOCATE HOLES ⊕ | Ø0.13[.005] ø2.00±0.05 [ø.079±.002]

SIDE VIEW

POSITION DIMENSIONS

ARE BASIC

11.43 [.450]

RECOMMENDED PCB LAYOUT

Notes

Non-Shielded

15.50 [.610]

FRONT VIEW

RJE1J SINGLE PORT, NARROW PROFILE

PORT, NARROW PROFILE

Multiple position and contact options, single port, vertical connector with no shield or LED options. Made with high temperature thermoplastic this series is suitable for the IR Reflow process. This series is ideal for high volume cost sensitive programs.



SPECIFICATIONS


Material	
Insulator:	High temp. theromplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on tail

Electrical	
Contact Resistance:	$20\ m\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Note: Suitable for IR Reflow

ORDERING INFORMATION

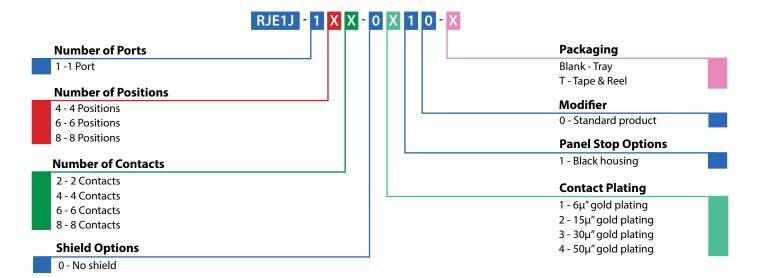

Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


RJE1J

SINGLE PORT, NARROW PROFILE


Single Port

RJE1J-188-0X10

Non-Shielded

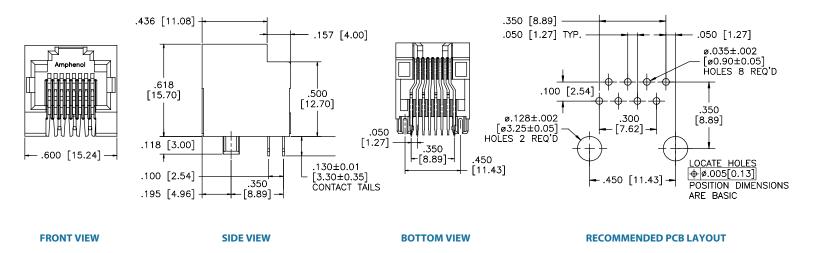

Non-Shielded RJE1J-144-0X10

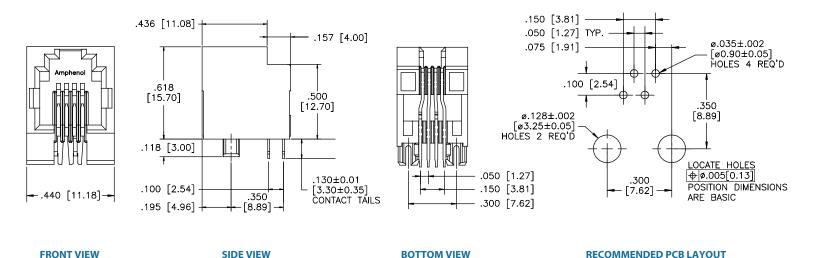

RJE23 SINGLE PORT, SURFACE MOUNT

SINGLE PORT, SURFACE MOUNT

The RJE23 series is designed for high volume production where a vertical modular jack is required. Shielding provides increased EMI performance. Surface mount contacts and hold-down nail bracket assist in speeding up the production process.




SPECIFICATIONS

Material	
Insulator:	High temp. theromplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6μ ", 15μ ", 30μ ", 50μ ") over 50μ " min. nickel on contact mating area; 100μ " min. matte tin plating over nickel on soldering tail
Shield:	Copper alloy; matte tin plating
Hold Down:	Copper alloy; matte tin plating
Coplanarity:	0.004" max. gap between all terminal tails

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615
Note: Connector is suitable for IR Reflow	

Electrical Contact Resistance: $20 \text{ m}\Omega \text{ max}$. Insulation resistance: $500 \text{ M}\Omega \text{ min. at } 500 \text{V DC for } 2 \text{ mins max.}$ Current Rating: 1.5 Amps per contact Voltage Rating: 125 Volts AC DWV: 1000 VAC, 60 Hz. 1 min.

ORDERING INFORMATION

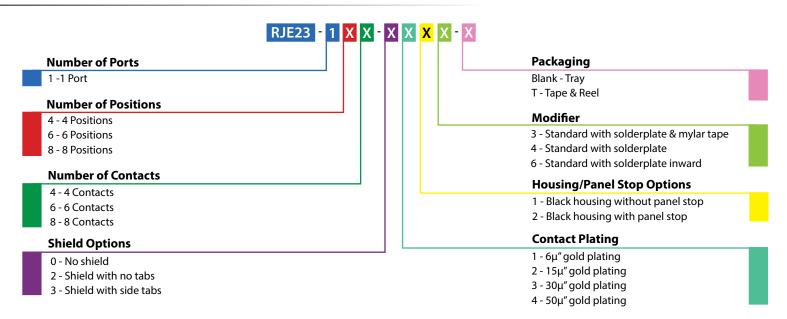


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.


SINGLE PORT, SURFACE MOUNT

Single Port Shielded


RJE23-188-3X16




FRONT VIEW

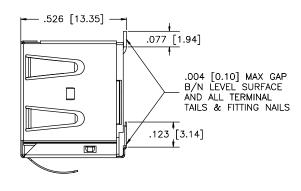

SIDE VIEW




BOTTOM VIEW

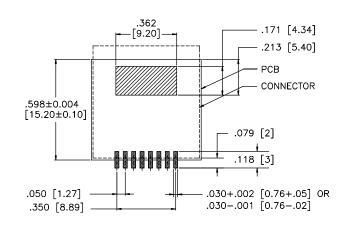



RECOMMENDED PCB LAYOUT

Non-Shielded

RJE23-188-0X13



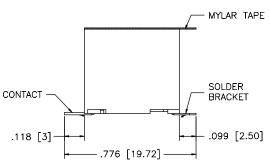

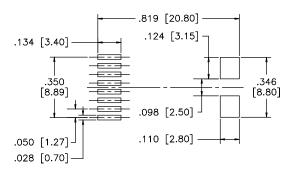

FRONT VIEW SIDE VIEW


RECOMMENDED PCB LAYOUT

RJE4N

VERTICAL, 2X4 PORT

VERTICAL, 2X4 PORT

RJ45, vertical, multi-port connector in a 2x4 port configuration. Standard height profile available in both shielded and unshielded versions. Can be designed into various networking devices that require multiple ports and limited space.




SPECIFICATIONS

Material	
Insulator:	Engineering thermoplastic, complies with UL94V-0, Black colour
Contacts:	Phosphor bronze hard temper with gold thickness options (6μ ", 15μ ", 30μ ", 50μ ") over 50μ " min. nickel on contact mating area; 100μ " minimum Nickel on contact mating area Gold flash on soldering tails
Shield:	Copper alloy with Nickel plating underplated

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Operating Temperature:	-55°C to + 85°C
Soldering Temperature:	Wave soldering peaked at 260°C for 5 seconds maximum

Electrical	
Contact Resistance:	$20\ \text{m}\Omega$ max.
Insulation resistance:	$500\mbox{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.

ORDERING INFORMATION

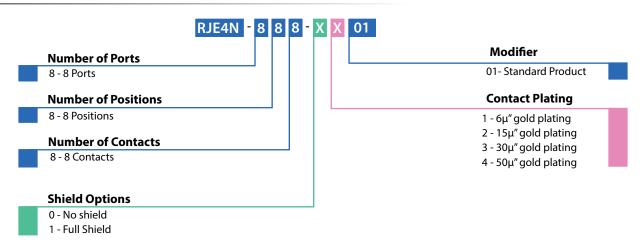

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

RJE4N


VERTICAL, 2X4 PORT

Eight Ports

Shielded

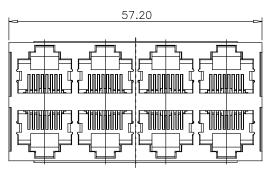



FRONT VIEW

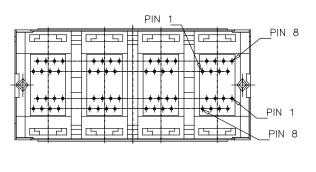

BOTTOM VIEW

RJE4N-888-1X01



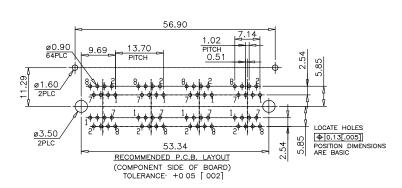

RECOMMENDED PCB LAYOUT

Notes

RJ45 OVER USB

RJ45 OVER USB

RJ 45 over USB 2.0 type. A unique series that combines two different types of connectors: RJ45 and USB connectors. Configurations include RJ45 over a single USB and RJ45 over two USBs. The RJ is available with or without LEDs for link activity and network verification. Full shield for superior EMI protection with EMI tabs options.



SPECIFICATIONS


Material		
Insulator:	Engineering thermoplastic; Complies with UL 94V-0; Black	
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on soldering tail	
Shield:	Copper alloy plated with Nickel	
LED:	Tin plating	on LED tails
Mechanica	l	
Insertion Forc	e:	5 lbs max.
Pull Retention	Force:	20 lbs min.
Durability:		750 mating & unmating cycles
Recommender Soldering Tem	_	Wave soldering peaked at 260°C for 5 secs max.
Operating Ten	nperature:	-20°C to + 85°C

E136228

$20\ m\Omega$ max.
$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
1.5 Amps per contact
125 Volts AC
Contact to contact: 1000 VAC, 60 Hz. 1 min.
20mA typical
1.6 -2.4 Volts max. at 2mA (for single colours)
5 Volts min.
2 to 12 mcd min. at 20mA (for single colours)
Yellow: 590 ± 5 nm measured at 20mA Green: 570 ± 5 nm measured at 20mA Red: 650 ± 15 nm measured at 20mA

ORDERING INFORMATION


UL File #:

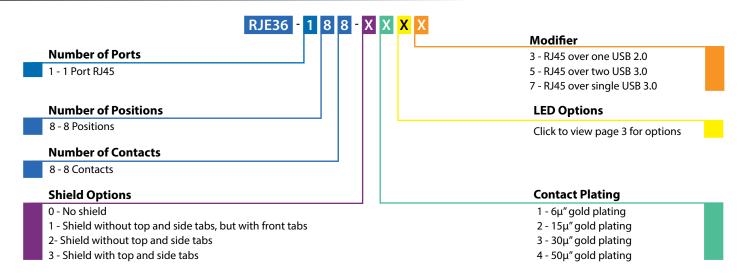


Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

Single Port Shielded

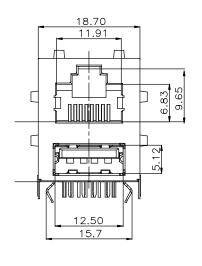

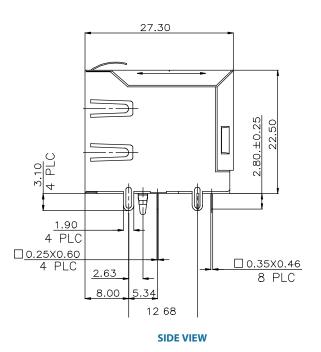

RJE36-188-2X03

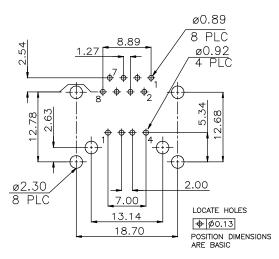



RECOMMENDED PCB LAYOUT

Dual Port


FRONT VIEW

Shielded with LEDs

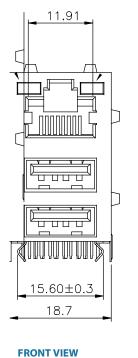

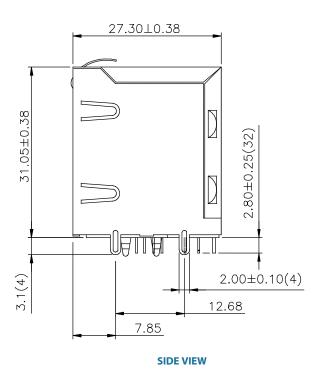

RJE36-188-3X**X**5

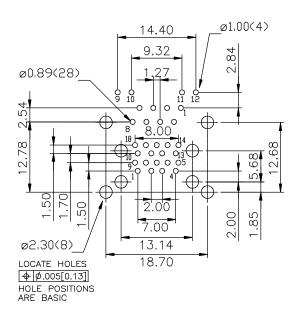

RECOMMENDED PCB LAYOUT

RJSAE

2, 4 AND 8 PORTS WITH LED AND SHIELD OPTIONS

2, 4 AND 8 PORTS WITH LED AND SHIELD OPTIONS

The RJSAE is a RJ45 stackable connector that reduces component and labor costs by incorporating LEDs. Its stackable feature enables more ports with the same board space. With superior EMI performance, the option of configuring your connector with a ferrite filter is available to further reduce crosstalk in noisy applications.



Click to Return to Table of Contents


SPECIFICATIONS

Material		
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black	
Contacts:	options (6μ	ronze hard temper with gold thickness ", 15μ", 30μ", 50μ") over 50μ" min. nickel mating area; 100μ" min. matte tin plating
Shield:	Copper alloy; nickel plated or stainless steel with tin dripped tail (as specified in drawing)	
LED:	Tin plating	on LED tail
Mechanical		
Insertion For	:e:	5 lbs max.
Pull Retention	n Force:	20 lbs min.
Durability:		750 mating & unmating cycles
Recommender Soldering Ten	· 	Wave soldering peaked at 260°C for 5 secs max.
Operating Te	mperature:	-55°C to + 85°C
UL File #:		E135615
CSA File #:		150190
Note: Connectors without LEDs are suitable for IR Reflow; Connectors with Reflow LEDs available		

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	Contact to contact: 1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 2mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

8 - 8 Contacts

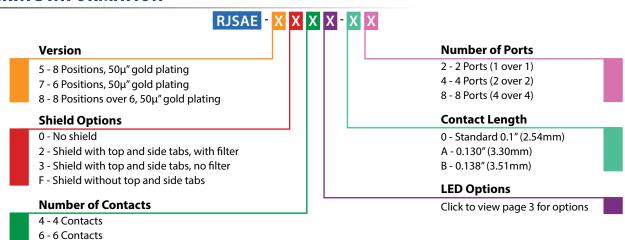

Please contact sales@amphenolcanada.com and let us know what you need.


Didn't find what you were looking for?

RJSAE


2, 4 AND 8 PORTS WITH LED AND SHIELD OPTIONS

Single Port

Non-Shielded





FRONT VIEW



RJSAE-508X-02 .540 [13.72] .100 [2.54] TYP. .100 [2.54] TYP. .165 [4.19] .050 [1.27] TYP. .325 [8.25] .825 .100 [2.54] .570 [30.95] TYP [14.48] .100 [2.54] TYP ø.128±.002 [ø3.25±0.05] HOLES 2 REQ'D $\emptyset.035\pm.002$ [$\emptyset0.89\pm0.05$] HOLES 24 REQ'D (BASED ON 2 LEDS PER PORT) .075 [1.91] .350 [8.89] .020 [0.51] POSITION DIMENSIONS .500 [12.70] ARE BASIC **RECOMMENDED PCB LAYOUT**

Shielded 4 075 | 000 540 50 | 0.51

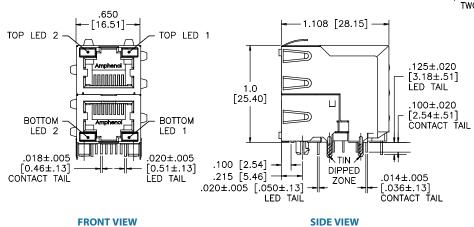


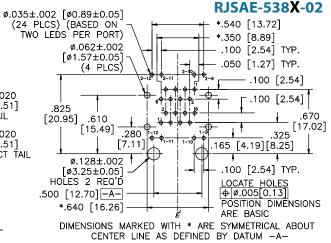


RECOMMENDED PCB LAYOUT

Multi Port

Non-Shielded

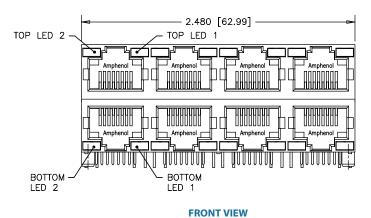

RJSAE-508**X**-08

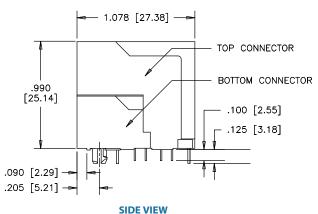


RJSAE

2, 4 AND 8 PORTS WITH LED AND SHIELD OPTIONS


Multi Port Non-Shielded

RJSAE-508X-08

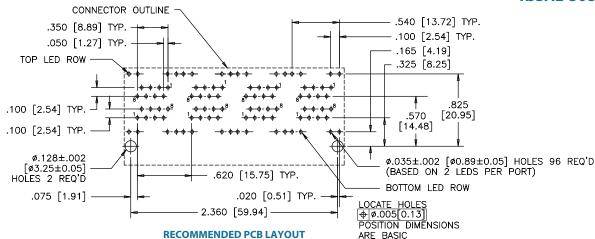


Shielded

RJSAE-538X-08

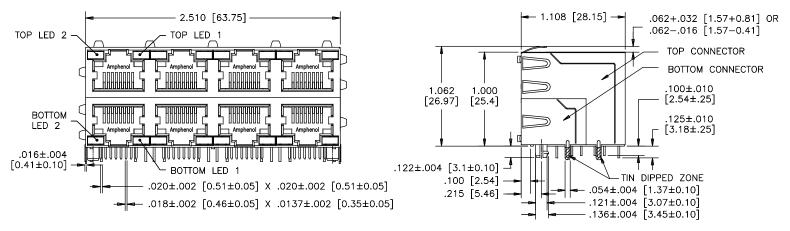

FRONT VIEW

SIDE VIEW

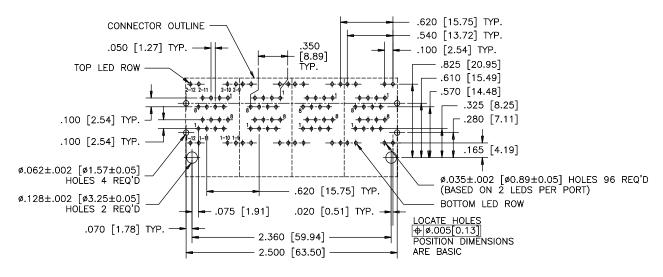

RECOMMENDED PCB LAYOUT

RJSNE

4 OVER 4 PORTS WITH LED AND SHIELD OPTIONS

4 OVER 4 PORTS WITH LED AND SHIELD OPTIONS

The RJSNE series is a stacked connector that offers LED options for link activity and network verification. It is available with or without shielding. The RJSNE series also includes a unique inner shield device to reduce the crosstalk between top and bottom ports.




SPECIFICATIONS

Material	
Insulator:	Engineering thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on tail
Shield:	Copper alloy; nickel plated or stainless steel with tin dipped tail
LED:	Pure tin plating on LED tail

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-40°C to + 85°C
UL File #:	E135615
CSA File #:	150190

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.5 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

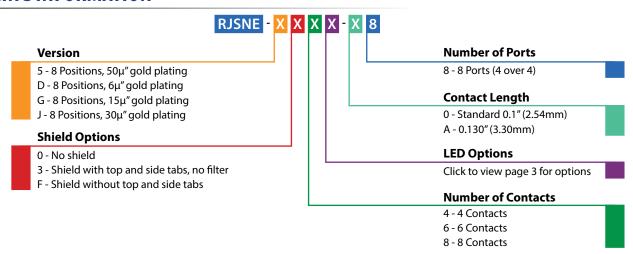


Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

RJSNE

2, 4 AND 8 PORTS WITH LED AND SHIELD OPTIONS

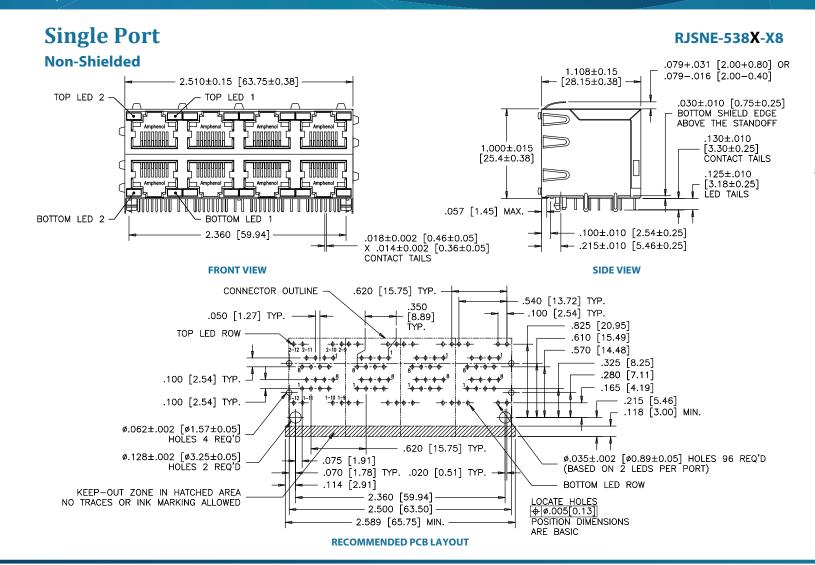

Notes

CAT 5e, RIGHT ANGLE, LOW PROFILE, WITH LEDS

RIGHT ANGLED, LOW PROFILE, WITH LEDS

The RJE48 series of modular jacks meet CAT 5e performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding is available for increased EMI performance and LEDs for link activity and network verification.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; $100\mu''$ min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tail

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

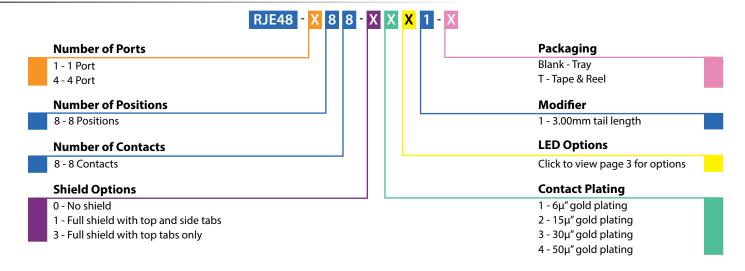

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

Click to Return to Table of Contents


CAT 5e, RIGHT ANGLE, LOW PROFILE, WITH LEDS

Single Port

Shielded




FRONT VIEW




TOP VIEW

RJE48-188-1XX1




SIDE VIEW

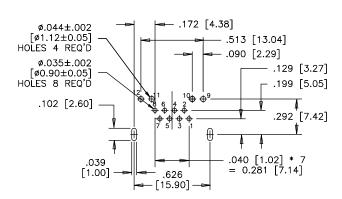

RECOMMENDED PCB LAYOUT

Multi Port

RJE48-488-1XX1

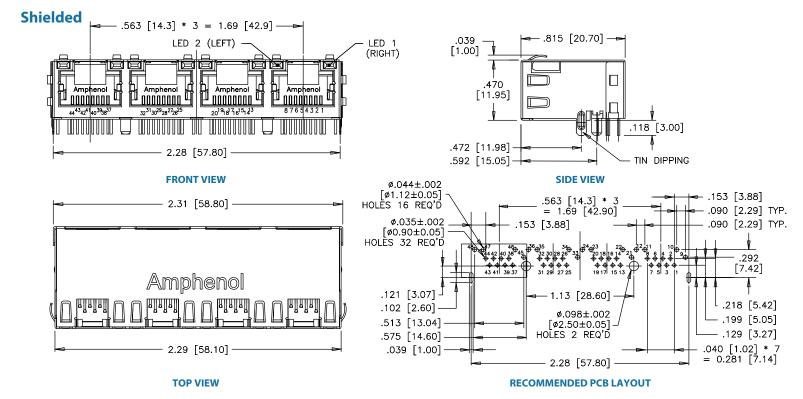

CAT 5e, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

RIGHT ANGLED, STANDARD PROFILE, WITH LEDS

The RJE58 series of modular jacks meet CAT 5e performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding is available for increased EMI performance and LEDs for link activity and network speed verification.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tail

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 10 secs. max, for one cycle with an LED defect rate of no more than 100 ppm
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours) 0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

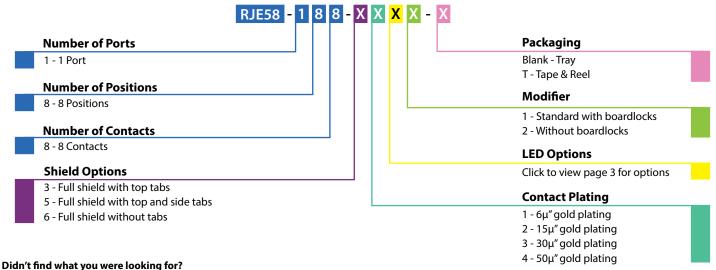


Please contact sales@amphenolcanada.com and let us know what you need.

CAT 5e, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS


Single Port

RJE58-188-3XX1


RJE58-188-5XX1

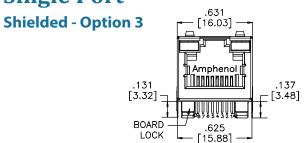


FRONT VIEW




TOP VIEW



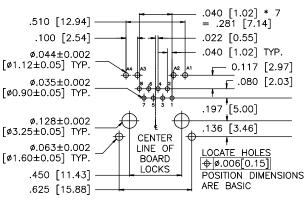


RECOMMENDED PCB LAYOUT

Shielded - Option 5




FRONT VIEW




TOP VIEW

.043 [1.09] .547 [13.90] 100 [2.54] .411 .117 [2.97] [10.43] .080 [2.03] DIPPED ZONE .197 [5.00] .136 [3.46]

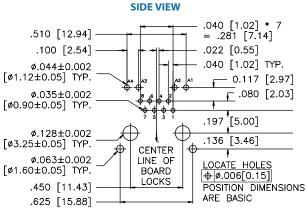

RECOMMENDED PCB LAYOUT

CAT 5e, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

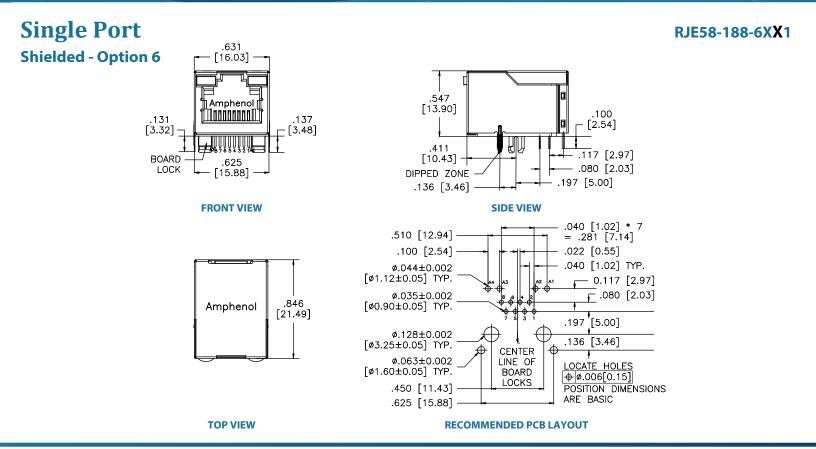

Notes

CAT 5e, RIGHT ANGLE, RECESSED, LOW PROFILE WITH LEDS

RIGHT ANGLE, RECESSED, LOW PROFILE WITH LEDS

The RJE72 series of modular jacks meet CAT 5e performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding available for increased EMI performance and LEDs for link activity and network speed verification.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6µ", 15µ", 30µ", 50µ") over 50µ" min. nickel on contact mating area; 100μ " min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tail

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL file #:	E135615

Note: IR Reflow compatible; Consult factory for details

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

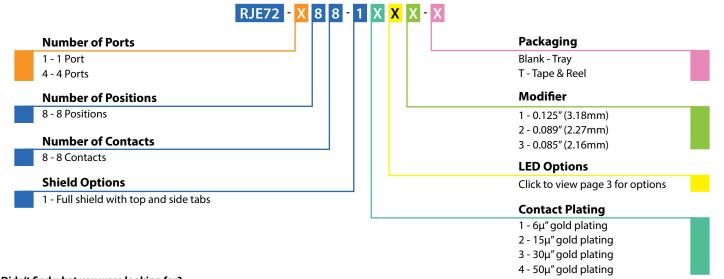

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

Click to Return to Table of Contents


CAT 5e, RIGHT ANGLE, RECESSED, LOW PROFILE WITH LEDS

Single Port

Shielded




FRONT VIEW




TOP VIEW

RJE72-188-14X1

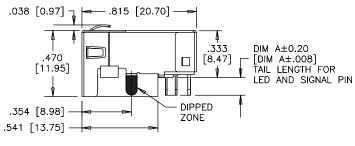

SIDE VIEW

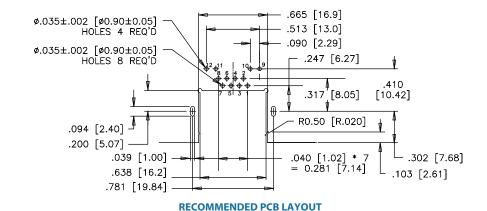

.815 [20.70]

.038 [0.97]

.470

[11.95]


.333

[8.47]

Multi Port

Shielded .563 [14.3] * 3 = 1.69 [42.9] LED 2 (LEFT) Amphenol Amphenol Amphenol Jacob 1 (RIGHT) Amphenol Amphenol Amphenol Amphenol Amphenol Amphenol Amphenol 2019/18/46/51/43 243 [61.7]


FRONT VIEW

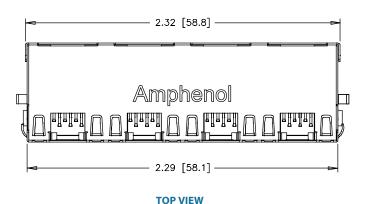

RJE72-488-14X1

DIM A±0.20 [DIM A±.008] TAIL LENGTH FOR

LED AND SIGNAL PIN

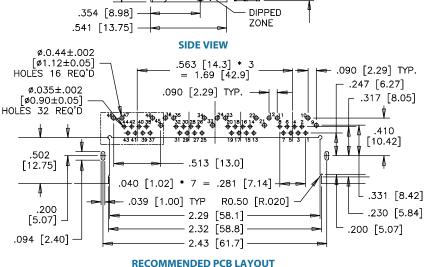

RJSGE

CAT 5e, 2 OVER 2 PORTS, PRESS FIT, WITH LEDS

2 OVER 2 PORTS, PRESS FIT, WITH LEDs

The RJSGE series of modular jacks meet CAT 5e performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding available for increased EMI performance and LEDs for Link Activity and Network Speed verification.

SPECIFICATIONS


Material	
Insulator:	Engineering thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails
Shield:	Stainless steal with press-fit tails
LED:	Press-fit with tin plating on LED tails

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Note: IR Reflow compatible; Consult factory for details

Electrical	
Contact Resistance:	$20\ \text{m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts max.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 570 ± 5 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

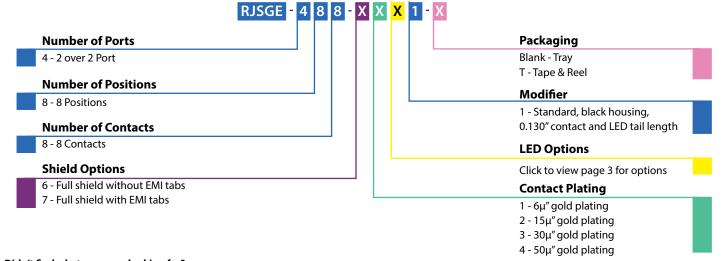

Didn't find what you were looking for?

 $Please\ contact\ sales@amphenolcanada.com\ and\ let\ us\ know\ what\ you\ need.$


Click to return to Table of Contents


RJSGE


CAT 5e, 2 OVER 2 PORTS, PRESS FIT, WITH LEDs

Four Port

RJSGE-488-6XX1 Shielded - with no EMI Tabs





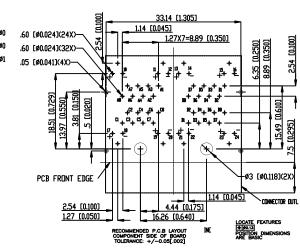

FRONT VIEW


SIDE VIEW

RECOMMENDED PCB LAYOUT

Measurements: mm [Inches]

Shielded - with EMI Tabs

RJSGE-488-7XX1

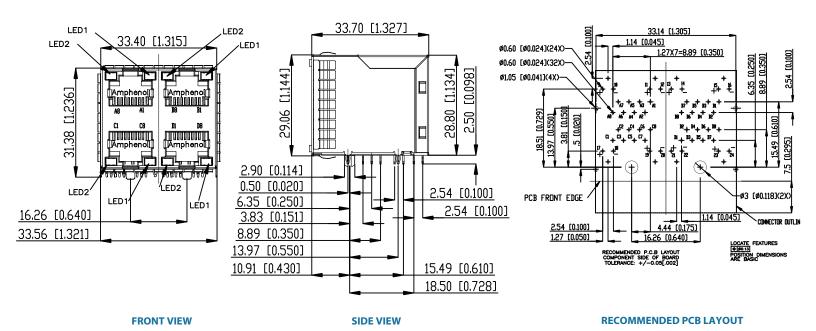

Measurements: mm [Inches]

CAT 6, SINGLE PORT, LOW PROFILE, WITH LEDS

SINGLE PORT, LOW PROFILE, WITH LEDS

The RJE45 series of modular jacks meet CAT 6 performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols and 10 Gig links in applications up to 50m. Shielding available for increased EMI performance and LEDs for link activity and network speed verification.

SPECIFICATIONS

Material		
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black	
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails	
Shield:	Stainless steel with tin dipped tails	
LED:	Tin plating on LED tail	
Mechanical		
Insertion Force:		5 lbs max.
Pull Retention	Force:	20 lbs min.
Durability		750 mating & unmating cycles

 Pull Retention Force:
 20 lbs min.

 Durability:
 750 mating & unmating cycles

 Recommended
 Wave soldering peaked at 260°C for 5 secs max. or lead free reflow soldering up to 260°C for 10 secs for one cycle with an LED defect rate of no more than 1000ppm

 Operating Temperature:
 -55°C to + 85°C

 UL File Number:
 E135615

Electrical	
Contact Resistance:	$20\ \text{m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

Note: Multiple exposures not recommended


ORDERING INFORMATION RJE45 - 1 8 8 - X X X X - X **Number of Ports Packaging** 1 - 1 Port Blank - Tray T - Tape & Reel **Number of Positions** Modifier 8 - 8 Positions 1 - Standard, black housing, **Number of Contacts** 0.130" contact and LED tail length 8 - 8 Contacts 2 - Black housing, with flange, 0.130" contact and LED tail length **Shield Options LED Options** 0 - No shield Click to view page 3 for options 1 - Full shield with top and bottom EMI tabs 2 - Full shield without EMI tabs, back PCB tabs **Contact Plating** 4 - Full shield without EMI tabs, front PCB tabs 1 - 6µ" gold plating 2 - 15µ" gold plating 3 - 30µ" gold plating Didn't find what you were looking for? 4 - 50µ" gold plating Please contact sales@amphenolcanada.com and let us know what you need.

RJE45-188-0X01


CAT 6, SINGLE PORT, LOW PROFILE, WITH LEDS

Single Port

Non-Shielded




TOP VIEW



BACK VIEW

.470 [11.95] .130 [3.30] .100 [2.54] .350 [8.89] .250 [6.35]

SIDE VIEW

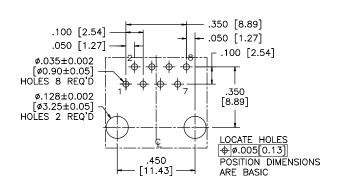

RECOMMENDED PCB LAYOUT

∭ Amphenol

[.624]


TOP VIEW- .624 [15.84] --

LED2


[.677]

LED1

Shielded

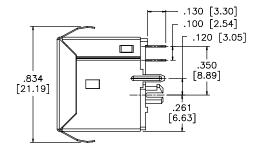

SIDE VIEW

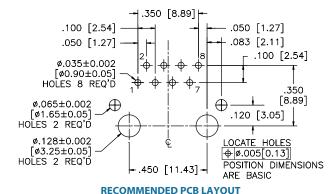

.651 [16.54]

[11.43] **BACK VIEW**

450

RJE45-188-1XX1

Click to Return to Table of Contents

RJF49

CAT 6, RIGHT ANGLE, LOW PROFILE, WITH LEDS

RIGHT ANGLE, LOW PROFILE, WITH LEDS

The RJE49 series of modular jacks meet CAT 6 performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding is available for increased EMI performance and LEDs for link activity and network verification.




SPECIFICATIONS

Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tail

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615

Electrical	
Contact Resistance:	$20\ m\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

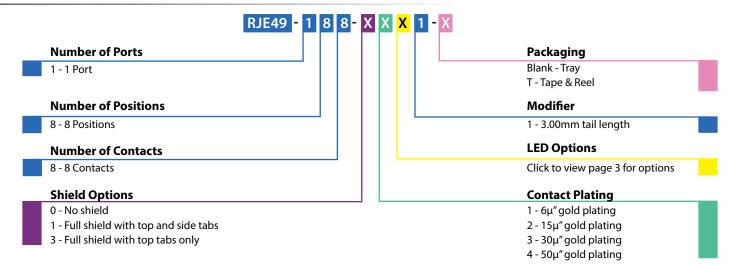

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.

Click to Return to Table of Contents


CAT 6, RIGHT ANGLE, LOW PROFILE, WITH LEDS

Single Port

Shielded




FRONT VIEW




TOP VIEW

RJE49-188-1XX1



SIDE VIEW

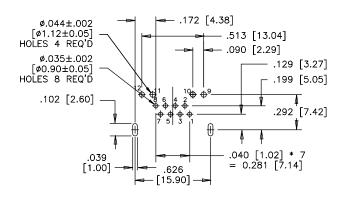

RECOMMENDED PCB LAYOUT

Notes

CAT 6, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

The RJE59 series of modular jacks meet CAT 6 performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding is available for increased EMI performance and LEDs for link activity and network speed verification.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tail

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 10 secs max. for one cycle with an LED defect rate of no more than 100ppm
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615
Note: multiple exposures not recommended; IR Reflow compatible version	

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500\mbox{M}\Omega$ min. at $500\mbox{V}$ DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours) 0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

also available; Consult factory for details

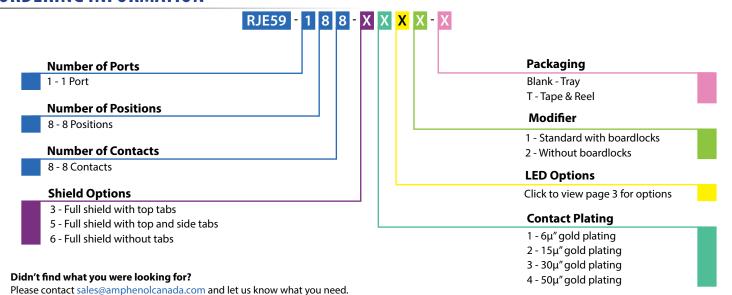

CAT 6, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

100

.117 [2.97]


.080 [2.03]

[2.54]


Single Port

RJE59-188-3XX1

RJE59-188-5XX1

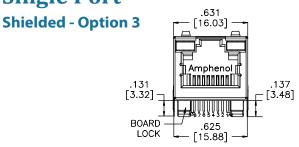

FRONT VIEW

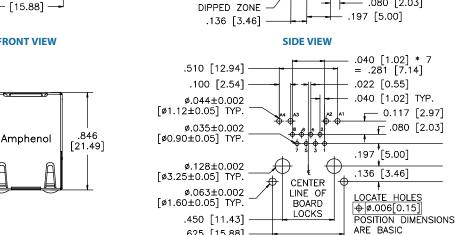

.625 [15.88]

.043 [1.09]

547

[13.90]


411

[10.43]


TOP VIEW

RECOMMENDED PCB LAYOUT

Shielded - Option 5



FRONT VIEW




TOP VIEW

.043 [1.09] .547 [13.90] .100 _ [2.54] 411 .117 [2.97] [10.43] .080 [2.03] DIPPED ZONE .197 [5.00] .136 [3.46]

SIDE VIEW .040 [1.02] * 7 = .281 [7.14] .510 [12.94] .100 [2.54] .022 [0.55] .040 [1.02] TYP. ø.044±0.002 [ø1.12±0.05] TYP. - 0.117 [2.97] <u>r</u> .080 [2.03] ø.035±0.002 [ø0.90±0.05] TYP. .197 [5.00] ø.128±0.002 .136 [3.46] [ø3.25±0.05] TYP. CENTER ø.063±0.002 [ø1.60±0.05] TYP. LINE OF BOARD LOCKS .450 [11.43] POSITION DIMENSIONS ARE BASIC .625 [15.88]

RECOMMENDED PCB LAYOUT

CAT 6, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

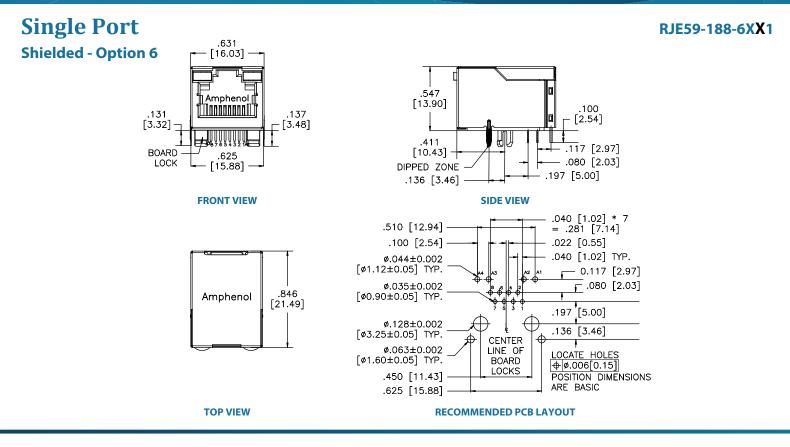

Notes

CAT 6, RIGHT ANGLE, RECESSED, LOW PROFILE, WITH LEDS

RIGHT ANGLED, RECESSED, LOW PROFILE, WITH LEDS

The RJE71 series of modular jacks meet CAT 6 performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding available for increased EMI performance and LEDs for link activity and network speed verification.




SPECIFICATIONS

Materiai		
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black	
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails	
Shield:	Stainless steel with tin dipped tails	
LED:	Tin plating on LED tail	
Mechanical		
Insertion For	:e:	5 lbs max.
Pull Retention	n Force:	20 lbs min.
Durability:		750 mating & unmating cycles
Recommender Soldering Ten		Wave soldering peaked at 260°C for 5 secs max.
Operating Te	mperature:	-55°C to + 85°C
UL File:		E135615
Note: IR Reflow compatible version also available; Consult factory for		

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION


details

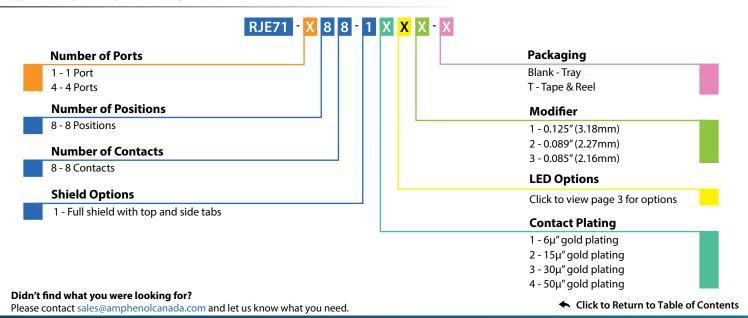


CAT 6, RIGHT ANGLE, RECESSED, LOW PROFILE, WITH LEDS


Single Port

RJE71-188-1XXX

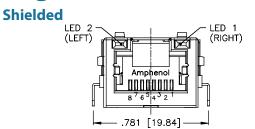


FRONT VIEW

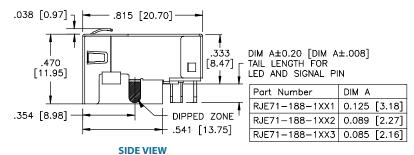




TOP VIEW

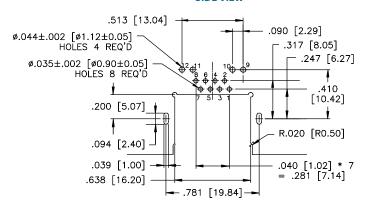


RECOMMENDED PCB LAYOUT

Multi Port

RJE71-488-1XX1

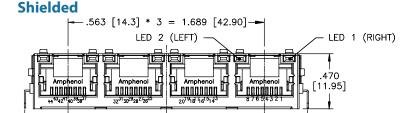

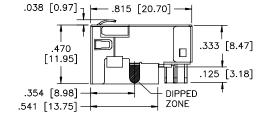

2.431 [61.74] **FRONT VIEW**

2.315 [58.80] Amphenol 2.287 [58.10]

TOP VIEW

SIDE VIEW ø.0.44±.002 .563 [14.3] * 3 = 1.689 [42.90] [ø1.12±0.05] .090 [2.29] TYP. HOLĒS 16 REQ'D .247 [6.27] ø.035±.002 .090 [2.29] TYP. .317 [8.05] [ø0.90±0.05] HOLES 32 REQ'D 345 345 20 18 16 14 21 4 4 4 4 4 4 4 4 5 3 12 9 27 25 19 17 15 13 410 [10.42] .502 .513 [13.04] [12.75] .040 [1.02] * 7 = .281 [7.14]L .331 [8.42] .039 [1.00] TYP R0.50 [R.020] .200 .230 [5.84] 2.287 [58.10] [5.07] 2.315 [58.80] .200 [5.07] .094 [2.40] - 2.431 [61.71]

RECOMMENDED PCB LAYOUT

Didn't find what you were looking for?

 $Please\ contact\ sales@amphenolcanada.com\ and\ let\ us\ know\ what\ you\ need.$

RJE1R

CAT 5e/CAT 6, 1 OVER 1 PORT WITH LEDs

CAT 5e, CAT 6, 1 OVER 1 PORT WITH LEDs

The RJE1R series is a unique 2x1 stacked connector. Two 8P8C ports with the option to choose from three different performances levels for each individual port: Cat5 equivalent, Cat5e, or Cat6. Each port will meet their designated performance as per EIA-568-C.2. Shielding available for increased EMI performance and LEDs for link activity and network speed verification.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails
Mechanical	

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	IR reflow peaked at 260°C for 5 to 8 secs.
Operating Temperature:	-55°C to + 85°C

Electrical	
Contact Resistance:	$20\ \text{m}\Omega$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA
UL File Number:	E135615

Note: IR Reflow is not recommended for connectors with LEDs


ORDERING INFORMATION

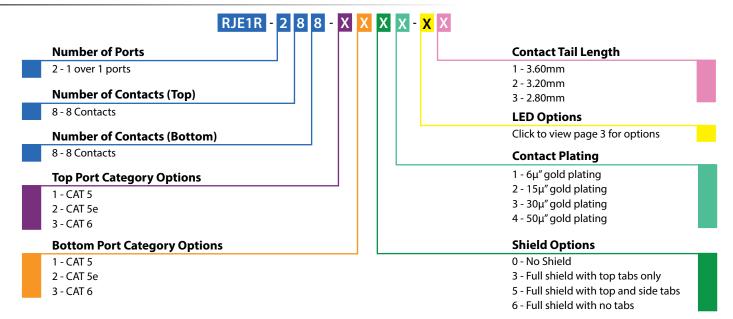


RJE1R CAT 5e/CAT 6, 1 OVER 1 PORT WITH LEDS

One Over One Port


RJE1R-288-XX3X-XX





FRONT VIEW

SIDE VIEW

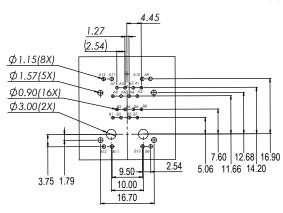

RECOMMENDED PCB LAYOUT

Measurements: mm

Notes

Didn't find what you were looking for?

Please contact sales@amphenolcanada.com and let us know what you need.

RJE4A

CAT 6A, SINGLE PORT, LOW PROFILE, WITH LEDS

VERTICAL, LOW PROFILE, WITH LEDs

The RJE4A series of modular jacks meet CAT 6A performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding available for increased EMI performance and LEDs for link activity and network speed verification.




SPECIFICATIONS

Material			
Insulator:		High temp. thermoplastic; Complies with UL 94V-0; Black	
Contacts:	options (6µ contact ma	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails	
Shield:	Stainless st	Stainless steel with tin dipped tails	
LED:	Tin plating	Tin plating on LED tail	
Mechanical			
Insertion Fo	rce:	5 lbs max.	
Pull Retention	n Force:	20 lbs min.	
Durability:		750 mating & unmating cycles	
Recommend Soldering Te		Wave soldering peaked at 260°C for 5 secs max. or lead free reflow soldering	

dir neterition i orce.	20 103 111111.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	Wave soldering peaked at 260°C for 5 secs max. or lead free reflow soldering up to 260°C for 10 secs for one cycle with an LED defect rate of no more than 1000ppm
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615
Note: Multiple exposures not r	ecommended

Electrical	
Contact Resistance:	20 m $Ω$ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours)0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

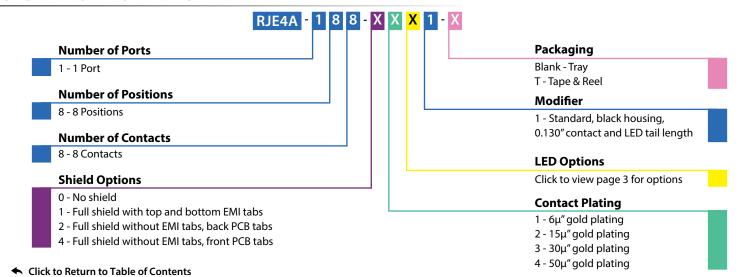


RJE4A


CAT 6A, SINGLE PORT, LOW PROFILE, WITH LEDS

Single Port

Non-Shielded



TOP VIEW




BACK VIEW

.470 [11.95] .130 [3.30] .100 [2.54] .350 [8.89]

[6.35]

SIDE VIEW

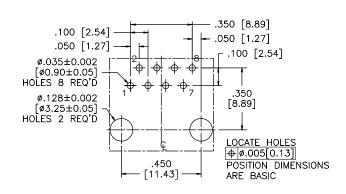


RECOMMENDED PCB LAYOUT


Shielded

RJE4A-188-XXX1


RJE4A-188-0X01

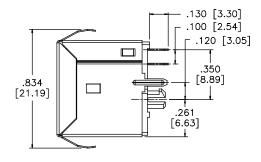


SIDE VIEW

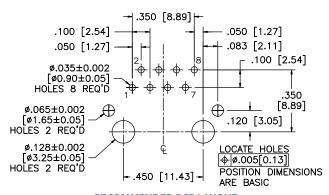

RECOMMENDED PCB LAYOUT



TOP VIEW



BACK VIEW

RJE7B

CAT 6A, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

RIGHT ANGLED, STANDARD PROFILE, WITH LEDS

The RJE7B series of modular jacks meet CAT 6A performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols and 10G Ethernet over lengths of up to 100m. Shielding available for increased EMI performance and LEDs for link activity and network speed verification.



SPECIFICATIONS


Material	
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black colour
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails
Shield:	Stainless steel with tin dipped tails
LED:	Tin plating on LED tails

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Recommended Soldering Temperature:	IR reflow peaked at 260°C for 5 to 8 secs.
Operating Temperature:	-55°C to + 85°C
UL File Number:	E135615
Note: IP Poflow compatible	orsion also available: Consult factory for

Note: IR Reflow compatible version also available; Consult factory for details

Electrical	
Contact Resistance:	20 mΩ max.
Insulation resistance:	$500~\text{M}\Omega$ min. at 500V DC for 2 mins max.
Current Rating:	1.25 Amps per contact
Voltage Rating:	125 Volts AC
DWV:	1000 VAC, 60 Hz. 1 min.
LED Forward DC Current:	20mA typical
LED Forward Voltage:	1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours)
LED Reverse Voltage:	5 Volts min.
LED Light Intensity:	0.4 to 1.5 mcd min. at 2mA (for single colours) 0.5 mcd min. at 2mA (for bicolours)
LED Wave Length:	Yellow: 587 ± 7 nm measured at 20mA Green: 565 ± 6 nm measured at 20mA Red: 625 ± 5 nm measured at 20mA


ORDERING INFORMATION

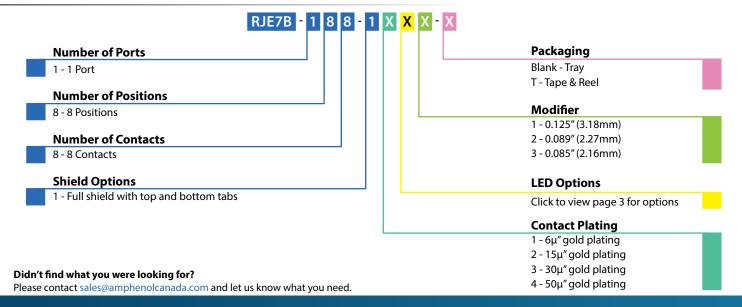


RJE7B

CAT 6A, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS


Single Port RJE7B-188-1XXX

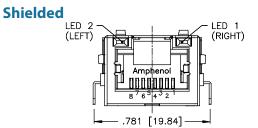


FRONT VIEW



TOP VIEW

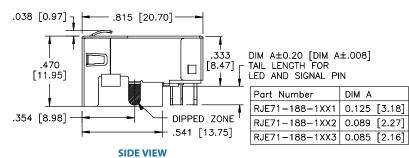

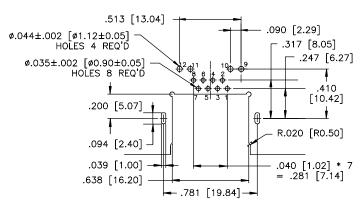

RECOMMENDED PCB LAYOUT

Notes

Click to Return to Table of Contents

CAT 6A, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

RIGHT ANGLED, STANDARD PROFILE, WITH LEDS

The RJE60 series of modular jacks meet CAT 6A performance per EIA-568-C.2. It supports Gigabit Ethernet Protocols. Shielding is available for increased EMI performance and LEDs for link activity and network speed verification.



SPECIFICATIONS

Material		
Insulator:	High temp. thermoplastic; Complies with UL 94V-0; Black	
Contacts:	Phosphor bronze hard temper with gold thickness options (6 μ ", 15 μ ", 30 μ ", 50 μ ") over 50 μ " min. nickel on contact mating area; 100 μ " min. matte tin plating on solder tails	
Shield:	Stainless steel with tin dipped tails	
LED:	Tin plating on LED tail	
Mechanical		
Insertion Force	e:	5 lbs max.
Pull Retention	Force:	20 lbs min.
Durability:		750 mating & unmating cycles
Recommended Soldering Tem	- -	Wave soldering peaked at 260°C for 10 secs max. for one cycle with an LED

E135615 Note: Multiple exposure not recommended; IR Reflow compatible version also available; Consult factory for details

-55°C to +85°C

defect rate of no more than 100ppm

Electrical Contact Resistance: $20 \text{ m}\Omega \text{ max}.$ Insulation resistance: 500 M Ω min. at 500V DC for 2 mins max. **Current Rating:** 1.25 Amps per contact **Voltage Rating:** 125 Volts AC DWV: 1000 VAC, 60 Hz. 1 min. **LED Forward DC** 20mA typical **Current: LED Forward Voltage:** 1.9 Volts max. at 2mA (for single colours) 2.6 Volts max. at 20mA (for bicolours) **LED Reverse Voltage:** 5 Volts min. **LED Light Intensity:** 0.4 to 1.5 mcd min. at 2mA (for single colours) 0.5 mcd min. at 2mA (for bicolours) **LED Wave** Yellow: 587 ± 7 nm measured at 20mA


Green: 565 ± 6 nm measured at 20mA

Red: 625 ± 5 nm measured at 20mA

ORDERING INFORMATION

Operating Temperature:

UL File Number:

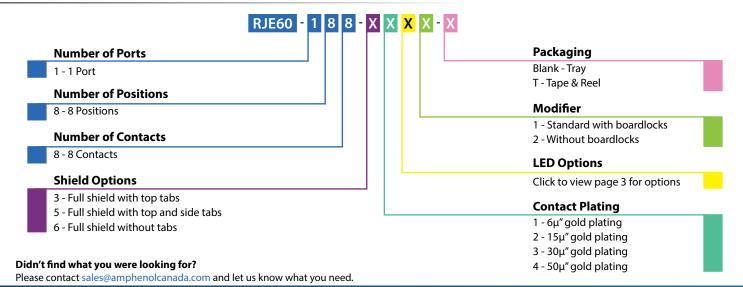


Length:


CAT 6A, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

Single Port

Shielded - Option 3




FRONT VIEW



TOP VIEW


.043 [1.09] 547 [13.90] .100 [2.54] 411 .117 [2.97] [10.43] .080 [2.03] DIPPED ZONE .197 [5.00] .136 [3.46]

SIDE VIEW

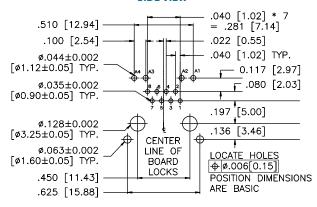


RECOMMENDED PCB LAYOUT

Shielded - Option 5



FRONT VIEW



TOP VIEW

.043 [1.09] .547 [13.90] .100 [2.54] 411 .117 [2.97] [10.43] -.080 [2.03] DIPPED ZONE .197 [5.00] .136 [3.46]

.040 [1.02] * 7 .510 [12.94] = .281 [7.14] .100 [2.54] .022 [0.55] .040 [1.02] TYP. ø.044±0.002 [ø1.12±0.05] TYP. 0.117 [2.97] ø.035±0.002 .080 [2.03] [ø0.90±0.05] TYP. .197 [5.00] ø.128±0.002 .136 [3.46] [ø3.25±0.05] TYP. CENTER ø.063±0.002 LINE OF LOCATE HOLES [ø1.60±0.05] TYP. BOARD LOCKS .450 [11.43] POSITION DIMENSIONS ARE BASIC

SIDE VIEW


RECOMMENDED PCB LAYOUT

RJE60-188-5XX1

RJE60-188-3XX1

.625 [15.88]

CAT 6A, RIGHT ANGLE, STANDARD PROFILE, WITH LEDS

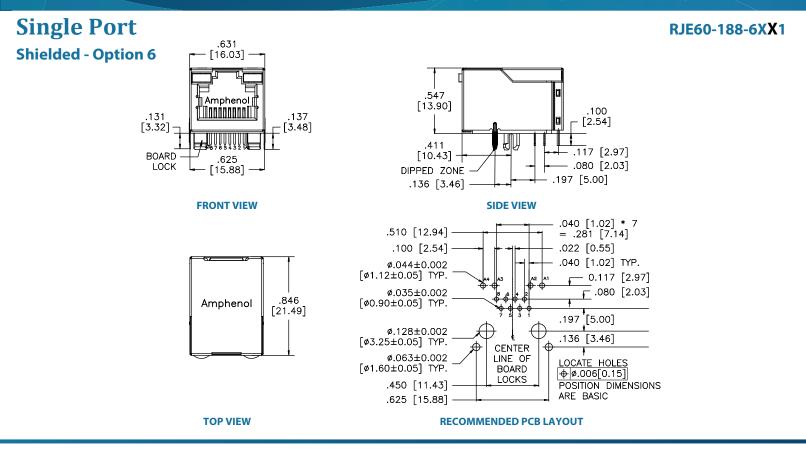

Notes

RJ45 COUPLER

The RJE17 coupler provides connections through barriers such as equipment covers and panels. They are locked into place with a panel latch for secure mounting. Available in CAT 3 and CAT 5e performance. The added shielding provides optional EMI protection.



SPECIFICATIONS

Material	
Insulator:	Engineering thermoplastic; Complies with UL 94V-0; Black
Contacts:	Phosphor bronze hard temper with several gold thickness options over $50\mu''$ min. nickel on contact mating area (refer to drawing below)
Shield:	Stainless steel with tin dipped tails

B	lectrical	

Contact Resistance: $20 \text{ m}\Omega \text{ max}.$

Insulation resistance: 500 M Ω min. at 500V DC for 2 mins max.


Current Rating: 1.25 Amps per contact

Voltage Rating: 125 Volts AC

DWV: 1000 VAC, 60 Hz. 1 min.

Mechanical	
Insertion Force:	5 lbs max.
Pull Retention Force:	20 lbs min.
Durability:	750 mating & unmating cycles
Operating Temperature:	-40°C to + 70°C
Operating Temperature:	-40°C to + 85°C
UL File Number	E136228

ORDERING INFORMATION

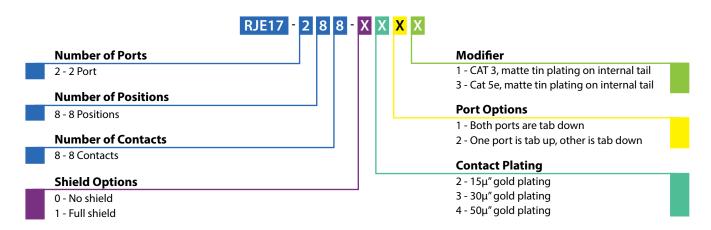

Didn't find what you were looking for?


Please contact sales@amphenolcanada.com and let us know what you need.


← Click to Return to Table of Contents


Single Port

RJE17-288-1X21

Shielded



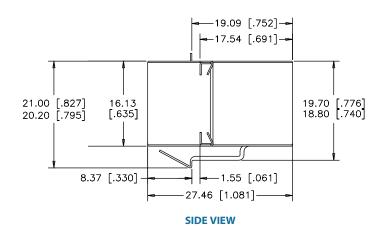




Notes

STACKED

Right Angle

RJSDE

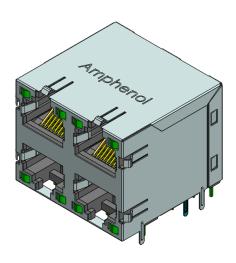

RJSAR RJSFE





HIGH PERFORMANCE

CAT 5e

RJE1A



RJE72









CAT 6

RJE1B



CAT 6A

RJE1C



RJE50




Click to Return to Table of Contents


DUST COVERS & OTHERS

Dust Covers

FRJ-2611



FRJ-2411

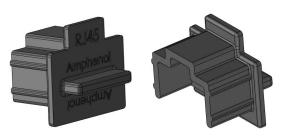

Other

RJE1L



NOTES

Amphenol ICC

605 Milner Avenue Toronto, Ontario Canada, M1B 5X6

www.amphenolcanada.com (www.amphenol-icc.com)

Telephone: (416) 291-4401

Fax: (416) 754-8668

E-mail: sales@amphenolcanada.com

All specifications are subject to change without notice.



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru