


RoHS compliant

FEATURES

1. 4-channel (4 Form A) in a small SOP16-pin package

The device comes in a miniature SOP measuring (W) 10.37 × (L) 4.4 × (H) 2.1mm (W) .408 × (L) .173 × (H) .083inch— approx. 50% of the footprint size of 8-pin (2-channel) type.

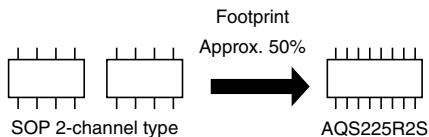

2. Low CxR and high response speed

- Output capacitance: 4.5pF (typ.)
- On resistance: 10.5Ω (typ.)
- Turn on time: 0.04ms (typ.)

3. Applicable for 4 Form A use, as well as 4 independent 1 Form A

4. Low-level off state leakage current of typ. 0.01nA

5. Controls low-level analog signals

TYPICAL APPLICATIONS

For multi-circuit switching;

1. Measuring and testing equipment
IC tester, Liquid crystal driver tester,
Probe card, Bear board tester,
In-circuit tester, Function tester, etc.

2. Communication and broadcasting equipment

3. Medical equipment
Ultrasonic wave diagnostic machine
4. Multi-point recorder
Warping, Thermo couple

TYPES

	Output rating*		Package	Part No.			Packing quantity		
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel	
					Picked from the 1/2/3/4/5/6/7/8-pin side	Picked from the 9/10/11/12/13/14/15/16-pin side			
AC/DC dual use	80V	70mA	SOP16-pin	AQS225R2S	AQS225R2SX	AQS225R2SZ	1 tube contains: 50 pcs. 1 batch contains: 1,000 pcs.	1,000 pcs.	

* Indicate the peak AC and DC values.

Note: The packing style indicator "X" or "Z" is not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQS225R2S		Remarks
Input	LED forward current	I _F	50 mA		
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (peak AC)	V _L	80 V		
	Continuous load current	I _L	0.07 A	Peak AC, DC	
	Peak load current	I _{peak}	0.2 A	100 ms (1 shot), V _L = DC	
	Power dissipation	P _{out}	600 mW		
Total power dissipation		P _T	650 mW		
I/O isolation voltage		V _{iso}	1,500 V AC		
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures	
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F		

RF SOP 4 Form A CxR (AQS225R2S)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

	Item	Symbol	AQS225R2S	Condition
Input	LED operate current	Typical Maximum	I _{Fon}	I _L = Max.
			0.9 mA 3 mA	
	LED turn off current	Minimum	I _{Foff}	I _L = Max.
		Typical	0.3 mA 0.85 mA	
Output	LED dropout voltage	Typical Maximum	V _F	I _F = 50 mA
			1.25 V (1.14 V at I _F = 5 mA) 1.5 V	
	On resistance	Typical	R _{on}	I _F = 5 mA
		Maximum	10.5Ω 15Ω	I _L = Max. Within 1 s on time
Transfer characteristics	Output capacitance	Typical Maximum	C _{out}	I _F = 0 V _A = 0 V f = 1 MHz
			4.5 pF 6 pF	
	Off state leakage current	Typical	I _{Leak}	I _F = 0 V _L = Max.
		Maximum	0.01 nA 10 nA	
	Turn on time*	Typical	T _{on}	I _F = 5 mA
		Maximum	0.04 ms 0.3 ms	I _L = Max.
	Turn off time*	Typical	T _{off}	I _F = 5 mA
		Maximum	0.07 ms 0.2 ms	I _L = Max.
	I/O capacitance	Typical	C _{iso}	f = 1 MHz
		Maximum	0.8 pF 1.5 pF	V _B = 0
	Initial I/O isolation resistance	Minimum	R _{iso}	500 V DC

*Turn on/Turn off time

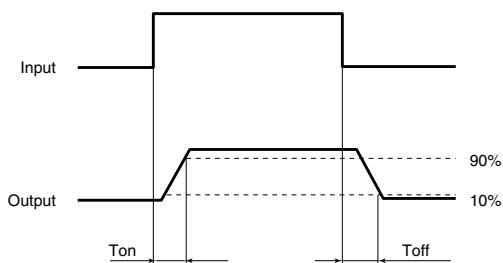

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

For more information.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

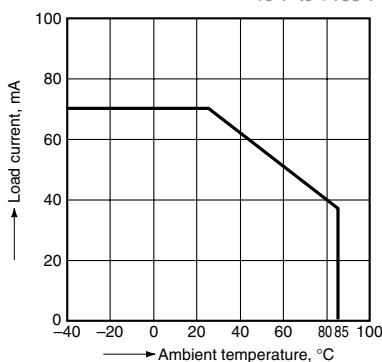


2. On resistance vs. ambient temperature characteristics

LED current: 5 mA;
Continuous load current: 70 mA (DC)

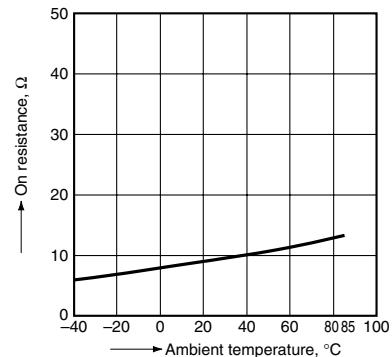


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 80 V (DC);
Continuous load current: 70 mA (DC)

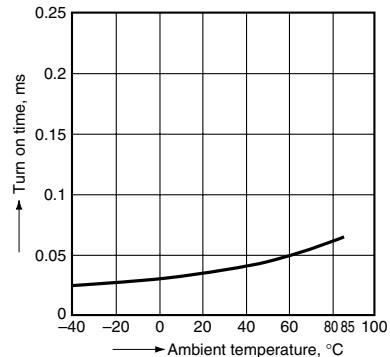


RF SOP 4 Form A CxR (AQS225R2S)


4. Turn off time vs. ambient temperature characteristics
LED current: 5 mA; Load voltage: 80 V (DC);
Continuous load current: 70 mA (DC)

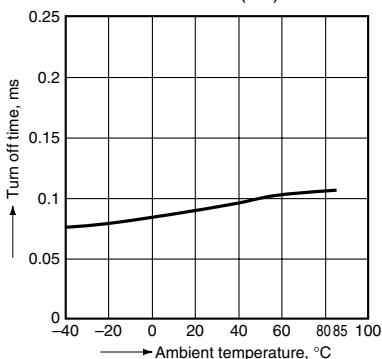


5. LED operate current vs. ambient temperature characteristics
Continuous load current: 70 mA (DC)

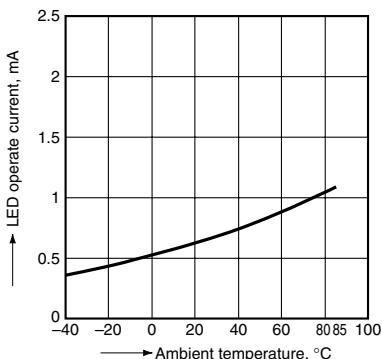


6. LED turn off current vs. ambient temperature characteristics
Continuous load current: 70 mA (DC)

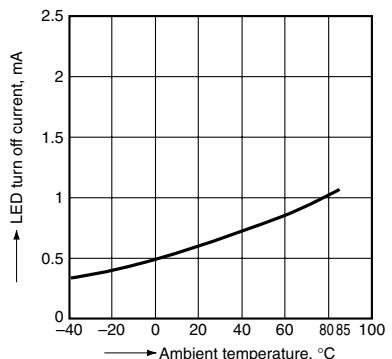


7. LED dropout voltage vs. ambient temperature characteristics
LED current: 5 to 50 mA

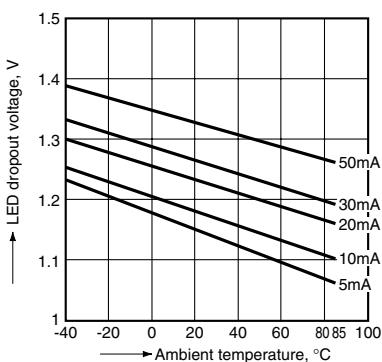


8. Current vs. voltage characteristics of output at MOS portion
Ambient temperature: 25°C 77°F

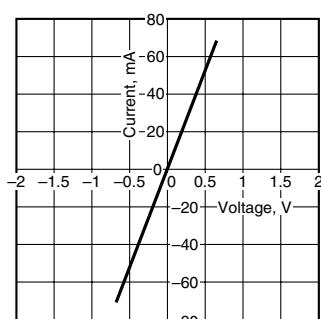


9. Off state leakage current vs. load voltage characteristics
Ambient temperature: 25°C 77°F

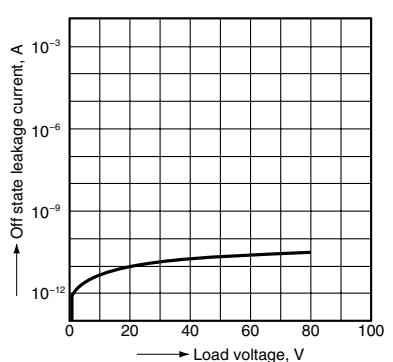


10. Turn on time vs. LED forward current characteristics
Load voltage: 80 V (DC); Continuous load current: 70 mA (DC); Ambient temperature: 25°C 77°F

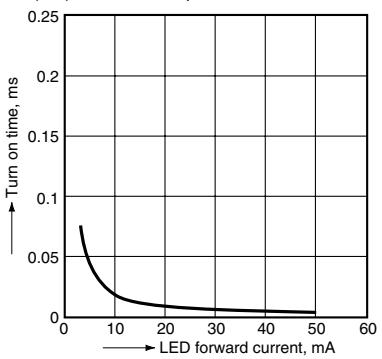


11. Turn off time vs. LED forward current characteristics
Load voltage: 80 V (DC); Continuous load current: 70 mA (DC); Ambient temperature: 25°C 77°F

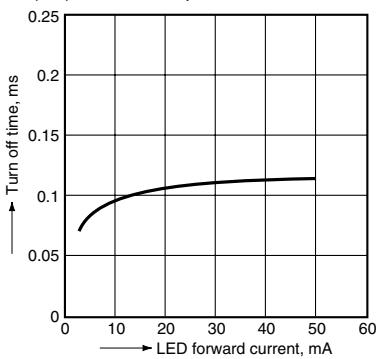


12. Output capacitance vs. applied voltage characteristics
Frequency: 1 MHz, 30 mVrms;
Ambient temperature: 25°C 77°F

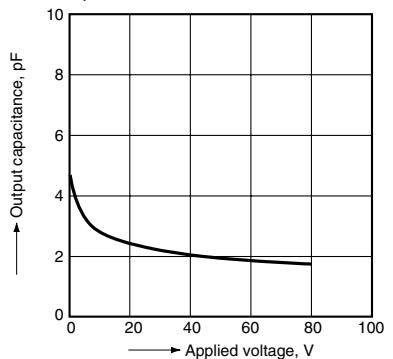

13. Isolation vs. frequency characteristics (50Ω impedance)
Ambient temperature: 25°C 77°F

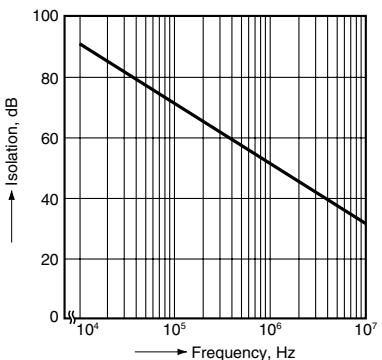

14. Insertion loss vs. frequency characteristics (50Ω impedance)
Ambient temperature: 25°C 77°F

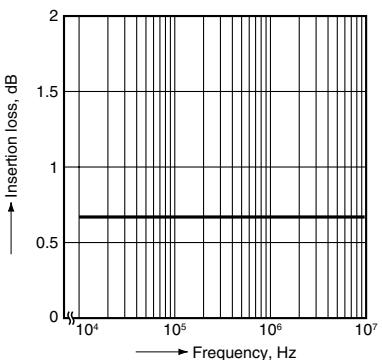

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[AQS225R2S](#) [AQS225R2SX](#) [AQS225R2SZ](#) [AQS225S](#)

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru