

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0760655001

Status:

Active

Overview:

sfp_stacked_multiport_connectors

Description:

Small Form-factor Pluggable Plus (SFP+) Stacked 2-by-2 Multi-Port Press Fit Connector without Lightpipe Ports, EMI Metal Gasket, 80 Circuits, Tin (Sn) Tails

Documents:

3D Model

Drawing (PDF)

Application Specification (PDF)

Product Specification PS-75310-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

76065

Application

Module-to-Board

Component Type

Receptacle

Overview

sfp_stacked_multiport_connectors

Product Name

SFP Plus

Type

N/A

Physical

Boot Color

N/A

Circuits (Loaded)

80

Circuits (maximum)

80

Circuits Detail

80

Color - Resin

Black

Durability (mating cycles max)

100

Flammability

94V-0

Gender

Female

Keying to Mating Part

None

Lock to Mating Part

Yes

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Number of Rows

2

Orientation

Right Angle

PC Tail Length (in)

0.081 In

PC Tail Length (mm)

2.07 mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.57 mm

Packaging Type

Tray

Panel Mount

No

Pitch - Mating Interface (in)

0.031 In

Pitch - Mating Interface (mm)

0.80 mm

Pitch - Term. Interface (in)

0.031 In

Pitch - Term. Interface (mm)

0.80 mm

Plating min: Mating (µin)

30.4

Plating min: Mating (µm)

0.76

Plating min: Termination (µin)

30.4




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76065Series

Use With

0759510999 SFP Dust Plug,

Application Tooling

FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

SFP Stacked Multi-Port Insertion Tool, 2 by 2

0622029970

SFP Stacked Multi-Port Extraction Tool, 2 by 2

0622029975

Plating min: Termination (µm)	0.76
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	4
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No

Electrical

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shield Type	EMI Gasket
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC




Material Info

Reference - Drawing Numbers

Application Specification	AS-75310-001
Packaging Specification	PK-75714-001
Product Specification	PS-75310-001
Sales Drawing	SD-76065-001

This document was generated on 05/27/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

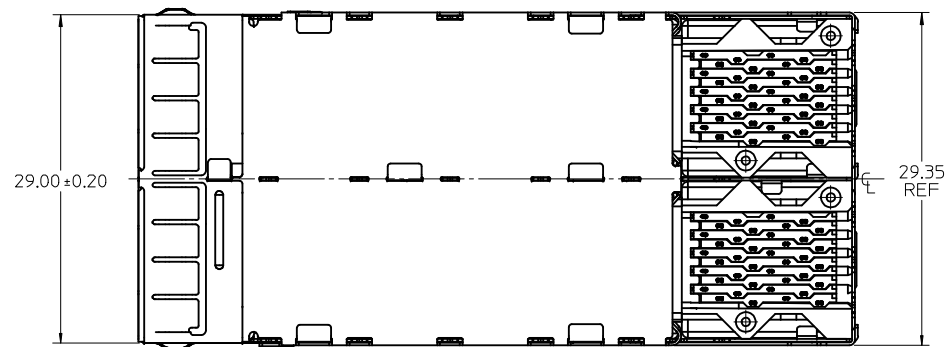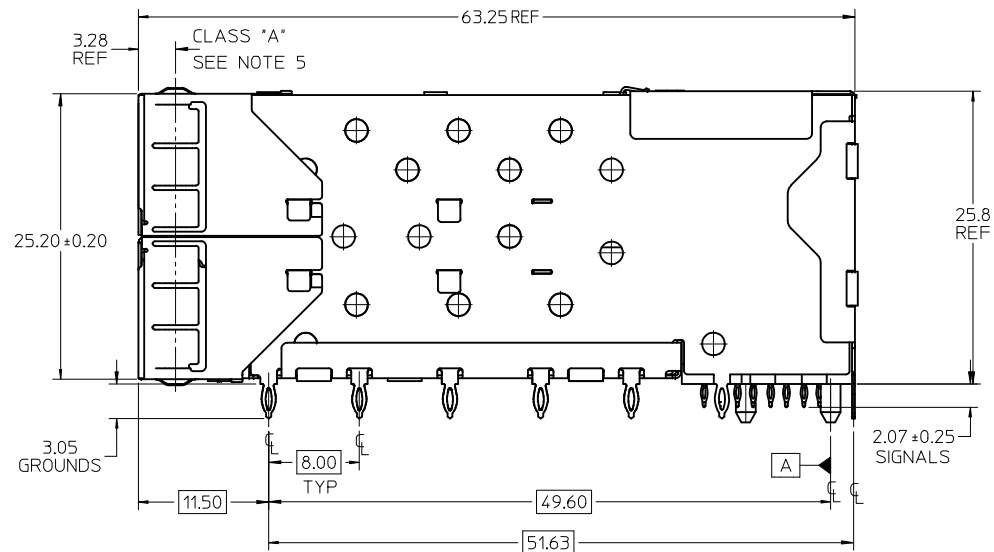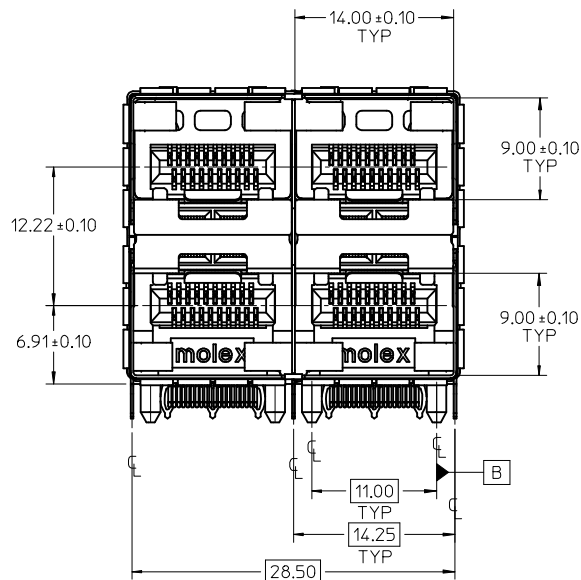

NOTES

1. MATERIAL:

CAGE: NICKEL SILVER, THICKNESS: 0.25mm
EMI METAL GASKET: PHOS-BRONZE
CONNECTOR HOUSING: GLASS FILLED HIGH TEMP PLASTIC, 94 V-0
COLOR BLACK
OVERMOLDED TERMINALS HOUSING: GLASS FILLED HIGH TEMP PLASTIC,
94 V-0, COLOR: BLACK
TERMINALS: TIN BRASS

2. FINISH:



LIGHT PIPE HOUSING: 150 MICRONS NICKEL OVER 150 MICRONS COPPER
TERMINAL: CONTACT AREA: 0.76 MICRONS MIN, HARD GOLD OVER
1.27 MICRONS MIN. NICKEL.
COMPLIANT TAIL - TIN/LEAD OPTION: 0.76 - 1.52 MICRONS 90/10 TIN/LEAD
OVER 0.76 - 1.52 MICRONS NICKEL
COMPLIANT TAIL - TIN OPTION: 0.76 - 1.52 MICRONS TIN
OVER 0.76 - 1.52 MICRONS NICKEL
EMI METAL GASKET: 2.54 MICRONS NICKEL OVERALL

3. REFER TO PS-75310-001 PRODUCT SPEC FOR ALL ELECTRICAL, MECHANICAL, AND ENVIRONMENTAL SPECIFICATIONS.

4. REFER TO PK-75714-001 FOR ALL PACKAGING SPECIFICATIONS.

5. ALL EXTERIOR SURFACES TO BE CLASS 'B' SURFACE EXCEPT THE UNDER SIDE OF THE CAGE WHERE THE PCB WOULD BE LOCATED AND AS NOTED. THE SURFACES TO CONFORM TO THE MOLEX COSMETIC DOC PS-45499-002.

ADD KEEP-OUT ZONES		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
EC NO: UCP2009-1356		DRAWN BY: MSANDBERG		DATE: 10-23-06		MM ONLY		3:1		METRIC		TITLE	
DRWN:MSI BARRA		CHECKED BY: JLONG		DATE: 10-23-06		4 PLACES ± ---		MOLEX INCORPORATED		SD-76065-001		SHEET NO.	
CHKD:BBARKER		APPROVED BY: RNELSON		DATE: 10-23-06		3 PLACES ± ---		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		1 OF 4			
APPR:SMILLER						2 PLACES ± 0.13							
						1 PLACE ± 0.25							
						ANGULAR ± 5 °							
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

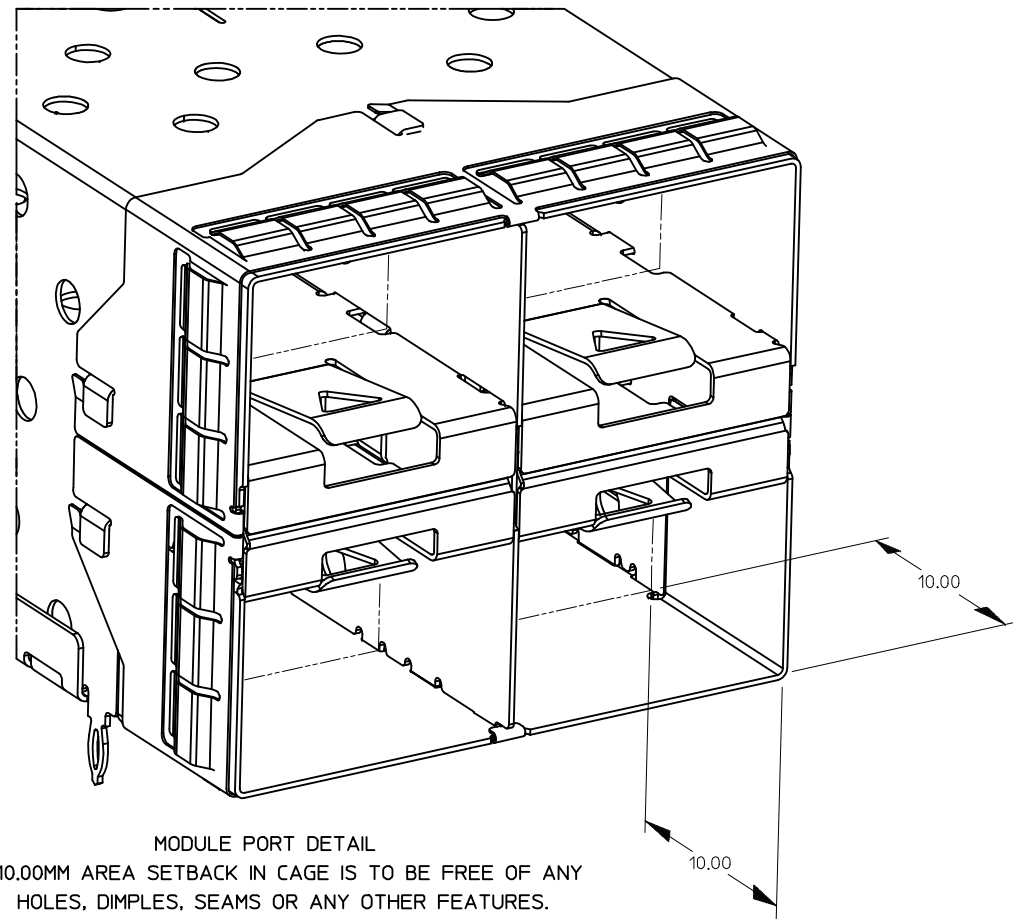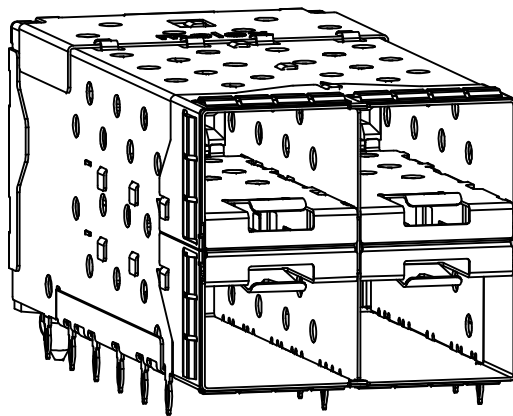


MODULE PORT DETAIL
10.00MM AREA SETBACK IN CAGE IS TO BE FREE OF ANY
HOLES, DIMPLES, SEAMS OR ANY OTHER FEATURES.
(4 SIDES PER MODULE PORT)


SEE SHEET 1 EC NO: UCP2009-1356 DRAWN:MSI BARRA 2009/08/04 CHKD:BBARKER 2009/08/06 APPR:SMILLER 2009/08/06	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	STACKED SFP+ 2X2 ASS'Y WITH METAL EMI GASKET			
			REV	DESCRIPTION	mm	INCH	DRAWN BY MSANDBERG	DATE 10-23-06			TITLE		
					4 PLACES ± ---	± ---	CHECKED BY JLONG	DATE 10-23-06					
					3 PLACES ± ---	± ---	APPROVED BY RNELSON	DATE 10-23-06					
					2 PLACES ± 0.13	± ---	MATERIAL NO.	DOCUMENT NO.					
			1 PLACE ± 0.25	± ---	ANGULAR ± 5 °		SEE CHART				SD-76065-001		SHEET NO. 2 OF 4
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

T20 T18 T16 T14 T12
 T19 T17 T15 T13 T11
 T1 T3 T5 T7 T9
 T2 T4 T6 T8 T10
 L10 L8 L6 L4 L2
 L9 L7 L5 L3 L1
 L11 L13 L15 L17 L19
 L12 L14 L16 L18 L20


CONNECTOR PIN-OUT
 COMPONENT SIDE OF BOARD

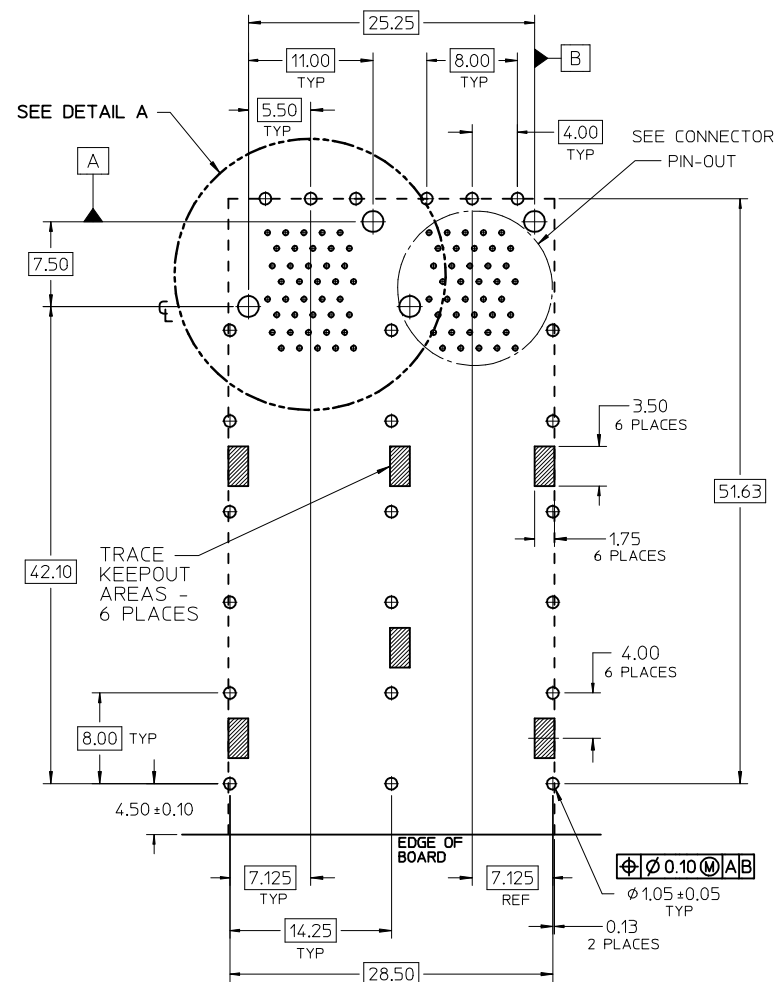


RECOMMENDED PCB LAYOUT - COMPONENT SIDE
 RECOMMENDED PCB THICKNESS - 2.36 MM (.093 INCH)
 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
 TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENTS
 THIS AREA IS INDICATED BY THE DASHED LINE

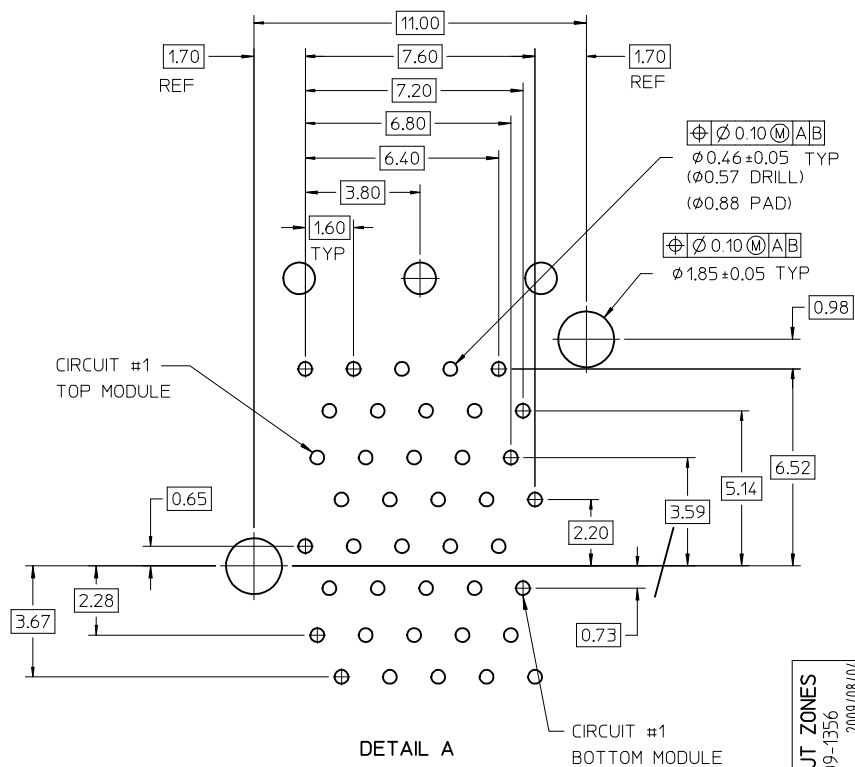

ADD KEEP-OUT ZONES	EC NO: UCP2009-1356			DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	DRWN:MSI BARRA 2009/08/04					mm INCH			MM ONLY		3:1	METRIC		
	CHKD:BBARKER 2009/08/06					4 PLACES	±---	±---	DRAWN BY	DATE	STACKED SFP+ 2X2 ASS'Y WITH METAL EMI GASKET			
	APPR:SMILLER 2009/08/06					3 PLACES	±---	±---	CHECKED BY	DATE				
						2 PLACES	±0.13	±---	JLONG	10-23-06	MOLEX MOLEX INCORPORATED			
						1 PLACE	±0.25	±---	APPROVED BY	DATE				
						ANGULAR ± 5 °			RNELSON	10-23-06	DOCUMENT NO. SD-76065-001			
									MATERIAL NO.					
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		3 OF 4			
									SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

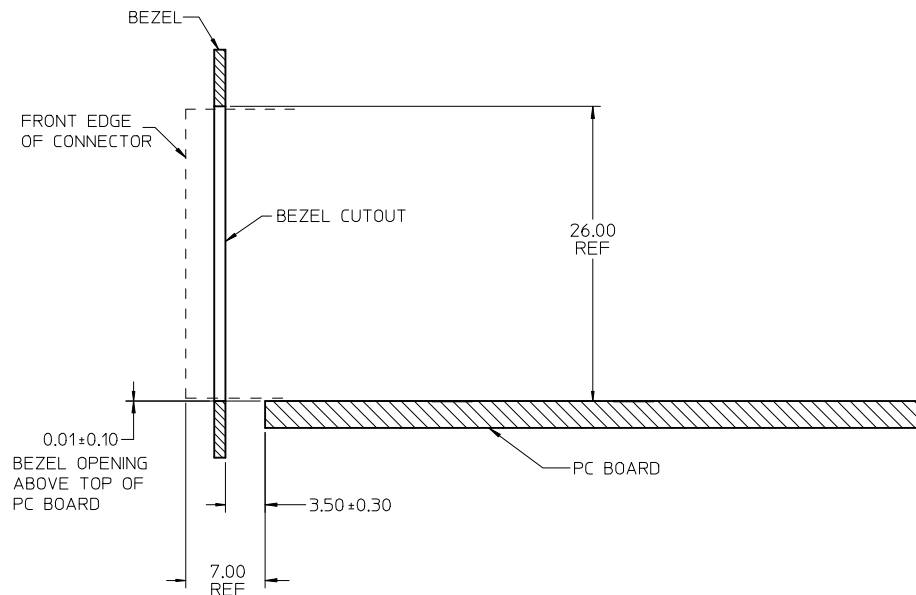

SECTION A-A

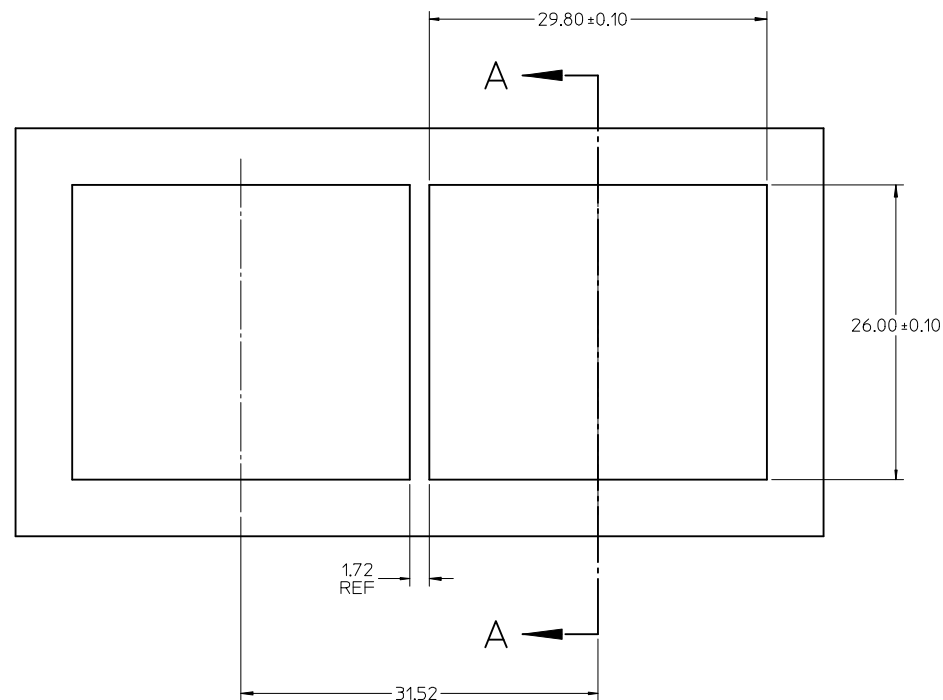

BEZEL CUT-OUT CENTER SPACING DETAIL
BEZEL THICKNESS: 0.8 - 2.6

SEE SHEET 1	REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE STACKED SFP+ 2X2 ASS'Y WITH METAL EMI GASKET			
					mm	INCH	DRAWN BY MSANDBERG	DATE 10-23-06	CHECKED BY JLONG			DATE 10-23-06		
				4 PLACES	± ---	± ---	APPROVED BY RNELSON	DATE 10-23-06						
				3 PLACES	± ---	± ---								
				2 PLACES	± 0.13	± ---	MATERIAL NO.		DOCUMENT NO.			SHEET NO. 4 OF 4		
				1 PLACE	± 0.25	± ---	SEE CHART		SD-76065-001					
				ANGULAR ± 5 °		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru