

## CONNECTOR DESIGNATORS A-F-H-L-S

### ROTATABLE COUPLING

319 F J 001 M 16 06-6 T

Product Series — 319  
 Connector Designator — F  
 Angle and Profile — J  
 J = 90°  
 H = 45°  
 See page 319-2 for straight  
 Basic Part No. — 001

M — Shell Size (Table I)  
 16 — Cable Entry (Table IV)  
 06-6 — Shield Length (1 inch increments: Minimum 6 inches)  
 T — Shrink Boot (Table IV - Omit for None)  
 Finish (Table II)



**STYLE 2**  
(45° & 90°  
See Note 5)

**-445**

Now Available  
with the "NESTOR"

Glenair's Non-Detent,  
Spring-Loaded, Self-  
Locking Coupling.

Add "-445" to Specify  
This AS85049 Style "N"  
Coupling Interface.

**319-001**  
**EMI/RFI Shield Sock Shrink Boot Adapter**  
with Optional Shrink Boot  
**Standard Profile - Rotatable Coupling**



**319**

See inside back cover fold-out or pages 13 and 14 for unabridged Tables I and II.

**TABLE III: DIMENSIONS**

| Shell Size<br>Conn. Desig.<br>A-F-L-S H |    | E<br>Max |        | F<br>Max |        | G<br>Max |        | H<br>Max |        |
|-----------------------------------------|----|----------|--------|----------|--------|----------|--------|----------|--------|
| 08                                      | 09 | .830     | (21.1) | 1.045    | (26.5) | .940     | (23.9) | 1.155    | (29.3) |
| 10                                      | 11 | .860     | (21.8) | 1.075    | (27.3) | 1.010    | (25.7) | 1.225    | (31.1) |
| 12                                      | 13 | .882     | (22.4) | 1.097    | (27.9) | 1.070    | (27.2) | 1.285    | (32.6) |
| 14                                      | 15 | .900     | (22.9) | 1.125    | (28.6) | 1.130    | (28.7) | 1.345    | (34.2) |
| 16                                      | 17 | .930     | (23.6) | 1.145    | (29.1) | 1.190    | (30.2) | 1.405    | (35.7) |
| 18                                      | 19 | .950     | (24.1) | 1.165    | (29.6) | 1.240    | (31.5) | 1.455    | (37.0) |
| 20                                      | 21 | .980     | (24.9) | 1.195    | (30.4) | 1.310    | (33.3) | 1.525    | (38.7) |
| 22                                      | 23 | 1.000    | (25.4) | 1.215    | (30.9) | 1.360    | (34.5) | 1.575    | (40.0) |
| 24                                      | 25 | 1.030    | (26.2) | 1.245    | (31.6) | 1.430    | (36.3) | 1.645    | (41.8) |

1. Cable Entry is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (page 40).
3. Metric dimensions (mm) are indicated in parentheses.
4. O-Ring not supplied with Connector Designator A.
5. When maximum entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G, & H will not apply. Please consult factory.


**TABLE II: STANDARD FINISHES**

| GLENAIR<br>SYMBOL                                                               | FINISH                                               |
|---------------------------------------------------------------------------------|------------------------------------------------------|
| B                                                                               | Cadmium Plate, Olive Drab                            |
| M                                                                               | Electroless Nickel                                   |
| NF                                                                              | Cadmium Plate, Olive Drab Over<br>Electroless Nickel |
| See Back Cover for Complete Finish Information<br>and Additional Finish Options |                                                      |

**TABLE IV: CABLE ENTRY/SHRINK BOOT**

| Dash<br>No.                                                                        | Cable<br>Entry |        | Shrink<br>Boot * |
|------------------------------------------------------------------------------------|----------------|--------|------------------|
| 01                                                                                 | .188           | (4.8)  | n/a              |
| 02                                                                                 | .250           | (6.4)  | n/a              |
| 03                                                                                 | .312           | (7.9)  | 202K121-25-0     |
| 04                                                                                 | .375           | (9.5)  | 202K121-25-0     |
| 05                                                                                 | .438           | (11.1) | 202K121-25-0     |
| 06                                                                                 | .500           | (12.7) | 202K132-25-0     |
| 07                                                                                 | .562           | (14.3) | 202K132-25-0     |
| 08                                                                                 | .625           | (15.9) | 202K132-25-0     |
| 09                                                                                 | .688           | (17.5) | 202K142-25-0     |
| 10                                                                                 | .750           | (19.1) | 202K142-25-0     |
| 11                                                                                 | .812           | (20.6) | 202K142-25-0     |
| 12                                                                                 | .875           | (22.2) | 202K153-25-0     |
| 13                                                                                 | .938           | (23.8) | 202K153-25-0     |
| 14                                                                                 | 1.000          | (25.4) | 202K153-25-0     |
| 15                                                                                 | 1.250          | (31.8) | 202K163-25-0     |
| 16                                                                                 | 1.500          | (38.1) | 202K174-25-0     |
| 17                                                                                 | 1.750          | (44.5) | n/a              |
| 18                                                                                 | 2.000          | (50.8) | n/a              |
| 19                                                                                 | 1.125          | (28.6) | n/a              |
| 20                                                                                 | 1.375          | (34.9) | n/a              |
| 21                                                                                 | 1.625          | (41.3) | n/a              |
| 22                                                                                 | 1.062          | (27.0) | n/a              |
| 23                                                                                 | 1.188          | (30.2) | n/a              |
| 24                                                                                 | 1.875          | (47.6) | n/a              |
| * Raychem Shrink Boot Supplied<br>with "T" Option (see Part Number<br>Development) |                |        |                  |

## CONNECTOR DESIGNATORS A-F-H-L-S ROTATABLE COUPLING

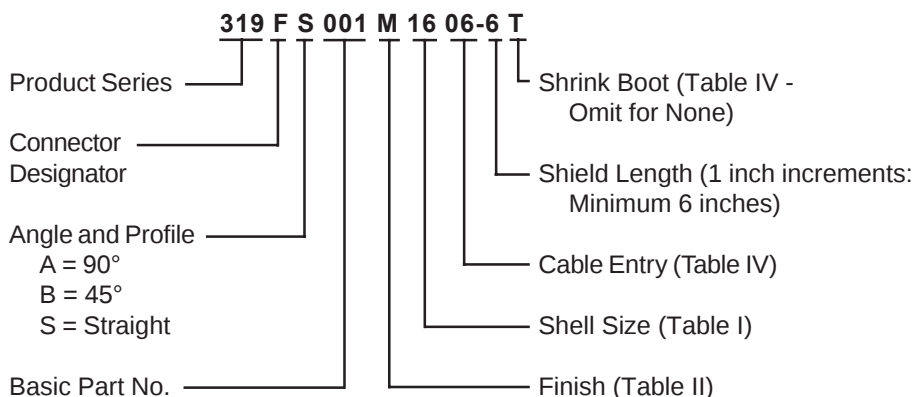

**STYLE 2  
(STRAIGHT  
See Note 5)**



**STYLE 2  
(45° & 90°  
See Note 5)**

**-445**

Now Available  
with the "NESTOR"

Glenair's Non-Detent,  
Spring-Loaded, Self-  
Locking Coupling.

Add "-445" to Specify  
This AS85049 Style "N"  
Coupling Interface.



**319-001**  
**EMI/RFI Shield Sock Shrink Boot Adapter**  
 with Optional Shrink Boot  
 Low Profile - Rotatable Coupling



319

See inside back cover fold-out or pages 13 and 14 for unabridged Tables I and II.

**TABLE III: DIMENSIONS**

| Shell Size<br>Conn. Desig. |    | E     |        | F     |        | G     |        | H     |        |
|----------------------------|----|-------|--------|-------|--------|-------|--------|-------|--------|
| A-F-L-S                    | H  | Max   |        | Max   |        | Max   |        | Max   |        |
| 08                         | 09 | .457  | (11.6) | 1.710 | (43.4) | .500  | (12.7) | 1.730 | (43.9) |
| 10                         | 11 | .520  | (13.2) | 1.770 | (45.0) | .595  | (15.1) | 1.850 | (47.0) |
| 12                         | 13 | .582  | (14.8) | 1.830 | (46.5) | .610  | (15.5) | 1.870 | (47.5) |
| 14                         | 15 | .645  | (16.4) | 1.920 | (48.8) | .700  | (17.8) | 1.940 | (49.3) |
| 16                         | 17 | .738  | (18.7) | 2.030 | (51.6) | .885  | (22.5) | 2.030 | (51.6) |
| 18                         | 19 | .926  | (23.5) | 2.220 | (56.4) | .975  | (24.8) | 2.200 | (55.9) |
| 20                         | 21 | .926  | (23.5) | 2.220 | (56.4) | .975  | (24.8) | 2.200 | (55.9) |
| 22                         | 23 | 1.020 | (25.9) | 2.370 | (60.2) | 1.125 | (28.6) | 2.310 | (58.7) |
| 24                         | 25 | 1.020 | (25.9) | 2.370 | (60.2) | 1.125 | (28.6) | 2.310 | (58.7) |
| 28                         |    | 1.145 | (29.1) | 2.420 | (61.5) | 1.225 | (31.1) | 2.480 | (63.0) |
| 32                         |    | 1.207 | (30.7) | 2.520 | (64.0) | 1.575 | (40.0) | 2.730 | (69.3) |
| 36                         |    | 1.238 | (31.4) | 2.610 | (66.3) | 1.775 | (45.1) | 2.730 | (69.3) |

**TABLE IV: CABLE ENTRY/SHRINK BOOT**

| Dash No. | Cable Entry |        | Shrink Boot * |
|----------|-------------|--------|---------------|
| 01       | .188        | (4.8)  | n/a           |
| 02       | .250        | (6.4)  | n/a           |
| 03       | .312        | (7.9)  | 202K121-25-0  |
| 04       | .375        | (9.5)  | 202K121-25-0  |
| 05       | .438        | (11.1) | 202K121-25-0  |
| 06       | .500        | (12.7) | 202K132-25-0  |
| 07       | .562        | (14.3) | 202K132-25-0  |
| 08       | .625        | (15.9) | 202K132-25-0  |
| 09       | .688        | (17.5) | 202K142-25-0  |
| 10       | .750        | (19.1) | 202K142-25-0  |
| 11       | .812        | (20.6) | 202K142-25-0  |
| 12       | .875        | (22.2) | 202K153-25-0  |
| 13       | .938        | (23.8) | 202K153-25-0  |
| 14       | 1.000       | (25.4) | 202K153-25-0  |
| 15       | 1.250       | (31.8) | 202K163-25-0  |
| 16       | 1.500       | (38.1) | 202K174-25-0  |
| 17       | 1.750       | (44.5) | n/a           |
| 18       | 2.000       | (50.8) | n/a           |
| 19       | 1.125       | (28.6) | n/a           |
| 20       | 1.375       | (34.9) | n/a           |
| 21       | 1.625       | (41.3) | n/a           |
| 22       | 1.062       | (27.0) | n/a           |
| 23       | 1.188       | (30.2) | n/a           |
| 24       | 1.875       | (47.6) | n/a           |

\* Raychem Shrink Boot Supplied with "T" Option (see Part Number Development)

1. Cable Entry or range is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
2. See Shrink Boot Reference Information (page 40).
3. Metric dimensions (mm) are indicated in parentheses.
4. O-Ring not supplied with Connector Designator A.
5. When maximum entry (page 21) is exceeded, Style 2 will be supplied. Dimensions E, F, G, & H will not apply. Please consult factory.

**TABLE II - STANDARD FINISHES**

| GLENAIR |                                                   |
|---------|---------------------------------------------------|
| SYMBOL  | FINISH                                            |
| B       | Cadmium Plate, Olive Drab                         |
| M       | Electroless Nickel                                |
| NF      | Cadmium Plate, Olive Drab Over Electroless Nickel |

See Back Cover for Complete Finish Information and Additional Finish Options

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)