


Spring Cage Feed Through Terminal Blocks with Angled Design STS 6

The ST-DESK series of spring cage terminal blocks features an angled conductor entry. This family of compact terminal blocks is used especially in wiring systems where space is to be saved using underfloor wiring. With their dual jumper channel, STS 6 and STS 6-TWIN offer a variety of options for potential bridging. Moreover, these jumper channels are conveniently positioned and are in the same location as is the case for the 2.5 and 4 mm² terminal blocks of the ST-DESK series. Using adapter bridge RB-ST 6-(4/2,5), the potential can be distributed both to the left or right to the terminal blocks with smaller nominal cross sections.



Spring Cage Feed Through Terminal Block STS 6

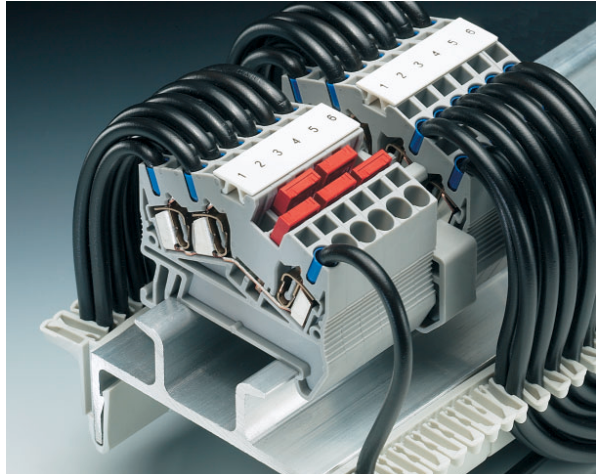

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.2-10	0.2-6	24-8	52	800

Technical data

Spring cage terminal block,
for mounting on 

gray
blue terminal width 8.2
terminal width 8.2

(1) End cover

gray



(2) **Plug-in bridge**, for
cross-connections in the
terminal center

2-pos.
3-pos.
4-pos.
5-pos.
10-pos.



(3) **Adapter bridge**, for connecting an STS 6
to an STS 4 or STS 2,5



(4) **Partition plate**, for
visual and electrical separation
of terminal groups, 2 mm thick



(5) **Test adapter**, for 4 mm Ø test plug PS
and 4 mm Ø safety test plugs,
making contact in the bridge shaft



(6) **2.3 mm Ø test plug** ¹⁾, consisting of
metal part and red insulating sleeve



(7) **Modular test plug**, can be labeled with ZBF 5




(8) **Screwdriver**, for
actuating the tension spring



(9) **Zack strip**, 10-section, for
labeling in the terminal center

white



Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]

Stripping length [mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)


Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6	30 38 12 1	50
STS 6 BU	30 38 13 4	50
D-STIS 6	30 38 18 9	50
FBS 2-8 $I_{max}: 41 A$	30 30 28 4	10
FBS 3-8 $41 A$	30 30 29 7	10
FBS 4-8 $41 A$	30 30 30 7	10
FBS 5-8 $41 A$	30 30 31 0	10
FBS 10-8 $41 A$	30 30 32 3	10
RB ST 6-(2,5/4) $I_{max}: 48 A$	30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 58 / 2.2
50.0 / 57.5
52 / 10 // 41 / 6
8 / 3
III / I
0.25 - 6
0.25 - 6
0.25 - 1.5
12
A 5
PA
V0
applied for
applied for

Spring Cage Feed Through Terminal Block STS 6-TWIN

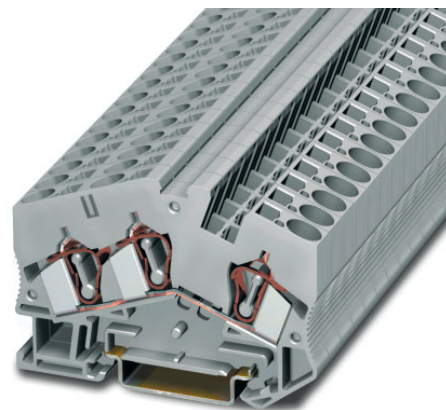

(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.2-10	0.2-6	24-8	52*	800

* The max. load current must not be exceeded by the total current of all connected conductors.

Technical data

Spring cage terminal block,
for mounting on 

gray
blue terminal width 8.2
terminal width 8.2

(1) End cover

gray



(2) **Plug-in bridge**, for
cross-connections in the
terminal center

2-pos.
3-pos.
4-pos.
5-pos.
10-pos.



(3) **Adapter bridge**, for connecting an STS 6
to an STS 4 or STS 2,5



(4) **Partition plate**, for
visual and electrical separation
of terminal groups, 2 mm thick



(5) **Test adapter**, for 4 mm Ø test plug PS
and 4 mm Ø safety test plugs,
making contact in the bridge shaft



(6) **2.3 mm Ø test plug** ¹⁾, consisting of
metal part and red insulating sleeve



(7) **Modular test plug**, can be labeled with ZBF 5




(8) **Screwdriver**, for
actuating the tension spring



(9) **Zack strip**, 10-section, for
labeling in the terminal center

white



Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]

Stripping length [mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)


Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6-TWIN	30 38 15 0	50
STS 6-TWIN BU	30 38 16 3	50
D-STIS 6-TWIN	30 38 20 2	50
FBS 2-8 $I_{max.}: 41\text{ A}$	30 30 28 4	10
FBS 3-8 41 A	30 30 29 7	10
FBS 4-8 41 A	30 30 30 7	10
FBS 5-8 41 A	30 30 31 0	10
FBS 10-8 41 A	30 30 32 3	10
RB ST 6-(2,5/4) $I_{max.}: 48\text{ A}$	30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 70 / 2.2
50.0 / 57.5
52 / 10 // 41 / 6
8 / 3
III / I
0.25 - 6
0.25 - 6
0.25 - 1.5
12
A 5
PA
V0
applied for
applied for

Spring Cage Ground Terminal Block STS 6-PE

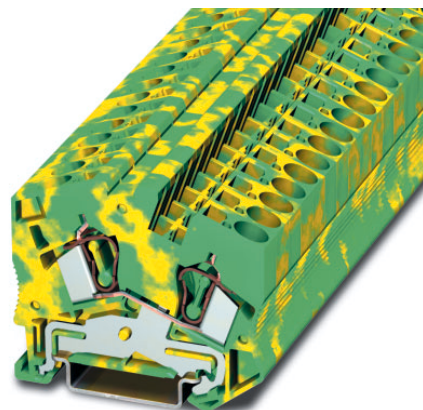

(IEC) [mm ²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.2-10	0.2-6	24-8
Current carrying capacity of mounting rails, see CLIPLINE catalog.			

Technical data

Spring cage ground terminal block,
for mounting on  green-yellow terminal width 8.2

(1) End cover	gray	
(2) Plug-in bridge , for cross-connections in the terminal center	2-pos. 3-pos. 4-pos. 5-pos. 10-pos.	
(3) Adapter bridge , for connecting an STS 6 to an STS 4 or STS 2,5		
(4) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick		
(5) Test adapter , for 4 mm Ø test plug PS and 4 mm Ø safety test plugs, making contact in the bridge shaft		
(6) 2.3 mm Ø test plug ¹⁾ , consisting of metal part and red insulating sleeve		
(7) Modular test plug , can be labeled with ZBF 5		
(8) Screwdriver , for actuating the tension spring		
(9) Zack strip , 10-section, for labeling in the terminal center	white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]

Stripping length	[mm]
-------------------------	------

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94


Approval data (UL and CSA/CUL)

Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG


¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6-PE	30 38 14 7	50
D-STIS 6	30 38 18 9	50
FBS 2-8	30 30 28 4	10
FBS 3-8	30 30 29 7	10
FBS 4-8	30 30 30 7	10
FBS 5-8	30 30 31 0	10
FBS 10-8	30 30 32 3	10
RB ST 6-(2,5/4)	30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 58 / 2.2
50.0 / 57.5
–
8 / 3
III / I
0.25 - 6
0.25 - 6
0.25 - 1.5
12
A 5
PA
V0
applied for
applied for



Spring Cage Ground Terminal Block STS 6-TWIN-PE

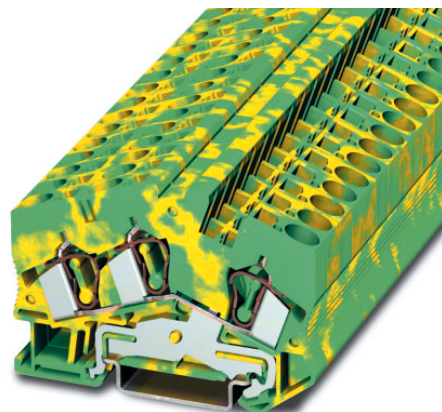


(IEC) [mm ²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.2-10	0.2-6	24-8

Current carrying capacity of mounting rails, see CLIPLINE catalog.

Technical data

Spring cage ground terminal block,
for mounting on  green-yellow terminal width 8.2

(1) End cover	gray	
(2) Plug-in bridge , for cross-connections in the terminal center	2-pos. 3-pos. 4-pos. 5-pos. 10-pos.	
(3) Adapter bridge , for connecting an STS 6 to an STS 4 or STS 2,5		
(4) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick		
(5) Test adapter , for 4 mm Ø test plug PS and 4 mm Ø safety test plugs, making contact in the bridge shaft		
(6) 2.3 mm Ø test plug ¹⁾ , consisting of metal part and red insulating sleeve		
(7) Modular test plug , can be labeled with ZBF 5		
(8) Screwdriver , for actuating the tension spring		
(9) Zack strip , 10-section, for labeling in the terminal center	white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / –
Surge voltage category / insulation material group	– / –

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]

Stripping length	[mm]
-------------------------	------

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94


Approval data (UL and CSA/CUL)

Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6-TWIN-PE	30 38 17 6	50
D-STTS 6-TWIN	30 38 20 2	50
FBS 2-8	30 30 28 4	10
FBS 3-8	30 30 29 7	10
FBS 4-8	30 30 30 7	10
FBS 5-8	30 30 31 0	10
FBS 10-8	30 30 32 3	10
RB ST 6-(2,5/4)	30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 70 / 2.2
50.0 / 57.5
–
8 / 3
III / I
0.25 - 6
0.25 - 6
0.25 - 1.5
12
A 5
PA
V0
applied for
applied for



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru