

NOTES:

I. MATERIALS AND FINISHES:

SMA STR BHD JACK - BRASS, GOLD PLATING
CABLE - 1.13 MM TO AMC R/A PLUG


2. ELECTRICAL:

A. IMPEDANCE: 50 OHM, NOMINAL

3. PACKAGING:

A. QUANTITY: SINGLE PACK
B. BAG TO BE MARKED: AMPHENOL RF, 336313-12-XXXX, AND DATE CODE



THIRD ANGLE PROJ.

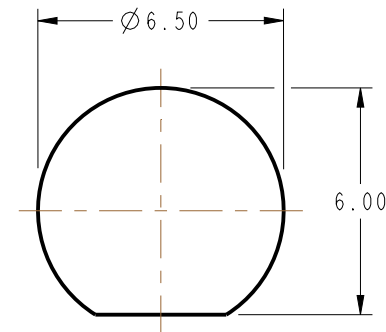

RECOMMENDED MOUNTING HOLE DIMENSIONS

(MAX. PANEL THICKNESS = 3.20 MM)

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG	--	--	--
B	DRAWING UPDATED & COD SHEET ADDED	28-Jul-15	50567	NR
C	NO CHANGE TO THIS SHEET	30-Apr-18	7963	BMG
D	350MM ADDED TO LENGTH TABLE	12-Jun-18	8301	NB

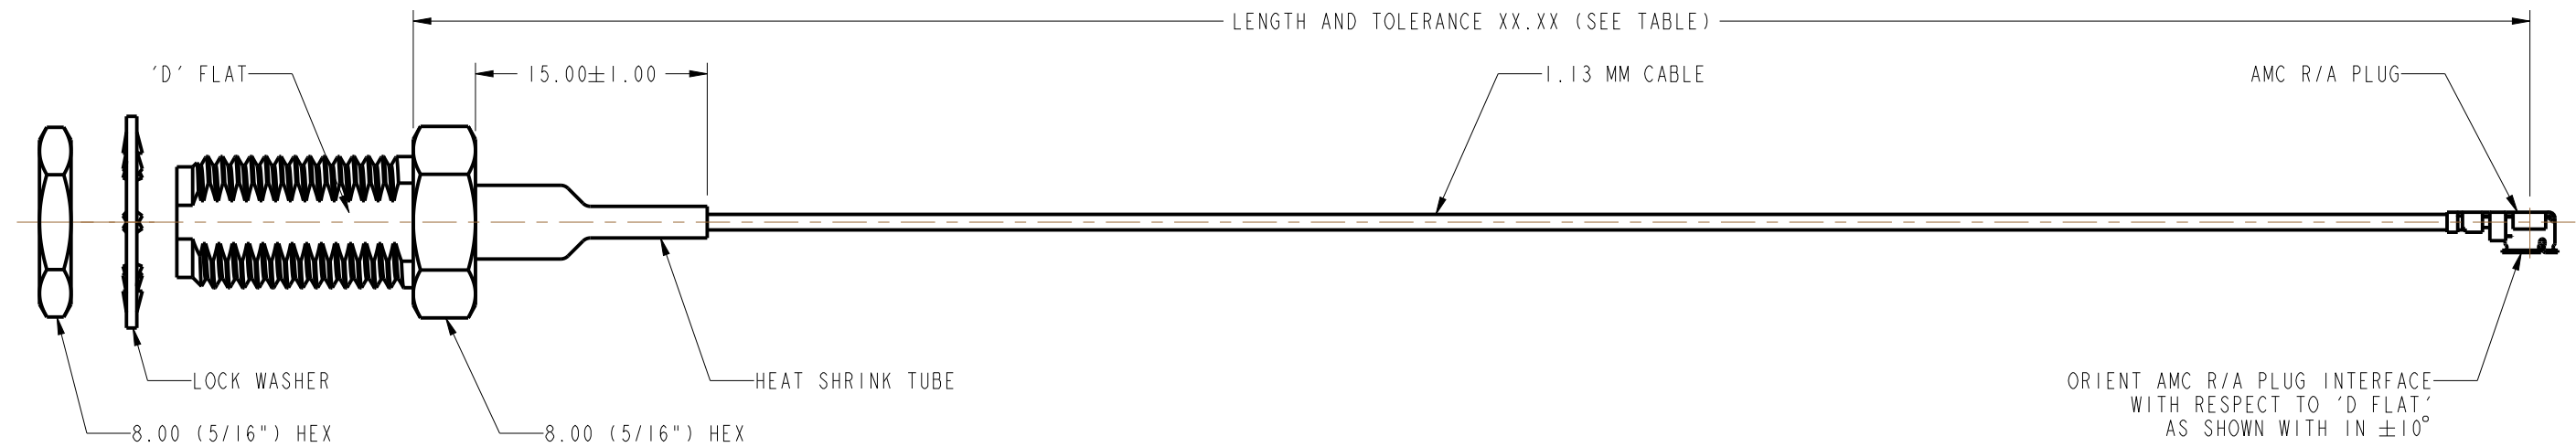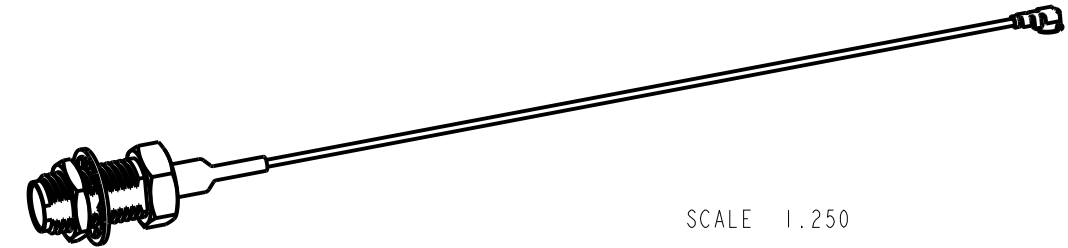

PART NUMBER	LENGTH AND TOLERANCE XX.XX IN MM
336313-12-0050	50.00±5.00
336313-12-0100	100.00±5.00
336313-12-0150	150.00±5.00
336313-12-0200	200.00±5.00
336313-12-0250	250.00±5.00
336313-12-0300	300.00±5.00
336313-12-0350	350.00±5.00

DESIGN REQUIREMENTS:

X FREQUENCY : DC TO 6 GHz

☐ VSWR : --- MAX

INS. LOSS : ---- dBMAX

X CONTINUITY

☐ HI-POT : 200 VRMS

☐ OTHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:				
< 0.5mm	0.5 - 6mm	6 - 30mm	30 - 120mm	ANGLES
± 0.05mm	± 0.1mm	± 0.2mm	± 0.3mm	± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

	MATERIAL
1	Steel plate, 1/2" thick, 6' x 8'
2	Aluminum plate, 1/4" thick, 6' x 8'
3	Copper plate, 1/8" thick, 6' x 8'
4	Brass plate, 1/4" thick, 6' x 8'
5	Stainless steel plate, 1/2" thick, 6' x 8'
6	Inconel plate, 1/4" thick, 6' x 8'
7	Titanium plate, 1/8" thick, 6' x 8'
8	Nickel plate, 1/4" thick, 6' x 8'
9	Zinc plate, 1/8" thick, 6' x 8'
10	Lead plate, 1/4" thick, 6' x 8'
11	Gold plate, 1/8" thick, 6' x 8'
12	Silver plate, 1/4" thick, 6' x 8'
13	Pt/Cr alloy plate, 1/8" thick, 6' x 8'
14	Pt/Ni alloy plate, 1/4" thick, 6' x 8'
15	Pt/Mo alloy plate, 1/8" thick, 6' x 8'
16	Pt/W alloy plate, 1/4" thick, 6' x 8'
17	Pt/Rh alloy plate, 1/8" thick, 6' x 8'
18	Pt/Ir alloy plate, 1/4" thick, 6' x 8'
19	Pt/B alloy plate, 1/8" thick, 6' x 8'
20	Pt/Sn alloy plate, 1/4" thick, 6' x 8'
21	Pt/Pb alloy plate, 1/8" thick, 6' x 8'
22	Pt/Bi alloy plate, 1/4" thick, 6' x 8'
23	Pt/Tl alloy plate, 1/8" thick, 6' x 8'
24	Pt/Li alloy plate, 1/4" thick, 6' x 8'
25	Pt/K alloy plate, 1/8" thick, 6' x 8'
26	Pt/Rb alloy plate, 1/4" thick, 6' x 8'
27	Pt/Cs alloy plate, 1/8" thick, 6' x 8'
28	Pt/Fr alloy plate, 1/4" thick, 6' x 8'
29	Pt/At alloy plate, 1/8" thick, 6' x 8'
30	Pt/As alloy plate, 1/4" thick, 6' x 8'
31	Pt/V alloy plate, 1/8" thick, 6' x 8'
32	Pt/Nb alloy plate, 1/4" thick, 6' x 8'
33	Pt/Ta alloy plate, 1/8" thick, 6' x 8'
34	Pt/Sb alloy plate, 1/4" thick, 6' x 8'
35	Pt/Te alloy plate, 1/8" thick, 6' x 8'
36	Pt/Se alloy plate, 1/4" thick, 6' x 8'
37	Pt/Sr alloy plate, 1/8" thick, 6' x 8'
38	Pt/Zr alloy plate, 1/4" thick, 6' x 8'
39	Pt/Hf alloy plate, 1/8" thick, 6' x 8'
40	Pt/Y alloy plate, 1/4" thick, 6' x 8'
41	Pt/La alloy plate, 1/8" thick, 6' x 8'
42	Pt/Ce alloy plate, 1/4" thick, 6' x 8'
43	Pt/Pr alloy plate, 1/8" thick, 6' x 8'
44	Pt/Nd alloy plate, 1/4" thick, 6' x 8'
45	Pt/Pm alloy plate, 1/8" thick, 6' x 8'
46	Pt/Sm alloy plate, 1/4" thick, 6' x 8'
47	Pt/Eu alloy plate, 1/8" thick, 6' x 8'
48	Pt/Gd alloy plate, 1/4" thick, 6' x 8'
49	Pt/Tb alloy plate, 1/8" thick, 6' x 8'
50	Pt/Dy alloy plate, 1/4" thick, 6' x 8'
51	Pt/Er alloy plate, 1/8" thick, 6' x 8'
52	Pt/Tm alloy plate, 1/4" thick, 6' x 8'
53	Pt/Yb alloy plate, 1/8" thick, 6' x 8'
54	Pt/Lu alloy plate, 1/4" thick, 6' x 8'
55	Pt/Hf alloy plate, 1/8" thick, 6' x 8'
56	Pt/Zr alloy plate, 1/4" thick, 6' x 8'
57	Pt/Y alloy plate, 1/8" thick, 6' x 8'
58	Pt/La alloy plate, 1/4" thick, 6' x 8'
59	Pt/Ce alloy plate, 1/8" thick, 6' x 8'
60	Pt/Pr alloy plate, 1/4" thick, 6' x 8'
61	Pt/Nd alloy plate, 1/8" thick, 6' x 8'
62	Pt/Pm alloy plate, 1/4" thick, 6' x 8'
63	Pt/Sm alloy plate, 1/8" thick, 6' x 8'
64	Pt/Eu alloy plate, 1/4" thick, 6' x 8'
65	Pt/Gd alloy plate, 1/8" thick, 6' x 8'
66	Pt/Tb alloy plate, 1/4" thick, 6' x 8'
67	Pt/Dy alloy plate, 1/8" thick, 6' x 8'
68	Pt/Er alloy plate, 1/4" thick, 6' x 8'
69	Pt/Tm alloy plate, 1/8" thick, 6' x 8'
70	Pt/Yb alloy plate, 1/4" thick, 6' x 8'
71	Pt/Lu alloy plate, 1/8" thick, 6' x 8'
72	Pt/Hf alloy plate, 1/4" thick, 6' x 8'
73	Pt/Zr alloy plate, 1/8" thick, 6' x 8'
74	Pt/Y alloy plate, 1/4" thick, 6' x 8'
75	Pt/La alloy plate, 1/8" thick, 6' x 8'
76	Pt/Ce alloy plate, 1/4" thick, 6' x 8'
77	Pt/Pr alloy plate, 1/8" thick, 6' x 8'
78	Pt/Nd alloy plate, 1/4" thick, 6' x 8'
79	Pt/Pm alloy plate, 1/8" thick, 6' x 8'
80	Pt/Sm alloy plate, 1/4" thick, 6' x 8'
81	Pt/Eu alloy plate, 1/8" thick, 6' x 8'
82	Pt/Gd alloy plate, 1/4" thick, 6' x 8'
83	Pt/Tb alloy plate, 1/8" thick, 6' x 8'
84	Pt/Dy alloy plate, 1/4" thick, 6' x 8'
85	Pt/Er alloy plate, 1/8" thick, 6' x 8'
86	Pt/Tm alloy plate, 1/4" thick, 6' x 8'
87	Pt/Yb alloy plate, 1/8" thick, 6' x 8'
88	Pt/Lu alloy plate, 1/4" thick, 6' x 8'
89	Pt/Hf alloy plate, 1/8" thick, 6' x 8'
90	Pt/Zr alloy plate, 1/4" thick, 6' x 8'
91	Pt/Y alloy plate, 1/8" thick, 6' x 8'
92	Pt/La alloy plate, 1/4" thick, 6' x 8'
93	Pt/Ce alloy plate, 1/8" thick, 6' x 8'
94	Pt/Pr alloy plate, 1/4" thick, 6' x 8'
95	Pt/Nd alloy plate, 1/8" thick, 6' x 8'
96	Pt/Pm alloy plate, 1/4" thick, 6' x 8'
97	Pt/Sm alloy plate, 1/8" thick, 6' x 8'
98	Pt/Eu alloy plate, 1/4" thick, 6' x 8'
99	Pt/Gd alloy plate, 1/8" thick, 6' x 8'
100	Pt/Tb alloy plate, 1/4" thick, 6' x 8'

SEE NOTES

REFERENCE
EAR # 6751

CONFIGURATION LEVEL: In Work

FINISH

DRAWN	
RAJAGOPAL N	

ENGINEER
RAJAGOPAL N

APPROVED
K. CAPOZZ

CAD FILE

DATE
19-May-15

DATE
19-May-15

DATE
12-Jun-18

TITLE	SMA STR BHD JACK TO AMC R/A PLUG USING 1.13 MM CABLE VARIOUS LENGTH
-------	--

SCALE: 3.0:1.0	SHEET 2 OF 2
----------------	--------------

DWG SIZE
B

REV
D

Amphenol RF

www.amphenorrf.com

DRAWING NO. 336313-12-XXXX

ITEM NO. 336313-12-XXXX

PART NO. 336313-12-XXXX

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru