


# CGHV60075D5

75 W, 6.0 GHz, GaN HEMT Die

Cree's CGHV60075D5 is a gallium nitride (GaN) High Electron Mobility Transistor (HEMT). GaN has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity, and higher thermal conductivity. GaN HEMTs offer greater power density and wider bandwidths compared to Si and GaAs transistors.

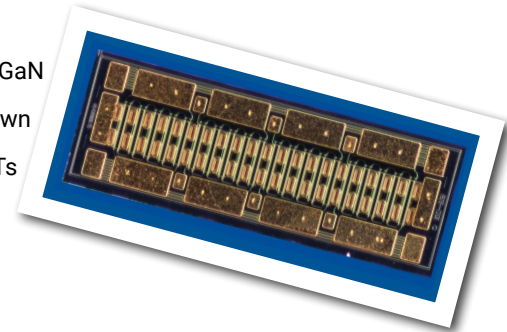

## FEATURES


- 19 dB Typical Small Signal Gain at 4 GHz
- 17 dB Typical Small Signal Gain at 6 GHz
- 65% Typical Power Added Efficiency at 4 GHz
- 60% Typical Power Added Efficiency at 6 GHz
- 75 W Typical  $P_{SAT}$
- 50 V Operation
- High Breakdown Voltage
- Up to 6 GHz Operation

## APPLICATIONS

- 2-Way Private Radio
- Broadband Amplifiers
- Cellular Infrastructure
- Test Instrumentation
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms

## Packaging Information

- Bare die are shipped on tape or in Gel-Pak® containers.
- Non-adhesive tacky membrane immobilizes die during shipment.

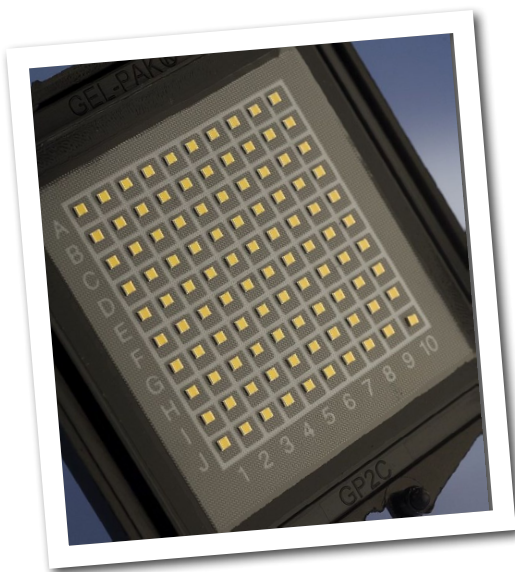

## Absolute Maximum Ratings (not simultaneous)

Parameter	Symbol	Rating	Units	Conditions
Drain-source Voltage	$V_{DS}$	150	$V_{DC}$	25°C
Gate-source Voltage	$V_{GS}$	-10, +2	$V_{DC}$	25°C
Storage Temperature	$T_{STG}$	-65, +150	°C	
Operating Junction Temperature	$T_J$	225	°C	
Maximum Drain Current <sup>1</sup>	$I_{MAX}$	6.3	A	25°C
Maximum Forward Gate Current	$I_{GMAX}$	10	mA	25°C
Thermal Resistance, Junction to Case (packaged) <sup>2</sup>	$R_{\theta JC}$	2.67	°C/W	85°C, 41.6W Dissipation
Thermal Resistance, Junction to Case (die only)	$R_{\theta JC}$	1.66	°C/W	85°C, 41.6W Dissipation
Mounting Temperature	$T_S$	320	°C	30 seconds

Note<sup>1</sup> Current limit for long term reliable operation.

Note<sup>2</sup> Eutectic die attach using 80/20 AuSn mounted to a 10 mil thick Cu15Mo85 carrier.

## Electrical Characteristics (Frequency = 6 GHz unless otherwise stated; $T_C = 25^\circ\text{C}$ )

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>DC Characteristics</b>						
Gate Pinch-Off Voltage	$V_P$	-3.8	-3.0	-2.3	V	$V_{DS} = 10\text{ V}, I_D = 10\text{ mA}$
Drain Current <sup>1</sup>	$I_{DSS}$	8	10	-	A	$V_{DS} = 6\text{ V}, V_{GS} = 2.0\text{ V}$
Drain-Source Breakdown Voltage	$V_{BD}$	150	-	-	V	$V_{GS} = -8\text{ V}, I_D = 10\text{ mA}$
On Resistance	$R_{ON}$	-	0.28	-	$\Omega$	$V_{DS} = 0.1\text{ V}$
Gate Forward Voltage	$V_{G-ON}$	-	1.9	-	V	$I_{GS} = 10\text{ mA}$
<b>RF Characteristics</b>						
Small Signal Gain	$G_{SS}$	-	17	-	dB	$V_{DD} = 50\text{ V}, I_{DQ} = 125\text{ mA}$
Saturated Power Output <sup>2,3</sup>	$P_{SAT}$	-	75	-	W	$V_{DD} = 50\text{ V}, I_{DQ} = 125\text{ mA}$
Drain Efficiency <sup>3</sup>	$\eta$	-	60	-	%	$V_{DD} = 50\text{ V}, I_{DQ} = 125\text{ mA}, P_{SAT} = 75\text{ W}$
Intermodulation Distortion	IM3	-	-30	-	dBc	$V_{DD} = 50\text{ V}, I_{DQ} = 125\text{ mA}, P_{OUT} = 75\text{ W PEP}$
Output Mismatch Stress	VSWR	-	-	10 : 1	$\Psi$	No damage at all phase angles, $V_{DD} = 50\text{ V}, I_{DQ} = 125\text{ mA}, P_{OUT} = 75\text{ W CW}$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{GS}$	-	9.51	-	pF	$V_{DS} = 50\text{ V}, V_{GS} = -8\text{ V}, f = 1\text{ MHz}$
Output Capacitance	$C_{DS}$	-	3.6	-	pF	$V_{DS} = 50\text{ V}, V_{GS} = -8\text{ V}, f = 1\text{ MHz}$
Feedback Capacitance	$C_{GD}$	-	0.26	-	pF	$V_{DS} = 50\text{ V}, V_{GS} = -8\text{ V}, f = 1\text{ MHz}$


Notes:

<sup>1</sup> Scaled from PCM data

<sup>2</sup>  $P_{SAT}$  is defined as  $I_G = 1.0\text{ mA}$ .

<sup>3</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$

## DIE DIMENSIONS (units in microns)

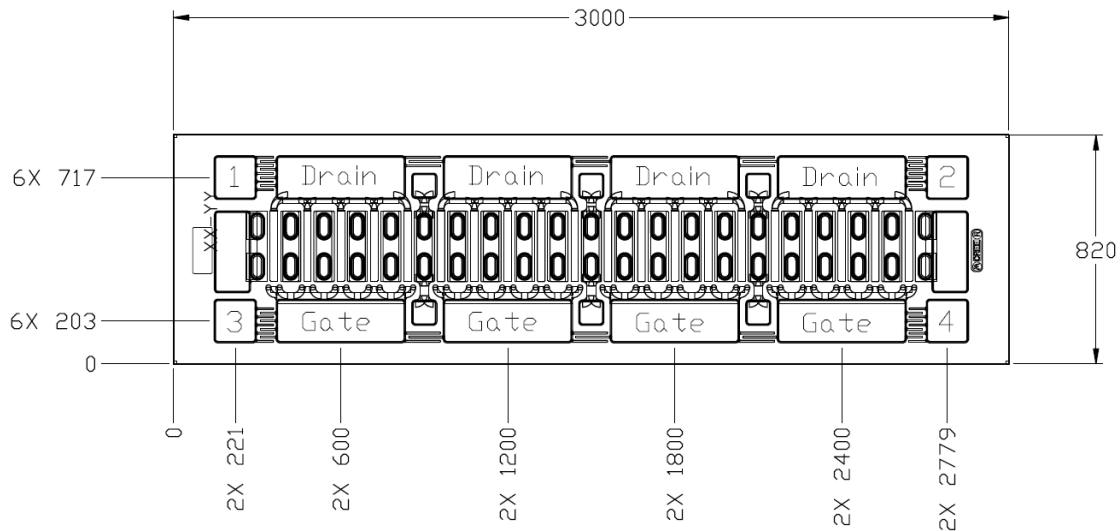

Overall die size 3000 x 820 (+0/-50) microns, die thickness 100 microns.  
All Gate and Drain pads must be wire bonded for electrical connection.

### Assembly Notes:


- Recommended solder is AuSn (80/20) solder. Refer to Cree's website for the Eutectic Die Bond Procedure application note at [www.cree.com/rf/document-library](http://www.cree.com/rf/document-library)
- Vacuum collet is the preferred method of pick-up.
- The backside of the die is the Source (ground) contact.
- Die back side gold plating is 5 microns thick minimum.
- Thermosonic ball or wedge bonding are the preferred connection methods.
- Gold wire must be used for connections.
- Use the die label (XX-YY) for correct orientation.

### Electrostatic Discharge (ESD) Classifications


Parameter	Symbol	Class	Test Methodology
Human Body Model	HBM	1A (> 250 V)	JEDEC JESD22 A114-D
Charge Device Model	CDM	II (200 < 500 V)	JEDEC JESD22 C101-C

## Typical Performance

**Figure 1. - CGHV60075D5  $G_{MAX}$  and K Factor vs. Frequency at  $T_{case} = 25^{\circ}C$   
 $V_{DD} = 50V, I_{DQ} = 125 mA$**

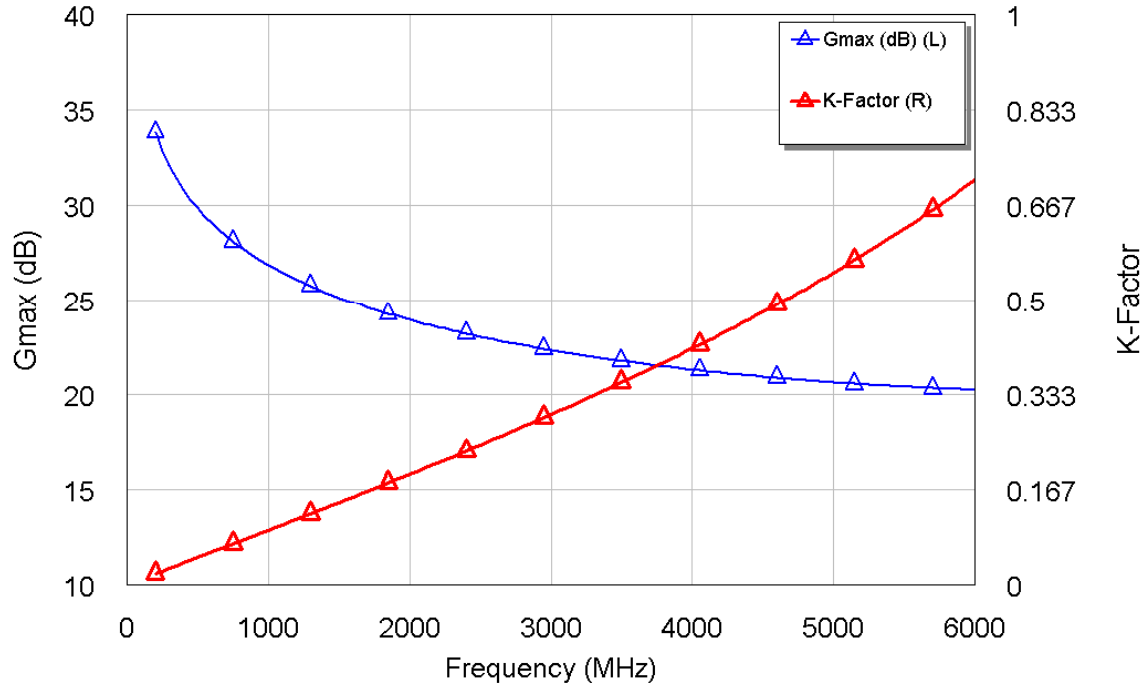

## Product Ordering Information

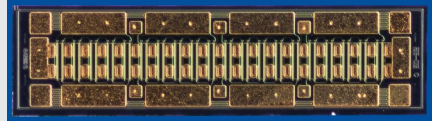Order Number	Description	Unit of Measure	
CGHV60075D5	Bare Die	Each	




Typical Die S-Parameters (Small Signal,  $V_{DS} = 50\text{ V}$ ,  $I_{DQ} = 125\text{ mA}$ , magnitude / angle)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
0.5	0.93309	-154.44	14.266	88.053	0.014402	-0.85181	0.35448	-119.95
0.6	0.93352	-158.34	11.838	83.444	0.01433	-5.2391	0.3779	-122.32
0.7	0.93452	-161.14	10.06	79.434	0.014195	-9.0268	0.40373	-124.1
0.8	0.93586	-163.24	8.7019	75.832	0.014019	-12.407	0.43075	-125.62
0.9	0.93743	-164.87	7.6297	72.531	0.013813	-15.485	0.45814	-127.01
1	0.93917	-166.17	6.761	69.468	0.013583	-18.326	0.48532	-128.36
1.1	0.94101	-167.24	6.0431	66.6	0.013336	-20.972	0.51193	-129.69
1.2	0.94292	-168.13	5.4398	63.9	0.013076	-23.449	0.5377	-131
1.3	0.94485	-168.89	4.926	61.348	0.012806	-25.779	0.56247	-132.31
1.4	0.9468	-169.55	4.4834	58.931	0.01253	-27.974	0.58611	-133.6
1.5	0.94872	-170.12	4.0987	56.635	0.012249	-30.047	0.60859	-134.86
1.6	0.95062	-170.64	3.7616	54.451	0.011966	-32.007	0.62986	-136.11
1.7	0.95247	-171.1	3.4641	52.373	0.011683	-33.861	0.64994	-137.32
1.8	0.95426	-171.51	3.2003	50.392	0.011401	-35.619	0.66885	-138.51
1.9	0.956	-171.89	2.9648	48.503	0.011122	-37.283	0.68662	-139.66
2	0.95767	-172.24	2.7539	46.699	0.010846	-38.863	0.70331	-140.77
2.1	0.95926	-172.56	2.5641	44.976	0.010574	-40.36	0.71895	-141.85
2.2	0.96079	-172.86	2.3927	43.33	0.010307	-41.781	0.73359	-142.89
2.3	0.96225	-173.14	2.2375	41.754	0.010045	-43.13	0.74731	-143.9
2.4	0.96364	-173.41	2.0963	40.247	0.0097893	-44.411	0.76014	-144.87
2.5	0.96496	-173.65	1.9677	38.802	0.0095396	-45.629	0.77216	-145.8
2.6	0.96621	-173.89	1.8502	37.416	0.0092961	-46.787	0.78341	-146.7
2.7	0.9674	-174.11	1.7425	36.087	0.0090588	-47.888	0.79393	-147.57
2.8	0.96853	-174.32	1.6437	34.811	0.0088279	-48.935	0.80379	-148.4
2.9	0.96959	-174.52	1.5528	33.584	0.0086033	-49.933	0.81303	-149.2
3	0.9706	-174.71	1.4689	32.404	0.0083851	-50.882	0.82169	-149.97
3.2	0.97246	-175.07	1.3198	30.177	0.0079668	-52.647	0.83741	-151.43
3.4	0.97412	-175.4	1.1918	28.105	0.0075724	-54.252	0.85128	-152.78
3.6	0.97561	-175.71	1.081	26.175	0.0072005	-55.712	0.86354	-154.03
3.8	0.97695	-175.99	0.98461	24.373	0.0068495	-57.041	0.87439	-155.19
4	0.97815	-176.26	0.90032	22.681	0.0065185	-58.254	0.88404	-156.27
4.2	0.97923	-176.5	0.82619	21.091	0.0062057	-59.361	0.89265	-157.28
4.4	0.9802	-176.74	0.76072	19.592	0.0059099	-60.372	0.90034	-158.21
4.6	0.98108	-176.96	0.70262	18.175	0.0056299	-61.295	0.90725	-159.09
4.8	0.98187	-177.17	0.65085	16.832	0.0053644	-62.137	0.91345	-159.91
5	0.98259	-177.36	0.60454	15.558	0.0051122	-62.903	0.91905	-160.68
5.2	0.98324	-177.55	0.56297	14.343	0.0048724	-63.603	0.92411	-161.41
5.4	0.98383	-177.73	0.52552	13.185	0.0046441	-64.237	0.9287	-162.09
5.6	0.98437	-177.91	0.49168	12.078	0.0044262	-64.81	0.93287	-162.73
5.8	0.98487	-178.07	0.46099	11.017	0.0042182	-65.327	0.93667	-163.34
6	0.98532	-178.23	0.4331	9.9987	0.0040191	-65.79	0.94015	-163.92

To download the s-parameters in s2p format, go to the CGHV60075D5 Product Page and click the documentation tab.

## Part Number System

**CGHV60075D5**

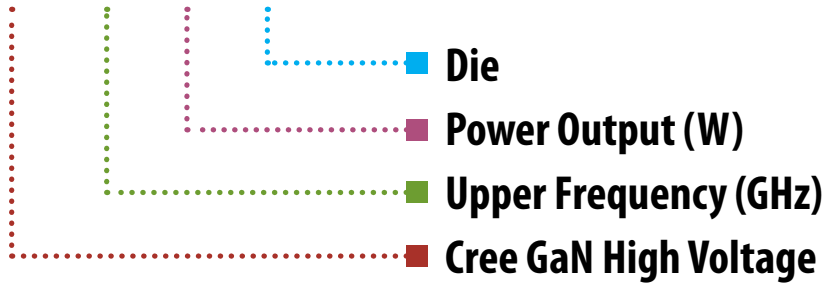

Parameter	Value	Units
Upper Frequency <sup>1</sup>	6.0	GHz
Power Output	75	W
Package	Bare Die	-

**Table 1.**

**Note<sup>1</sup>:** Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz

**Table 2.**



## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for its use or for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications, and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended, or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death, or in applications for the planning, construction, maintenance or direct operation of a nuclear facility. CREE and the CREE logo are registered trademarks of Cree, Inc.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, NC 27703  
[www.cree.com/rf](http://www.cree.com/rf)

Sarah Miller  
Marketing  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Marketing  
Cree, RF Components  
1.919.407.7816

Tom Dekker  
Sales Director  
Cree, RF Components  
1.919.407.5639

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)