





**Max. high capacity 10A
in a slim SIL package**

**PhotoMOS®
Power 1 Form A
DC High Capacity (AQZ19O)**



RoHS compliant

FEATURES

1. High capacity type power PhotoMOS.

Can switch a wide range of currents and voltages. Can control various types of loads, from very small loads to a max. 10 A DC current for sequencers, motors, and lamps.

2. Low on-resistance and high sensitivity.

Low on-resistance of less than Typ. 8 mΩ (AQZ192). High sensitivity LED operate current of Typ. 0.7 mA.

3. 4-pin SIL type

(Thickness: Max. 4.5 mm .177 inch)
(L) 24.5 mm × (W) 4.5 mm × (H) 20.5 mm
(L) .965 inch × (W) .177 inch × (H) .807 inch.

4. Low-level off state leakage current of max. 10 µA

5. Controls low-level analog signals
The triac, photocoupler, or SSR cannot be used to control signals of less than several hundred mV. The high capacity type power PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

TYPICAL APPLICATIONS

- Photovoltaic power generation system
- Battery system
- Measuring instruments
- Power supply unit
- Industrial machines

TYPES

	Output rating*		Package	Part No.	Packing quantity	
	Load voltage	Load current			Inner carton	Outer carton
DC only	60 V	10 A	SIL4-pin	AQZ192	20 pcs	500 pcs
	200 V	5 A		AQZ197		

Note: Please refer to the cautions for use regarding the recommended operation load voltage.

*Load voltage and load current of DC type: DC

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


	Item	Symbol	AQZ192	AQZ197	Remarks
Input	LED forward current	I _F	50 mA		
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A		f = 100Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (DC)	V _L	60 V	200 V	
	Continuous load current (DC)	I _L	10 A	5 A	
	Peak load current	I _{peak}	30 A	15 A	100 ms (1shot), V _L = DC
	Power dissipation	P _{out}	2.0 W		
Total power dissipation		P _T	2.0 W		
I/O isolation voltage		V _{iso}	3,000 Vrms		
Ambient temperature	Operating	T _{opr}	-40 to +85°C	-40 to +185°F	(Non-icing at low temperatures)
	Storage	T _{stg}	-40 to +100°C	-40 to +212°F	

Power 1 Form A DC High Capacity (AQZ19)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ192	AQZ197	Condition
Input	LED operate current	Typical	I_{Fon}	0.7 mA	$I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
		Maximum		3.0 mA	
	LED turn off current	Minimum	I_{Foff}	0.2 mA	
		Typical		0.5 mA	
Output	LED dropout voltage	Typical	V_F	1.35 V (1.17 V at $I_F = 10 \text{ mA}$)	$I_F = 50 \text{ mA}$
		Maximum		1.5 V	
	On resistance	Typical	R_{on}	8 mΩ	$I_F = 10 \text{ mA}, I_L = \text{Max.}$ Within 1 s
		Maximum		15 mΩ	
Transfer characteristics	Off state leakage current	Maximum	I_{Leak}	10 μA	$I_F = 0 \text{ mA}, V_L = \text{Max.}$
	Turn on time*	Typical	T_{on}	1.0 ms	$I_F = 10 \text{ mA}, I_L = 100 \text{ mA}, V_L = 10 \text{ V}$
		Maximum		3.0 ms	
	Turn off time*	Typical	T_{off}	0.11 ms	
		Maximum		1.0 ms	
	I/O capacitance	Typical	C_{iso}	1.3 pF	$f = 1 \text{ MHz}, V_B = 0 \text{ V}$
		Maximum		3.0 pF	
	Initial I/O isolation resistance	Minimum	R_{iso}	1,000 MΩ	500 V DC
	Max. operating frequency	Maximum	—	0.5 cps	$I_F = 10 \text{ mA}$, Duty factor = 50%, $V_L = \text{Max.}, I_L = \text{Max.}$

*Turn on/off time

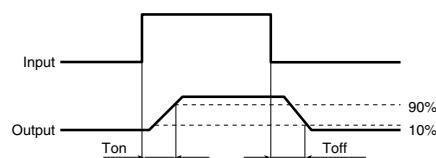

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
LED current		I_F	10	30	mA
AQZ192	Load voltage (Peak AC)	V_L	—	48	V
	Continuous load current	I_L	—	10	A
AQZ197	Load voltage (Peak AC)	V_L	—	160	V
	Continuous load current	I_L	—	5	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

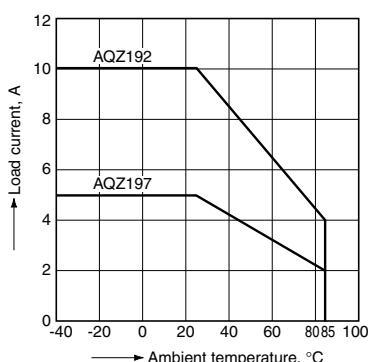

2. Load current vs. ambient temperature characteristics in adjacent mounting

Sample: All types


I_L : Load current;
 I_L (max.): Maximum continuous load current

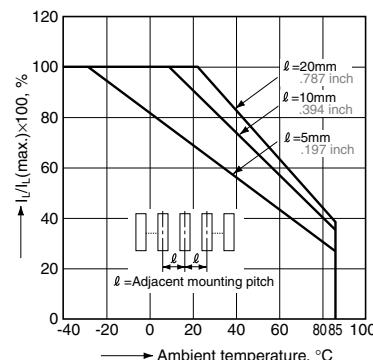

3. On resistance vs. ambient temperature characteristics


LED current: 10 mA;

Continuous load current: 10 A DC (AQZ192)
5 A DC (AQZ197)

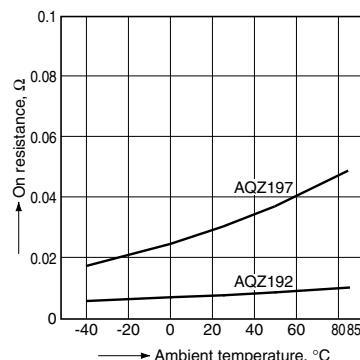


4. Turn on time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

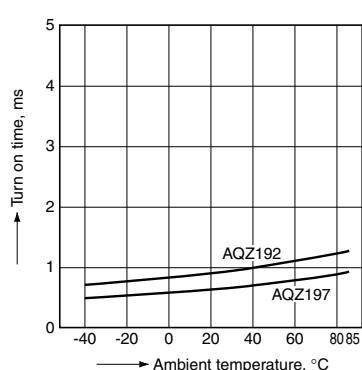


5. Turn off time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

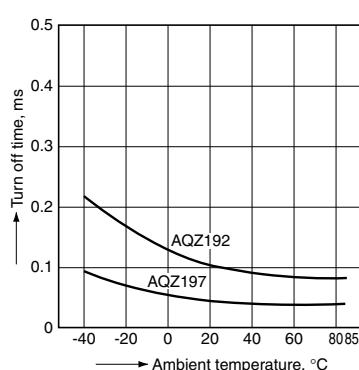


6. LED operate current vs. ambient temperature characteristics

Sample: All types
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

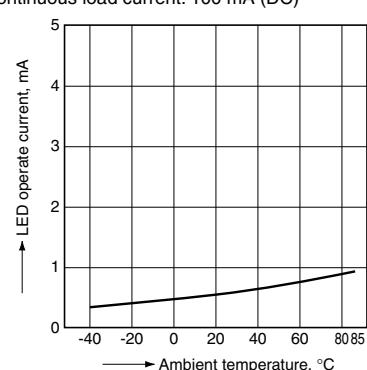


7. LED turn off current vs. ambient temperature characteristics

Sample: All types
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)

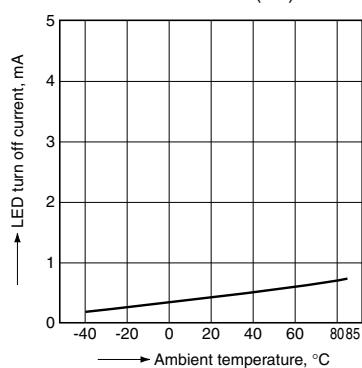


8. LED dropout voltage vs. ambient temperature characteristics

Sample: All types
LED current: 5 to 50 mA

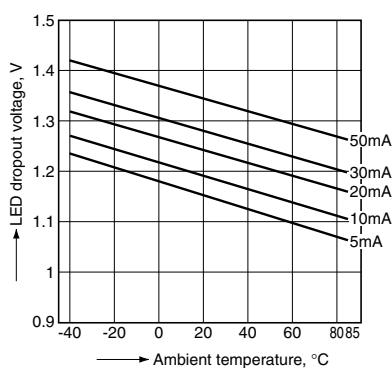


9. Current vs. voltage characteristics of output at MOS portion

Ambient temperature: 25°C 77°F




10. Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

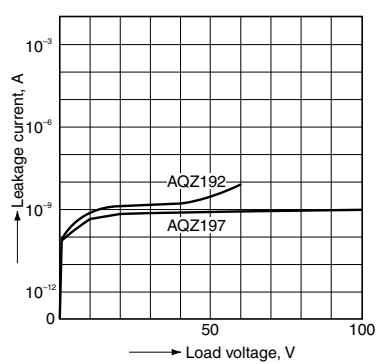


11. Turn on time vs. LED forward current characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

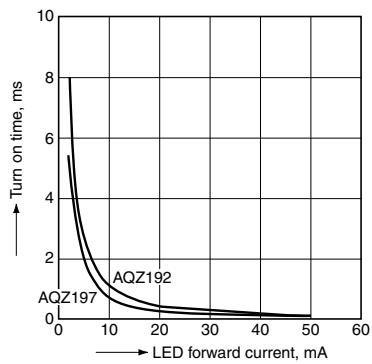

12. Turn off time vs. LED forward current characteristics

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

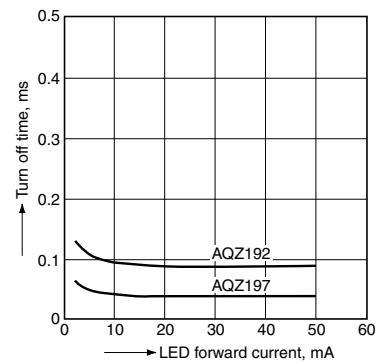


Power 1 Form A DC High Capacity (AQZ19)

13. Max. operating frequency vs. load voltage/current characteristics


Sample: All types; LED current: 10 mA;
Ambient temperature: 25°C 77°F

V_L : Load voltage, V_L (Max.): Max. rated load voltage
 I_L : Load current, I_L (Max.): Max. rated continuous load current

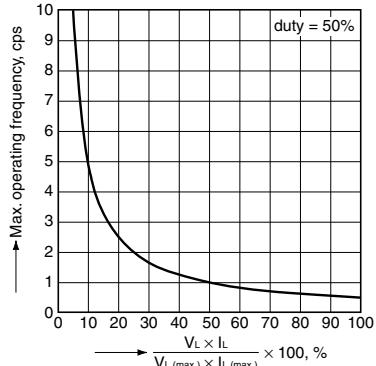

14. Output capacitance vs. applied voltage

Characteristics
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

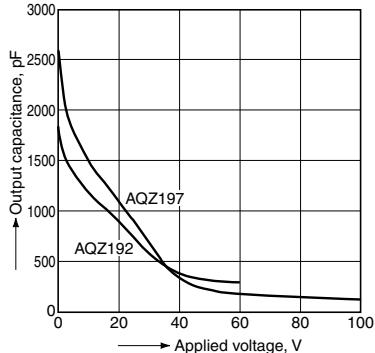


DIMENSIONS (mm inch)

CAD




The CAD data of the products with a **CAD** mark can be downloaded from: <http://industrial.panasonic.com/ac/e/>

External dimensions

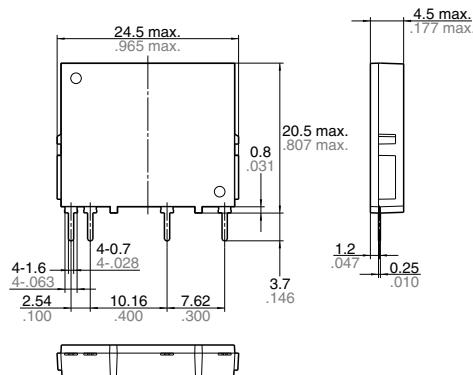

General tolerance: ±0.2 ±.008

PC board pattern (Bottom view)



Tolerance: ±0.1 ±.004

Schematic

Input	Output
- + ○ ○	- + ○ ○

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQZ197](#)

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru