

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850130024](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612 Header, Through Hole, Vertical, Style R Reverse, 0.6µm (24µ") Selective Gold (Au), 96 Circuits, Lead free

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General


Product Family Backplane Connectors
Series [85013](#)
Application Backplane
Comments No Mounting Clips. No Flux Proof
Component Type PCB Header
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style R

Physical

Circuits (Loaded) 96
Circuits (maximum) 96
Circuits Detail Rows A, B, & C
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Number of Columns 32
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Vertical
PC Tail Length (in) 0.524 In
PC Tail Length (mm) 13.30 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.062 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Plating min: Mating (µin) 24
Plating min: Mating (µm) 0.6
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C

Electrical

Current - Maximum per Contact 1A
Data Rate 622.0 Mbps

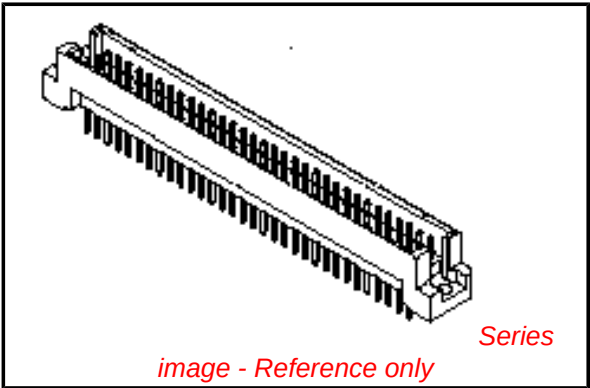

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[85013Series](#)

Mates With
[85042](#) DIN 41612 Receptacle . [85052](#) DIN
41612 Header

Voltage - Maximum

1000V (RMS)

Material Info

Reference - Drawing Numbers

Sales Drawing

SD-85013-0024, SDA-85013-0001, SDA-85013-0024

This document was generated on 05/17/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

A = 96 STANDARD CONTACTS L = 13.3


A	G2/0	a1-32 b1-32 c1-32
CONTACT SYMBOL	PERFORMANCE LEVEL	CONTACT POSITION NUMBER

2d-border.DGN REV A
96/06/12 LEVEL 6







Section A - B
5:1

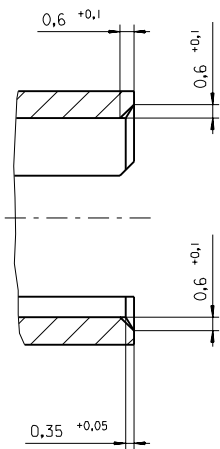

View X
5:1

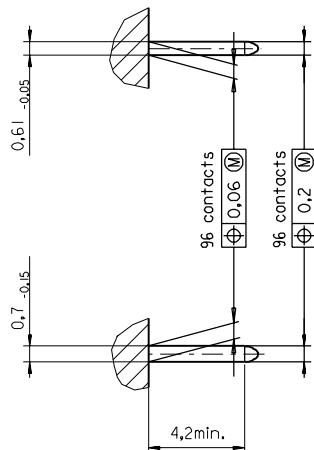

View W
5:1

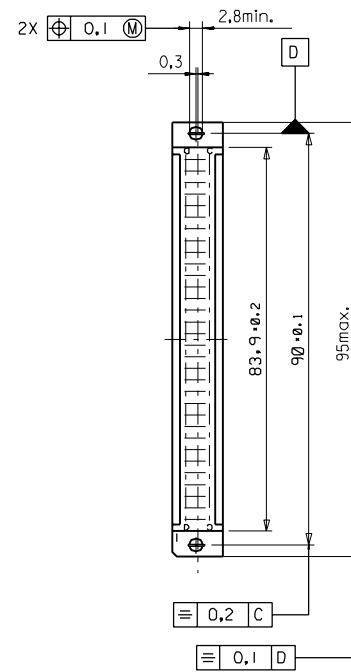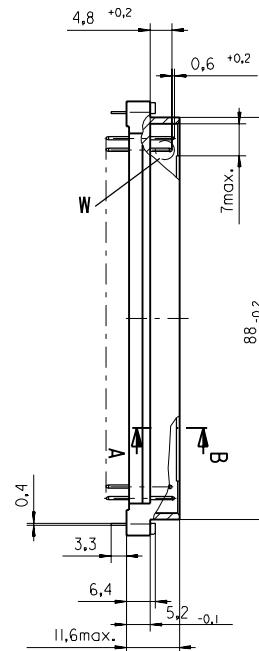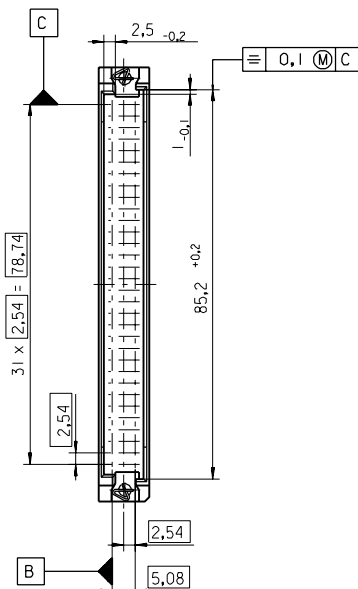

FIRST ANGLE PROJECTION

REVISE ONLY ON CAD SYSTEM

SH. REV.

UNLESS OTHERWISE SPECIFIED
TOLERANCES: ANGULAR $\pm 2^\circ$

	INCH	METRIC
3 PLACE	$\pm .$	$\pm$
2 PLACE	$\pm .$	$\pm$
1 PLACE	$\pm .$	$\pm$

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☒ MM
☐ IN.

EQUIVALENT DIMENSION ☐ MM
☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS
THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG
BY

SIGN

Ca

CHK'D
BY

SIGN

KN

APP'D
BY

SIGN

SCALE

1:1

CAD/CAM PROJECT NAME

85013000
611

TITLE

96 pos. Male connector

acc. DIN 41612 Style R

Dimensions

MOLEX EUROPE

SHEET NO. DATE

1 OF 95/06/07

PART NO.

SDA-85013-0001

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO
MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SIZE

B

SIZE

SIZE

SIZE

SIZE

SIZE

SIZE

SIZE

SIZE

View on mating side

[illegible]

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

A = 96 standard contacts L=13, 3

Marking	Standard
Performance level	G2/0 = Contact area perform. level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85013-0001 sht.1
Technical Data	PS-85013-0001

first release see ECN No. 1868	REVISIONS	FOR PREVIOUS REVISIONS SEE MRI LIST				UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 2^\circ$ INCH METRIC	DRWG BY Cd	SIGN	CAD/CAM PROJECT NAME	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	REV.			
		3 PLACE $\pm$.	2 PLACE $\pm$.	1 PLACE $\pm$.	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							DESIGN DIMENSION ☐ MM ☐ IN.	EQUIVALENT DIMENSION ☐ MM ☐ IN.	IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY
A	LTR	REVISIONS	FOR PREVIOUS REVISIONS SEE MRI LIST	UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR $\pm 2^\circ$ INCH METRIC	DRWG BY Cd	SIGN	SCALE	PART NO.	85013-0024	DWG NO.	SDA-85013-0024	SIZE A		
 MOLEX EUROPE SHEET NO. 1 OF 1 DATE 95/06/07														
TITLE 96 pos. Male connector acc. DIN 41612 style R contacts arrangement														

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru