
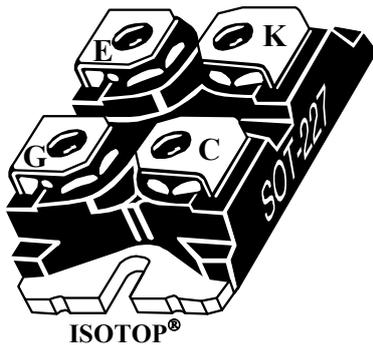


**ISOTOP® Boost chopper  
High speed Trench + Field Stop IGBT4  
Power Module**

**$V_{CES} = 650V$   
 $I_C = 100A^* @ T_c = 80^\circ C$**

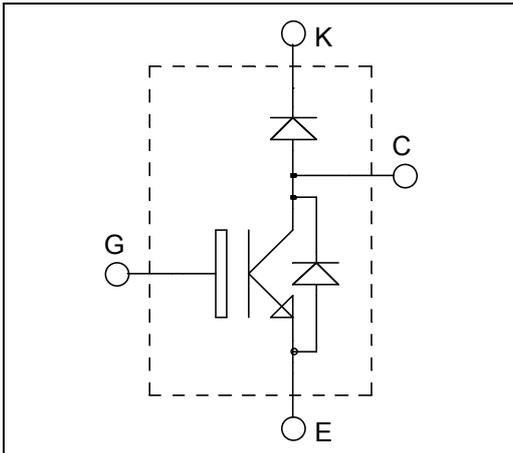

#### Application

- AC and DC motor control
- Switched Mode Power Supplies
- Power Factor Correction
- Brake switch

#### Features

- **High speed Trench + Field Stop IGBT 4**
  - Low voltage drop
  - Low leakage current
  - Low switching losses
- ISOTOP® Package (SOT-227)
- Very low stray inductance

#### Benefits

- Low conduction losses
- Stable temperature behavior
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive  $T_C$  of  $V_{CEsat}$
- RoHS Compliant

**All ratings @  $T_j = 25^\circ C$  unless otherwise specified**

#### Absolute maximum ratings

| Symbol    | Parameter                    | Max ratings        | Unit |
|-----------|------------------------------|--------------------|------|
| $V_{CES}$ | Collector - Emitter Voltage  | 650                | V    |
| $I_C$     | Continuous Collector Current | $T_C = 25^\circ C$ | 165* |
|           |                              | $T_C = 80^\circ C$ | 100* |
| $I_{CM}$  | Pulsed Collector Current     | 270                | A    |
| $V_{GE}$  | Gate - Emitter Voltage       | $\pm 20$           | V    |
| $P_D$     | Power Dissipation            | 430                | W    |

\* Specification of IGBT device but output current must be limited due to size of output pins.

 **CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

**Electrical Characteristics**

| Symbol               | Characteristic                       | Test Conditions   | Min | Typ                           | Max | Unit |
|----------------------|--------------------------------------|---|-----|-------------------------------|-----|------|
| I <sub>CEs</sub>     | Zero Gate Voltage Collector Current  | V <sub>GE</sub> = 0V, V <sub>CE</sub> = 650V                |     |                               | 50  | μA   |
| V <sub>CE(sat)</sub> | Collector Emitter Saturation Voltage | V <sub>GE</sub> = 15V<br>I <sub>C</sub> = 100A              | 1.4 | T <sub>j</sub> = 25°C<br>1.85 | 2.3 | V    |
|                      |                                      | T <sub>j</sub> = 150°C                                      |     | 2.2                           |     |      |
| V <sub>GE(th)</sub>  | Gate Threshold Voltage               | V <sub>GE</sub> = V <sub>CE</sub> , I <sub>C</sub> = 1.6 mA | 4.2 | 5.1                           | 5.6 | V    |
| I <sub>GES</sub>     | Gate – Emitter Leakage Current       | V <sub>GE</sub> = 20V, V <sub>CE</sub> = 0V                 |     |                               | 150 | nA   |

**Dynamic Characteristics**

| Symbol              | Characteristic                      | Test Conditions  | Min                    | Typ  | Max  | Unit |
|---------------------|-------------------------------------|--|------------------------|------|------|------|
| C <sub>ies</sub>    | Input Capacitance                   | V <sub>GE</sub> = 0V<br>V <sub>CE</sub> = 25V<br>f = 1MHz  |                        | 6100 |      | pF   |
| C <sub>oes</sub>    | Output Capacitance                  |  |                        | 232  |      |      |
| C <sub>res</sub>    | Reverse Transfer Capacitance        |  |                        | 180  |      |      |
| Q <sub>G</sub>      | Gate charge                         | V <sub>GE</sub> = 15V, I <sub>C</sub> = 100A<br>V <sub>CE</sub> = 480V   |                        | 630  |      | nC   |
| T <sub>d(on)</sub>  | Turn-on Delay Time                  | Inductive Switching (25°C)<br>V <sub>GE</sub> = ±15V<br>V <sub>Bus</sub> = 400V<br>I <sub>C</sub> = 100A<br>R <sub>G</sub> = 3.6Ω  |                        | 19   |      | ns   |
| T <sub>r</sub>      | Rise Time                           |  |                        | 33   |      |      |
| T <sub>d(off)</sub> | Turn-off Delay Time                 |  |                        | 197  |      |      |
| T <sub>f</sub>      | Fall Time                           |  |                        | 21   |      |      |
| T <sub>d(on)</sub>  | Turn-on Delay Time                  | Inductive Switching (150°C)<br>V <sub>GE</sub> = ±15V<br>V <sub>Bus</sub> = 400V<br>I <sub>C</sub> = 100A<br>R <sub>G</sub> = 3.6Ω |                        | 19   |      | ns   |
| T <sub>r</sub>      | Rise Time                           |  |                        | 29   |      |      |
| T <sub>d(off)</sub> | Turn-off Delay Time                 |  |                        | 227  |      |      |
| T <sub>f</sub>      | Fall Time                           |  |                        | 22   |      |      |
| E <sub>on</sub>     | Turn on Energy                      | V <sub>GE</sub> = ±15V<br>V <sub>Bus</sub> = 400V<br>I <sub>C</sub> = 100A   | T <sub>j</sub> = 150°C | 2.4  |      | mJ   |
| E <sub>off</sub>    | Turn off Energy                     | R <sub>G</sub> = 3.6Ω  |                        | 2    |      |      |
| R <sub>G</sub>      | Integrated gate resistor            |  |                        | 2    |      | Ω    |
| I <sub>sc</sub>     | Short Circuit data                  | V <sub>GE</sub> ≤ 15V ; V <sub>Bus</sub> = 400V<br>t <sub>p</sub> ≤ 5μs ; T <sub>j</sub> = 150°C                                   |                        | 700  |      | A    |
| R <sub>thJC</sub>   | Junction to Case Thermal Resistance |  |                        |      | 0.35 | °C/W |

**Chopper diode ratings and characteristics**

| Symbol            | Characteristic                      | Test Conditions   | Min                          | Typ | Max  | Unit |
|-------------------|-------------------------------------|---|------------------------------|-----|------|------|
| V <sub>RRM</sub>  | Peak Repetitive Reverse Voltage     |   |                              |     | 650  | V    |
| I <sub>RM</sub>   | Reverse Leakage Current             | V <sub>R</sub> = 650V   |                              |     | 50   | μA   |
| I <sub>F</sub>    | DC Forward Current                  | T <sub>c</sub> = 60°C   |                              | 50  |      | A    |
| V <sub>F</sub>    | Diode Forward Voltage               | I <sub>F</sub> = 50A<br>V <sub>GE</sub> = 0V                      | T <sub>j</sub> = 25°C<br>1.6 | 2   |      | V    |
|                   |                                     | T <sub>j</sub> = 150°C  | 1.5                          |     |      |      |
| t <sub>rr</sub>   | Reverse Recovery Time               | I <sub>F</sub> = 50A<br>V <sub>R</sub> = 300V<br>di/dt = 1800A/μs | T <sub>j</sub> = 25°C        | 100 |      | ns   |
|                   |                                     |   | T <sub>j</sub> = 150°C       | 150 |      |      |
| Q <sub>rr</sub>   | Reverse Recovery Charge             |   | T <sub>j</sub> = 25°C        | 2.6 |      | μC   |
|                   |                                     |   | T <sub>j</sub> = 150°C       | 5.4 |      |      |
| E <sub>rr</sub>   | Reverse Recovery Energy             | T <sub>j</sub> = 25°C   | 0.6                          |     | mJ   |      |
|                   |                                     | T <sub>j</sub> = 150°C  | 1.2                          |     |      |      |
| R <sub>thJC</sub> | Junction to Case Thermal Resistance |   |                              |     | 1.14 | °C/W |


## IGBT parallel diode ratings and characteristics

| Symbol            | Characteristic                      | Test Conditions   | Min                    | Typ  | Max | Unit |
|-------------------|-------------------------------------|---|------------------------|------|-----|------|
| V <sub>RRM</sub>  | Peak Repetitive Reverse Voltage     |   |                        |      | 650 | V    |
| I <sub>RM</sub>   | Reverse Leakage Current             | V <sub>R</sub> = 650V   |                        |      | 50  | μA   |
| I <sub>F</sub>    | DC Forward Current                  | T <sub>c</sub> = 60°C   |                        | 20   |     | A    |
| V <sub>F</sub>    | Diode Forward Voltage               | I <sub>F</sub> = 20A<br>V <sub>GE</sub> = 0V                      | T <sub>j</sub> = 25°C  | 1.6  | 2   | V    |
|                   |                                     |   | T <sub>j</sub> = 150°C | 1.5  |     |      |
| t <sub>rr</sub>   | Reverse Recovery Time               | I <sub>F</sub> = 20A<br>V <sub>R</sub> = 300V<br>di/dt = 1600A/μs | T <sub>j</sub> = 25°C  | 100  |     | ns   |
|                   |                                     |   | T <sub>j</sub> = 150°C | 150  |     |      |
| Q <sub>rr</sub>   | Reverse Recovery Charge             | I <sub>F</sub> = 20A<br>V <sub>R</sub> = 300V<br>di/dt = 1600A/μs | T <sub>j</sub> = 25°C  | 1.1  |     | μC   |
|                   |                                     |   | T <sub>j</sub> = 150°C | 2.3  |     |      |
| E <sub>rr</sub>   | Reverse Recovery Energy             | I <sub>F</sub> = 20A<br>V <sub>R</sub> = 300V<br>di/dt = 1600A/μs | T <sub>j</sub> = 25°C  | 0.23 |     | mJ   |
|                   |                                     |   | T <sub>j</sub> = 150°C | 0.50 |     |      |
| R <sub>thJC</sub> | Junction to Case Thermal Resistance |   |                        |      | 2.6 | °C/W |

## Thermal and package characteristics








| Symbol                            | Characteristic   | Min  | Typ  | Max                      | Unit |
|-----------------------------------|--|------|------|--------------------------|------|
| V <sub>ISOL</sub>                 | RMS Isolation Voltage, any terminal to case t = 1 min, 50/60Hz               | 2500 |      |                          | V    |
| T <sub>J</sub> , T <sub>STG</sub> | Storage Temperature Range  | -55  |      | 175                      | °C   |
| T <sub>JOP</sub>                  | Recommended junction temperature under switching conditions                  | -55  |      | T <sub>Jmax</sub><br>-25 |      |
| T <sub>L</sub>                    | Max Lead Temp for Soldering: 0.063" from case for 10 sec                     |      |      | 300                      |      |
| Torque                            | Mounting torque (Mounting = 8-32 or 4mm Machine and terminals = 4mm Machine) |      |      | 1.5                      | N.m  |
| Wt                                | Package Weight   |      | 29.2 |                          | g    |

## SOT-227 (ISOTOP®) Package Outline

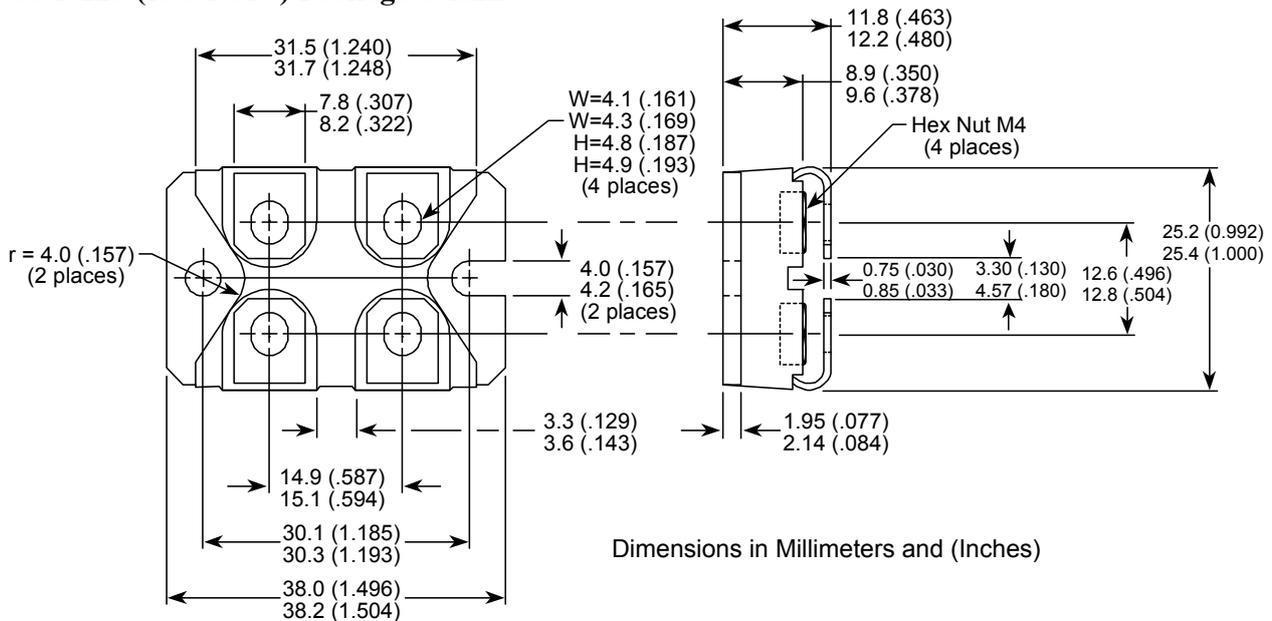


ISOTOP® is a registered trademark of ST Microelectronics NV


## IGBT Typical Performance Curves

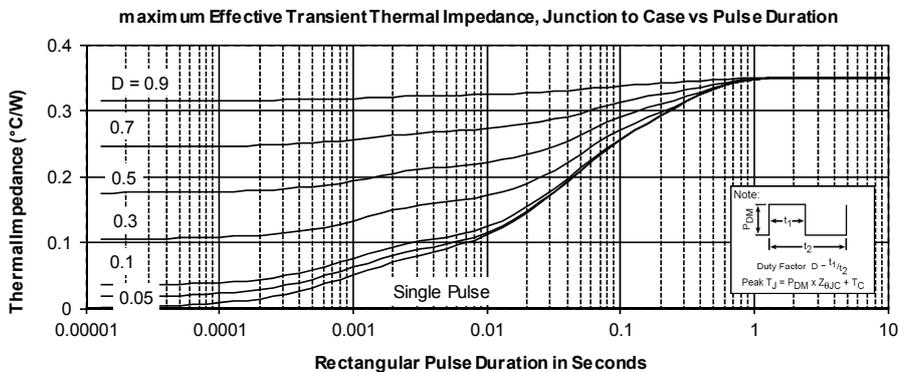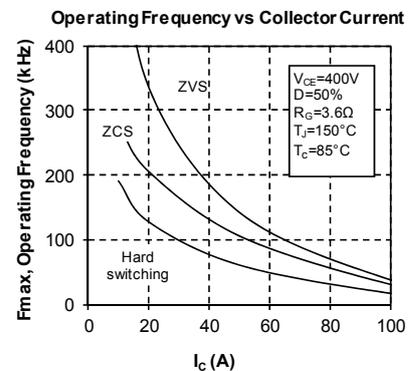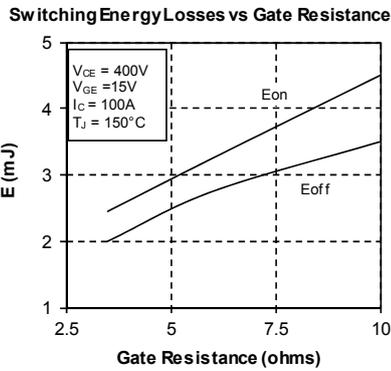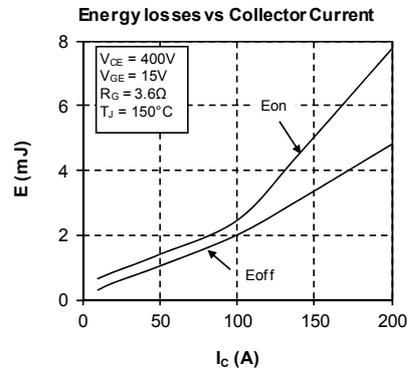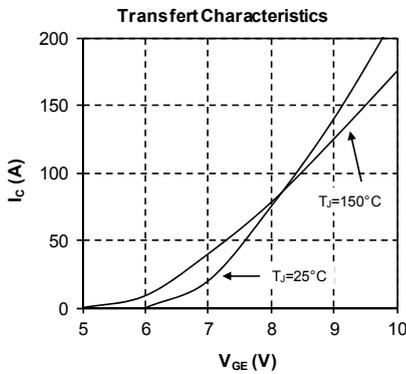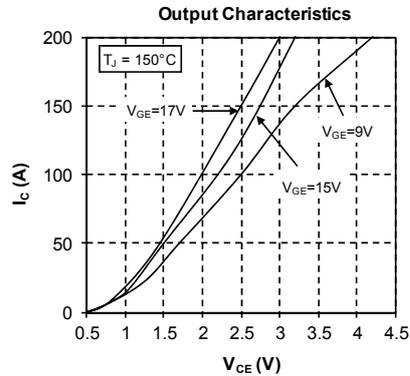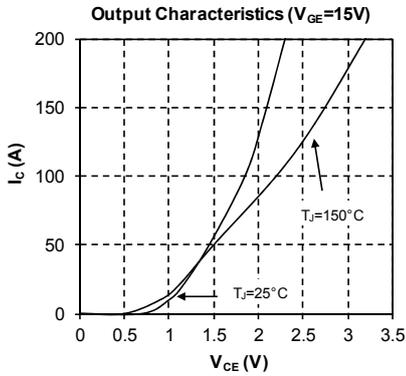

## Chopper diode Typical Performance Curves

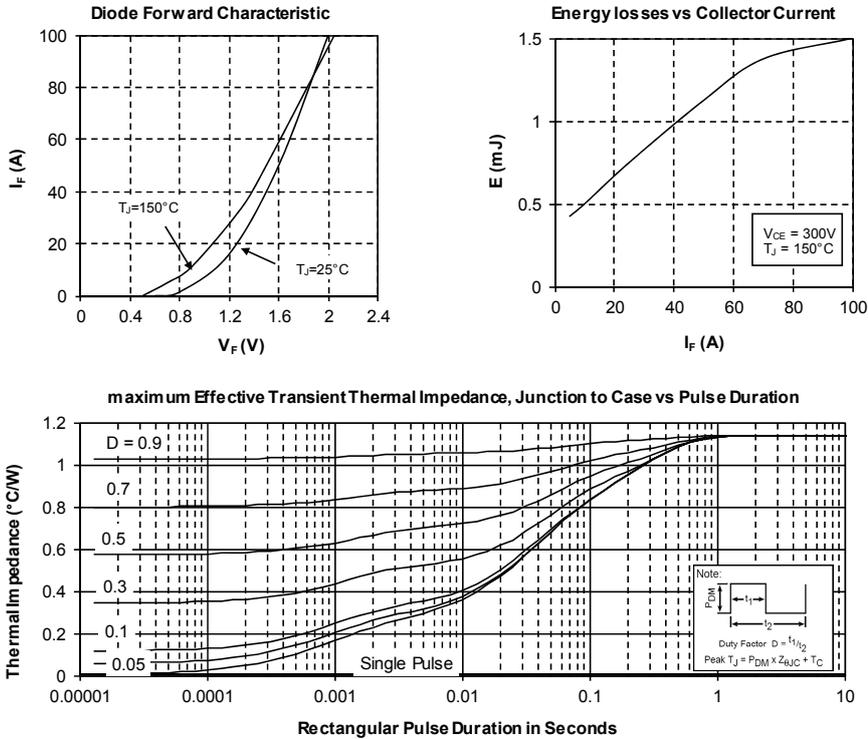

## IGBT parallel diode Typical Performance Curves

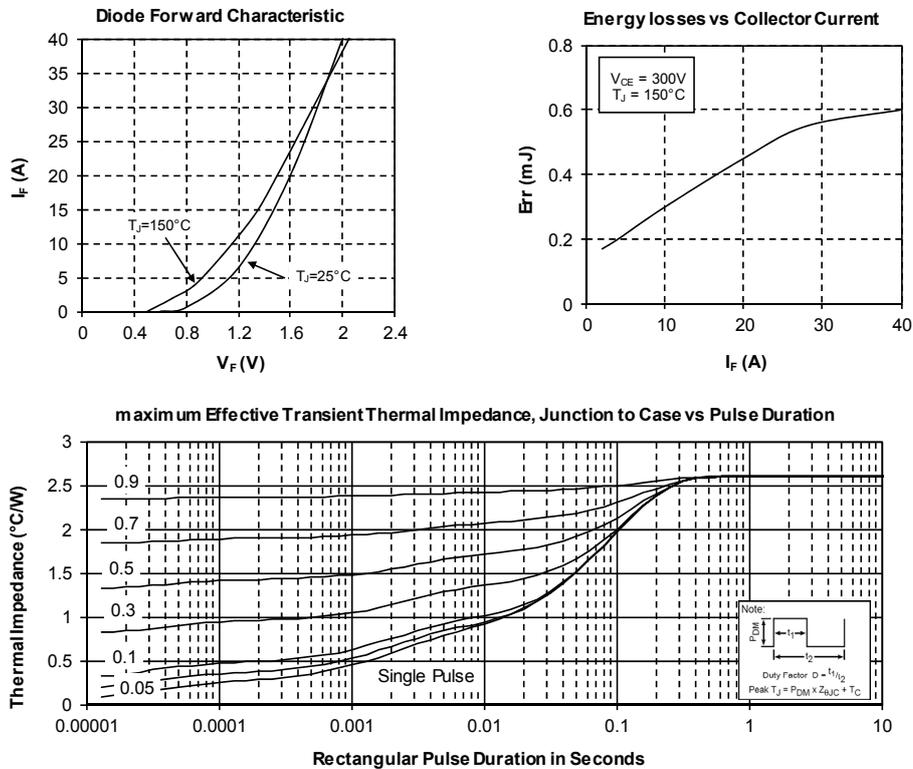

---

DISCLAIMER

The information contained in the document (unless it is publicly available on the Web without access restrictions) is PROPRIETARY AND CONFIDENTIAL information of Microsemi and cannot be copied, published, uploaded, posted, transmitted, distributed or disclosed or used without the express duly signed written consent of Microsemi. If the recipient of this document has entered into a disclosure agreement with Microsemi, then the terms of such Agreement will also apply. This document and the information contained herein may not be modified, by any person other than authorized personnel of Microsemi. No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the information, either expressly, by implication, inducement, estoppels or otherwise. Any license under such intellectual property rights must be approved by Microsemi in writing signed by an officer of Microsemi.

Microsemi reserves the right to change the configuration, functionality and performance of its products at anytime without any notice. This product has been subject to limited testing and should not be used in conjunction with life-support or other mission-critical equipment or applications. Microsemi assumes no liability whatsoever, and Microsemi disclaims any express or implied warranty, relating to sale and/or use of Microsemi products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Any performance specifications believed to be reliable but are not verified and customer or user must conduct and complete all performance and other testing of this product as well as any user or customers final application. User or customer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the customer's and user's responsibility to independently determine suitability of any Microsemi product and to test and verify the same. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the User. Microsemi specifically disclaims any liability of any kind including for consequential, incidental and punitive damages as well as lost profit. The product is subject to other terms and conditions which can be located on the web at <http://www.microsemi.com/legal/tnc.asp>

Life Support Application

Seller's Products are not designed, intended, or authorized for use as components in systems intended for space, aviation, surgical implant into the body, in other applications intended to support or sustain life, or for any other application in which the failure of the Seller's Product could create a situation where personal injury, death or property damage or loss may occur (collectively "Life Support Applications").

Buyer agrees not to use Products in any Life Support Applications and to the extent it does it shall conduct extensive testing of the Product in such applications and further agrees to indemnify and hold Seller, and its officers, employees, subsidiaries, affiliates, agents, sales representatives and distributors harmless against all claims, costs, damages and expenses, and attorneys' fees and costs arising, directly or indirectly, out of any claims of personal injury, death, damage or otherwise associated with the use of the goods in Life Support Applications, even if such claim includes allegations that Seller was negligent regarding the design or manufacture of the goods.

Buyer must notify Seller in writing before using Seller's Products in Life Support Applications. Seller will study with Buyer alternative solutions to meet Buyer application specification based on Sellers sales conditions applicable for the new proposed specific part.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[APT100GLQ65JU2](#)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)