


CRYSTAL CONTROLLED OSCILLATORS

2.5V LVCMOS SURFACE MOUNT 7.5x5mm CRYSTAL CLOCK OSCILLATOR



5112, 5122, 5132

ABSOLUTE MAXIMUM RATINGS

TABLE 1.0

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Storage Temperature		-55	-	125	°C	
Supply Voltage	(Vcc)	-0.5	-	7.0	Vdc	

MODEL SPECIFICATIONS:

TABLE 2.0

MODEL 5112

Frequency Range	(Fo)	1.8	-	50	MHz	
Frequency Tolerance:		-25	-	25	ppm	1

MODEL 5122

Frequency Range	(Fo)	1.8	-	50	MHz	
Frequency Tolerance:		-50	-	50	ppm	1

MODEL 5132

Frequency Range	(Fo)	1.8	-	50	MHz	
Frequency Tolerance:		-100	-	100	ppm	1

OPERATING SPECIFICATIONS

TABLE 3.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Operating Temperature Range		-10	-	70	°C	
Supply Voltage	(Vdd)	2.375	2.5	2.625	Vdc	
Supply Current	(Icc)	-	-	10	mA	
		-	-	12	mA	

INPUT CHARACTERISTICS

TABLE 4.0

Enable Voltage	(Vih)	70%Vcc	-	-	Vdc	2
Disable Voltage	(Vil)	-	-	30%Vcc	Vdc	
Enable Time		-	-	10	ms	
Disable Time		-	-	150	ns	
Output Disable Current	(Icc)	-	-	10	uA	

LVCMOS OUTPUT CHARACTERISTICS

TABLE 5.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
LOAD		-	-	15	pF	
Voltage (High)	(Voh)	2.14	-	-	Vdc	
(Low)	(Vol)	-	-	0.26	Vdc	
Current (High)	(Ioh)	-4	-	-	mA	
(Low)	(Iol)	-	-	4	mA	
Duty Cycle at 50% of Vcc		45	50	55	%	
Rise / Fall Time 10% to 90%		-	-	5	ns	
Start-Up Time		-	-	10	ms	
Period Jitter		-	3	5	ps RMS	
Phase Jitter (BW=12kHz to 20MHz)		-	0.5	1	ps RMS	


PACKAGE CHARACTERISTICS

TABLE 6.0

Package	Hermetically sealed ceramic package and metal cover
Soldering Process	RoHS Compliant, lead free. See solder profile on page 2.

Note:

- Inclusive of calibration @ 25°C, frequency vs. temperature stability, supply voltage change, load change, shock and vibration, 10 years aging.

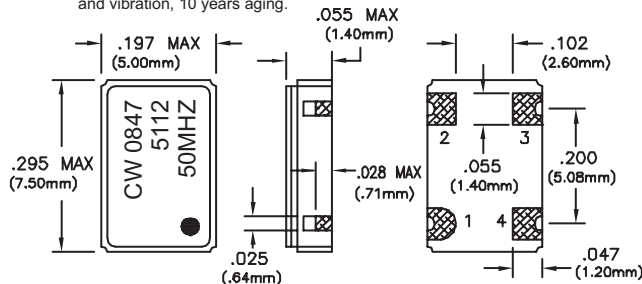

PAD	CONNECTION
1	ENABLE/DISABLE
2	GROUND
3	OUTPUT
4	Vcc

Dimensional Tolerance: ±.02" (.508mm)
±.005" (.127mm)

DESCRIPTION

The Connor-Winfield 5112, 5122, 5132 are 2.5V LVCMOS, Surface Mount, Fixed Frequency Crystal Oscillators (XO) designed for use in all applications requiring precision clocks. This oscillator features low stand-by current (10uA) when the output is disabled. The surface mount package is designed for high-density mounting and is optimum for mass production.

FEATURES

1.8 to 80 Mhz

2.5V OPERATION

TRI-STATE ENABLE / DISABLE FUNCTION

OVERALL FREQUENCY TOLERANCE:

5112 ±25ppm

5122 ±50ppm

5132 ±100ppm

TEMPERATURE RANGE: -10 to 70°C

POWER SAVING STAND-BY CURRENT

CERAMIC SURFACE MOUNT PACKAGE

TAPE AND REEL PACKAGING

RoHS COMPLIANT / LEAD FREE

ORDERING INFORMATION

5112 - 050.0M

CLOCK
SERIES

CENTER
FREQUENCY

Specifications subject to change without notice.

CRYSTAL CONTROLLED OSCILLATORS

ENVIRONMENTAL CHARACTERISTICS

TEMPERATURE CYCLE:

The specimen shall meet electrical characteristics after tested 5 cycles of $-55^{\circ}\text{C}/30\text{ min}$ & $+125^{\circ}\text{C}/30\text{ min}$.

HERMETICAL

No bubbles appear in Fluorinert (FC-43) at $125^{\circ}\text{C} \pm 5^{\circ}\text{C}$, for 5 minutes.

SOLVENT RESISTANCE:

Marking will withstand immersion in Isopropyl Alcohol
or Trichloroethylene.

SOLDERING

GENERAL CONDITIONS:

260°C max x 10 sec max x 2 times max or
230°C max x 180 sec max x 1 time.

TYPICAL OPERATION DATA (Vapor phase reflow)

20 to 100 sec up to 215°C, 50 sec at 215°C then down to room temperature per 1 to 5°C/sec

MECHANICAL CHARACTERISTICS

FREE DROP:

The specimen shall meet electrical characteristics after tested 3 times Free Drop testing on the hard wooden board from a height of 75cm.

VIBRATION:

The specimen shall meet electrical characteristics after tested by the following conditions:
10-55Hz 1.5mm Amplitude, 55-2000Hz 20G's,
2 hours for each plane.

THERMAL SHOCK:


After applied Thermal Shock of 260°C max x 10 sec max x 2 times, or 230°C max x 180 sec max, the specimen shall meet electrical characteristics.

SOLDERABILITY: (EIAJ-RGX-0102/1D1 Condition 1a)


1. Flux: MIL-F-14256 (WW Rosin=25%, Isopropyl alcohol=75%)
2. Solder: QQ-S-571 (Sn=63%, Pb=37%)
3. Solder bath temperature: 235°C ± 5°C
4. Depth of immersion: Up to electrical terminal.
5. Immersing time: Within 2 sec ± 0.5 sec into solder bath.

After performing the above procedures, a newly soldered coverage shall be greater than 90%.


TEST CIRCUIT

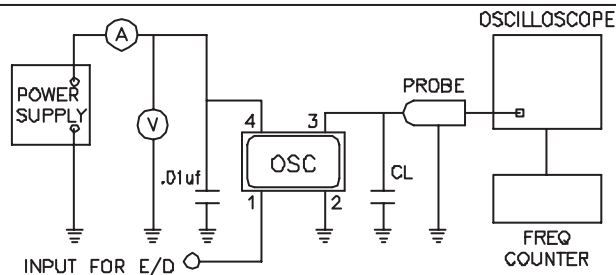

OUTPUT WAVEFORM

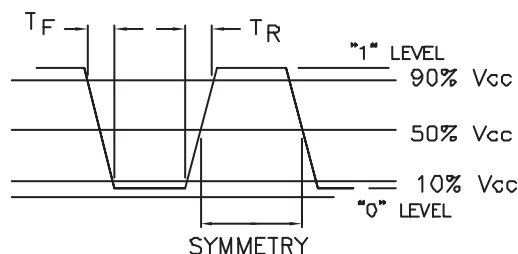


SUGGESTED PAD LAYOUT



Bypass capacitor, C-by, should be ceramic capacitor $\geq .01\mu\text{f}$.


TAPING AND REEL DIMENSIONS

SOLDER PROFILE

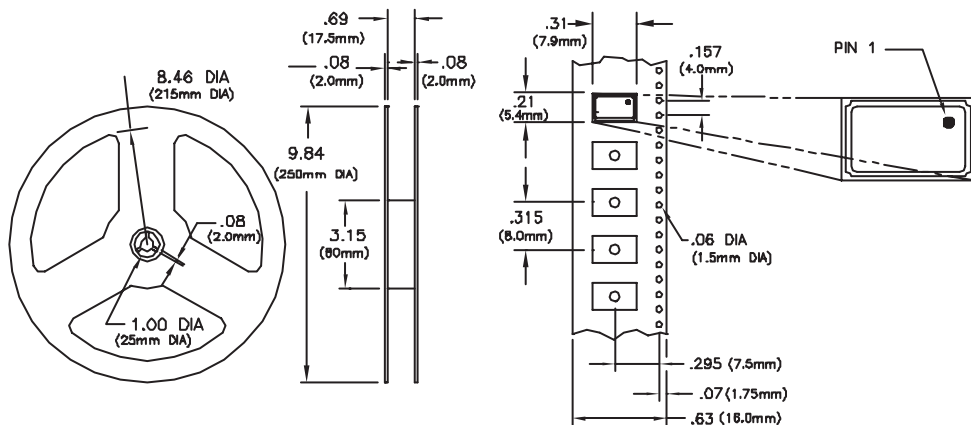

MEETS EIA-481A AND EIAJ-1009B
2,000 PCS/REEL

Dimensional Tolerance: $\pm .02"$ (.508mm)
 $\pm .005"$ (.127mm)

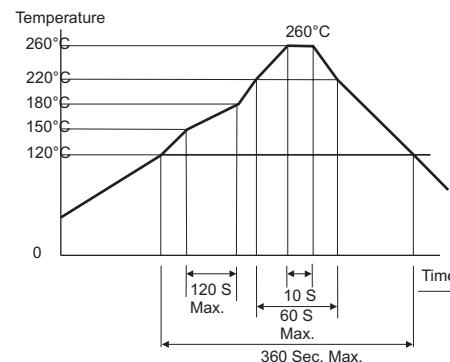

Specifications subject to change without notice.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru