


Crystal Units/Crystal Oscillators



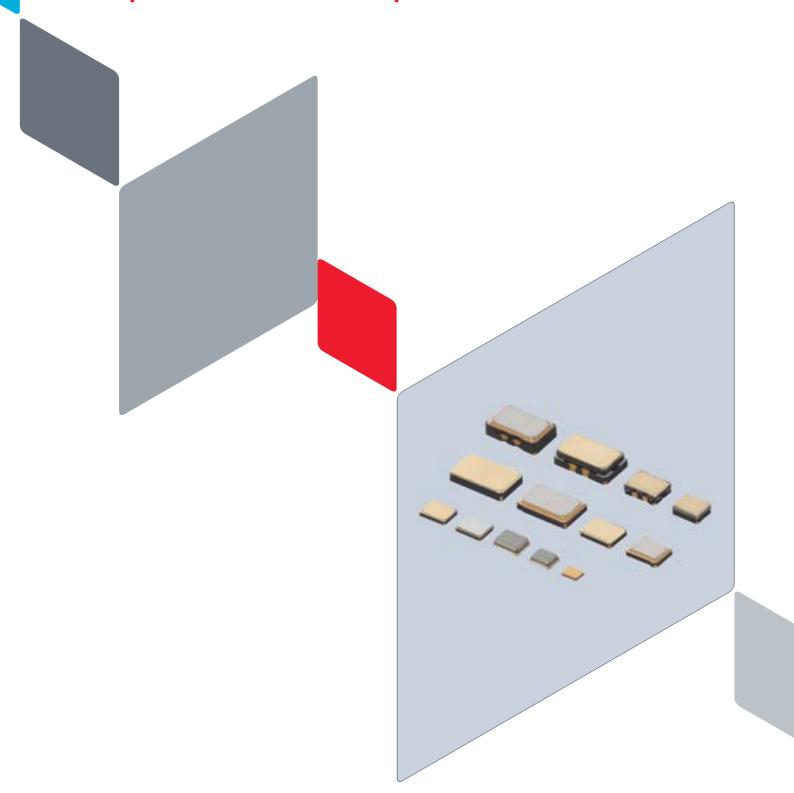

4

Contents


Product specifications are as of $December\ 2015$.

Bluetooth $^{\circledR}$ is a registered trademark or trademark of Bluetooth SIG, Inc. in the United States and other countries.

Selection Guide ·····	p2
Part Numbering ·····	р3
1 Crystal Units for Consumer	
Features, Applications ·····	р5
Appearance, Dimension ·····	р5
Part Number List · · · · · · · · · · · · · · · · · · ·	р6
Standard Land Pattern Dimensions	p8
Notice ·····	p10
Packaging ·····	p12
2 Crystal Units for Automotive	
Features, Applications ·····	p15
Appearance, Dimension ·····	p15
Part Number List ·····	p16
Standard Land Pattern Dimensions	p16
Notice ·····	p17
Packaging ·····	p19
3 Crystal Units for Industrial	
Features, Applications	p20
Appearance, Dimension ·····	p20
Part Number List ·····	p21
Standard Land Pattern Dimensions	p22
Notice ·····	p23
Packaging ·····	p25
4 Crystal Oscillators for Industrial	
Features, Applications ·····	p28
Appearance, Dimension ·····	p28
Part Number List ·····	p29
Standard Land Pattern Dimensions	p30
Notice ·····	p31
Packaging ·····	p33
Measuring Circuit of Crystal Units	p35

Please check the MURATA website (http://www.murata.com/) if you cannot find a part number in this catalog.

Selection Guides

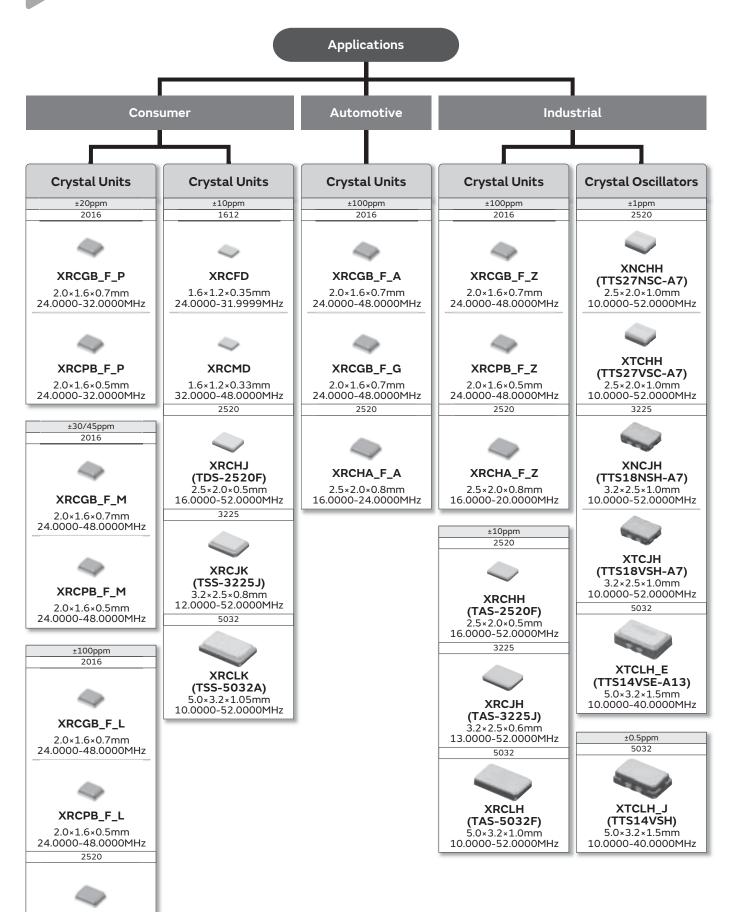

XRCHA_F_L 2.5×2.0×0.8mm 16.0000-20.0000MHz

Part Numbering

Crystal Unit

(Part Number) XR C GB 24M000 F 0 L 00 R0

1 Product ID

Product ID	
XR	Crystal Unit

2Lead Style

Code	Lead Style
C/T	SMD

3Size · Structure

Code	Size · Structure
FD	1612 (STD) Metal Sealing
MD	1612 (Low Profile) Metal Sealing
GB	2016 (STD) Resin Sealing
PB	2016 (Low Profile) Resin Sealing
HA	2520 Resin Sealing
НН	2520 Metal Sealing
HJ	2520 Seam Sealing
JH	3225 Metal Sealing
JK	3225 Seam Sealing
LH	5032 Metal Sealing
LK	5032 Seam Sealing

Mominal Center Frequency

Expressed by six-digit alphanumeric. The unit is in hertz (Hz). Decimal point is expressed by capital letter ${}^{\rm H}M{}^{\rm H}$.

5Overtone Order

Code	Overtone Order
F	Fundamental
K	Customized Fundamental

6Frequency Tolerance

Code	Frequency Tolerance
0	±100ppm
1	±10ppm
2	±20ppm
3	±30ppm
4	±45ppm/±40ppm* ¹
5	±50ppm
Α	±25ppm/±15ppm* ²
Υ	Total* ³ ±20ppm

*1 *2 When 3 is "HH" or "JK"

*3 Including Initial Torelance+Temperature Characteristics+Aging+Reflow

Frequency Shift by Temperature

Code	Frequency Shift by Temperature
Α	±100ppm max. (Automotive Grade)
G	±50ppm (Car Multimedia Grade)
L	±50ppm min.
М	±40ppm
N	±25ppm or 30ppm
P	±20ppm
Q	±10ppm to ±15ppm/±10ppm to ±19ppm*1
Z	±100ppm (for Industrial)

*1 When 3 is "HH" or "JK"

8Individual Specification

Code	
**	Two-digit alphanumerics express Individual Specification.

00: Standard specification type.

Packaging (Quantity and Plastic taping reel diameter are expressed by one-digit number in "*")

Code	Packaging
R*/E*/J*/P*	Plastic Taping

Crystal Oscillator

(Part Number) XN C HH 19M200 T J E A5 P0

1 Product ID

Product ID	
XT	VC-TCXO
XN	тсхо

2Lead Style

Code	Lead Style
С	SMD

3Size · Structure

Code	Size · Structure
НН	2520 Metal Sealing
JH	3225 Metal Sealing
LH	5032 Metal Sealing

4 Nominal Center Frequency

Expressed by six-digit alphanumeric. The unit is in hertz (Hz). Decimal point is expressed by capital letter ${}^{\rm H}M{}^{\rm H}$.

6Output Wave

Code	Output Wave
Т	Clipped Sign Wave

6Frequency Tolerance

Code	Frequency Tolerance
J	±1.0 to ±1.4ppm

7Frequency Shift by Temperature

Code	Frequency Shift by Temperature
E	±0.5ppm max.
J	Less than ±0.3ppm

8 Individual Specification

Code	
**	Two-digit alphanumerics express Individual Specification.

Packaging (Quantity and Plastic taping reel diameter are expressed by one-digit number in "*")

Code	Packaging
E*/G*/P*	Plastic Taping

Crystal Units

for Consumer




These crystal units feature a small package and highly accurate frequency, based on Murata's excellent package technology and high grade quartz crystal elements.

Features

- This series is ideal for applications requiring high accuracy crystal units, especially communication clocks such as GPS, Wi-Fi, B.T. (Bluetooth®), BLE (Bluetooth® Low Energy), SATA and USB3.0.
- 2. The crystal units are extremely small, contributing to a reduction in the mounting area.
- 3. The series complies to RoHS directive, being lead-free (phase 3).

Applications

- 1. Clock for GPS controller ICs: smartphone, wearable equipment, module, etc.
- 2. Clock for Wi-Fi, B.T. and ACPU controller ICs: smartphone, wearable device, module, etc.
- 3. Clock for BLE controller ICs: wearable, fitness and healthcare devices, module, etc.
- 4. Storage devices with SATA interface: HDD, SSD, Optical storage device, etc.
- 5. Clock for USB (Ultra-Speed and High-Speed) controller ICs: Mobile phone, DVC, DSC, Portable audio, PC peripheral, etc.
- 6. Clock for PC, visual equipment controller ICs
- 7. Audio equipment and musical instrument, etc.
- 8. Other applications for replacement of other crystal units or oscillators.

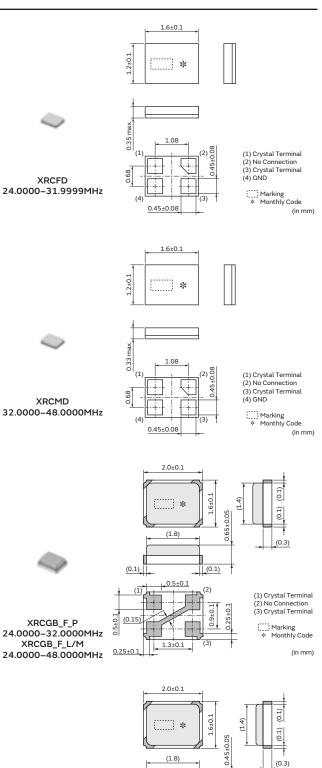

Continued on the following page.

(1) Crystal Terminal(2) No Connection(3) Crystal Terminal

Marking Monthly Code


(0.1)

0.5±0.1

(0.15

XRCPB_F_P

24.0000-32.0000MHz XRCPB_F_L/M 24.0000-48.0000MHz

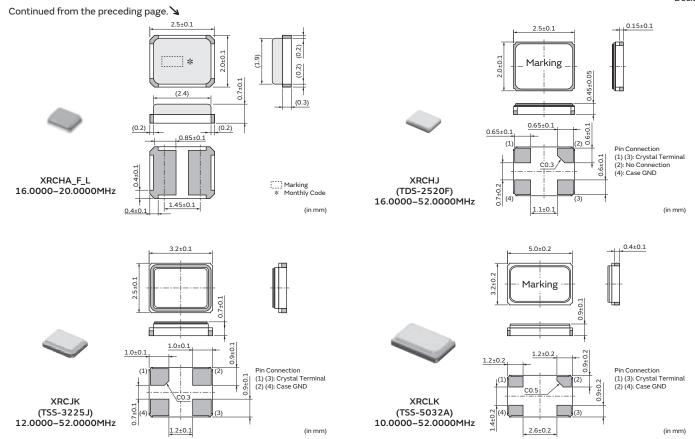

Series

Series	Туре	Size	Package	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	Drive Level (µW max.)	Operating Temperature Range (°C)														
XRCFD		1612	Metal	24.0000 to 31.9999	±10	±10	±1	100	-20 to +70														
XRCMD		1012	Metal	32.0000 to 48.0000	±10	±10	Ξ1		-20 t0 +70														
XRCGB_F_P				24.0000 to 32.0000	±20	±20																	
XRCPB_F_P				24.0000 to 32.0000	±20	±20	±5	300	20405														
XRCGB_F_M	-	2016		24.0000 to 48.0000	±30/±45	±40																	
XRCPB_F_M		2016	Resin																				
XRCGB_F_L																							
XRCPB_F_L																			±100	±50			-30 to +85
XRCHA_F_L		2520		16.0000 to 20.0000		±100			_														
XRCHJ	TDS-2520F	2520		16.0000 to 52.0000																			
XRCJK	TSS-3225J	3225	Seam	12.0000 to 52.0000	±10	±15	±3	60															
XRCLK	TSS-5032A	5032		10.0000 to 52.0000																			

 $\ensuremath{\mathsf{XRCPB}}$ series is a low profile type of $\ensuremath{\mathsf{XRCGB}}$ series.

Part Number List

Series	Туре	Part Number	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	by Temperaturé (ppm max.)	Frequency Aging (ppm max./Year)	ESR* (Ωmax.)	Load Capacitance (pF)	Drive Level (µW max.)
XRCMD	-	XRCMD37M400F1Q01R0	37.4000	±10	±10 (-20 to +70°C)	±1	60	8	100
XRCGB_F_P	-	XRCGB24M000F2P00R0	24.0000	±20	±20 (-30 to +85°C)	±5	150	6	300
XRCGB_F_P	-	XRCGB25M000F2P00R0	25.0000	±20	±20 (-30 to +85°C)	±5	150	6	300
XRCGB_F_P	-	XRCGB26M000F2P00R0	26.0000	±20	±20 (-30 to +85°C)	±5	150	6	300
XRCGB_F_P	-	XRCGB27M000F2P00R0	27.0000	±20	±20 (-30 to +85°C)	±5	150	6	300
XRCGB_F_P	-	XRCGB27M120F2P00R0	27.1200	±20	±20 (-30 to +85°C)	±5	150	6	300
XRCGB_F_P	-	XRCGB27M120F2P10R0	27.1200	±20	±20 (-30 to +85°C)	±5	80	10	300
XRCGB_F_P	-	XRCGB30M000F2P00R0	30.0000	±20	±20 (-30 to +85°C)	±5	100	6	300
XRCGB_F_P	-	XRCGB31M250F2P00R0	31.2500	±20	±20 (-30 to +85°C)	±5	100	6	300
XRCGB_F_P	-	XRCGB32M000F2P00R0	32.0000	±20	±20 (-30 to +85°C)	±5	100	6	300
XRCPB_F_P	-	XRCPB24M000F2P00R0	24.0000	±20	±20 (-30 to +85°C)	±5	150	6	300

^{*} Equivalent Series Resistance

Continued from the preceding page.

Name	Continued from	the precedi	ng page. 🛚							
NACES P	Series	Туре	Part Number		(ppm max.)	by Temperature (ppm max.)	Aging		Capacitance	Level
XRCPB_F_P	V2022 - 2			, ,		i		<u>'</u>	` '' '	,,,
XRCPB_F_P		-				,			-	
XRCPB_F_P		_				,				
XRCPB_F_P		_				,				
XRCRB_F_P - XRCPB31M250F20000 31.0500	XRCPB_F_P	-	XRCPB27M120F2P00R0	27.1200	±20	±20 (-30 to +85°C)	±5	150	6	300
XRCRB_F_M - XRCRB22M000F3M00R0 24.0000 230 20.010-18°C 25 100 6 300	XRCPB_F_P	_	XRCPB30M000F2P00R0	30.0000	±20	±20 (-30 to +85°C)	±5	100	6	300
XRCGB_F_M	XRCPB_F_P	-	XRCPB31M250F2P00R0	31.2500	±20	±20 (-30 to +85°C)	±5	100	6	300
XRCGB_F_M	XRCPB_F_P	-	XRCPB32M000F2P00R0	32.0000	±20	±20 (-30 to +85°C)	±5	100	6	300
XRCGB_F_M	XRCGB_F_M	-	XRCGB24M000F3M00R0	24.0000	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCGB_F_M	XRCGB_F_M	-	XRCGB24M576F3M00R0	24.5760	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCGB_F_M	XRCGB_F_M	-	XRCGB25M000F3M00R0	25.0000	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCGB_F_M	XRCGB_F_M	_	XRCGB26M000F3M00R0	26.0000	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCGB_FM	XRCGB_F_M	-	XRCGB27M000F3M00R0	27.0000	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCGB_F_M	XRCGB_F_M	-	XRCGB27M120F3M00R0	27.1200	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCGB_F_M	XRCGB_F_M	_	XRCGB27M120F3M10R0	27.1200	±30	±40 (-30 to +85°C)	±5	80	10	300
XRCGB_F_M	XRCGB_F_M	_	XRCGB30M000F3M00R0	30.0000	±30	±40 (-30 to +85°C)	±5	100	6	300
XRCGB_F_M	XRCGB_F_M	-	XRCGB31M250F3M00R0	31.2500	±30	±40 (-30 to +85°C)	±5	100	6	300
XRCGB_F_M	XRCGB_F_M	-	XRCGB32M000F3M00R0	32.0000	±30	±40 (-30 to +85°C)	±5	100	6	300
XRCGB_F_M		-	XRCGB33M868F4M00R0	33.8688	±45	,	±5	100	6	300
XRCGB_F_M	XRCGB F M	_	XRCGB40M000F4M00R0	40.0000	±45	±40 (-30 to +85°C)	±5	100	6	300
XRCPB_F_M		-				, ,			-	
XRCPB_F_M		_	XRCPB24M000F3M00R0	24.0000	±30	±40 (-30 to +85°C)	±5	150	6	300
XRCPB_F_M		_				,			6	300
XRCPB_F_M		_				,			6	300
XRCPB_F_M		_				, ,			6	300
XRCPB_F_M						, ,			-	
XRCPB_F_M		_				,			-	
XRCPB_F_M -		_				,				
XRCPB_F_M		_				,				
XRCPB_F_M						,				
XRCPB_F_M						,				
XRCPB_F_M						,				
XRCGB_F_L						, ,				
XRCGB_F_L		_				,				
XRCGB_F_L										
XRCGB_F_L — XRCGB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCGB_F_L — XRCGB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCGB_F_L — XRCGB30M000F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCGB_F_L — XRCGB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB32M000F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB3M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB4M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 </th <th></th> <th></th> <th></th> <th></th> <th></th> <th>, ,</th> <th></th> <th></th> <th></th> <th></th>						, ,				
XRCGB_F_L - XRCGB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCGB_F_L - XRCGB27M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCGB_F_L - XRCGB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5<						· ' '				
XRCGB_F_L — XRCGB27M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCGB_F_L — XRCGB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB33M868F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB49M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L — XRCGB48M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5						,				
XRCGB_F_L - XRCGB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB48M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB24M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB24M000F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5						, ,				
XRCGB_F_L - XRCGB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCGB48M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB26M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5<						· ' '				
XRCGB_F_L — XRCGB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB48M000F0L00R0 ±4000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L — XRCPB24M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 <th></th> <th></th> <th></th> <th></th> <th></th> <th><u> </u></th> <th></th> <th></th> <th></th> <th></th>						<u> </u>				
XRCGB_F_L - XRCGB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L - XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB24M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB25M000F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5<						, ,				
XRCGB_F_L — XRCGB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCGB_F_L — XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L — XRCPB24M576F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB25M000F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB27M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB30M000F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5<						,				
XRCGB_F_L - XRCGB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB24M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB27M120F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5<										
XRCPB_F_L — XRCPB24M000F0L00R0 24.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB30M000F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB30M000F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L — XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5<										
XRCPB_F_L — XRCPB24M576F0L00R0 24.5760 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB27M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB30M000F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L — XRCPB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L — XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L — XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5<						, ,				
XRCPB_F_L - XRCPB25M000F0L00R0 25.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5<										
XRCPB_F_L - XRCPB26M000F0L00R0 26.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB37M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300										
XRCPB_F_L - XRCPB27M000F0L00R0 27.0000 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB27M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300						, ,				
XRCPB_F_L - XRCPB27M120F0L00R0 27.1200 ±100 ±50 (-30 to +85°C) ±5 150 6 300 XRCPB_F_L - XRCPB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300						, ,				
XRCPB_F_L - XRCPB30M000F0L00R0 30.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300										
XRCPB_F_L - XRCPB31M250F0L00R0 31.2500 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300						, ,				
XRCPB_F_L - XRCPB32M000F0L00R0 32.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300						, ,				
XRCPB_F_L - XRCPB33M868F0L00R0 33.8688 ±100 ±50 (-30 to +85°C) ±5 100 6 300 XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300						, ,				
XRCPB_F_L - XRCPB40M000F0L00R0 40.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300						, ,		_		
						, ,		_		
XRCPB_F_L - XRCPB48M000F0L00R0 48.0000 ±100 ±50 (-30 to +85°C) ±5 100 6 300		-				, ,				
	XRCPB_F_L	-	XRCPB48M000F0L00R0	48.0000	±100	±50 (-30 to +85°C)	±5	100	6	300

^{*} Equivalent Series Resistance

Continued from the preceding page. \searrow


Series	Туре	Part Number	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	ESR* (Ωmax.)	Load Capacitance (pF)	Drive Level (µW max.)
XRCHA_F_L	-	XRCHA16M000F0L01R0	16.0000	±100	±100 (-30 to +85°C)	±5	100	8	300
XRCHA_F_L	-	XRCHA20M000F0L01R0	20.0000	±100	±100 (-30 to +85°C)	±5	80	8	300
XRCHJ	TDS-2520F	XRCHJ16M000F1QB1P0	16.0000	±10	±15 (-30 to +85°C)	±3	100	8	60
XRCHJ	TDS-2520F	XRCHJ19M200F1QA9P0	19.2000	±10	±15 (-30 to +85°C)	±3	100	8	60
XRCHJ	TDS-2520F	XRCHJ20M000F1QA7P0	20.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCHJ	TDS-2520F	XRCHJ26M000F1QD1P0	26.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCHJ	TDS-2520F	XRCHJ36M000F1QA0P0	36.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCHJ	TDS-2520F	XRCHJ40M000F1QB0P0	40.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCHJ	TDS-2520F	XRCHJ52M000F1QA0P0	52.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK12M000F1QB4P0	12.0000	±10	±15 (-30 to +85°C)	±3	100	8	60
XRCJK	TSS-3225J	XRCJK13M000F1QA3P0	13.0000	±10	±15 (-30 to +85°C)	±3	100	8	60
XRCJK	TSS-3225J	XRCJK15M360F1QA0P0	15.3600	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK20M000F1QB3P0	20.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK24M576F1QA0P0	24.5760	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK26M000F1QC3P0	26.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK36M000F1QA0P0	36.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK40M000F1QA2P0	40.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCJK	TSS-3225J	XRCJK52M000F1QA0P0	52.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCLK	TSS-5032A	XRCLK10M000F1QA8P0	10.0000	±10	±15 (-30 to +85°C)	±3	80	8	60
XRCLK	TSS-5032A	XRCLK12M000F1QA6P0	12.0000	±10	±15 (-30 to +85°C)	±3	60	8	60
XRCLK	TSS-5032A	XRCLK14M745F1QB6P0	14.7456	±10	±15 (-30 to +85°C)	±3	60	8	60
XRCLK	TSS-5032A	XRCLK16M000F1QA7P0	16.0000	±10	±15 (-30 to +85°C)	±3	60	8	60
XRCLK	TSS-5032A	XRCLK21M250F1QA8P0	21.2500	±10	±15 (-30 to +85°C)	±3	60	8	60
XRCLK	TSS-5032A	XRCLK52M000F1QA0P0	52.0000	±10	±15 (-30 to +85°C)	±3	60	8	60

^{*} Equivalent Series Resistance

Standard Land Pattern Dimensions


XRCFD, XRCMD

(Recommended Land Pattern)



XRCGB_F_P/M/L, XRCPB_F_P/M/L


(Recommended Land Pattern)




(in mm) (in mm)

XRCHA_F_L

(Recommended Land Pattern)



XRCHJ (TDS-2520F)




(in mm) (in mm)

(in mm)


1

Standard Land Pattern Dimensions

XRCJK (TSS-3225J)



XRCLK (TSS-5032A)



(in mm)

muRata

Notice - Crystal Units for Consumer-

Notice (Soldering and Mounting)

1.1. Soldering Condition

(1) Reflow

Please mount components on a circuit board by the reflow soldering method.

Flux: Please use rosin based flux; do not use water soluble

Solder: Please use solder (Sn-3.0Ag-0.5Cu) under the following condition.

Standard thickness of soldering paste: 0.10 to 0.15mm

	Condition					
Pre-heating	150 to 180°C	60 to 120 sec.				
Heating	220°C min.	30 to 60 sec.				
Peak Temperature	245°C min. 260°C	C max. 5 sec. max.				





If compelled to mount the component by using a soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied. Please keep solder away from the metal cap (Lid) portion.

	Condition
Pre-heating	150°C 60 sec.
Heating of the Soldering Iron	350°C max.
Watt	30W max.
Shape of the Soldering Iron	ø3mm max.
Soldering Time	5 sec. max.
Solder	Sn-3.0Ag-0.5Cu

1.2. Optimum Solder Amount for Soldering

Please make the solder volume below the height of the substrate. When exceeding the substrate, the damage to the sealing between the metal cap and the substrate may occur.


2. Wash

The component cannot withstand washing.

3. Notice for Mounting

The component is recommended for placement machines employing optical placement capabilities. The component might be damaged by mechanical force depending on placement machine and condition. Make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines employing mechanical positioning.

Please contact Murata for details beforehand.

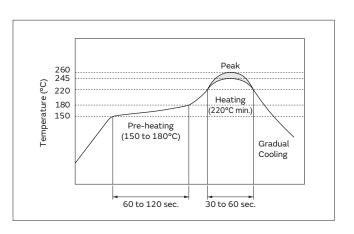

Continued on the following page. 7

Notice - Crystal Units for Consumer-

Continued from the preceding page.

Notice (Storage and Operating Condition)

Product Storage Condition
 Please store the products in a room where the temperature/humidity is stable and avoid places where there are large temperature changes. Please store the products under the following conditions:

Temperature: -10 to + 40 degrees C Humidity: 15 to 85% R.H.

- 2. Expire Date on Storage Expiration date (shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty. Please confirm solderability and characteristics
- for the products regularly.

 3. Notice on Product Storage
- (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in solderability due to the storage in a chemical atmosphere.

- (2) Please do not put the products directly on the floor without anything under them to avoid damp places and/or dusty places.
- (3) Please do not store the products in places such as in a damp heated place or any place exposed to direct sunlight or excessive vibration.
- (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in solderability due to storage under poor conditions.
- (5) Please do not drop the products to avoid cracking the crystal element.
- 4. Other

Conformal coating or washing of the component is not acceptable.

Please be sure to consult with our sales representative or engineer prior to using the products.

Notice (Rating)

The component may be damaged if excess mechanical stress is applied.


Notice (Handling)

- Irregular or stopped oscillation may occur under unmatched circuit conditions.
 Please design your oscillation circuit to get 5 times or more of a negative resistance against the maximum value of the Equivalent Series Resistance, that is specified in order.
- 2. Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.
- Please do not use these products in the following applications in transportation equipment: vehicles, trains, ships, etc. (example: engine control, brake control, steering control, body control.)


Packaging -Crystal Units for Consumer-


Minimum Quantity/Dimensions of Reel


Plastic Tape ø180mm	Plastic Tape ø330mm
3,000	9,000
	(ncs)

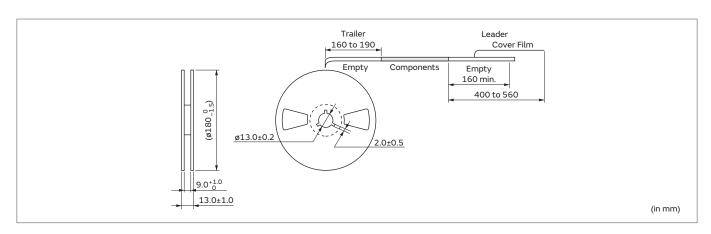


Dimensions of Taping











Packaging - Crystal Units for Consumer-

Minimum Quantity/Dimensions of Reel



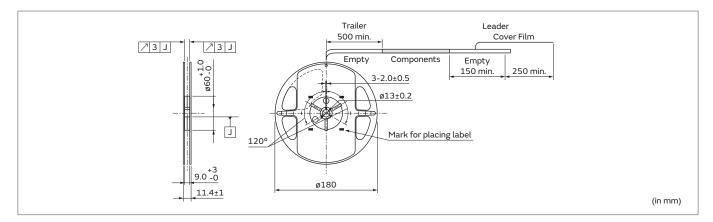


Dimensions of Taping

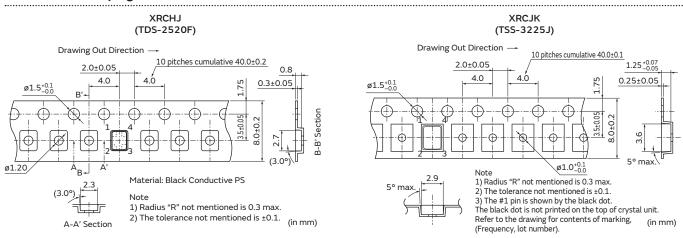

Packaging - Crystal Units for Consumer-


Minimum Quantity/Dimensions of Reel

Plastic Tape ø255mm 3,000 (pcs.)

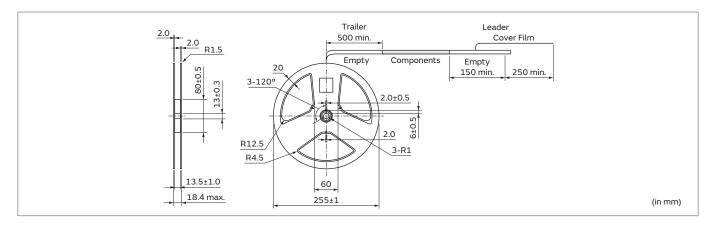

Dimensions of Taping

XRCLK (TSS-5032A)



Crystal Units

● for Automotive






These crystal units for automotive feature a small package and highly accurate frequency, based on Murata's excellent package technology and high grade quartz crystal elements.


Features

- 1. The series has high reliability and is available for a wide temperature range.
- 2. The crystal units are extremely small, contributing to a reduction in the mounting area.
- 3. The series complies to RoHS and ELV directives, being lead-free (phase 3).
- 4. The series complies to AEC-Q200.

Applications

- 1. Power Train (ex. Engine/Transmission management ECU)
- 2. ADAS (ex. Camera for driver assist, Image processing, Emergency Brake Assist ECU)
- 3. Chassis, Safety applications, etc.
- 4. Car multimedia equipment.

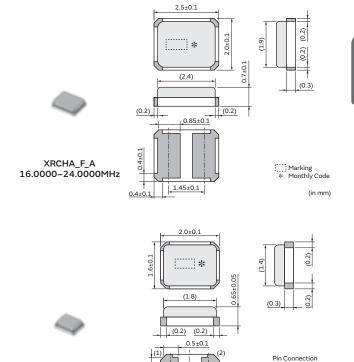



XRCGB F A 24.0000-48.0000MHz

Sarias

Jeries								
Series	Size	Package		Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	Operating Temperature Range (°C)	Applications
XRCHA_F_A	2520		16.0000 to 24.0000	±100	±100	±5	-40 to +125*	ADAS, Power Train, Chassis, Safety
XRCGB_F_A	2016	Resin	24.0000 to 48.0000	±30/±50	±35/±65	±2	-40 to +125	ADAS, Power Train, Chassis, Safety
XRCGB_F_G	2010		24.0000 to 48.0000	±30/±45/±100	±50	±5	-40 to +85	Car Multimedia


^{* +150°}C is available.

Part Number List

Series	Part Number	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	ESR* (Ωmax.)	Load Capacitance (pF)	Drive Level (µW max.)
XRCHA_F_A	XRCHA16M000F0A01R0	16.0000	±100	±100 (-40 to +125°C)	±5	100	8	300
XRCHA_F_A	XRCHA16M000F0A11R0	16.0000	±100	±100 (-40 to +125°C)	±5	100	8	600
XRCHA_F_A	XRCHA16M000F0A12R0	16.0000	±100	±100 (-40 to +150°C)	±5	100	8	300
XRCHA_F_A	XRCHA16M000F0A13R0	16.0000	±100	±100 (-40 to +150°C)	±5	100	8	600
XRCHA_F_A	XRCHA20M000F0A01R0	20.0000	±100	±100 (-40 to +125°C)	±5	80	8	300
XRCHA_F_A	XRCHA20M000F0A11R0	20.0000	±100	±100 (-40 to +125°C)	±5	80	8	600
XRCHA_F_A	XRCHA20M000F0A12R0	20.0000	±100	±100 (-40 to +150°C)	±5	80	8	300
XRCHA_F_A	XRCHA20M000F0A13R0	20.0000	±100	±100 (-40 to +150°C)	±5	80	8	600
XRCHA_F_A	XRCHA24M000F0A01R0	24.0000	±100	±100 (-40 to +125°C)	±5	80	8	300
XRCHA_F_A	XRCHA24M000F0A11R0	24.0000	±100	±100 (-40 to +125°C)	±5	80	8	600
XRCHA_F_A	XRCHA24M000F0A12R0	24.0000	±100	±100 (-40 to +150°C)	±5	80	8	300
XRCHA_F_A	XRCHA24M000F0A13R0	24.0000	±100	±100 (-40 to +150°C)	±5	80	8	600
XRCGB_F_A	XRCGB24M000F3A00R0	24.0000	±30	±35 (-40 to +125°C)	±2	120	6	300
XRCGB_F_A	XRCGB25M000F3A00R0	25.0000	±30	±35 (-40 to +125°C)	±2	100	6	300
XRCGB_F_A	XRCGB26M000F3A00R0	26.0000	±30	±35 (-40 to +125°C)	±2	80	6	300
XRCGB_F_A	XRCGB27M000F3A00R0	27.0000	±30	±35 (-40 to +125°C)	±2	80	6	300
XRCGB_F_A	XRCGB27M120F3A00R0	27.1200	±30	±35 (-40 to +125°C)	±2	80	6	300
XRCGB_F_A	XRCGB48M000F5A00R0	48.0000	±50	±65 (-40 to +125°C)	±2	60	6	300
XRCGB_F_G	XRCGB24M000F0G00R0	24.0000	±100	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB24M000F3G00R0	24.0000	±30	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB24M576F0G00R0	24.5760	±100	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB24M576F3G00R0	24.5760	±30	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB25M000F0G00R0	25.0000	±100	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB25M000F3G00R0	25.0000	±30	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB26M000F0G00R0	26.0000	±100	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB26M000F3G00R0	26.0000	±30	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB27M000F0G00R0	27.0000	±100	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB27M000F3G00R0	27.0000	±30	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB27M120F3G00R0	27.1200	±30	±50 (-40 to +85°C)	±5	150	6	300
XRCGB_F_G	XRCGB30M000F0G00R0	30.0000	±100	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB30M000F3G00R0	30.0000	±30	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB33M868F0G00R0	33.8688	±100	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB33M868F4G00R0	33.8688	±45	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB40M000F0G00R0	40.0000	±100	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB40M000F4G00R0	40.0000	±45	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB48M000F0G00R0	48.0000	±100	±50 (-40 to +85°C)	±5	100	6	300
XRCGB_F_G	XRCGB48M000F4G00R0	48.0000	±45	±50 (-40 to +85°C)	±5	100	6	300

^{*} Equivalent Series Resistance

Standard Land Pattern Dimensions

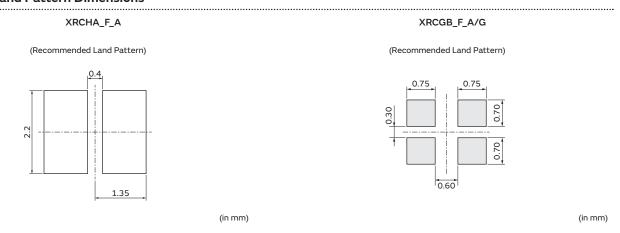

Notice - Crystal Units for Automotive-

Notice (Soldering and Mounting)

1.1. Soldering Condition

(1) Reflow

Please mount components on a circuit board by the reflow soldering method.

Flux: Please use rosin based flux; do not use water soluble

Solder: Please use solder (Sn-3.0Ag-0.5Cu) under the following condition.

Standard thickness of soldering paste: 0.10 to 0.15mm

	Condition					
Pre-heating	150 to 180°C	60 to 120 sec.				
Heating	220°C min.	30 to 60 sec.				
Peak Temperature	245°C min. 260°C max. 5 sec. max.					



(2) Soldering Iron

If compelled to mount the component by using a soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

	Condition
Pre-heating	150°C 60 sec.
Heating of the Soldering Iron	350°C max.
Watt	30W max.
Shape of the Soldering Iron	ø3mm max.
Soldering Time	5 sec. max.
Solder	Sn-3.0Ag-0.5Cu

1.2. Optimum Solder Amount for Soldering

Please make the solder volume below the height of the substrate. When exceeding the substrate, damage to the sealing part between the metal cap and the substrate may occur.

1.3. Other

Do not reuse components once mounted onto a circuit board.


2. Wash

The component cannot withstand washing.

3. Notice for Mounting

The component is recommended for placement machines employing optical placement capabilities. The component might be damaged by mechanical force depending on placement machine and condition. Make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines employing mechanical positioning.

Please contact Murata for details beforehand.

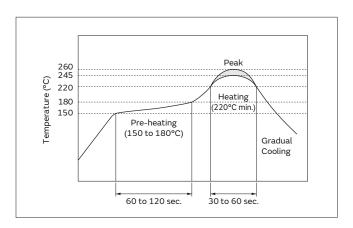

Notice - Crystal Units for Automotive-

Continued from the preceding page.

Notice (Storage and Operating Condition)

Product Storage Condition
 Please store the products in a room where the temperature/humidity is stable and avoid places where there are large temperature changes. Please store the products under the following conditions:

Temperature: -10 to + 40 degrees C Humidity: 15 to 85% R.H.

- 2. Expire Date on Storage Expiration date (shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty. Please confirm solderability and characteristics for the products regularly.
- 3. Notice on Product Storage
- (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in solderability due to the storage in a chemical atmosphere.

- (2) Please do not put the products directly on the floor without anything under them to avoid damp places and/or dusty places.
- (3) Please do not store the products in places such as in a damp heated place or any place exposed to direct sunlight or excessive vibration.
- (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in solderability due to storage under poor conditions.
- (5) Please do not drop the products to avoid cracking the crystal element.
- 4. Other

Conformal coating or washing of the component is not acceptable because it is not hermetically sealed. Please be sure to consult with our sales representative or engineer whenever and prior to using the products.

Notice (Rating)

The component may be damaged if excess mechanical stress is applied.


Notice (Handling)

- Irregular or stopped oscillation may occur under unmatched circuit conditions.
 Please design your oscillation circuit to get 5 times or more of a negative resistance against the maximum value of the Equivalent Series Resistance, that is specified in order.
- 2. Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.


Packaging - Crystal Units for Automotive-

Minimum Quantity/Dimensions of Reel

Plastic Tape ø180mm	Plastic Tape ø330mm
3,000	9,000
	(pcs.)

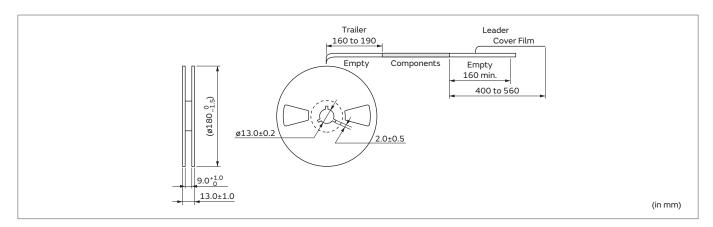

Dimensions of Taping

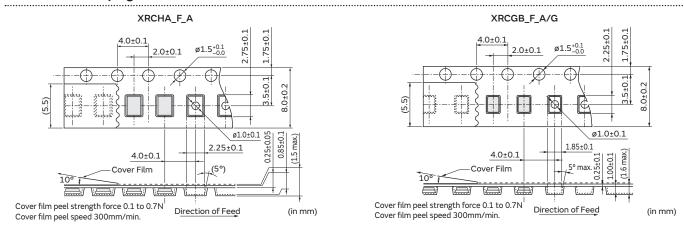

Crystal Units

for Industrial




These crystal units feature a small package and highly accurate frequency. Based on Murata's excellent package technology and high grade quartz crystal elements, achieving small size and high accuracy crystal units.


Features


- 1. The series is available in the applications to be necessary for high accuracy crystal units.
- 2. The crystal units are extremely small, contributing to a reduction in the mounting area.
- 3. The series complies to RoHS directive, being lead-free (phase 3).


Applications


- Clock for PLC, Inverter, Servo Amp, Servo Motor, etc. controller ICs
- 2. Clock for LCD, Programmable display and Visual equipment controller ICs
- 3. Storage devices with SATA interface (Server, HDD, SSD, Optical storage device, etc.)
- Clock for USB (Ultra-Speed and High-speed) controller ICs (Mobile phone, DVC, DSC, Portable audio, PC peripheral, etc.)
- 5. Other applications for replacement of other crystal units or oscillators

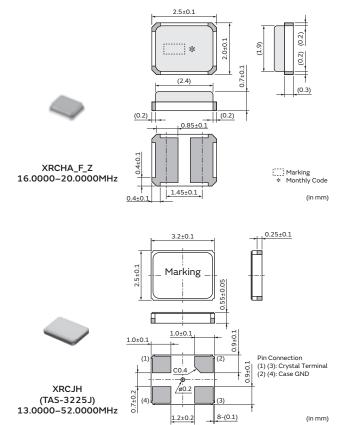









Series

Series	Туре	Size	Package		Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	Drive Level (µW max.)	Operating Temperature Range (°C)
XRCGB_F_Z XRCPB_F_Z	-	2016	Resin	24.0000 to 48.0000	±100	±100	±5	300	-40 to +105
XRCHA_F_Z		2520		16.0000 to 20.0000					
XRCHH	TAS-2520F			16.0000 to 52.0000					
XRCJH	TAS-3225J	3225	Metal	13.0000 to 52.0000	±10	±15	±1(±3/5Years)	60	-30 to +85
XRCLH	TAS-5032F	5032		10.0000 to 52.0000					

 $\ensuremath{\mathsf{XRCPB}}$ series is a low profile type of $\ensuremath{\mathsf{XRCGB}}$ series.

Part Number List


Part Num	ber List								
Series	Туре	Part Number	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	ESR* (Ωmax.)	Load Capacitance (pF)	Drive Level (µW max.)
XRCGB_F_Z	-	XRCGB24M000F0Z00R0	24.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCGB_F_Z	-	XRCGB24M576F0Z00R0	24.5760	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCGB_F_Z	-	XRCGB25M000F0Z00R0	25.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCGB_F_Z	-	XRCGB26M000F0Z00R0	26.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCGB_F_Z	-	XRCGB27M000F0Z00R0	27.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCGB_F_Z	-	XRCGB27M120F0Z00R0	27.1200	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCGB_F_Z	-	XRCGB30M000F0Z00R0	30.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCGB_F_Z	-	XRCGB31M250F0Z00R0	31.2500	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCGB_F_Z	-	XRCGB32M000F0Z00R0	32.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCGB_F_Z	-	XRCGB33M868F0Z00R0	33.8688	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCGB_F_Z	-	XRCGB40M000F0Z00R0	40.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCGB_F_Z	-	XRCGB48M000F0Z00R0	48.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCPB_F_Z	-	XRCPB24M000F0Z00R0	24.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCPB_F_Z	-	XRCPB24M576F0Z00R0	24.5760	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCPB_F_Z	-	XRCPB25M000F0Z00R0	25.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCPB_F_Z	-	XRCPB26M000F0Z00R0	26.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCPB_F_Z	_	XRCPB27M000F0Z00R0	27.0000	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCPB_F_Z	_	XRCPB27M120F0Z00R0	27.1200	±100	±100 (-40 to +105°C)	±5	150	6	300
XRCPB_F_Z	_	XRCPB30M000F0Z00R0	30.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCPB_F_Z	_	XRCPB31M250F0Z00R0	31.2500	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCPB_F_Z	-	XRCPB32M000F0Z00R0	32.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCPB_F_Z	-	XRCPB33M868F0Z00R0	33.8688	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCPB_F_Z	-	XRCPB40M000F0Z00R0	40.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCPB_F_Z	-	XRCPB48M000F0Z00R0	48.0000	±100	±100 (-40 to +105°C)	±5	100	6	300
XRCHA_F_Z	-	XRCHA16M000F0Z01R0	16.0000	±100	±100 (-40 to +105°C)	±5	100	8	300
XRCHA_F_Z	_	XRCHA20M000F0Z01R0	20.0000	±100	±100 (-40 to +105°C)	±5	80	8	300
XRCHH		XRCHH16M000F1QB7P0	16.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	80	8	60
XRCHH		XRCHH20M000F1QB1P0	20.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCHH		XRCHH26M000F1QD8P0		±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCHH		XRCHH36M000F1QA3P0		±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCHH		XRCHH40M000F1QB3P0	40.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCHH		XRCHH52M000F1QA2P0		±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCJH		XRCJH13M000F1QA0P0	13.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	80	8	60
XRCJH		XRCJH16M000F1QB5P0 XRCJH20M000F1QB3P0	16.0000 20.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	80	8	60
XRCJH		•		±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCJH		XRCJH26M000F1QC1P0	26.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	60	8	60
XRCJH		XRCJH36M000F1QA1P0 XRCJH40M000F1QB2P0	36.0000 40.0000	±10 ±10	±15 (-30 to +85°C) ±15 (-30 to +85°C)	±1 (±3/5Years)	60 60	8	
		,			,	±1 (±3/5Years)			60
XRCJH		XRCJH52M000F1QA1P0 XRCLH10M000F1QA4P0	52.0000 10.0000	±10 ±10	±15 (-30 to +85°C) ±15 (-30 to +85°C)	±1 (±3/5Years) ±1 (±3/5Years)	60	8 g	60
XRCLH		XRCLH10M000F1QA4P0 XRCLH12M000F1QA0P0	12.0000	±10 ±10	,	, ,	60	8	60
XRCLH		XRCLH12M000F1QA0P0 XRCLH14M745F1QA0P0	14.7456	±10 ±10	±15 (-30 to +85°C) ±15 (-30 to +85°C)	±1 (±3/5Years)	60 40	8	60
XRCLH		XRCLH14M745F1QA0P0 XRCLH16M000F1QA2P0	16.0000	±10 ±10	±15 (-30 to +85°C) ±15 (-30 to +85°C)	±1 (±3/5Years) ±1 (±3/5Years)	40	8	60
XRCLH		XRCLH16M000F1QA2F0 XRCLH21M250F1QA0P0	21.2500			, ,	40	8	60
		-		±10	±15 (-30 to +85°C)	±1 (±3/5Years)			
XRCLH	1A5-5U32F	XRCLH52M000F1QA1P0	52.0000	±10	±15 (-30 to +85°C)	±1 (±3/5Years)	40	8	60

^{*} Equivalent Series Resistance

XRCHA_F_Z


(Recommended Land Pattern)

0.75 0.75 0.75 0.75 0.75 0.75 0.75 0.75 (Recommended Land Pattern)




(in mm) (in mm)

XRCHH (TAS-2520F)




XRCJH (TAS-3225J)



(in mm) (in mm)

XRCLH (TAS-5032F)



Avoid putting signal lines under the product except referenced land pattern.

(in mm)

Notice - Crystal Units for Industrial-

Notice (Soldering and Mounting)

1.1. Soldering Condition

(1) Reflow

Please mount components on a circuit board by the reflow soldering method.

Flux: Please use rosin based flux; do not use water soluble

Solder: Please use solder (Sn-3.0Ag-0.5Cu) under the following condition.

Standard thickness of soldering paste: 0.10 to 0.15mm

	Condition				
Pre-heating	150 to 180°C	60 to 120 sec.			
Heating	220°C min. 30 to 60 sec.				
Peak Temperature	245°C min. 260°0	C max. 5 sec. max.			



(2) Soldering Iron

If compelled to mount the component by using a soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied. Please keep solder

Condition 150°C 60 sec. Pre-heating Heating of the Soldering Iron 350°C max. Watt 30W max. Shape of the Soldering Iron ø3mm max. Soldering Time 5 sec. max. Solder Sn-3.0Ag-0.5Cu

1.2. Optimum Solder Amount for Soldering

away from the metal cap (Lid) portion.

Please make the solder volume below the height of the substrate. When exceeding the substrate, the damage to the sealing between the metal cap and the substrate may occur.


2. Wash

The component cannot withstand washing.

3. Notice for Mounting

The component is recommended for placement machines employing optical placement capabilities. The component might be damaged by mechanical force depending on placement machine and condition. Make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines employing mechanical positioning.

Please contact Murata for details beforehand.

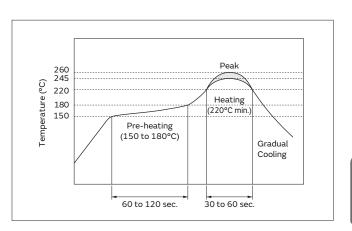

Continued on the following page. 7

Notice - Crystal Units for Industrial-

Continued from the preceding page.

Notice (Storage and Operating Condition)

Product Storage Condition
 Please store the products in a room where the temperature/humidity is stable and avoid places where there are large temperature changes. Please store the products under the following conditions:

Temperature: -10 to + 40 degrees C Humidity: 15 to 85% R.H.

- 2. Expire Date on Storage Expiration date (shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty. Please confirm solderability and characteristics for the products regularly.
- 3. Notice on Product Storage
- (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in solderability due to the storage in a chemical atmosphere.

- (2) Please do not put the products directly on the floor without anything under them to avoid damp places and/or dusty places.
- (3) Please do not store the products in places such as in a damp heated place or any place exposed to direct sunlight or excessive vibration.
- (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in solderability due to storage under poor conditions.
- (5) Please do not drop the products to avoid cracking the crystal element.
- 4. Other

Conformal coating or washing of the component is not acceptable.

Please be sure to consult with our sales representative or engineer prior to using the products.

Notice (Rating)

The component may be damaged if excess mechanical stress is applied.


Notice (Handling)

- Irregular or stopped oscillation may occur under unmatched circuit conditions.
 Please design your oscillation circuit to get 5 times or more of a negative resistance against the maximum value of the Equivalent Series Resistance, that is specified in order.
- Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.
- Please do not use these products in the following applications in transportation equipment: vehicles, trains, ships, etc. (example: engine control, brake control, steering control, body control.)


Packaging - Crystal Units for Industrial-


Minimum Quantity/Dimensions of Reel


Plastic Tape ø180mm	Plastic Tape ø330mm
3,000	9,000
	(pcs.)

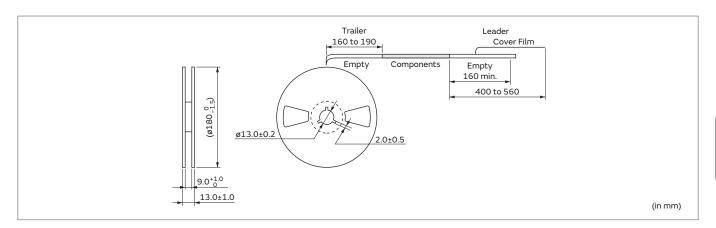

Dimensions of Taping









Packaging - Crystal Units for Industrial-

Minimum Quantity/Dimensions of Reel

Plastic Tape ø180mm 3,000 (pcs.)

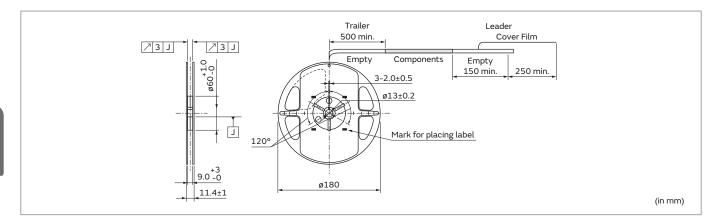


Dimensions of Taping

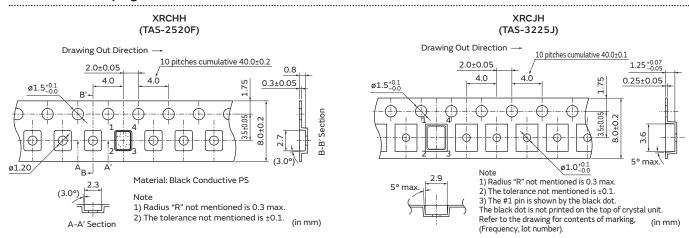

Packaging - Crystal Units for Industrial-


Minimum Quantity/Dimensions of Reel



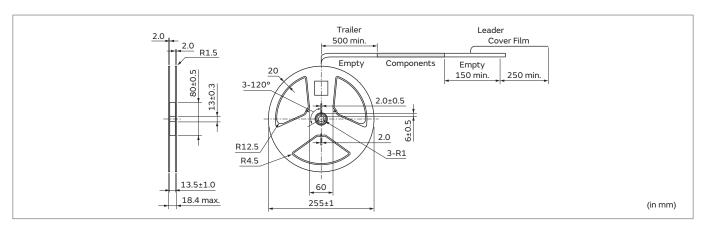

Dimensions of Taping

XRCLH (TAS-5032F)



Crystal Oscillators

for Industrial




We offer a varied lineup of TCXO (Temperature compensated crystal oscillator)/VC-TCXO (Voltage-controlled temperature compensated crystal oscillator) based on highly reliable crystal units, superior temperature compensation and adjusting method fostered by our long experience and expertise.


Features


- 1. Excellent frequency stability over temperature
- 2. Low profile
- 3. Low supply voltage
- 4. SMD type (Reflow soldering available)
- 5. The series complies to RoHS directive, being lead-free (phase 3).


Applications

- 1. Business radios
- 2. GPS (GNSS) systems
- 3. Small cells
- 4. Wireless devices

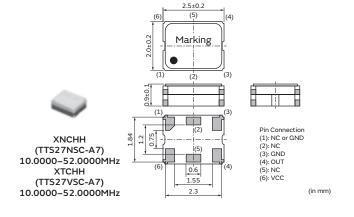





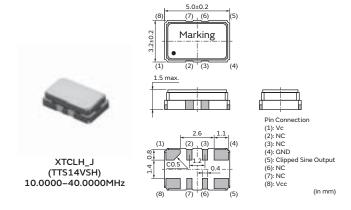

Series


Series	Туре	Size	Package	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	Frequency Shift by Temperature (ppm max.) [Standard Condition: +25°C]	Frequency Aging (ppm max./Year)	Operating Temperature Range (°C)	Supply Voltage (Vp-p)	VC Function			
XNCHH	TTS27NSC-A7	2520								_			
ХТСНН	TTS27VSC-A7	2320		10.0000 to 52.0000	±1.0	±0.5	±1.0	-30 to +85°C		0			
XNCJH	TTS18NSH-A7	2225	Metal						+3.0±5%	_			
XTCJH	TTS18VSH-A7	3225	3225	3225	3223	Metal						+3.0±3 /6	
XTCLH_E	TTS14VSE-A13	5032		10.0000 to 40.0000						0			
XTCLH_J	TTS14VSH	5032		10.0000 to 40.0000	±0.5	±0.2	±0.5	-40 to +85°C					

Part Number List


Partivo	imber List							
Series	Туре	Part Number	Frequency (MHz)	Frequency Tolerance (ppm max.) [at 25°C±3°C]	by Temperature (ppm max.)	Frequency Aging (ppm max./Year)	Current Consumption (mA max.)	Frequency Controlled Range (ppm)
XNCHH	TTS27NSC-A7	XNCHH10M000TJEA2P0	10.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH15M300TJEA0P0	15.3000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH16M368TJEA4P0	16.3680	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH16M800TJEA3P0	16.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH19M200TJEC1P0	19.2000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH26M000TJEE5P0	26.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH28M800TJEA1P0	28.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH32M000TJEB5P0	32.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH38M400TJEB3P0	38.4000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCHH	TTS27NSC-A7	XNCHH52M000TJEA1P0	52.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
хтснн	TTS27VSC-A7	XTCHH10M000TJEA3P0	10.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH15M300TJEA2P0	15.3000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH16M800TJEA2P0	16.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH19M200TJEB4P0	19.2000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH20M950TJEA0P0	20.9500	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH21M250TJEA0P0	21.2500	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH26M000TJEB1P0	26.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH28M800TJEA0P0	28.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH38M400TJEA1P0	38.4000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
хтснн	TTS27VSC-A7	XTCHH52M000TJEA1P0	52.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
XNCJH	TTS18NSH-A7	XNCJH10M000TJEA8P0	10.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH15M300TJEA0P0	15.3000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH16M800TJEA1P0	16.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH19M200TJEA5P0	19.2000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH26M000TJEB4P0	26.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH28M800TJEA1P0	28.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH38M400TJEA3P0	38.4000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
XNCJH	TTS18NSH-A7	XNCJH52M000TJEA0P0	52.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	-
ХТСЈН	TTS18VSH-A7	XTCJH10M000TJEB0P0	10.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН	TTS18VSH-A7	XTCJH15M300TJEA3P0	15.3000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН	TTS18VSH-A7	XTCJH16M800TJEB0P0	16.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН		XTCJH19M200TJEB6P0	19.2000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН	TTS18VSH-A7	XTCJH26M000TJEB4P0	26.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН	TTS18VSH-A7	XTCJH28M800TJEA0P0	28.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН	TTS18VSH-A7	XTCJH38M400TJEA3P0	38.4000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
ХТСЈН	-	XTCJH52M000TJEA5P0	52.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±5 min. to ±15 max.
	-	XTCLH10M000TJEB4P0	10.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
		XTCLH13M000TJEA3P0	13.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
	-	XTCLH16M800TJED2P0	16.8000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
		XTCLH19M200TJEC4P0	19.2000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
XTCLH_E	TTS14VSE-A13	XTCLH20M000TJEB7P0	20.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
		XTCLH21M250TJEA0P0	21.2500	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
XTCLH_E	TTS14VSE-A13	XTCLH26M000TJEA7P0	26.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
XTCLH_E	TTS14VSE-A13	XTCLH38M400TJEA0P0	38.4000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
XTCLH_E	TTS14VSE-A13	XTCLH40M000TJEB0P0	40.0000	±1.0	±0.5 (-30 to +85°C)	±1.0	2	±3 min. to ±15 max.
	TTS14VSH	XTCLH19M200TJJC3P0	19.2000	±0.5	±0.2 (-40 to +85°C)	±0.5	3	±3 min. to ±6 max.
	TTS14VSH	XTCLH25M000TJJA5P0	25.0000	±0.5	±0.2 (-40 to +85°C)	±0.5	3	±3 min. to ±6 max.
XTCLH_J	TTS14VSH	XTCLH26M000TJJA6P0	26.0000	±0.5	±0.2 (-40 to +85°C)	±0.5	3	±3 min. to ±6 max.

Standard Land Pattern Dimensions

XNCHH (TTS27NSC-A7) XTCHH (TTS27VSC-A7)




XNCJH (TTS18NSH-A7) XTCJH (TTS18VSH-A7)



(in mm) (in mm)

XTCLH_E (TTS14VSE-A13) XTCLH_J (TTS14VSH)



(in mm)

Notice - Crystal Oscillators for Industrial-

Notice (Soldering and Mounting)

1.1. Soldering Condition

(1) Reflow


Please mount components on a circuit board by the reflow soldering method.

Flux: Please use rosin based flux; do not use water soluble

Solder: Please use solder (Sn-3.0Ag-0.5Cu) under the following condition.

Standard thickness of soldering paste: 0.10 to 0.15mm

	Condition					
Pre-heating	150 to 180°C	60 to 120 sec.				
Heating	220°C min.	30 to 60 sec.				
Peak Temperature	245°C min. 260°	C max. 5 sec. max.				



(2) Soldering Iron

If compelled to mount the component by using a soldering iron, please do not directly touch the component with the soldering iron. The component terminals or electrical characteristics may be damaged if excessive thermal stress is applied.

	Condition
Pre-heating	150°C 60 sec.
Heating of the Soldering Iron	350°C max.
Watt	30W max.
Shape of the Soldering Iron	ø3mm max.
Soldering Time	5 sec. max.
Solder	Sn-3.0Ag-0.5Cu

1.2. Optimum Solder Amount for Soldering

Please make the solder volume below the height of the substrate. When exceeding the substrate, damage to the sealing part between the metal cap and the substrate may occur.


2. Wash

The component cannot withstand washing.

3. Notice for Mounting

The component is recommended for placement machines employing optical placement capabilities. The component might be damaged by mechanical force depending on placement machine and condition. Make sure that you have evaluated by using placement machines before going into mass production. Do not use placement machines employing mechanical

Please contact Murata for details beforehand.

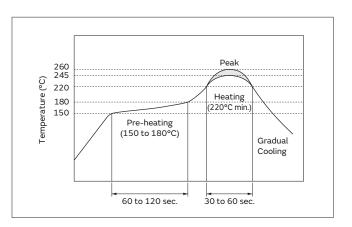

Continued on the following page. 7

Notice - Crystal Oscillators for Industrial-

Continued from the preceding page.

Notice (Storage and Operating Condition)

Product Storage Condition
 Please store the products in a room where the temperature/humidity is stable and avoid places where there are large temperature changes. Please store the products under the following conditions:

Temperature: -10 to + 40 degrees C Humidity: 15 to 85% R.H.

- 2. Expire Date on Storage Expiration date (shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability and/or rusty. Please confirm solderability and characteristics for the products regularly.
- 3. Notice on Product Storage
- (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, and/or be degraded in the solderability due to storage in a chemical atmosphere.

- (2) Please do not put the products directly on the floor without anything under them to avoid damp places and/or dusty places.
- (3) Please do not store the products in places such as in a damp heated place or any place exposed to direct sunlight or excessive vibration.
- (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in solderability due to storage under poor conditions.
- (5) Please do not drop the products to avoid cracking the crystal element.
- 4. Other

Conformal coating or washing of the component is not acceptable.

Please be sure to consult with our sales representative or engineer whenever and prior to using the products.

Notice (Rating)


The component may be damaged if excess mechanical stress is applied.


Notice (Handling)

- Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused by the abnormal function or the failure of our product.
- Please do not use these products in the following applications in transportation equipment (vehicles, trains, ships, etc.). (example: engine control, brake control, steering control, body control.)

Packaging - Crystal Oscillators for Industrial-

Minimum Quantity/Dimensions of Reel




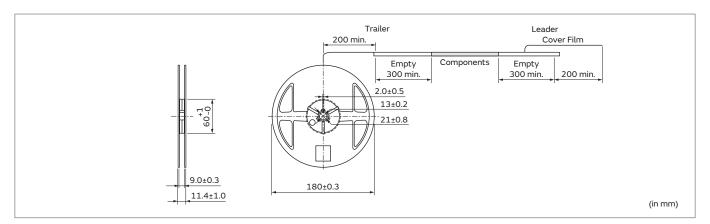

Dimensions of Taping

XTCHH (TTS27VSC-A7) Drawing Out Direction $\,\longrightarrow\,$ 2.0±0.05 1.4±0.1 4.0±0.1 4.0±0.1 0.3±0.05 $\emptyset 1.5^{+0.1}_{-0.0}$ 3.5±0.05 ø1.2±0.1 2.3±0.1 Material: Black Conductive PS 5° max. 1) Cumulative tolerance of 10 pitches R0.3 max. of the sprocket hole is 40.0±0.2mm. (in mm)


XNCHH (TTS27NSC-A7)



Packaging - Crystal Oscillators for Industrial-


Minimum Quantity/Dimensions of Reel



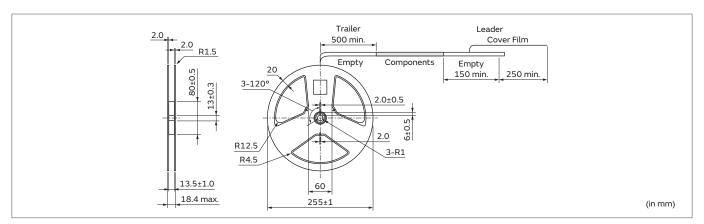

Dimensions of Taping

XTCLH_E (TTS14VSE-A13) XTCLH_J (TTS14VSH)



Measuring Circuit of Crystal Units

Measuring Circuit

1. Frequency Measuring Method


The load resonance frequency (Lower frequency of the two given when the electrical impedance of the component becomes resistant near its resonance point) is measured by network analyzer (Agilent E5100A or the equivalent) and the circuit in Figure 1. DUT is shown in Figure 2, and the value of Cs refers to the load capacitance value in specifications.


2. Equivalent Series Resistance


The equivalent series resistance (R1) is measured by network analyzer (Agilent E5100A or equivalent) and the circuit in Figure 1. DUT is shown in Figure 3.

3. Measuring Condition

Standard conditions for measurement shall be +25±3°C temperature and humidity of 45 to 85%R.H.

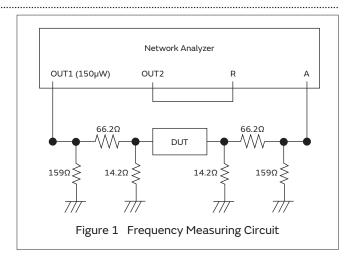



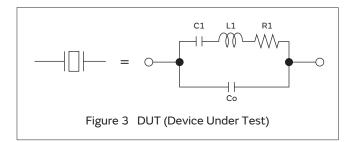

Global Locations

For details please visit www.murata.com



Note

1 Export Control

For customers outside Japan:

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

For customers in Japan:

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- 2 Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
 - Aircraft equipment
 - Aerospace equipment
 - 3 Undersea equipment
 - Power plant equipment
 - Medical equipment
 - Transportation equipment (vehicles, trains, ships, etc.)
 - 7 Traffic signal equipment
 - (3) Disaster prevention / crime prevention equipment
 - Data-processing equipment
 - Application of similar complexity and/or reliability requirements to the applications listed above

- Product specifications in this catalog are as of December 2015. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.
- 4 Please read rating and \(\Delta\)CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- This catalog has only typical specifications.
 Therefore, please approve our product
 specifications or transact the approval sheet
 for product specifications before ordering.
- Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
- No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.

Murata Manufacturing Co., Ltd.

www.murata.com





OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru