


FEATURES

- C0G (NP0), X7R, X5R, Z5U and Y5V Dielectrics
- 10, 16, 25, 50, 100 and 200 Volts
- Standard End Metallization: Tin-plate over nickel barrier
- Available Capacitance Tolerances: ± 0.10 pF; ± 0.25 pF; ± 0.5 pF; $\pm 1\%$; $\pm 2\%$; $\pm 5\%$; $\pm 10\%$; $\pm 20\%$; and $+80\%-20\%$
- Tape and reel packaging per EIA481-1. (See page 92 for specific tape and reel information.) Bulk Cassette packaging (0402, 0603, 0805 only) per IEC60286-6 and EIAJ 7201.
- RoHS Compliant

CAPACITOR OUTLINE DRAWINGS

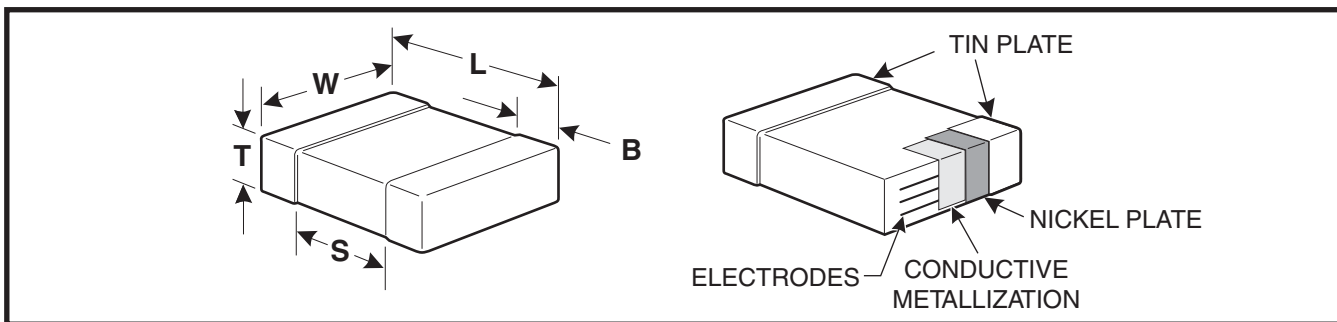

DIMENSIONS—MILLIMETERS AND (INCHES)

| EIA SIZE CODE | METRIC SIZE CODE | L - LENGTH | W - WIDTH | T THICKNESS | B - BANDWIDTH | S SEPARATION minimum | MOUNTING TECHNIQUE |
|---------------|------------------|-----------------------------|-----------------------------------|---------------------------------------|------------------------------|----------------------|--------------------------------------|
| 0201* | 0603 | 0.6 (.024) \pm .03 (.001) | 0.3 \pm (.012) \pm .03 (.001) | See page 78 for thickness dimensions. | 0.15 (.006) \pm .05 (.002) | N/A | Solder Reflow |
| 0402* | 1005 | 1.0 (.04) \pm .05 (.002) | 0.5 (.02) \pm .05 (.002) | | 0.20 (.008) \pm .40 (.016) | 0.3 (.012) | |
| 0603 | 1608 | 1.6 (.063) \pm .15 (.006) | 0.8 (.032) \pm .15 (.006) | | 0.35 (.014) \pm .15 (.006) | 0.7 (.028) | |
| 0805* | 2012 | 2.0 (.079) \pm .20 (.008) | 1.25 (.049) \pm .20 (.008) | | 0.50 (.02) \pm .25 (.010) | 0.75 (.030) | Solder Wave + or Solder Reflow |
| 1206* | 3216 | 3.2 (.126) \pm .20 (.008) | 1.6 (.063) \pm .20 (.008) | | 0.50 (.02) \pm .25 (.010) | N/A | |
| 1210* | 3225 | 3.2 (.126) \pm .20 (.008) | 2.5 (.098) \pm .20 (.008) | | 0.50 (.02) \pm .25 (.010) | N/A | |
| 1812 | 4532 | 4.5 (.177) \pm .30 (.012) | 3.2 (.126) \pm .30 (.012) | | 0.60 (.024) \pm .35 (.014) | N/A | Solder Reflow |
| 1825* | 4564 | 4.5 (.177) \pm .30 (.012) | 6.4 (.252) \pm .40 (.016) | | 0.60 (.024) \pm .35 (.014) | N/A | |
| 2220 | 5650 | 5.6 (.220) \pm .40 (.016) | 5.0 (.197) \pm .40 (.016) | | 0.60 (.024) \pm .35 (.014) | N/A | |
| 2225 | 5664 | 5.6 (.220) \pm .40 (.016) | 6.3 (.248) \pm .40 (.016) | | 0.60 (.024) \pm .35 (.014) | N/A | |

* Note: Indicates EIA Preferred Case Sizes (Tightened tolerances apply for 0402, 0603, and 0805 packaged in bulk bassette, see page 96.)

+ For extended value 1210 case size - solder reflow only.

CAPACITOR ORDERING INFORMATION (Standard Chips - For Military see page 87)

| | | | | | | | | | | |
|--|--------------------------------|-------------|----------|------------|----------|----------|----------|----------|-----------|---|
| CERAMIC SIZE CODE | C | 0805 | C | 103 | K | 5 | R | A | C* | END METALLIZATION |
| SPECIFICATION | | | | | | | | | | C-Standard (Tin-plated nickel barrier) |
| CAPACITANCE CODE | | | | | | | | | | FAILURE RATE LEVEL |
| Expressed in Picofarads (pF) | | | | | | | | | | A- Not Applicable |
| First two digits represent significant figures. | | | | | | | | | | TEMPERATURE CHARACTERISTIC |
| Third digit specifies number of zeros. (Use 9 for 1.0 through 9.9pF. Use 8 for 0.5 through 0.99pF) | | | | | | | | | | Designated by Capacitance |
| (Example: 2.2pF = 229 or 0.50 pF = 508) | | | | | | | | | | Change Over Temperature Range |
| CAPACITANCE TOLERANCE | | | | | | | | | | G - C0G (NP0) (± 30 PPM/ $^{\circ}$ C) |
| B - ± 0.10 pF | J - $\pm 5\%$ | | | | | | | | | R - X7R ($\pm 15\%$) (-55° C + 125° C) |
| C - ± 0.25 pF | K - $\pm 10\%$ | | | | | | | | | P - X5R ($\pm 15\%$) (-55° C + 85° C) |
| D - ± 0.5 pF | M - $\pm 20\%$ | | | | | | | | | U - Z5U ($+22\%$, -56%) ($+10^{\circ}$ C + 85° C) |
| F - $\pm 1\%$ | P - (GMV) - special order only | | | | | | | | | V - Y5V ($+22\%$, -82%) (-30° C + 85° C) |
| G - $\pm 2\%$ | Z - $+80\%$, -20% | | | | | | | | | VOLTAGE |
| | | | | | | | | | | 1 - 100V |
| | | | | | | | | | | 2 - 200V |
| | | | | | | | | | | 3 - 25V |
| | | | | | | | | | | 4 - 16V |
| | | | | | | | | | | 5 - 50V |
| | | | | | | | | | | 8 - 10V |
| | | | | | | | | | | 7 - 4V |
| | | | | | | | | | | 9 - 6.3V |

* Part Number Example: C0805C103K5RAC (14 digits - no spaces)

| Cap pF | Cap Code | Cap Tolerance | C0201* | | C0402* | | | C0603* | | | | | | C0805* | | | | | | C1206* | | | | | |
|-----------|-------------|------------------|--------|-----|--------|-----|-----|--------|-----|-----|-----|------|------|--------|-----|-----|-----|------|------|--------|-----|-----|-----|------|------|
| | | | 25V | 10V | 16V | 25V | 50V | 10V | 16V | 25V | 50V | 100V | 200V | 10V | 16V | 25V | 50V | 100V | 200V | 10V | 16V | 25V | 50V | 100V | 200V |
| 0.50 | 508 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 0.75 | 758 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 1.0 | 109 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 1.1 | 119 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 1.2 | 129 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 1.5 | 159 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 1.6 | 169 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 1.8 | 189 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 2.0 | 209 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 2.2 | 229 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 2.4 | 249 | C,D | | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 2.7 | 279 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 3.0 | 309 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 3.3 | 339 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 3.9 | 399 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 4.3 | 439 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 4.7 | 479 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 5.1 | 519 | C,D | K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 5.6 | 569 | C,D | J,K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 6.0 | 609 | C,D | J,K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 6.2 | 629 | C,D | J,K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 6.8 | 689 | C,D | J,K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 7.0 | 709 | C,D | J,K,M | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB | CB |
| 7.5 | 759 | C,D | J,K,M | BB | | | | | | | | | | | | | | | | | | | | | |

NOTE: For non-standard capacitance values or voltages, contact your local KEMET sales representative.
50 Volt Ceramic Chips can be used in 63 volt applications.

Reels with such substitutions will be marked with the improved KEMET part numbers.

- **Greater or equal to J (5%) tolerance available.**
- **J Tolerance Only: ^ = D Tolerance Only ~ = J,K,M Tolerance Only**

• J Tolerance Only; ^ = D Tolerance Only ~ = J,K,M Tolerance Only

See page 78 for Thickness Code Reference Chart.

©KEMET Electronics Corporation, P.O. Box 5928, Greenville, S.C. 29606. (864) 963-6300

73

| Cap pF | Cap Code | Cap Tolerance | C1210* | | | | C1812* | | | C1825* | | | C2220 | | | C2225 | | |
|-----------|-------------|------------------|--------|-----|------|------|--------|------|------|--------|------|------|-------|------|------|-------|------|------|
| | | | 25V | 50V | 100V | 200V | 50V | 100V | 200V | 50V | 100V | 200V | 50V | 100V | 200V | 50V | 100V | 200V |
| 10.0 | 100 | D J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 12.0 | 120 | D J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 15.0 | 150 | D G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 18.0 | 180 | D G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 22.0 | 220 | D G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 27.0 | 270 | D F,G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 33.0 | 330 | D F,G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 39.0 | 390 | D F,G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 47.0 | 470 | D F,G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 56.0 | 560 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 68.0 | 680 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 82.0 | 820 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 100.0 | 101 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 120.0 | 121 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 150.0 | 151 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 180.0 | 181 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 220.0 | 221 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 270.0 | 271 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 330.0 | 331 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 390.0 | 391 | F G,J,K,M | | FB | FB | FB | | | | | | | | | | | | |
| 470.0 | 471 | F G,J,K,M | | FB | FB | FB | GB | GB | GB | | | | | | | | | |
| 560.0 | 561 | F G,J,K,M | | FB | FB | FB | GB | GB | GB | | | | | | | | | |
| 680.0 | 681 | F G,J,K,M | | FB | FB | FB | GB | GB | GB | | | | | | | | | |
| 820.0 | 821 | F G,J,K,M | | FB | FB | FB | GB | GB | GB | | | | | | | | | |
| 1,000.0 | 102 | F G,J,K,M | | FB | FB | FB | GB | GB | GB | | | | | | | | | |
| 1,200.0 | 122 | F G,J,K,M | | FB | FB | FB | GB | GB | GB | | | | | | | | | |
| 1,500.0 | 152 | F G,J,K,M | | FB | FB | FE | GB | GB | GB | | | | | | | | | |
| 1,800.0 | 182 | F G,J,K,M | | FB | FB | FE | GB | GB | GB | | | | | | | | | |
| 2,200.0 | 222 | F G,J,K,M | | FB | FC | FG | GB | GB | GB | | | | | | | | | |
| 2,700.0 | 272 | F G,J,K,M | | FB | FC | FG | GB | GB | GB | | | | | | | | | |
| 3,300.0 | 332 | F G,J,K,M | | FB | FF | FF | GB | GB | GB | | | | | | | | | |
| 3,900.0 | 392 | F G,J,K,M | | FB | FF | FF | GB | GB | GB | HB | HB | HB | | | | | | |
| 4,700.0 | 472 | F G,J,K,M | | FF | FG | | GB | GB | GB | HB | HB | HB | HB | HB | | | | |
| 5,600.0 | 562 | F G,J,K,M | | FF | FG | | GB | GB | GB | HB | HB | HB | | | | KB | KB | KB |
| 6,800.0 | 682 | F G,J,K,M | | FF | FG | | GB | GB | GJ | HB | HB | HB | | | | KB | KB | KB |
| 8, | | | | | | | | | | | | | | | | | | |

| Cap pF | Cap Code | Cap Tolerance | C0402 | | | | C0603 | | | | | | C0805 | | | | | | C1206 | | | | | | | | | |
|-----------|-------------|------------------|-------|-----|-----|-----|-------|------|-----|-----|-----|-----|-------|------|------|-----|-----|-----|-------|------|------|------|-----|-----|-----|-----|------|------|
| | | | 6.3V | 10V | 16V | 25V | 50V | 6.3V | 10V | 16V | 25V | 50V | 100V | 200V | 6.3V | 10V | 16V | 25V | 50V | 100V | 200V | 6.3V | 10V | 16V | 25V | 50V | 100V | 200V |
| 150 | 151 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 180 | 181 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 220 | 221 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 270 | 271 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 330 | 331 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 390 | 391 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 470 | 471 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 560 | 561 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 680 | 681 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 820 | 821 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | | | | | | |
| 1,000 | 102 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CB | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 1,200 | 122 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 1,500 | 152 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 1,800 | 182 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 2,200 | 222 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 2,700 | 272 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 3,300 | 332 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 3,900 | 392 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 4,700 | 472 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 5,600 | 562 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 6,800 | 682 | K,M,J | BB | BB | BB | BB | BB | CB | CB | CB | CB | CB | CB | CC | DC | DC | DC | DC | DC | DC | DC | DC | EB | EB | EB | EB | EB | EB |
| 8,200 | 822 | K,M,J | BB | | | | | | | | | | | | | | | | | | | | | | | | | |

Improved product with higher ratings and tighter capacitance tolerance product may be substituted within the same size (length, width, and thickness) at KEMET's option. Reels with such substitutions will be marked with the improved KEMET part numbers.

74

©KEMET Electronics Corporation, P.O. Box 5928, Greenville, S.C. 29606, (864) 963-6300


Thickness Code Reference Chart
Packaging Quantity Based on Finished Chip Thickness Specifications

| Thickness Code | Chip Size | Chip Thickness Range (mm) | Qty per Reel 7" Plastic | Qty per Reel 13" Plastic | Qty per Reel 7" Paper | Qty per Reel 13" Paper | Qty per Bulk Cassette |
|----------------|-----------|---------------------------|-------------------------|--------------------------|-----------------------|------------------------|-----------------------|
| AA | 0201 | .30 ± .03 | N/A | N/A | 15,000 | N/A | N/A |
| BB | 0402 | .50 ± .05 | N/A | N/A | 10,000 | 50,000 | 50,000 |
| CB | 0603 | .80 ± .07 | N/A | N/A | 4,000 | 10,000 | 15,000 |
| CC | 0603 | .80 ± .10 | N/A | N/A | 4,000 | 10,000 | N/A |
| CD | 0603 | .80 ± .15 | N/A | N/A | 4,000 | 10,000 | N/A |
| DB | 0805 | .60 ± .10 | N/A | N/A | N/A | N/A | 10,000 |
| DC | 0805 | .78 ± .10 | 4,000 | 10,000 | 4,000 | 10,000 | N/A |
| DD | 0805 | .90 ± .10 | 4,000 | 10,000 | N/A | N/A | N/A |
| DE | 0805 | 1.00 ± .10 | 2,500 | 10,000 | N/A | N/A | N/A |
| DF | 0805 | 1.10 ± .10 | 2,500 | 10,000 | N/A | N/A | N/A |
| DG | 0805 | 1.25 ± .15 | 2,500 | 10,000 | N/A | N/A | N/A |
| DH | 0805 | 1.25 ± .20 | 2,500 | 10,000 | N/A | N/A | N/A |
| DJ | 0805 | 1.25 ± .20 | 3,000 | 10,000 | N/A | N/A | N/A |
| DK | 0805 | 1.25 ± .15 | 3,000 | 10,000 | N/A | N/A | N/A |
| EB | 1206 | .78 ± .10 | 4,000 | 10,000 | 4,000 | 10,000 | N/A |
| EC | 1206 | .90 ± .10 | 4,000 | 10,000 | N/A | N/A | N/A |
| ED | 1206 | 1.00 ± .10 | 2,500 | 10,000 | N/A | N/A | N/A |
| EE | 1206 | 1.10 ± .10 | 2,500 | 10,000 | N/A | N/A | N/A |
| EF | 1206 | 1.20 ± .15 | 2,500 | 10,000 | N/A | N/A | N/A |
| EG | 1206 | 1.60 ± .15 | 2,000 | 8,000 | N/A | N/A | N/A |
| EH | 1206 | 1.60 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| EJ | 1206 | 1.70 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| EK | 1206 | .80 ± .10 | 2,000 | 8,000 | N/A | N/A | N/A |
| EL | 1206 | 1.15 ± .15 | 2,000 | 8,000 | N/A | N/A | N/A |
| EM | 1206 | 1.25 ± .15 | 2,500 | 10,000 | N/A | N/A | N/A |
| EN | 1206 | 0.95 ± .10 | 4,000 | 10,000 | N/A | N/A | N/A |
| FB | 1210 | .78 ± .10 | 4,000 | 10,000 | N/A | N/A | N/A |
| FC | 1210 | .90 ± .10 | 4,000 | 10,000 | N/A | N/A | N/A |
| FD | 1210 | .95 ± .10 | 4,000 | 10,000 | N/A | N/A | N/A |
| FE | 1210 | 1.00 ± .10 | 2,500 | 10,000 | N/A | N/A | N/A |
| FF | 1210 | 1.10 ± .10 | 2,500 | 10,000 | N/A | N/A | N/A |
| FG | 1210 | 1.25 ± .15 | 2,500 | 10,000 | N/A | N/A | N/A |
| FH | 1210 | 1.55 ± .15 | 2,000 | 8,000 | N/A | N/A | N/A |
| FJ | 1210 | 1.85 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FK | 1210 | 2.10 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FL | 1210 | 1.40 ± .15 | 2,000 | 8,000 | N/A | N/A | N/A |
| FM | 1210 | 1.70 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FN | 1210 | 1.85 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FO | 1210 | 1.50 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FP | 1210 | 1.60 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FQ | 1210 | 2.5 ± .20 | 1,500 | 8,000 | N/A | N/A | N/A |
| FR | 1210 | 2.25 ± .20 | 2,000 | 8,000 | N/A | N/A | N/A |
| FS | 1210 | 2.50 ± .20 | 1,000 | 4,000 | N/A | N/A | N/A |
| GB | 1812 | 1.00 ± .10 | 1,000 | 4,000 | N/A | N/A | N/A |
| GC | 1812 | 1.10 ± .10 | 1,000 | 4,000 | N/A | N/A | N/A |
| GD | 1812 | 1.25 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| GE | 1812 | 1.30 ± .10 | 1,000 | 4,000 | N/A | N/A | N/A |
| GF | 1812 | 1.50 ± .10 | 1,000 | 4,000 | N/A | N/A | N/A |
| GG | 1812 | 1.55 ± .10 | 1,000 | 4,000 | N/A | N/A | N/A |
| GH | 1812 | 1.40 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| GJ | 1812 | 1.70 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| GK | 1812 | 1.60 ± .20 | 1,000 | 4,000 | N/A | N/A | N/A |
| GL | 1812 | 1.90 ± .20 | 1,000 | 4,000 | N/A | N/A | N/A |
| GM | 1812 | 2.00 ± .20 | 1,000 | 4,000 | N/A | N/A | N/A |
| GN | 1812 | 1.70 ± .20 | 1,000 | 4,000 | N/A | N/A | N/A |
| HB | 1825 | 1.10 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| HC | 1825 | 1.15 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| HD | 1825 | 1.30 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| HE | 1825 | 1.40 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| HF | 1825 | 1.50 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| JB | 2220 | 1.00 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| JC | 2220 | 1.10 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| JD | 2220 | 1.30 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| JE | 2220 | 1.40 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| JF | 2220 | 1.50 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| KB | 2225 | 1.00 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| KC | 2225 | 1.10 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| KD | 2225 | 1.30 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |
| KE | 2225 | 1.40 ± .15 | 1,000 | 4,000 | N/A | N/A | N/A |


This chart refers to ceramic chip thickness codes on pages 73-76.

Tape & Reel Packaging

KEMET offers Multilayer Ceramic Chip Capacitors packaged in 8mm and 12mm plastic tape on 7" and 13" reels in accordance with EIA standard 481-1: Taping of surface mount components for automatic handling. This packaging system is compatible with all tape fed automatic pick and place systems. See page 78 for details on reeling quantities for commercial chips and page 87 for MIL-PRF-55681 chips.

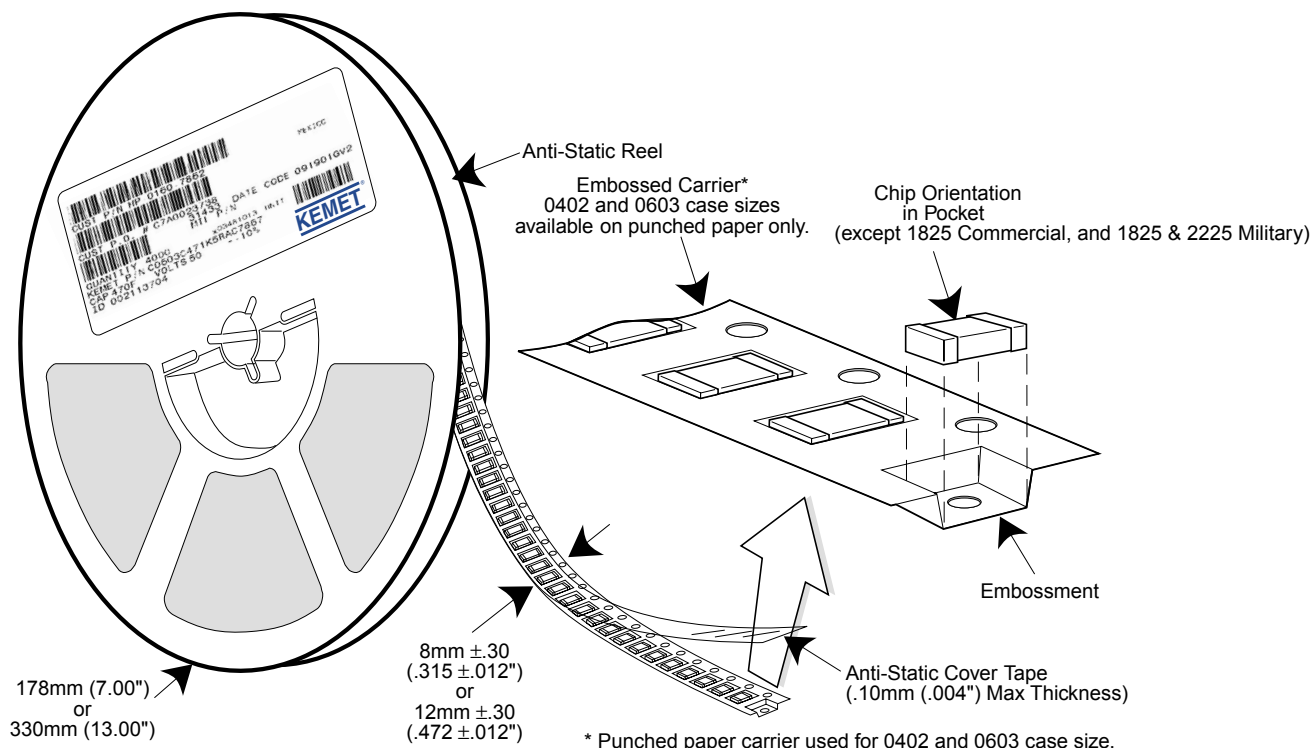

SURFACE MOUNT LAND DIMENSIONS - CERAMIC CHIP CAPACITORS - MM

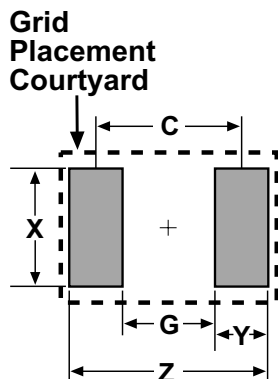

| Dimension | Reflow Solder | | | | | Wave Solder | | | | |
|-----------|---------------|------|------|--------|--------|-----------------|------|------|--------|------|
| | Z | G | X | Y(ref) | C(ref) | Z | G | X | Y(ref) | Smin |
| 0402 | 2.14 | 0.28 | 0.74 | 0.93 | 1.21 | Not Recommended | | | | |
| 0603 | 2.78 | 0.68 | 1.08 | 1.05 | 1.73 | 3.18 | 0.68 | 0.80 | 1.25 | 1.93 |
| 0805 | 3.30 | 0.70 | 1.60 | 1.30 | 2.00 | 3.70 | 0.70 | 1.10 | 1.50 | 2.20 |
| 1206 | 4.50 | 1.50 | 2.00 | 1.50 | 3.00 | 4.90 | 1.50 | 1.40 | 1.70 | 3.20 |
| 1210 | 4.50 | 1.50 | 2.90 | 1.50 | 3.00 | 4.90 | 1.50 | 2.00 | 1.70 | 3.20 |
| 1812 | 5.90 | 2.30 | 3.70 | 1.80 | 4.10 | Not Recommended | | | | |
| 1825 | 5.90 | 2.30 | 6.90 | 1.80 | 4.10 | | | | | |
| 2220 | 7.00 | 3.30 | 5.50 | 1.85 | 5.15 | | | | | |
| 2225 | 7.00 | 3.30 | 6.80 | 1.85 | 5.15 | | | | | |

Calculation Formula

$$Z = Lmin + 2Jt + Tt$$

$$G = Smax - 2Jh - Th$$

$$X = Wmin + 2Js + Ts$$

Tt, Th, Ts = Combined tolerances

Performance Notes

- Cover Tape Break Force:** 1.0 Kg Minimum.
- Cover Tape Peel Strength:** The total peel strength of the cover tape from the carrier tape shall be:

| Tape Width | Peel Strength |
|------------|--|
| 8 mm | 0.1 Newton to 1.0 Newton (10g to 100g) |
| 12 mm | 0.1 Newton to 1.3 Newton (10g to 130g) |

The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.

- Reel Sizes:** Molded tantalum capacitors are available on either 180 mm (7") reels (standard) or 330 mm (13") reels (with C-7280). Note that 13" reels are preferred.
- Labeling:** Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. Refer to EIA-556.

Embossed Carrier Tape Configuration: Figure 1

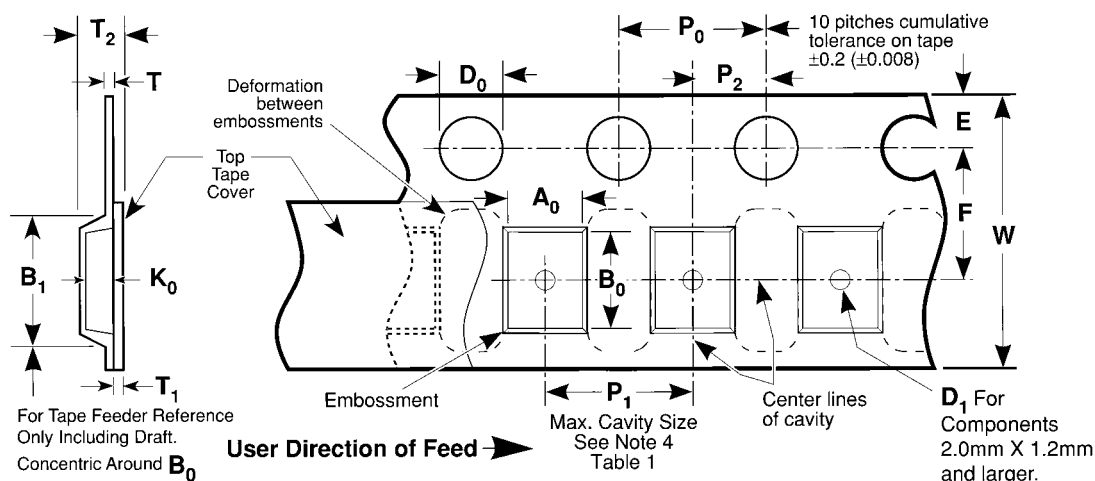



Table 1 — EMBOSSED TAPE DIMENSIONS (Metric will govern)

| Constant Dimensions — Millimeters (Inches) | | | | | | | | | |
|--|--|-------------------------------|-------------------------------|-----------------------------|-----------------------------|--------------------|--------------------|------------------------------|--|
| Tape Size | D ₀ | E | P ₀ | P ₂ | T Max | T ₁ Max | | | |
| 8 mm and 12 mm | 1.5 +0.10 -0.0 (0.059 +0.004, -0.0) | 1.75 ±0.10 (0.069 ±0.004) | 4.0 ±0.10 (0.157 ±0.004) | 2.0 ±0.05 (0.079 ±0.002) | 0.600 (0.024) | 0.100 (0.004) | | | |
| Variable Dimensions — Millimeters (Inches) | | | | | | | | | |
| Tape Size | Pitch | B ₁ Max. Note 1 | D ₁ Min. Note 2 | F | P ₁ | R Min. Note 3 | T ₂ Max | W | A ₀ B ₀ K ₀ Note 4 |
| 8 mm | Single (4 mm) | 4.4 (0.173) | 1.0 (0.039) | 3.5 ±0.05 (0.138 ±0.002) | 4.0 ±0.10 (0.157 ±0.004) | 25.0 (0.984) | 2.5 (0.098) | 8.0 ±0.30 (.315 ±0.012) | |
| 12 mm | Double (8 mm) | 8.2 (0.323) | 1.5 (0.059) | 5.5 ±0.05 (0.217 ±0.002) | 8.0 ±0.10 (0.315 ±0.004) | 30.0 (1.181) | 4.6 (0.181) | 12.0 ±0.30 (0.472 ±0.012) | |

NOTES

- B₁ dimension is a reference dimension for tape feeder clearance only.
- The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of embossment location and hole location shall be applied independent of each other.
- Tape with components shall pass around radius "R" without damage (see sketch A). The minimum trailer length (Fig. 2) may require additional length to provide R min. for 12 mm embossed tape for reels with hub diameters approaching N min. (Table 2)
- The cavity defined by A₀, B₀, and K₀ shall be configured to surround the part with sufficient clearance such that the chip does not protrude beyond the sealing plane of the cover tape, the chip can be removed from the cavity in a vertical direction without mechanical restriction, rotation of the chip is limited to 20 degrees maximum in all 3 planes, and lateral movement of the chip is restricted to 0.5 mm maximum in the pocket (not applicable to vertical clearance.)

Embossed Carrier Tape Configuration (cont.)

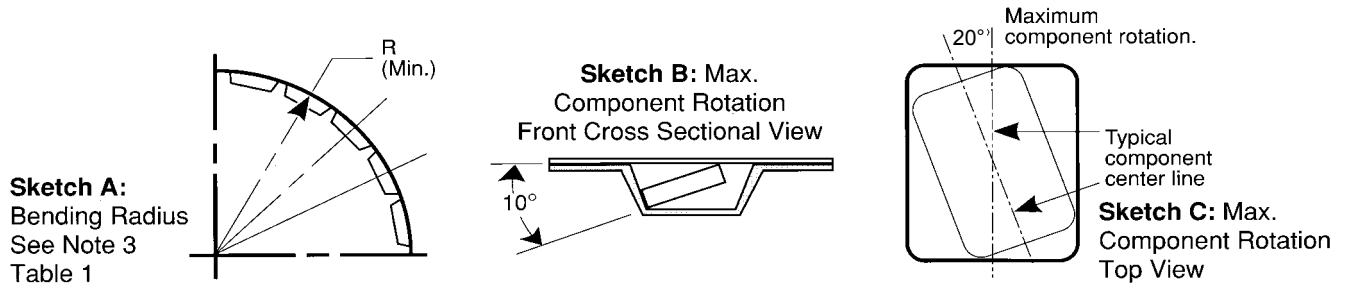

Sketch D: Tape Camber (Top View)

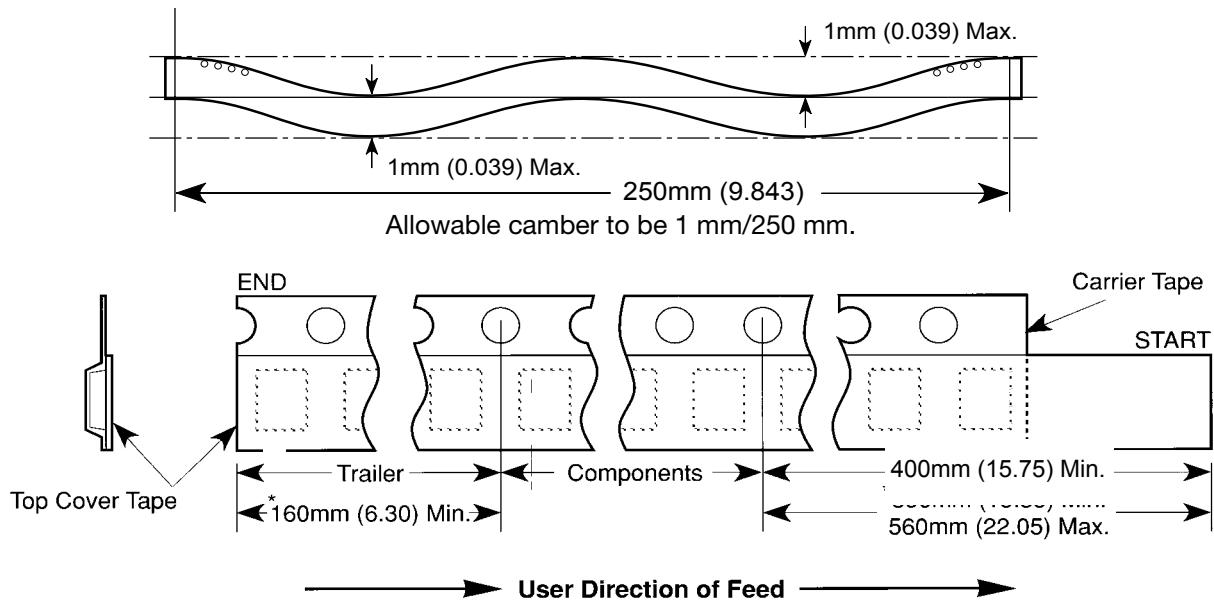


Figure 2:
Tape Leader
& Trailer
Dimensions
(Metric
Dimensions
Will Govern)

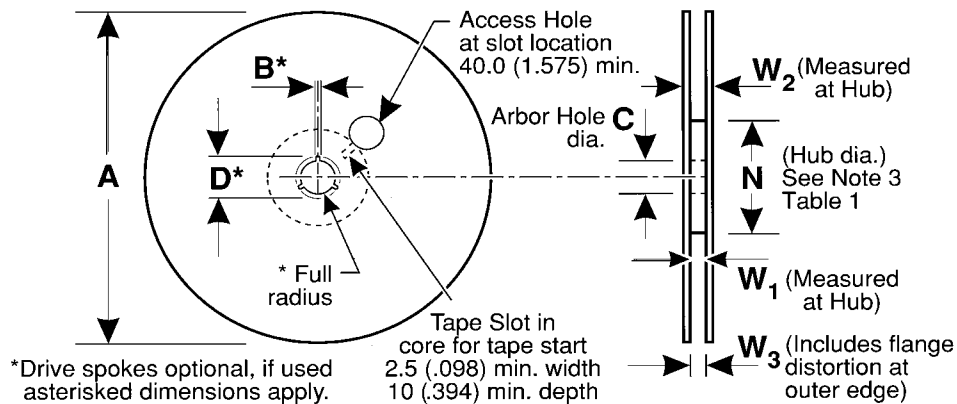
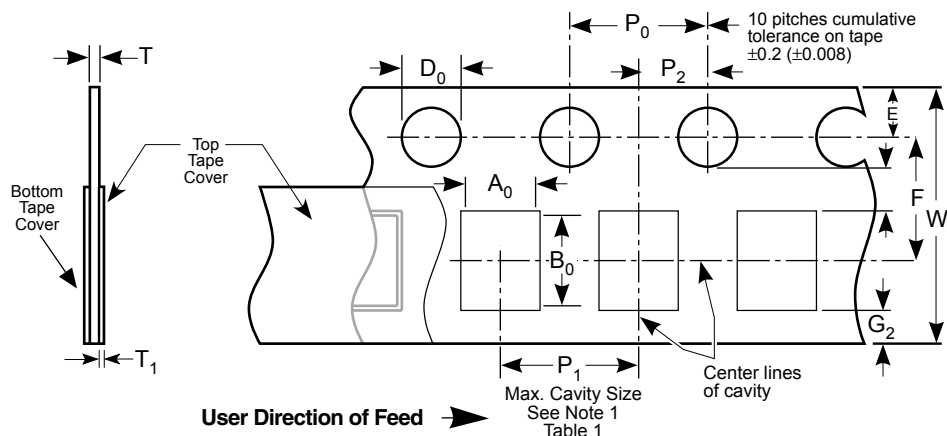


Figure 3: Reel Dimensions (Metric Dimensions will govern)

Table 2 – REEL DIMENSIONS (Metric will govern)

| Tape Size | A Max | B* Min | C | D* Min | N Min | W ₁ | W ₂ Max | W ₃ |
|-----------|-------------------|----------------|--------------------------------|-----------------|---|---|--------------------|--|
| 8 mm | 330.0 (12.992) | 1.5 (0.059) | 13.0 ± 0.20 (0.512 ± 0.008) | 20.2 (0.795) | 50.0 (1.969) See Note 3 Table 1 | 8.4 +1.5, -0.0 (0.331 +0.059, -0.0) | 14.4 (0.567) | 7.9 Min (0.311) 10.9 Max (0.429) |
| 12 mm | 330.0 (12.992) | 1.5 (0.059) | 13.0 ± 0.20 (0.512 ± 0.008) | 20.2 (0.795) | | 12.4 +2.0, -0.0 (0.488 +0.078, -0.0) | 18.4 (0.724) | 11.9 Min (0.469) 15.4 Max (0.606) |

Punched Carrier (Paper Tape) Configuration (Ceramic Chips Only):



**Table 1: 8 & 12mm Punched Tape
(Metric Dimensions Will Govern)**

Constant Dimensions - Millimeters (Inches)

| Tap Size | D ₀ | E | P ₀ | P ₂ | T ₁ | G ₁ | G ₂ | R Min. |
|--------------|--|-----------------------------|------------------------------|------------------------------|------------------------|------------------------|------------------------|------------------------------------|
| 8mm and 12mm | 1.5 +0.10, -0.0 (.059 +0.004, -0.0) | 1.75 ±0.10 (.069 ±0.004) | 4.0 ± 0.10 (.157 ± 0.004) | 2.0 ± 0.05 (.079 ± 0.002) | 0.10 (.004) Max. | 0.75 (.030) Min. | 0.75 (.030) Min. | 25 (.984) See Note 2 Table 1 |

**Table 1: 8 & 12mm Punched Tape
(Metric Dimensions Will Govern)**


Variable Dimensions - Millimeters (Inches)

| Tape Size | P ₁ | F | W | A ₀ B ₀ | T |
|-------------------------|--|-----------------------------|-----------------------------|-------------------------------|--|
| 8mm 1/2 Pitch | 2.0 ± 0.10 (.079 ± .004) See Requirements Section 3.3 (d) | 3.5 ± 0.05 (.138 ± .002) | 8.0 ± 0.3 (.315 ± 0.012) | See Note 1 Table 1 | 1.1mm (.043) Max. for Paper Base Tape and 1.6mm (.063) Max. for Non- Paper Base Compositions. See Note 3. |
| 8mm | 4.0 ± 0.10 (0.157 ± .004) | | | | |
| 12mm | 4.0 ± 0.10 (0.157 ± .004) | 5.5 ± 0.05 (.217 ± .002) | 12.0 ± 0.3 (.472 ± .012) | | |
| 12mm Double Pitch | 8.0 ± 0.10 (0.315 ± .004) | | | | |


Note:

1. A_0 , B_0 and T determined by the maximum dimensions to the ends of the terminals extending from the body and/or the body dimensions of the component. The clearance between the ends of the terminals or body of the component to the sides and depth of the cavity (A_0 , B_0 and T) must be within 0.05mm (.002) minimum and 0.50mm (.020) maximum. The clearance allowed must also prevent rotation of the component within the cavity of not more than 20 degrees (see sketches A and B).
2. Tape with components shall pass around radius "R" without damage.
3. KEMET nominal thicknesses are: 0402 = 0.6mm and all others 0.95mm minimum.


Sketch A:
Bending Radius
See Note 2
Table 1



Sketch B:
Max. Component
Rotation - Front
Cross Sectional View



Sketch C:
Component Rotation - Top View




CERAMIC CHIP CAPACITORS

Packaging Information



Bulk Cassette Packaging (Ceramic Chips only) (Meets Dimensional Requirements IEC-286-6 and EIAJ 7201)

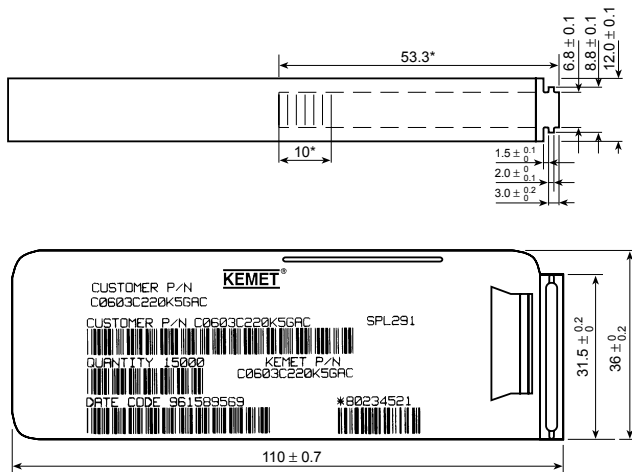

Unit: mm
* Reference




Table 2 – Capacitance Values Available In Bulk Cassette Packaging

| Case Size | Dielectric | Voltage | Min. Cap Value | Max. Cap Value |
|-----------|------------|---------|----------------|----------------|
| 0402 | All | All | All | All |
| 0603 | All | All | All | All |
| 0805 | C0G | 200 | 109 | 181 |
| | | 100 | 109 | 331 |
| | | 50 | 109 | 102 |
| | X7R | 200 | 221 | 392 |
| | | 100 | 221 | 103 |
| | | 50 | 221 | 273 |
| | | 25 | 221 | 104 |
| | | 16 | 221 | 104 |
| | Y5V | 25 | 104 | 224 |
| | | 16 | 104 | 224 |
| | | | | |
| | | | | |

Table 1 – Capacitor Dimensions for Bulk Cassette Packaging – Millimeters

| Metric Size Code | EIA Size Code | Length L | Width W | Thickness T | Bandwidth B | Minimum Separation S | Number of Pcs/Cassette |
|------------------|---------------|------------|-------------|-------------|-------------|----------------------|------------------------|
| 1005 | 0402 | 1.0 ± 0.05 | 0.5 ± 0.05 | 0.5 ± .05 | 0.2 to 0.4 | 0.3 | 50,000 |
| 1608 | 0603 | 1.6 ± 0.07 | 0.8 ± 0.07 | 0.8 ± .07 | 0.2 to 0.5 | 0.7 | 15,000 |
| 2012 | 0805 | 2.0 ± 0.10 | 1.25 ± 0.10 | 0.6 ± .10 | 0.5 to 0.75 | 0.75 | 10,000 |

Terminations: KEMET nickel barrier layer with a tin overplate.

CAPACITOR MARKING TABLE (Marking Optional - Not Available for 0402 Size or Y5V Dielectric)

| Alpha Character | Capacitance (pF) For Various Numeral Identifiers | | | | | | | | | |
|-----------------|--|-----|----|-----|------|--------|---------|-----------|------------|--|
| | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | |
| A | 0.10 | 1.0 | 10 | 100 | 1000 | 10,000 | 100,000 | 1,000,000 | 10,000,000 | |
| B | 0.11 | 1.1 | 11 | 110 | 1100 | 11,000 | 110,000 | 1,100,000 | 11,000,000 | |
| C | 0.12 | 1.2 | 12 | 120 | 1200 | 12,000 | 120,000 | 1,200,000 | 12,000,000 | |
| D | 0.13 | 1.3 | 13 | 130 | 1300 | 13,000 | 130,000 | 1,300,000 | 13,000,000 | |
| E | 0.15 | 1.5 | 15 | 150 | 1500 | 15,000 | 150,000 | 1,500,000 | 15,000,000 | |
| F | 0.16 | 1.6 | 16 | 160 | 1600 | 16,000 | 160,000 | 1,600,000 | 16,000,000 | |
| G | 0.18 | 1.8 | 18 | 180 | 1800 | 18,000 | 180,000 | 1,800,000 | 18,000,000 | |
| H | 0.20 | 2.0 | 20 | 200 | 2000 | 20,000 | 200,000 | 2,000,000 | 20,000,000 | |
| J | 0.22 | 2.2 | 22 | 220 | 2200 | 22,000 | 220,000 | 2,200,000 | 22,000,000 | |
| K | 0.24 | 2.4 | 24 | 240 | 2400 | 24,000 | 240,000 | 2,400,000 | 24,000,000 | |
| L | 0.27 | 2.7 | 27 | 270 | 2700 | 27,000 | 270,000 | 2,700,000 | 27,000,000 | |
| M | 0.30 | 3.0 | 30 | 300 | 3000 | 30,000 | 300,000 | 3,000,000 | 30,000,000 | |
| N | 0.33 | 3.3 | 33 | 330 | 3300 | 33,000 | 330,000 | 3,300,000 | 33,000,000 | |
| P | 0.36 | 3.6 | 36 | 360 | 3600 | 36,000 | 360,000 | 3,600,000 | 36,000,000 | |
| Q | 0.39 | 3.9 | 39 | 390 | 3900 | 39,000 | 390,000 | 3,900,000 | 39,000,000 | |
| R | 0.43 | 4.3 | 43 | 430 | 4300 | 43,000 | 430,000 | 4,300,000 | 43,000,000 | |
| S | 0.47 | 4.7 | 47 | 470 | 4700 | 47,000 | 470,000 | 4,700,000 | 47,000,000 | |
| T | 0.51 | 5.1 | 51 | 510 | 5100 | 51,000 | 510,000 | 5,100,000 | 51,000,000 | |
| U | 0.56 | 5.6 | 56 | 560 | 5600 | 56,000 | 560,000 | 5,600,000 | 56,000,000 | |
| V | 0.62 | 6.2 | 62 | 620 | 6200 | 62,000 | 620,000 | 6,200,000 | 62,000,000 | |
| W | 0.68 | 6.8 | 68 | 680 | 6800 | 68,000 | 680,000 | 6,800,000 | 68,000,000 | |
| X | 0.75 | 7.5 | 75 | 750 | 7500 | 75,000 | 750,000 | 7,500,000 | 75,000,000 | |
| Y | 0.82 | 8.2 | 82 | 820 | 8200 | 82,000 | 820,000 | 8,200,000 | 82,000,000 | |
| Z | 0.91 | 9.1 | 91 | 910 | 9100 | 91,000 | 910,000 | 9,100,000 | 91,000,000 | |
| a | 0.25 | 2.5 | 25 | 250 | 2500 | 25,000 | 250,000 | 2,500,000 | 25,000,000 | |
| b | 0.35 | 3.5 | 35 | 350 | 3500 | 35,000 | 350,000 | 3,500,000 | 35,000,000 | |
| d | 0.40 | 4.0 | 40 | 400 | 4000 | 40,000 | 400,000 | 4,000,000 | 40,000,000 | |
| e | 0.45 | 4.5 | 45 | 450 | 4500 | 45,000 | 450,000 | 4,500,000 | 45,000,000 | |
| f | 0.50 | 5.0 | 50 | 500 | 5000 | 50,000 | 500,000 | 5,000,000 | 50,000,000 | |
| m | 0.60 | 6.0 | 60 | 600 | 6000 | 60,000 | 600,000 | 6,000,000 | 60,000,000 | |
| n | 0.70 | 7.0 | 70 | 700 | 7000 | 70,000 | 700,000 | 7,000,000 | 70,000,000 | |
| t | 0.80 | 8.0 | 80 | 800 | 8000 | 80,000 | 800,000 | 8,000,000 | 80,000,000 | |
| y | 0.90 | 9.0 | 90 | 900 | 9000 | 90,000 | 900,000 | 9,000,000 | 90,000,000 | |

Laser marking is available as an extra-cost option for most KEMET ceramic chips. Such marking is two sided, and includes a \bar{K} to identify KEMET, followed by two characters (per EIA-198 - see table below) to identify the capacitance value. Note that marking is not available for size 0402 nor for any Y5V chip. In addition, the 0603 marking option is limited to the \bar{K} only.



Example shown is 1,000 pF capacitor.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru