

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type



While Type 3186's standard encasement is by compression with the capacitor element captured on an aluminum peg in the can bottom and a phenolic peg in the top, rilled construction is available. With rilled construction the element is secured by rills, spoon shaped dimples in the side of the can. Rilled construction offers the industry's highest vibration and shock withstanding and excellent heat transfer. Besides increasing ripple current handling, the rilled construction extends the great value of the Type 3186 into military and transportation applications that require rugged mechanical capability.

### Highlights

- Rilled cans withstand high shock and vibration
- High ripple current capability
- High capacitance per can

### Specifications

|                                 |                                                                                                                                                       |       |        |        |         |         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|--------|---------|---------|
| Temperature Range               | −40 °C to +85 °C                                                                                                                                      |       |        |        |         |         |
| Rated Voltage Range             | 16 Vdc to 500 Vdc                                                                                                                                     |       |        |        |         |         |
| Capacitance Range               | 220 uF to 1.0 F                                                                                                                                       |       |        |        |         |         |
| Capacitance Tolerance           | −10% +75% ≤ 160 Vdc<br>−10% +50% ≥ 200 Vdc                                                                                                            |       |        |        |         |         |
| Leakage Current                 | ≤6√CV μA (6 mA max.) at 5 minutes                                                                                                                     |       |        |        |         |         |
| Ripple Current Multipliers      | Ambient Temperature                                                                                                                                   |       |        |        |         |         |
|                                 | 45 °C                                                                                                                                                 | 55 °C | 65 °C  | 75 °C  | 85 °C   |         |
|                                 | 2.24                                                                                                                                                  | 2.00  | 1.73   | 1.41   | 1.00    |         |
|                                 | Frequency                                                                                                                                             |       |        |        |         |         |
|                                 |                                                                                                                                                       | 60 Hz | 120 Hz | 300 Hz | 1000 Hz | ≥10 kHz |
|                                 | 16 – 100 V                                                                                                                                            | 0.90  | 1.00   | 1.15   | 1.25    | 1.30    |
|                                 | 200 – 500 V                                                                                                                                           | 0.90  | 1.00   | 1.25   | 1.40    | 1.50    |
| Low Temperature Characteristics | Impedance ratio: Z <sub>−20 °C</sub> /Z <sub>+25 °C</sub><br>≤ 8 (16–50 Vdc)<br>≤ 4 (63–100 Vdc)<br>≤ 3 (150–500 Vdc)                                 |       |        |        |         |         |
| Endurance Life Test             | 1,500 h @ full load at 85 °C<br>ΔCapacitance ±10%<br>ESR 200% of limit<br>DCL 100% of limit                                                           |       |        |        |         |         |
| Shelf Life Test                 | 500 h @ 85 °C<br>ΔCapacitance ±10%<br>ESR 175% of limit<br>DCL 100% of limit                                                                          |       |        |        |         |         |
| Vibration                       | 10 to 500 Hz, 0.75 mm or 10 g* if less,<br>3 directions, 2 h ea<br>Δ Capacitance: ±5%<br>no visible damage or leakage<br>*15 g if rilled construction |       |        |        |         |         |
| RoHS Compliant                  |                                                                                                                                                       |       |        |        |         |         |

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type

### Part Numbering System

|             |                  |                                           |                                                      |                           |                                                                                                                     |                                                                              |                                                                          |
|-------------|------------------|-------------------------------------------|------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>3186</b> | <b>GH</b>        | <b>562</b>                                | <b>T</b>                                             | <b>400</b>                | <b>M</b>                                                                                                            | <b>P</b>                                                                     | <b>A1</b>                                                                |
| <b>Type</b> | <b>Case Code</b> | <b>Capacitance</b>                        | <b>Tolerance</b>                                     | <b>Voltage</b>            | <b>Terminal</b>                                                                                                     | <b>Insulation</b>                                                            | <b>Construction*</b>                                                     |
|             |                  | 562=5600 µF<br>223=22000 µF<br>821=820 µF | M= ±20%<br>S= -10 +30%<br>T= -10 +50%<br>U= -10 +75% | 016=16 Vdc<br>450=450 Vdc | A=high post<br>B=low post<br>D=high current low post<br>K=high current high post<br>M=M5 high post<br>J=M6 low post | P=0.008" PVC<br>N=none with mounting clamp/bracket<br>R=0.008" PVC<br>X=none | A1=compression<br>R1=rilled<br>S1=stud & compression<br>T1=stud & rilled |

\* Construction code is also a sequence number, e.g., A1, A2,---,A9, B1,B2,---, for customer specifications. Sequence number 1 in A1, R1, S1 and T1 denotes the standard catalog capacitor with no special requirements.

### Outline Drawing



### Stud Dimensions

| Case  | Stud   | P ± 0.039"    |
|-------|--------|---------------|
| Diam. | Thread | (±1.0 mm)     |
| 1.375 | M8     | 0.470" (12.0) |
| 1.750 | M8     | 0.470" (12.0) |
| 2.000 | M12    | 0.630" (16.0) |
| 2.500 | M12    | 0.630" (16.0) |
| 3.000 | M12    | 0.630" (16.0) |

### Can Dimensions Insulation Adders

|            | Diameter (D) |      | Length (L) |      | Standing Height (H) |      |
|------------|--------------|------|------------|------|---------------------|------|
|            | (in)         | (mm) | (in)       | (mm) | (in)                | (mm) |
| 0.008" PVC | 0.02         | 0.51 | 0.032      | 0.81 | 0.024               | 0.61 |

### Terminal Dimensions

| Terminal Style     | For Case Diameters | Code | Post Diameter |      | H max |     | Thread | min Full Thread |      | Torque |      |
|--------------------|--------------------|------|---------------|------|-------|-----|--------|-----------------|------|--------|------|
|                    |                    |      | in            | mm   | in    | mm  |        | in              | mm   | in-lb  | N-m  |
| Low Post           | 1 3/8 to 3         | B    | 0.314         | 8.0  | 0.094 | 2.4 | 10-32  | 0.218           | 5.5  | 25     | 2.82 |
| High Post          | 1 3/8 to 3         | A    | 0.314         | 8.0  | 0.281 | 7.1 | 10-32  | 0.375           | 9.5  | 25     | 2.82 |
| High Current, Low  | 2 1/2 & 3          | D    | 0.684         | 17.4 | 0.125 | 3.2 | 1/4-28 | 0.344           | 8.7  | 50     | 5.65 |
| High Current, High | 2 1/2 & 3          | K    | 0.684         | 17.4 | 0.281 | 7.1 | 1/4-28 | 0.469           | 11.9 | 60     | 6.78 |
| M5 High Post       | 1 3/8 to 2         | M    | 0.314         | 8.0  | 0.281 | 7.1 | M5     | 0.375           | 9.5  | 25     | 2.82 |
| M5 Post            | 2 1/2 & 3          | F    | 0.512         | 13.0 | 0.230 | 5.8 | M5     | 0.344           | 8.7  | 25     | 2.82 |
| M6 Low Post        | 3                  | J    | 0.684         | 17.4 | 0.125 | 3.2 | M6     | 0.344           | 8.7  | 50     | 5.65 |

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type

### Case Dimensions, Uninsulated Bare Can

| Case Code | Diam. (D) |      | Length (L) |       | Terminal Space(P) |      | Vent Plug (A) |      | Typical Weight |      | Optional Bracket Part No. |
|-----------|-----------|------|------------|-------|-------------------|------|---------------|------|----------------|------|---------------------------|
|           | ±0.031    | ±0.8 | ±0.062     | ±1.6  | ±0.014            | ±0.4 |               |      |                |      |                           |
|           | (in)      | (mm) | (in)       | (mm)  | (in)              | (mm) | (in)          | (mm) | (oz)           | (g)  |                           |
| BA        | 1.375     | 34.9 | 2.125      | 54.0  | 0.5               | 12.7 | 0.39          | 8.0  | 2.5            | 72   | 115058-06                 |
| BB        | 1.375     | 34.9 | 2.625      | 66.7  | 0.5               | 12.7 | 0.39          | 8.0  | 3.2            | 90   | 115058-06                 |
| BC        | 1.375     | 34.9 | 3.125      | 79.4  | 0.5               | 12.7 | 0.39          | 8.0  | 3.7            | 105  | 115058-06                 |
| BD        | 1.375     | 34.9 | 3.625      | 92.1  | 0.5               | 12.7 | 0.39          | 8.0  | 4.2            | 120  | 115058-06                 |
| BE        | 1.375     | 34.9 | 4.125      | 104.8 | 0.5               | 12.7 | 0.39          | 8.0  | 4.7            | 135  | 115058-06                 |
| BF        | 1.375     | 34.9 | 4.625      | 117.5 | 0.5               | 12.7 | 0.39          | 8.0  | 6.0            | 170  | 115058-06                 |
| BG        | 1.375     | 34.9 | 5.125      | 130.2 | 0.5               | 12.7 | 0.39          | 8.0  | 7.7            | 220  | 115058-06                 |
| BH        | 1.375     | 34.9 | 5.625      | 142.9 | 0.5               | 12.7 | 0.39          | 8.0  | 9.5            | 270  | 115058-06                 |
| DA        | 1.750     | 44.5 | 2.125      | 54.0  | 0.75              | 19.1 | 0.453         | 11.5 | 5.6            | 160  | 115058-15                 |
| DB        | 1.750     | 44.5 | 2.625      | 66.7  | 0.75              | 19.1 | 0.453         | 11.5 | 6.1            | 175  | 115058-15                 |
| DC        | 1.750     | 44.5 | 3.125      | 79.4  | 0.75              | 19.1 | 0.453         | 11.5 | 6.3            | 180  | 115058-15                 |
| DD        | 1.750     | 44.5 | 3.625      | 92.1  | 0.75              | 19.1 | 0.453         | 11.5 | 7.2            | 205  | 115058-15                 |
| DE        | 1.750     | 44.5 | 4.125      | 104.8 | 0.75              | 19.1 | 0.453         | 11.5 | 7.7            | 220  | 115058-15                 |
| DF        | 1.750     | 44.5 | 4.625      | 117.5 | 0.75              | 19.1 | 0.453         | 11.5 | 8.2            | 235  | 115058-15                 |
| DG        | 1.750     | 44.5 | 5.125      | 130.2 | 0.75              | 19.1 | 0.453         | 11.5 | 8.8            | 250  | 115058-15                 |
| DH        | 1.750     | 44.5 | 5.625      | 142.9 | 0.75              | 19.1 | 0.453         | 11.5 | 9.5            | 270  | 115058-15                 |
| EA        | 2.000     | 50.8 | 2.125      | 54.0  | 0.875             | 22.2 | 0.5           | 12.7 | 6.0            | 170  | 115058-09                 |
| EB        | 2.000     | 50.8 | 2.625      | 66.7  | 0.875             | 22.2 | 0.5           | 12.7 | 6.3            | 180  | 115058-09                 |
| EC        | 2.000     | 50.8 | 3.125      | 79.4  | 0.875             | 22.2 | 0.5           | 12.7 | 6.7            | 190  | 115058-09                 |
| ED        | 2.000     | 50.8 | 3.625      | 92.1  | 0.875             | 22.2 | 0.5           | 12.7 | 7.7            | 220  | 115058-09                 |
| EE        | 2.000     | 50.8 | 4.125      | 104.8 | 0.875             | 22.2 | 0.5           | 12.7 | 8.9            | 255  | 115058-09                 |
| EF        | 2.000     | 50.8 | 4.625      | 117.5 | 0.875             | 22.2 | 0.5           | 12.7 | 10.2           | 290  | 115058-09                 |
| EG        | 2.000     | 50.8 | 5.125      | 130.2 | 0.875             | 22.2 | 0.5           | 12.7 | 11.2           | 320  | 115058-09                 |
| EH        | 2.000     | 50.8 | 5.625      | 142.9 | 0.875             | 22.2 | 0.5           | 12.7 | 12.3           | 350  | 115058-09                 |
| FB        | 2.500     | 63.5 | 2.625      | 66.7  | 1.125             | 28.6 | 0.625         | 15.9 | 10.5           | 300  | 115058-14                 |
| FC        | 2.500     | 63.5 | 3.125      | 79.4  | 1.125             | 28.6 | 0.625         | 15.9 | 13.0           | 370  | 115058-14                 |
| FD        | 2.500     | 63.5 | 3.625      | 92.1  | 1.125             | 28.6 | 0.625         | 15.9 | 14.0           | 400  | 115058-14                 |
| FE        | 2.500     | 63.5 | 4.125      | 104.8 | 1.125             | 28.6 | 0.625         | 15.9 | 15.6           | 445  | 115058-14                 |
| FF        | 2.500     | 63.5 | 4.625      | 117.5 | 1.125             | 28.6 | 0.625         | 15.9 | 21.0           | 600  | 115058-14                 |
| FG        | 2.500     | 63.5 | 5.125      | 130.2 | 1.125             | 28.6 | 0.625         | 15.9 | 22.8           | 650  | 115058-14                 |
| FH        | 2.500     | 63.5 | 5.625      | 142.9 | 1.125             | 28.6 | 0.625         | 15.9 | 21.0           | 600  | 115058-14                 |
| GC        | 3.000     | 76.2 | 3.125      | 79.4  | 1.25              | 31.8 | 0.75          | 19.0 | 18.2           | 520  | 115058-11                 |
| GD        | 3.000     | 76.2 | 3.625      | 92.1  | 1.25              | 31.8 | 0.75          | 19.0 | 20.0           | 570  | 115058-11                 |
| GE        | 3.000     | 76.2 | 4.125      | 104.8 | 1.25              | 31.8 | 0.75          | 19.0 | 21.0           | 600  | 115058-11                 |
| GF        | 3.000     | 76.2 | 4.625      | 117.5 | 1.25              | 31.8 | 0.75          | 19.0 | 25.2           | 720  | 115058-11                 |
| GG        | 3.000     | 76.2 | 5.125      | 130.2 | 1.25              | 31.8 | 0.75          | 19.0 | 29.8           | 850  | 115058-11                 |
| GH        | 3.000     | 76.2 | 5.625      | 142.9 | 1.25              | 31.8 | 0.75          | 19.0 | 34.0           | 970  | 115058-11                 |
| GJ        | 3.000     | 76.2 | 5.875      | 149.2 | 1.25              | 31.8 | 0.75          | 19.0 | 36.8           | 1050 | 115058-11                 |
| GN        | 3.000     | 76.2 | 8.625      | 219.1 | 1.25              | 31.8 | 0.75          | 19.0 | 51.1           | 1460 | 115058-11                 |

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type

### Ratings

| Capacitance<br>(μF)       | Catalog<br>Part Number | ESR max<br>120 Hz, 25°C<br>(mΩ) | Ripple max<br>120 Hz, 85 °C<br>(A) | Case Size<br>DxL<br>(in) |
|---------------------------|------------------------|---------------------------------|------------------------------------|--------------------------|
| 16 Volts (20 Volts Surge) |                        |                                 |                                    |                          |
| 22000                     | 3186BA223T016APA1      | 25.0                            | 5.4                                | 1.375 X 2.125            |
| 39000                     | 3186BC393T016APA1      | 18.0                            | 7.6                                | 1.375 X 3.125            |
| 56000                     | 3186BE563T016APA1      | 14.0                            | 9.7                                | 1.375 X 4.125            |
| 82000                     | 3186EC823T016APA1      | 6.0                             | 17.0                               | 2.00 X 3.125             |
| 120000                    | 3186EE124T016APA1      | 5.0                             | 21.0                               | 2.00 X 4.125             |
| 150000                    | 3186EF154T016APA1      | 4.0                             | 23.0                               | 2.00 X 4.625             |
| 150000                    | 3186EH154T016APA1      | 4.0                             | 25.0                               | 2.00 X 5.625             |
| 220000                    | 3186FE224T016APA1      | 4.0                             | 27.0                               | 2.50 X 4.125             |
| 270000                    | 3186FF274T016APA1      | 4.0                             | 29.0                               | 2.50 X 4.625             |
| 330000                    | 3186FH334T016DPA1      | 3.0                             | 34.0                               | 2.50 X 5.625             |
| 330000                    | 3186GE334T016DPA1      | 4.0                             | 32.0                               | 3.00 X 4.125             |
| 390000                    | 3186GF394T016DPA1      | 3.0                             | 35.0                               | 3.00 X 4.625             |
| 470000                    | 3186GH474T016DPA1      | 3.0                             | 40.0                               | 3.00 X 5.625             |
| 820000                    | 3186GN824T016DPA1      | 3.0                             | 50.0                               | 3.00 X 8.625             |
| 1000000                   | 3186GN105T016DPA1      | 3.0                             | 50.0                               | 3.00 X 8.625             |
| 25 Volts (30 Volts Surge) |                        |                                 |                                    |                          |
| 18000                     | 3186BA183T025APA1      | 25.0                            | 5.4                                | 1.375 X 2.125            |
| 27000                     | 3186BC273T025APA1      | 18.0                            | 7.5                                | 1.375 X 3.125            |
| 39000                     | 3186BE393T025APA1      | 14.0                            | 9.0                                | 1.375 X 4.125            |
| 68000                     | 3186EC683T025APA1      | 6.0                             | 17.0                               | 2.00 X 3.125             |
| 100000                    | 3186EE104T025APA1      | 5.0                             | 21.0                               | 2.00 X 4.125             |
| 120000                    | 3186EF124T025APA1      | 4.0                             | 23.0                               | 2.00 X 4.625             |
| 150000                    | 3186EH154T025APA1      | 4.0                             | 26.0                               | 2.00 X 5.625             |
| 150000                    | 3186FE154T025APA1      | 4.0                             | 27.0                               | 2.50 X 4.125             |
| 180000                    | 3186FF184T025APA1      | 4.0                             | 29.0                               | 2.50 X 4.625             |
| 220000                    | 3186FH224T025DPA1      | 3.0                             | 31.0                               | 2.50 X 5.625             |
| 220000                    | 3186GE224T025DPA1      | 4.0                             | 32.0                               | 3.00 X 4.125             |
| 270000                    | 3186GF274T025DPA1      | 3.0                             | 35.0                               | 3.00 X 4.625             |
| 330000                    | 3186GH334T025DPA1      | 3.0                             | 38.0                               | 3.00 X 5.625             |
| 560000                    | 3186GN564T025DPA1      | 3.0                             | 50.0                               | 3.00 X 8.625             |
| 40 Volts (50 Volts Surge) |                        |                                 |                                    |                          |
| 10000                     | 3186BA103T040APA1      | 33.0                            | 4.8                                | 1.375 X 2.125            |
| 15000                     | 3186BC153T040APA1      | 19.0                            | 7.4                                | 1.375 X 3.125            |
| 22000                     | 3186BE223T040APA1      | 14.0                            | 9.4                                | 1.375 X 4.125            |
| 39000                     | 3186EC393T040APA1      | 7.0                             | 15.0                               | 2.00 X 3.125             |
| 56000                     | 3186EE563T040APA1      | 6.0                             | 19.0                               | 2.00 X 4.125             |
| 68000                     | 3186EF683T040APA1      | 5.0                             | 21.0                               | 2.00 X 4.625             |
| 82000                     | 3186EH82T040APA1       | 5.0                             | 23.0                               | 2.00 X 5.625             |
| 100000                    | 3186FE104T040APA1      | 5.0                             | 24.0                               | 2.50 X 4.125             |
| 120000                    | 3186FF124T040APA1      | 4.0                             | 27.0                               | 2.50 X 4.625             |
| 150000                    | 3186FH154T040DPA1      | 4.0                             | 31.0                               | 2.50 X 5.625             |
| 150000                    | 3186GE154T040APA1      | 4.0                             | 29.0                               | 3.00 X 4.125             |
| 180000                    | 3186GF184T040DPA1      | 4.0                             | 35.0                               | 3.00 X 4.625             |
| 220000                    | 3186GH224T040DPA1      | 3.0                             | 37.0                               | 3.00 X 5.625             |
| 330000                    | 3186GN334T040DPA1      | 3.0                             | 50.0                               | 3.00 X 8.625             |

| Capacitance<br>(μF)       | Catalog<br>Part Number | ESR max<br>120 Hz, 25°C<br>(mΩ) | Ripple max<br>120 Hz, 85 °C<br>(A) | Case Size<br>DxL<br>(in) |
|---------------------------|------------------------|---------------------------------|------------------------------------|--------------------------|
| 50 Volts (63 Volts Surge) |                        |                                 |                                    |                          |
| 8200                      | 3186BA822T050APA1      | 41.0                            | 4.2                                | 1.375 X 2.125            |
| 12000                     | 3186BC123T050APA1      | 28.0                            | 6.0                                | 1.375 X 3.125            |
| 18000                     | 3186BE183T050APA1      | 21.0                            | 7.8                                | 1.375 X 4.125            |
| 27000                     | 3186EC273T050APA1      | 15.0                            | 10.0                               | 2.00 X 3.125             |
| 47000                     | 3186EE473T050APA1      | 11.0                            | 13.0                               | 2.00 X 4.125             |
| 56000                     | 3186EF563T050APA1      | 10.0                            | 15.0                               | 2.00 X 4.625             |
| 68000                     | 3186EH683T050APA1      | 9.0                             | 17.0                               | 2.00 X 5.625             |
| 68000                     | 3186FE683T050APA1      | 8.0                             | 18.0                               | 2.50 X 4.125             |
| 82000                     | 3186FF823T050APA1      | 7.0                             | 20.0                               | 2.50 X 4.625             |
| 100000                    | 3186FH104T050APA1      | 6.0                             | 24.0                               | 2.50 X 5.625             |
| 100000                    | 3186GE104T050APA1      | 6.0                             | 23.0                               | 3.00 X 4.125             |
| 120000                    | 3186GF124T050APA1      | 6.0                             | 25.0                               | 3.00 X 4.625             |
| 150000                    | 3186GH154T050DPA1      | 5.0                             | 30.0                               | 3.00 X 5.625             |
| 220000                    | 3186GN224T050DPA1      | 4.0                             | 40.0                               | 3.00 X 8.625             |
| 63 Volts (75 Volts Surge) |                        |                                 |                                    |                          |
| 4700                      | 3186BA472T063APA1      | 42.0                            | 4.2                                | 1.375 X 2.125            |
| 8200                      | 3186BC822T063APA1      | 28.0                            | 6.0                                | 1.375 X 3.125            |
| 12000                     | 3186BE123T063APA1      | 21.0                            | 8.0                                | 1.375 X 4.125            |
| 18000                     | 3186EC183T063APA1      | 15.0                            | 10.0                               | 2.00 X 3.125             |
| 27000                     | 3186EE273T063APA1      | 11.0                            | 13.0                               | 2.00 X 4.125             |
| 33000                     | 3186EF333T063APA1      | 10.0                            | 15.0                               | 2.00 X 4.625             |
| 39000                     | 3186EH393T063APA1      | 9.0                             | 16.0                               | 2.00 X 5.625             |
| 47000                     | 3186FE473T063APA1      | 8.0                             | 18.0                               | 2.50 X 4.125             |
| 56000                     | 3186FF563T063APA1      | 7.0                             | 20.0                               | 2.50 X 4.625             |
| 68000                     | 3186FH683T063APA1      | 6.0                             | 24.0                               | 2.50 X 5.625             |
| 68000                     | 3186GE683T063APA1      | 6.0                             | 23.0                               | 3.00 X 4.125             |
| 82000                     | 3186GF823T063APA1      | 6.0                             | 25.0                               | 3.00 X 4.625             |
| 100000                    | 3186GH104T063DPA1      | 5.0                             | 30.0                               | 3.00 X 5.625             |
| 150000                    | 3186GN154T063DPA1      | 4.0                             | 40.0                               | 3.00 X 8.625             |
| 75 Volts (95 Volts Surge) |                        |                                 |                                    |                          |
| 3900                      | 3186BA392T075APA1      | 43.0                            | 4.1                                | 1.375 X 2.125            |
| 6800                      | 3186BC682T075APA1      | 29.0                            | 5.9                                | 1.375 X 3.125            |
| 10000                     | 3186BE103T075APA1      | 21.0                            | 7.8                                | 1.375 X 4.125            |
| 15000                     | 3186EC153T075APA1      | 15.0                            | 10.0                               | 2.00 X 3.125             |
| 22000                     | 3186EE223T075APA1      | 11.0                            | 13.0                               | 2.00 X 4.125             |
| 27000                     | 3186EF273T075APA1      | 10.0                            | 15.0                               | 2.00 X 4.625             |
| 33000                     | 3186EH333T075APA1      | 9.0                             | 17.0                               | 2.00 X 5.625             |
| 33000                     | 3186FE333T075APA1      | 8.0                             | 18.0                               | 2.50 X 4.125             |
| 39000                     | 3186FF393T075APA1      | 7.0                             | 20.0                               | 2.50 X 4.625             |
| 56000                     | 3186FH563T075APA1      | 6.0                             | 23.0                               | 2.50 X 5.625             |
| 47000                     | 3186GE473T075APA1      | 7.0                             | 23.0                               | 3.00 X 4.125             |
| 56000                     | 3186GF563T075APA1      | 6.0                             | 25.0                               | 3.00 X 4.625             |
| 82000                     | 3186GH823T075APA1      | 5.0                             | 29.0                               | 3.00 X 5.625             |
| 120000                    | 3186GN124T075DPA1      | 4.0                             | 40.0                               | 3.00 X 8.625             |

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type





| Capacitance<br>(μF)                | Catalog<br>Part Number | ESR max<br>120 Hz, 25°C<br>(mΩ) | Ripple max<br>120 Hz, 85 °C<br>(A) | Case Size<br>DxL<br>(in) |
|------------------------------------|------------------------|---------------------------------|------------------------------------|--------------------------|
| <b>100 Volts (125 Volts Surge)</b> |                        |                                 |                                    |                          |
| 2700                               | 3186BA272T100APA1      | 65.0                            | 3.3                                | 1.375 X 2.125            |
| 3900                               | 3186BC392T100APA1      | 50.0                            | 4.3                                | 1.375 X 3.125            |
| 5600                               | 3186BE562T100APA1      | 32.0                            | 5.9                                | 1.375 X 4.125            |
| 10000                              | 3186EC103T100APA1      | 52.0                            | 5.5                                | 2.00 X 3.125             |
| 15000                              | 3186EE153T100APA1      | 37.0                            | 7.3                                | 2.00 X 4.125             |
| 18000                              | 3186EF183T100APA1      | 27.0                            | 9.0                                | 2.00 X 4.625             |
| 22000                              | 3186EH223T100APA1      | 11.0                            | 15.0                               | 2.00 X 5.625             |
| 22000                              | 3186FE223T100APA1      | 19.0                            | 11.0                               | 2.50 X 4.125             |
| 27000                              | 3186FF273T100APA1      | 16.0                            | 13.0                               | 2.50 X 4.625             |
| 33000                              | 3186FH333T100APA1      | 14.0                            | 14.0                               | 2.50 X 5.625             |
| 33000                              | 3186GE333T100APA1      | 14.0                            | 14.0                               | 3.00 X 4.125             |
| 39000                              | 3186GF393T100APA1      | 11.0                            | 17.0                               | 3.00 X 4.625             |
| 56000                              | 3186GH563T100DPA1      | 8.0                             | 22.0                               | 3.00 X 5.625             |
| 82000                              | 3186GN823T100DPA1      | 7.0                             | 25.0                               | 3.00 X 8.625             |
| <b>200 Volts (250 Volts Surge)</b> |                        |                                 |                                    |                          |
| 1000                               | 3186BA102T200APA1      | 109.0                           | 2.6                                | 1.375 X 2.125            |
| 1500                               | 3186BC152T200APA1      | 77.0                            | 3.4                                | 1.375 X 3.125            |
| 2200                               | 3186BE222T200APA1      | 52.0                            | 4.6                                | 1.375 X 4.125            |
| 3900                               | 3186EC392T200APA1      | 73.0                            | 4.8                                | 2.00 X 3.125             |
| 5600                               | 3186EE562T200APA1      | 24.0                            | 8.6                                | 2.00 X 4.125             |
| 6800                               | 3186EF682T200APA1      | 21.0                            | 9.9                                | 2.00 X 4.625             |
| 8200                               | 3186EH822T200APA1      | 17.0                            | 12.0                               | 2.00 X 5.625             |
| 10000                              | 3186FE103T200APA1      | 22.0                            | 11.0                               | 2.50 X 4.125             |
| 12000                              | 3186FF123T200APA1      | 17.0                            | 12.0                               | 2.50 X 4.625             |
| 15000                              | 3186FH153T200APA1      | 16.0                            | 14.0                               | 2.50 X 5.625             |
| 12000                              | 3186GE123T200APA1      | 26.0                            | 11.0                               | 3.00 X 4.125             |
| 15000                              | 3186GF153T200APA1      | 23.0                            | 12.0                               | 3.00 X 4.625             |
| 22000                              | 3186GH223T200APA1      | 17.0                            | 15.0                               | 3.00 X 5.625             |
| 33000                              | 3186GN333T200APA1      | 15.0                            | 17.0                               | 3.00 X 8.625             |
| <b>250 Volts (300 Volts Surge)</b> |                        |                                 |                                    |                          |
| 680                                | 3186BA681T250APA1      | 120.0                           | 2.6                                | 1.375 X 2.125            |
| 1200                               | 3186BC122T250APA1      | 76.0                            | 2.6                                | 1.375 X 3.125            |
| 1800                               | 3186BE182T250APA1      | 53.0                            | 4.9                                | 1.375 X 4.125            |
| 2700                               | 3186EC272T250APA1      | 67.0                            | 4.4                                | 2.00 X 3.125             |
| 3900                               | 3186EE392T250APA1      | 27.0                            | 7.9                                | 2.00 X 4.125             |
| 4700                               | 3186EF472T250APA1      | 23.0                            | 9.0                                | 2.00 X 4.625             |
| 5600                               | 3186EH562T250APA1      | 20.0                            | 10.0                               | 2.00 X 5.625             |
| 6800                               | 3186FE682T250APA1      | 24.0                            | 10.0                               | 2.50 X 4.125             |
| 8200                               | 3186FF822T250APA1      | 19.0                            | 11.0                               | 2.50 X 4.625             |
| 10000                              | 3186FH103T250APA1      | 17.0                            | 14.0                               | 2.50 X 5.625             |
| 10000                              | 3186GE103T250APA1      | 25.0                            | 11.0                               | 3.00 X 4.125             |
| 12000                              | 3186GF123T250APA1      | 22.0                            | 12.0                               | 3.00 X 4.625             |
| 15000                              | 3186GH153T250APA1      | 19.0                            | 14.0                               | 3.00 X 5.625             |
| 22000                              | 3186GN223T250APA1      | 16.0                            | 17.0                               | 3.00 X 8.625             |
| <b>350 Volts (400 Volts Surge)</b> |                        |                                 |                                    |                          |
| 390                                | 3186BA391T350APA1      | 270.0                           | 1.3                                | 1.375 X 2.125            |
| 680                                | 3186BC681T350APA1      | 163.0                           | 2.5                                | 1.375 X 3.125            |

| Capacitance<br>(μF)                | Catalog<br>Part Number | ESR max<br>120 Hz, 25°C<br>(mΩ) | Ripple max<br>120 Hz, 85 °C<br>(A) | Case Size<br>DxL<br>(in) |
|------------------------------------|------------------------|---------------------------------|------------------------------------|--------------------------|
| 1000                               | 3186BE102T350APA1      | 112.0                           | 3.3                                | 1.375 X 4.125            |
| 1500                               | 3186EC152T350APA1      | 105.0                           | 3.9                                | 2.00 X 3.125             |
| 2200                               | 3186EE222T350APA1      | 55.0                            | 5.6                                | 2.00 X 4.125             |
| 2700                               | 3186EF272T350APA1      | 44.0                            | 7.0                                | 2.00 X 4.625             |
| 3300                               | 3186EH332T350APA1      | 37.0                            | 8.0                                | 2.00 X 5.625             |
| 2700                               | 3186FE272T350APA1      | 54.0                            | 6.6                                | 2.50 X 4.125             |
| 3900                               | 3186FF392T350APA1      | 37.0                            | 8.7                                | 2.50 X 4.625             |
| 4700                               | 3186FH472T350APA1      | 33.0                            | 9.6                                | 2.50 X 5.625             |
| 4700                               | 3186GE472T350APA1      | 33.0                            | 9.6                                | 3.00 X 4.125             |
| 5600                               | 3186GF562T350APA1      | 33.0                            | 10.0                               | 3.00 X 4.625             |
| 6800                               | 3186GH682T350APA1      | 28.0                            | 11.0                               | 3.00 X 5.625             |
| 12000                              | 3186GN123T350APA1      | 18.0                            | 18.0                               | 3.00 X 8.625             |
| <b>400 Volts (450 Volts Surge)</b> |                        |                                 |                                    |                          |
| 330                                | 3186BA331T400APA1      | 290.0                           | 1.3                                | 1.375 X 2.125            |
| 560                                | 3186BC561T400APA1      | 190.0                           | 2.1                                | 1.375 X 3.125            |
| 820                                | 3186BE821T400APA1      | 129.0                           | 3.0                                | 1.375 X 4.125            |
| 1200                               | 3186EC122T400APA1      | 95.0                            | 3.7                                | 2.00 X 3.125             |
| 1800                               | 3186EE182T400APA1      | 59.0                            | 5.5                                | 2.00 X 4.125             |
| 2200                               | 3186EF222T400APA1      | 50.0                            | 6.4                                | 2.00 X 4.625             |
| 2700                               | 3186EH272T400APA1      | 39.0                            | 7.9                                | 2.00 X 5.625             |
| 2700                               | 3186FE272T400APA1      | 48.0                            | 7.3                                | 2.50 X 4.125             |
| 3300                               | 3186FF332T400APA1      | 39.0                            | 8.5                                | 2.50 X 4.625             |
| 3900                               | 3186FH392T400APA1      | 37.0                            | 9.4                                | 2.50 X 5.625             |
| 3900                               | 3186GE392T400APA1      | 37.0                            | 9.4                                | 3.00 X 4.125             |
| 4700                               | 3186GF472T400APA1      | 34.0                            | 10.0                               | 3.00 X 4.625             |
| 5600                               | 3186GH562T400APA1      | 28.0                            | 11.0                               | 3.00 X 5.625             |
| 10000                              | 3186GN103T400APA1      | 18.0                            | 18.0                               | 3.00 X 8.625             |
| <b>450 Volts (525 Volts Surge)</b> |                        |                                 |                                    |                          |
| 220                                | 3186BA221T450APA1      | 430.0                           | 1.0                                | 1.375 X 2.125            |
| 390                                | 3186BC391T450APA1      | 310.0                           | 1.8                                | 1.375 X 3.125            |
| 560                                | 3186BE561T450APA1      | 180.0                           | 2.6                                | 1.375 X 4.125            |
| 820                                | 3186EC821T450APA1      | 145.0                           | 3.0                                | 2.00 X 3.125             |
| 1200                               | 3186EE122T450APA1      | 85.0                            | 4.6                                | 2.00 X 4.125             |
| 1500                               | 3186EF152T450APA1      | 71.0                            | 5.3                                | 2.00 X 4.625             |
| 1800                               | 3186EH182T450APA1      | 60.0                            | 5.9                                | 2.00 X 5.625             |
| 2200                               | 3186FE222T450APA1      | 53.0                            | 6.7                                | 2.50 X 4.125             |
| 2700                               | 3186FF272T450APA1      | 45.0                            | 7.7                                | 2.50 X 4.625             |
| 3300                               | 3186FH332T450APA1      | 35.0                            | 9.5                                | 2.50 X 5.625             |
| 3300                               | 3186GE332T450APA1      | 35.0                            | 9.5                                | 3.00 X 4.125             |
| 3900                               | 3186GF392T450APA1      | 36.0                            | 9.8                                | 3.00 X 4.625             |
| 4700                               | 3186GH472T450APA1      | 31.0                            | 11.0                               | 3.00 X 5.625             |
| 8200                               | 3186GN822T450APA1      | 23.0                            | 14.0                               | 3.00 X 8.625             |
| <b>500 Volts (550 Volts Surge)</b> |                        |                                 |                                    |                          |
| 820                                | 3186EE821T500APA1      | 132.0                           | 3.4                                | 2.00 X 4.125             |
| 1200                               | 3186EG122T500APA1      | 90.0                            | 4.6                                | 2.00 X 5.125             |
| 2200                               | 3186FG222T500APA1      | 59.0                            | 6.6                                | 2.50 X 5.125             |
| 3300                               | 3186GH332T500APA1      | 43.0                            | 8.6                                | 3.00 X 5.625             |

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type






### Typical Performance Curves

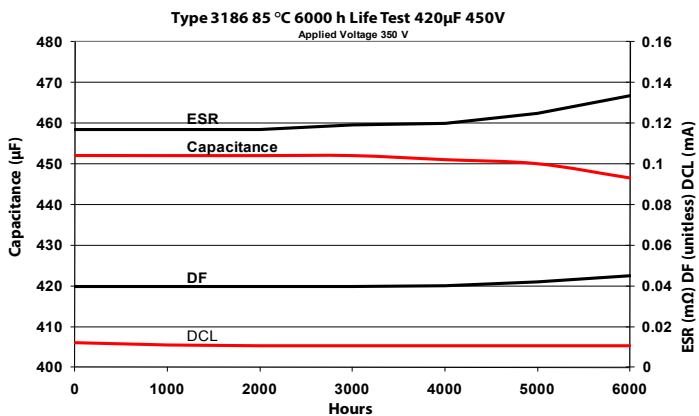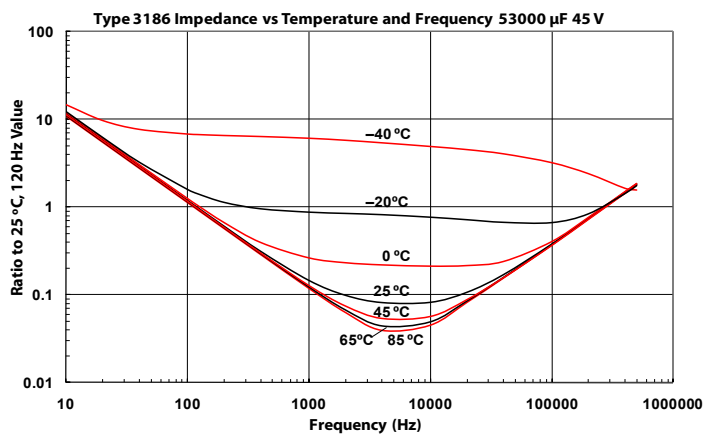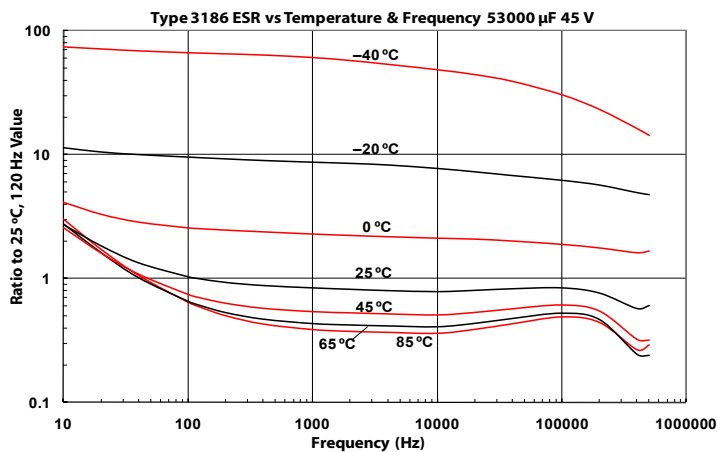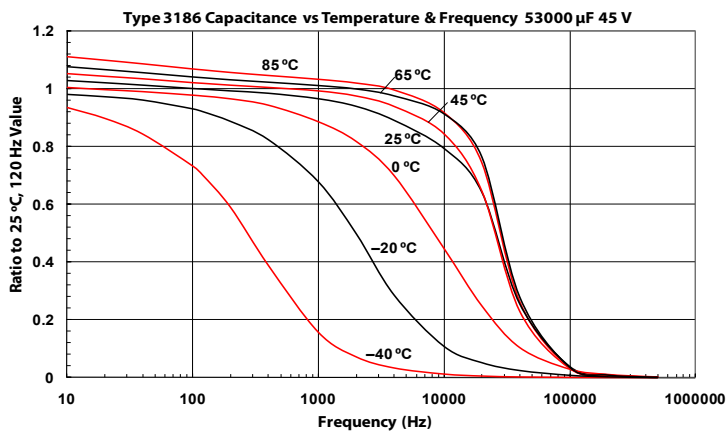

# Type 3186 85 °C Aluminum Electrolytic, Screw Terminal

## Best Value 85 °C High Capacitance Screw Terminal Type

### Typical Performance Curves

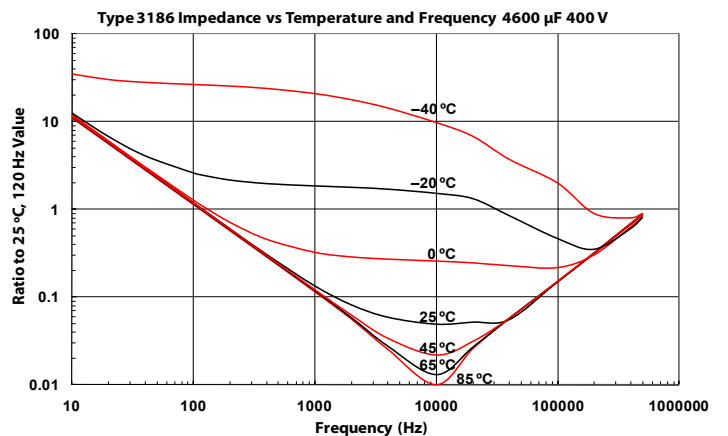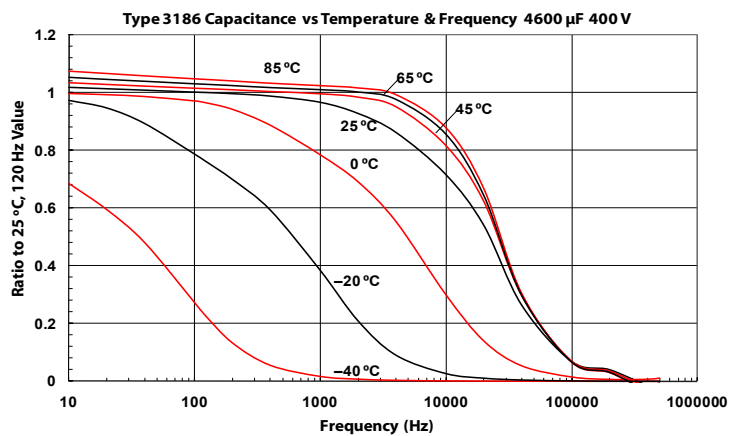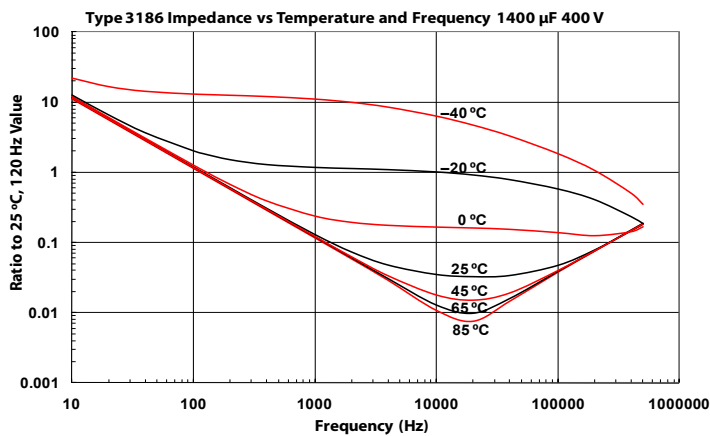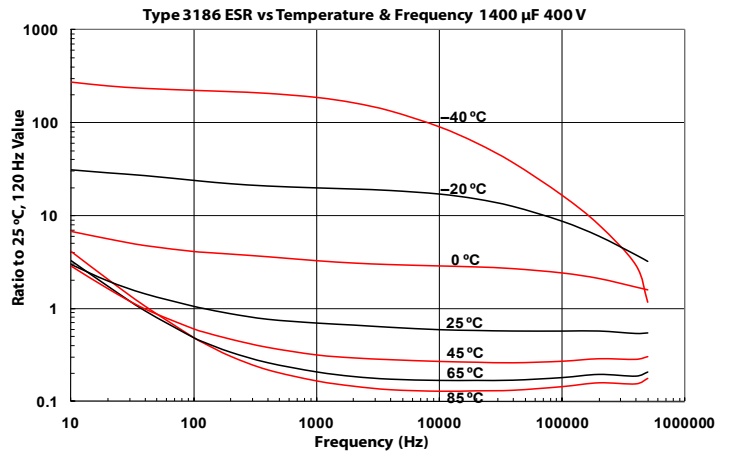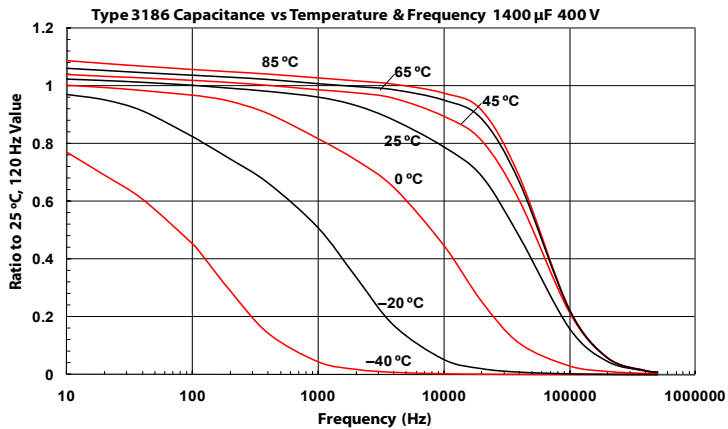

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)