

Low-Peak® Dual-Element Time-Delay Fuses Class RK1 – 250 Volts AC/DC

LPN-RK
70-600A



Catalog Symbol: LPN-RK_SP

Ampere Rating: 70 to 600A

Voltage Ratings:

ac: 250V (or less)

dc: 250V (or less)

Interrupting Ratings:

ac: 300,000A RMS Sym.

dc: 100,000A

Agency Information:

UL Listed—Special Purpose**, Guide JFHR, File E56412

CSA Certified, (200,000 AIR) Class 1422-02, File 53787,

Class RK1 per CSA C22.2 No. 248.12

Catalog Numbers

| | | |
|--------------|--------------|--------------|
| LPN-RK-70SP | LPN-RK-150SP | LPN-RK-350SP |
| LPN-RK-80SP | LPN-RK-175SP | LPN-RK-400SP |
| LPN-RK-90SP | LPN-RK-200SP | LPN-RK-450SP |
| LPN-RK-100SP | LPN-RK-225SP | LPN-RK-500SP |
| LPN-RK-110SP | LPN-RK-250SP | LPN-RK-600SP |
| LPN-RK-125SP | LPN-RK-300SP | — |

Available with tin plate option. Add Suffix "-TP" (Ex.: LPN-RK-100SP-TP)

Carton Quantity and Weight—LPN-RK (250Vac)


| Ampere Ratings | Carton Qty. | Weight* | |
|----------------|-------------|---------|-----|
| | | Lbs. | Kg. |
| 70-100 | 5 | 1.9 | 0.9 |
| 110-200 | 1 | 0.9 | 0.4 |
| 225-400 | 1 | 2.0 | 0.9 |
| 450-600 | 1 | 3.0 | 1.4 |

*Weight per carton.

** Meets all performance requirements of UL Standard 248-12 for Class RK1 fuses.

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 636-527-1270 for more information.

Dimensional Data

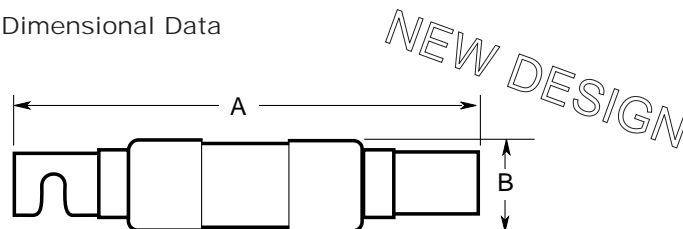

Dimensions (inches)


| Ampere Ratings | "A" | "B" |
|----------------|-----------------|----------------|
| 70-100 | 5.88 (± 0.062) | 1.10 (± 0.020) |
| 110-200 | 7.13 (± 0.062) | 1.61 (± 0.020) |
| 225-400 | 8.63 (± 0.094) | 2.36 (± 0.020) |
| 450-600 | 10.38 (± 0.094) | 2.88 (± 0.020) |

Features:

- Current limiting for maximum short-circuit protection.
- Type 2 protection for IEC and NEMA starters when properly sized.
- High in-rush current motor protection.
- Time-delay that permits 130% FLA sizing for back-up motor protection.
- Provides protection against single-phase motor damage.
- Low watt loss power consumption.
- Electrically isolated end caps.
- 250Vdc, UL Listed.

Applications:

- Branch distribution
- Motors
- Transformers
- Solenoids
- General purpose circuits



Recommended fuseblocks for Class R 250V fuses
See Data Sheet: 1110

Fuse Reducers For Class R Fuses

| Equipment Fuse Clips | Desired Fuse (Case) Size | Catalog Number (Pairs) 600V |
|----------------------|--------------------------|-----------------------------|
| 200A | 100A | No. 2621-R*** |
| 400A | 100A | No. 2641-R |
| | 200A | No. 642-R |
| 600A | 100A | No. 2661-R |
| | 200A | No. 2662-R |
| | 400A | No. 2664-R* |

*Single reducer only (pair not required).


***Reducer No. 2621-R does not apply to LPN-RK-70SP to LPN-RK-100SP Fuses.

For additional information, see Data Sheet: 1118.

Low-Peak® Dual-Element Time-Delay Fuses Class RK1 – 250 Volts AC/DC


LPN-RK
70-600A

Current Limitation Curves

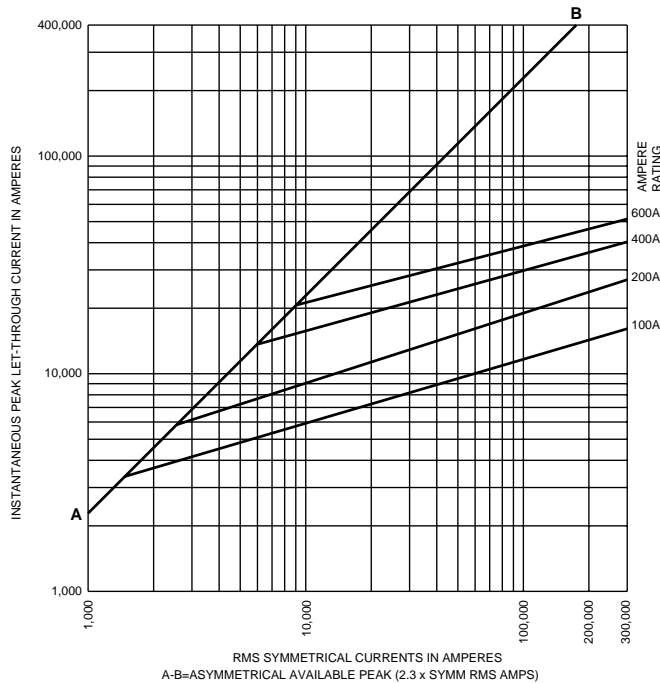

NEW DESIGN

Time-Current Characteristic Curves-Average Melt

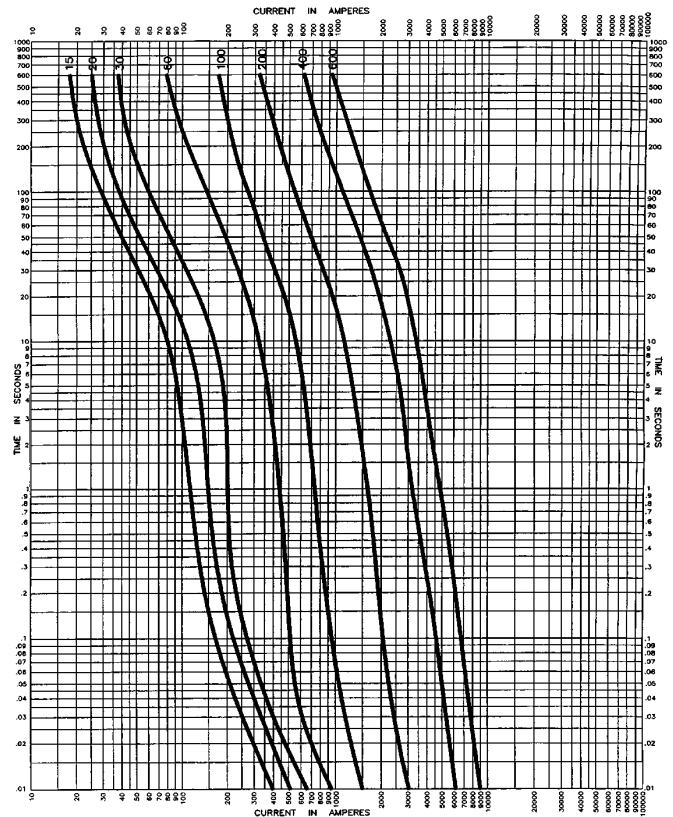

Current-Limiting Effects

| Prospect S.C.C. | Let-Through Current (Apparent RMS Symmetrical) Versus Fuse Rating | | | |
|-----------------|---|--------|--------|--------|
| | 100A | 200A | 400A | 600A |
| 5,000 | 2,100 | 3,150 | 5,000 | 5,000 |
| 10,000 | 2,600 | 3,950 | 6,900 | 9,250 |
| 15,000 | 2,950 | 4,500 | 7,650 | 10,250 |
| 20,000 | 3,200 | 4,900 | 8,350 | 11,050 |
| 25,000 | 3,350 | 5,300 | 8,850 | 11,750 |
| 30,000 | 3,550 | 5,600 | 9,300 | 12,250 |
| 35,000 | 3,750 | 5,850 | 9,700 | 12,800 |
| 40,000 | 3,900 | 6,150 | 10,050 | 13,250 |
| 50,000 | 4,150 | 6,600 | 10,700 | 14,050 |
| 60,000 | 4,400 | 7,000 | 11,250 | 14,750 |
| 80,000 | 4,750 | 7,650 | 12,200 | 15,850 |
| 100,000 | 5,050 | 8,250 | 12,950 | 16,800 |
| 150,000 | 5,700 | 9,400 | 14,500 | 18,650 |
| 200,000 | 6,200 | 10,300 | 15,700 | 20,100 |
| 250,000 | 6,600 | 11,050 | 16,700 | 21,250 |
| 300,000 | 7,000 | 11,750 | 17,550 | 22,350 |

*Values derived from curve data

For information on the previous design LPN-RK 70-6009SP, see Data Sheet: 1048.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru