THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

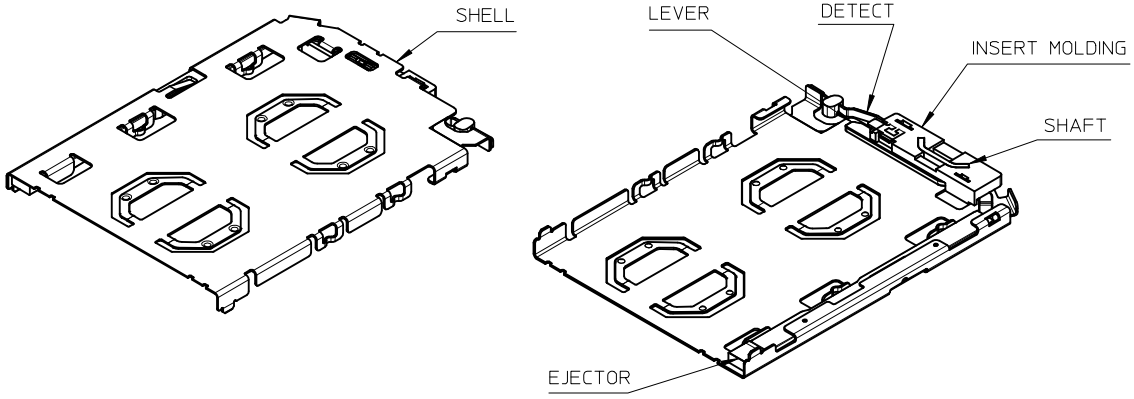

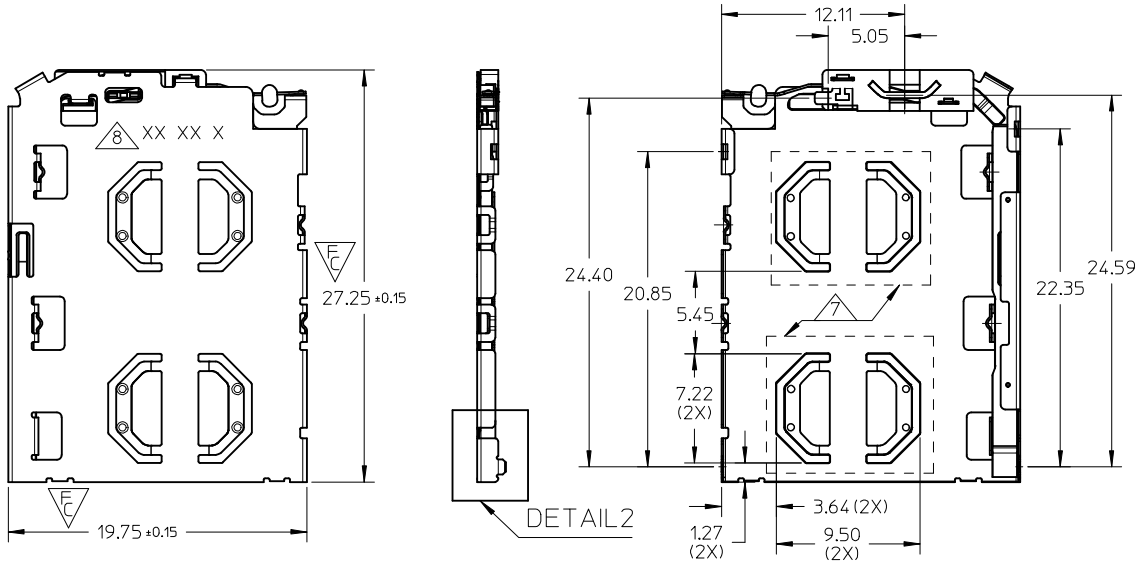

NOTES:
1. MATERIALS:
INSERT MOLD HOUSING: LCP, UL94V-0;
LEVER, SHAFT , EJECTOR , SHELL: STAINLESS STEEL;
DETECT SPRING: COPPER ALLOY;
2. FINISHES:
DETECT SPRING:
1.27um MIN. NICKEL UNDERPLATING OVERALL;
0.127um MIN. GOLD PLATING ON CONTACT AREA;
1.27 um MIN. TIN PLATING ON SOLDERING TAIL;
SHELL:
1.27um MIN NICKEL UNDERPLATING OVERALL;
0.025um MIN GOLD PLATING ON CONTACT AREA AND SOLDERING AREA;
SHAFT: 1.27um MIN TIN ON SOLDERING TAIL;
3. PRODUCT SPECIFICATION: PS-151031-001;
4. PACKAGING SPECIFICATION: PK-151031-001;PK-151032-001
5. SOLDER TAIL COPLANARITY: 0.10 MM MAX BEFORE REFLOW
6. THIS PART IS A FRAME ONLY, IT SHOULD BE USED TOGETHER WITH 0.35MM BLOCK SIM 151032 FOR AN ENTIRE SIM POP OUT SYSTEM;
7. 0.10 MINIMUM KEEP OUT ZONE FROM TOP SURFACE OF SHELL DURING INSERTION AND WITHDRAWAL OF TRAY (WITH SIM CARD)
8. DATE CODE PRINTED: XX XX X
DAY
WEEK
YEAR

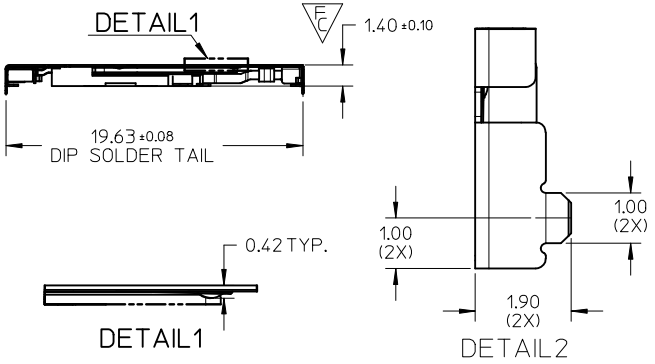

REV	DESCRIPTION
7	CHANGE BLOCK SIM AND TRAY EC NO: S2014-0434 2013/11/04 DRWN:JZENG 2014/01/02 CH'KD:JTAN02 2014/01/27 APPR:KHLIM

QUALITY SYMBOLS
FA=0
FC=4
FB=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	NTS
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	JZENG 2013/11/04
CHECKED BY / DATE	JTAN02 2013/12/05
APPROVED BY / DATE	KHLIM 2014/01/27
MATERIAL NO.	1510310001
TITLE	DUAL MICRO SIM FRAME 1.40 H
DOCUMENT NO.	SD-151031-0001
SHEET NO.	1 OF 5
SIZE	A3

SIM CONNECTOR
(WITH 151032 BLOCK SIM CONNECTOR)

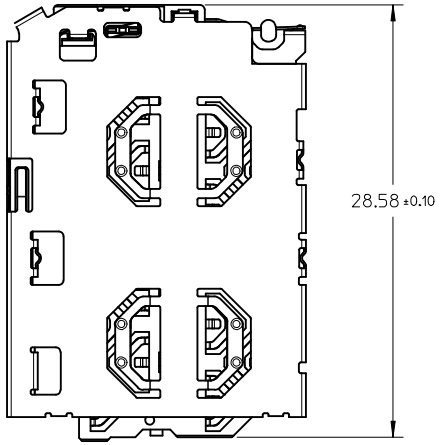

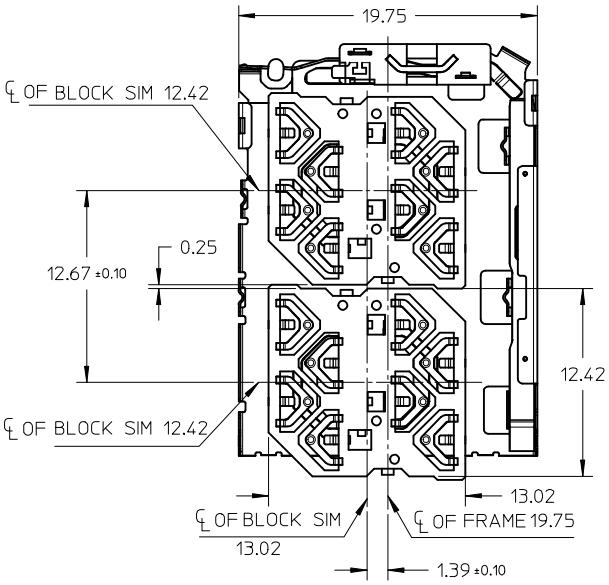

SIM CONNECTOR BOM

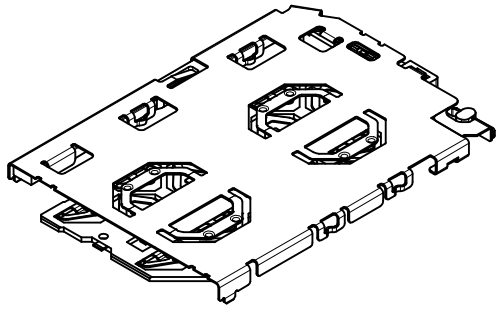

FRAME + BLOCK SIM

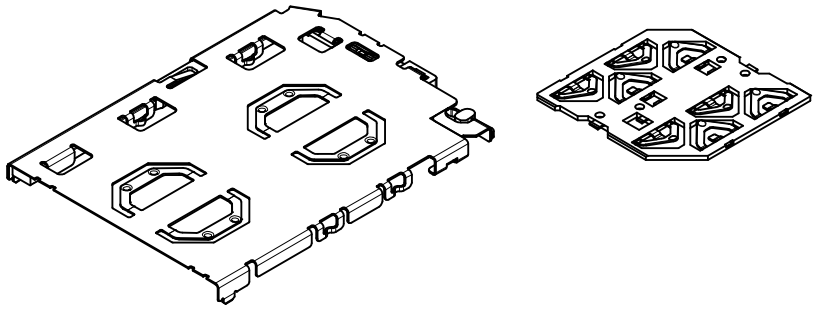

151032 SERIES

151031 SERIES

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

SEE SHEET1	DESCRIPTION	2013/11/04	
EC NO: S2014-0434		2014/01/02	
DRWN:JZENG		2014/01/27	
CH'KD:JTAN02			
APPR:KHLIM			
7	REV		

QUALITY SYMBOLS
FA=0
FC=0
FV=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: NTS	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: JZENG	DATE: 2013/11/04	TITLE: DUAL MICRO SIM FRAME 1.40 H	
CHECKED BY: JTAN02	DATE: 2013/12/05		
APPROVED BY: KHLIM	DATE: 2014/01/27	molex	
MATERIAL NO.: 1510310001		DOCUMENT NO.: SD-151031-0001	SHEET NO.: 2 OF 5
SIZE: A3			

SIM CONNECTOR FRAME AND TRAY

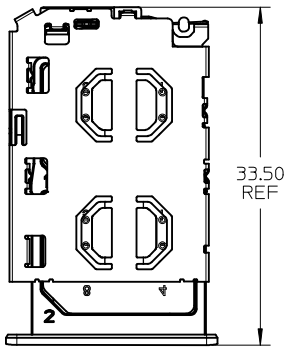

TRAY EJECTED POSITION



TRAY INSERTION POSITION

TRAY DETECT PIN DEFINITION	
TRAY DETECT PIN GND NORMAL SHORT (WITHOUT TRAY)	TRAY DETECT PIN AFTER TRAY INSERTED AFTER TRAY INSERTED OPEN

SIGNAL PIN

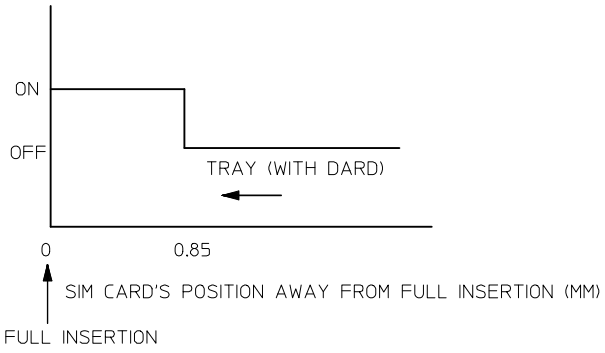

DETECT SWITCH PIN

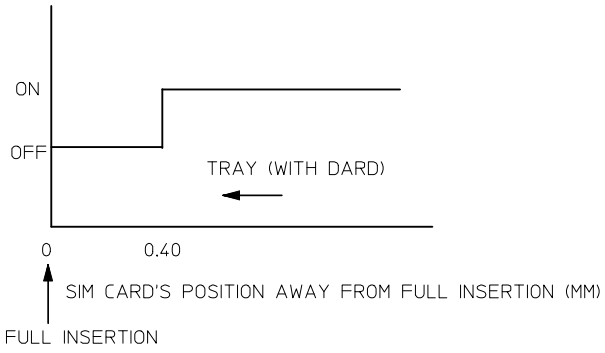

ENTER DESCRIPTION
EC NO: S2014-0434 2013/11/04
DRWN:JZENG 2014/01/02
CH'KD:JTAN02 2014/01/27
APPR:KHLIM
DESCRIPTION
REV
7

QUALITY SYMBOLS
$\sqrt{F_A}$=0
$\sqrt{F_C}$=0
$\sqrt{F_V}$=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/11/04
CHECKED BY: JTAN02 DATE: 2013/12/05
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40 H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0001
SHEET NO.: 3 OF 5
SIZE: A3

151031 FRAME SOLDERING AREA:

KEEP OUT ZONE:

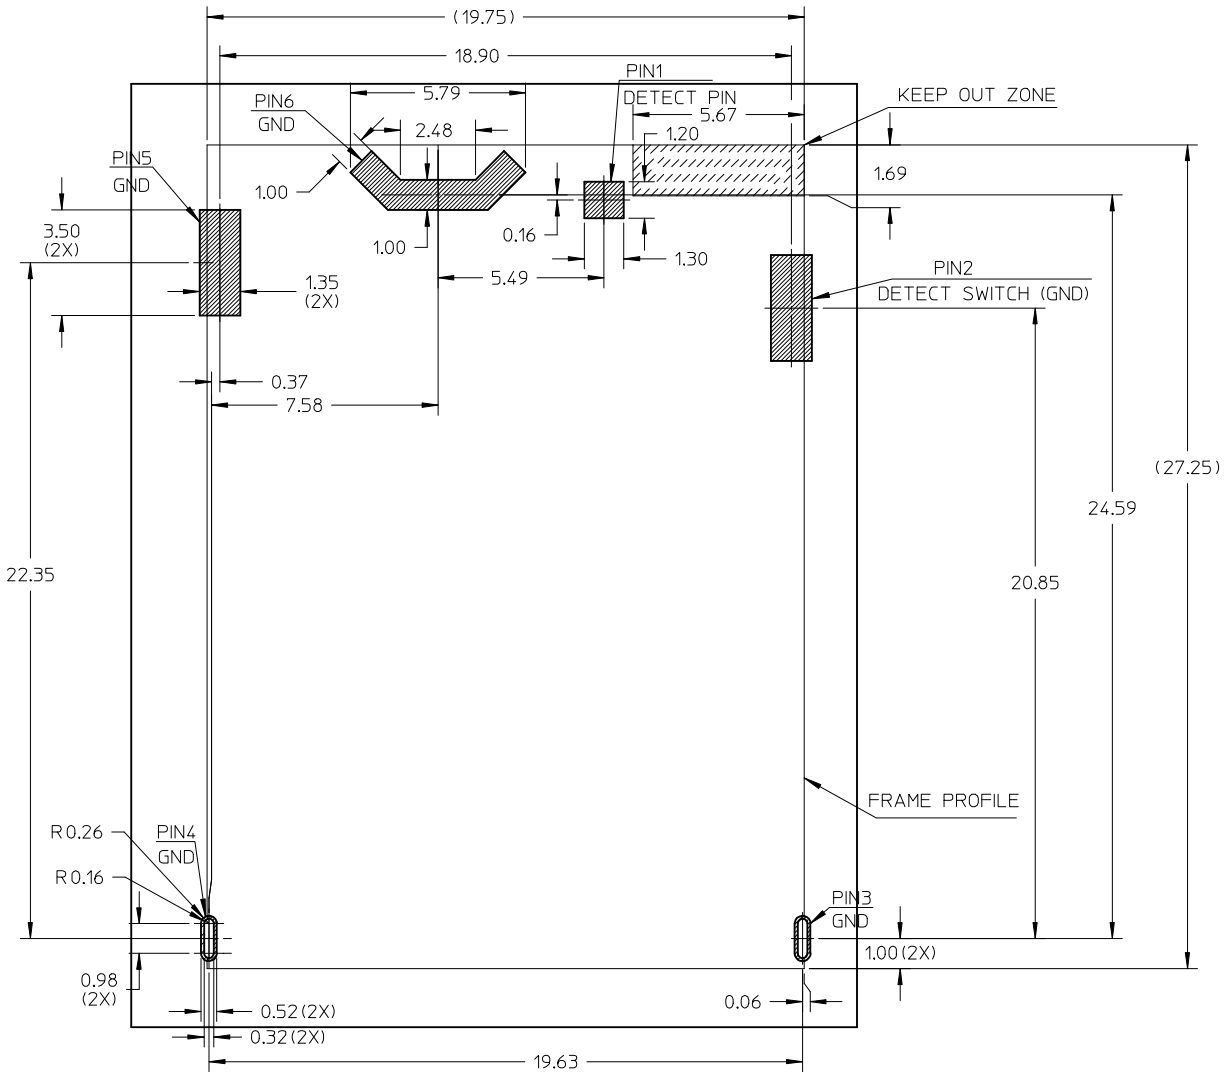

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

RECOMMENDED PCB LAYOUT: TOLERANCE ±0.05
RECOMMENDED PCB THICKNESS: 0.80MM
RECOMMENDED STENCIL THICKNESS: 0.10MM

SEE SHEET 1
EC NO: S2014-0434 2013/11/04
DRWN:JZENG 2014/01/02
CH'KD:JTAN02 2014/01/27
APPR:KHLIM
DESCRIPTION
REV
7

QUALITY SYMBOLS
FA=0
FC=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/11/04
CHECKED BY: JTAN02 DATE: 2013/12/05
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40 H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0001
SHEET NO.: 4 OF 5
SIZE: A3

151031 FRAME SOLDERING AREA:
151032 BLOCK SIM SOLDERING AREA:
KEEP OUT ZONE:

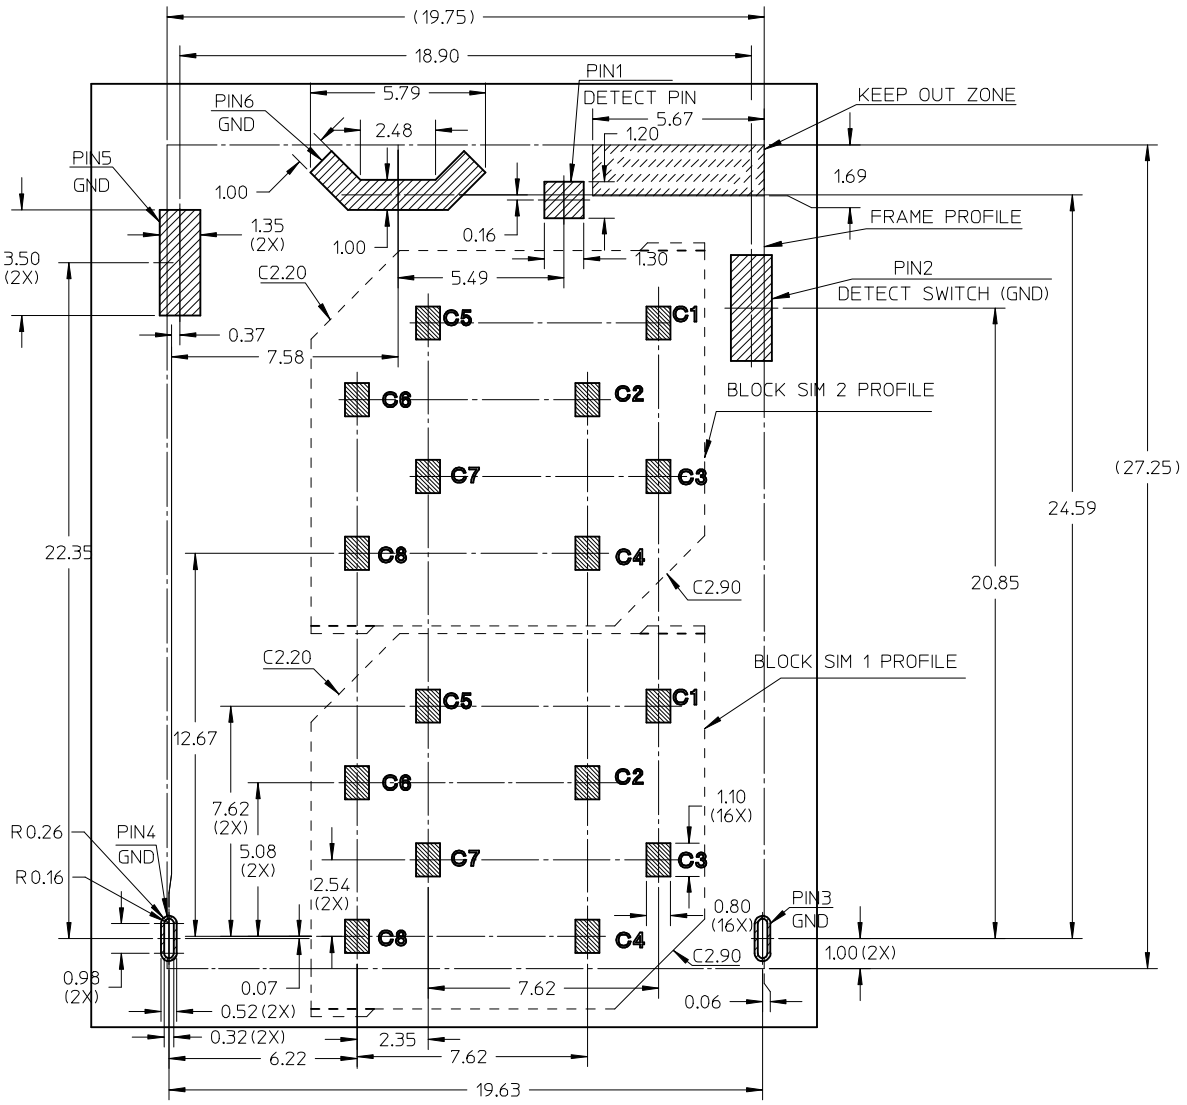

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

RECOMMENDED PCB LAYOUT: TOLERANCE ±0.05
RECOMMENDED PCB THICKNESS: 0.80MM
RECOMMENDED STENCIL THICKNESS: 0.10MM

SEE SHEET 1
EC NO: S2014-0434 2013/11/04
DRWN:JZENG 2014/01/02
CH'KD:JTAN02 2014/01/27
APPR:KHLIM
DESCRIPTION
REV
7

QUALITY SYMBOLS
$\sqrt{F_A}$=0
$\sqrt{F_C}$=0
$\sqrt{F_P}$=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/11/04
CHECKED BY: JTAN02 DATE: 2013/12/05
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40 H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0001
SHEET NO.: 5 OF 5
SIZE: A3

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

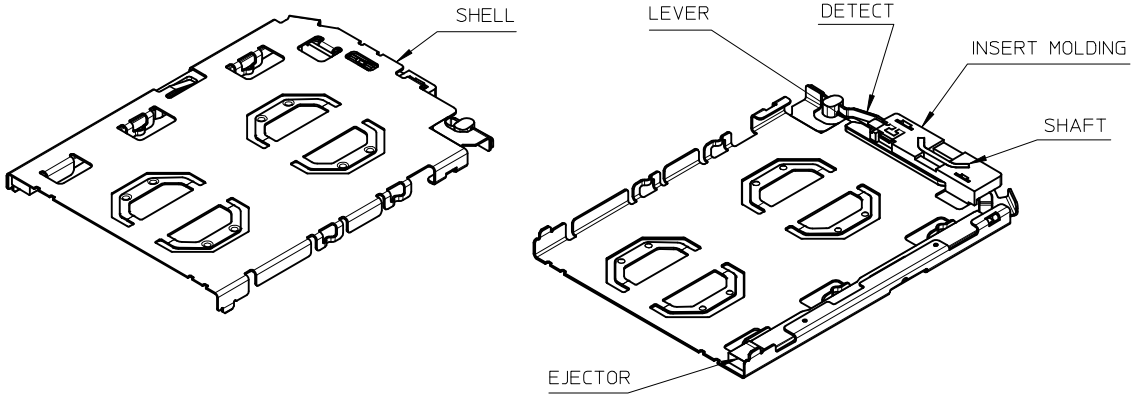

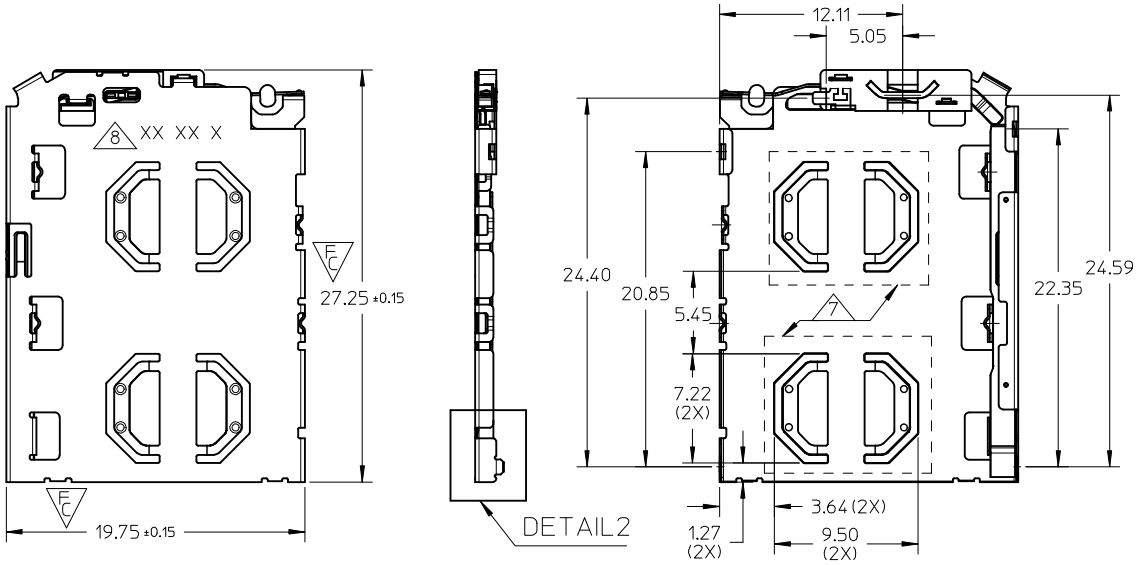

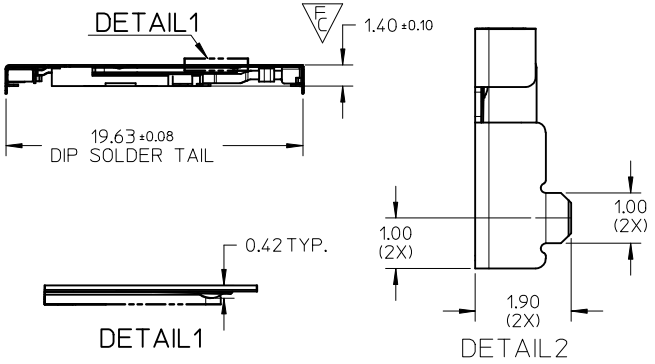

NOTES:
1. MATERIALS:
INSERT MOLD HOUSING: LCP, UL94V-0;
LEVER, SHAFT , EJECTOR , SHELL: STAINLESS STEEL;
DETECT SPRING: COPPER ALLOY;
2. FINISHES:
DETECT SPRING:
1.27um MIN. NICKEL UNDERPLATING OVERALL;
0.127um MIN. GOLD PLATING ON CONTACT AREA;
1.27 um MIN. TIN PLATING ON SOLDERING TAIL;
SHELL:
1.27um MIN NICKEL UNDERPLATING OVERALL;
0.025um MIN GOLD PLATING ON CONTACT AREA AND SOLDERING AREA;
SHAFT: 1.27um MIN TIN ON SOLDERING TAIL;
3. PRODUCT SPECIFICATION: PS-151031-001;
4. PACKAGING SPECIFICATION: PK-151031-001;PK-151032-001
5. SOLDER TAIL COPLANARITY: 0.10 MM MAX BEFORE REFLOW
6. THIS PART IS A FRAME ONLY, IT SHOULD BE USED TOGETHER WITH 0.35MM BLOCK SIM 151032 FOR AN ENTIRE SIM POP OUT SYSTEM;
7. 0.10 MINIMUM KEEP OUT ZONE FROM TOP SURFACE OF SHELL DURING INSERTION AND WITHDRAWAL OF TRAY (WITH SIM CARD)
8. DATE CODE PRINTED: XX XX X
DAY
WEEK
YEAR

UPDATED DRAWING
EC NO: S2014-0434 2013/12/13
DRWN:JZENG 2014/01/02
CH'KD:JTANO2 2014/01/27
APPR:KHLIM
DESCRIPTION
REV: 3

QUALITY SYMBOLS
FA=0
FC=4
FB=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/12/13
CHECKED BY: DATE:
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0002
SHEET NO.: 1 OF 4
SIZE: A3

SIM CONNECTOR
(WITH 151032 BLOCK SIM CONNECTOR)

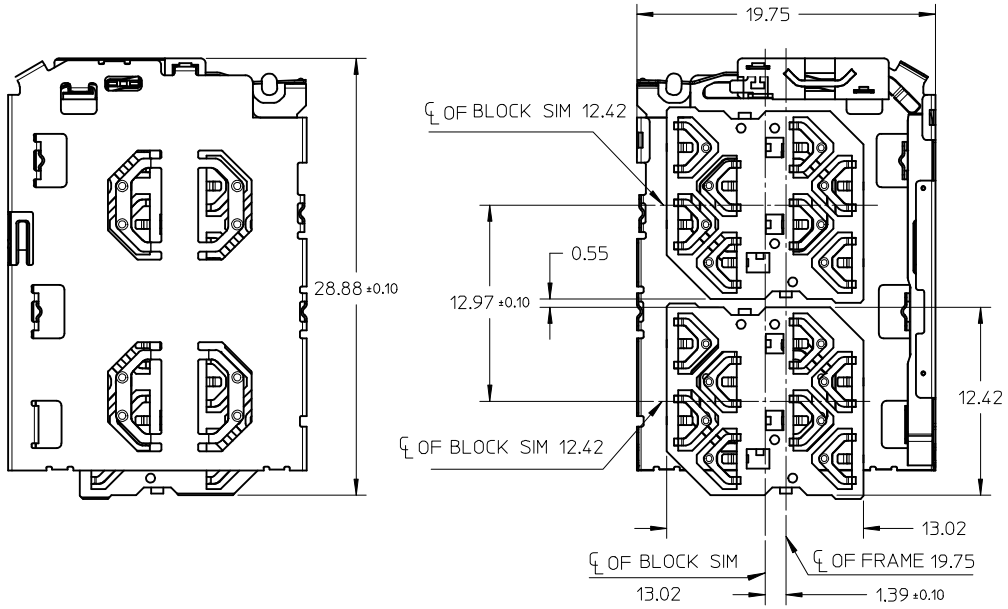

SIM CONNECTOR BOM

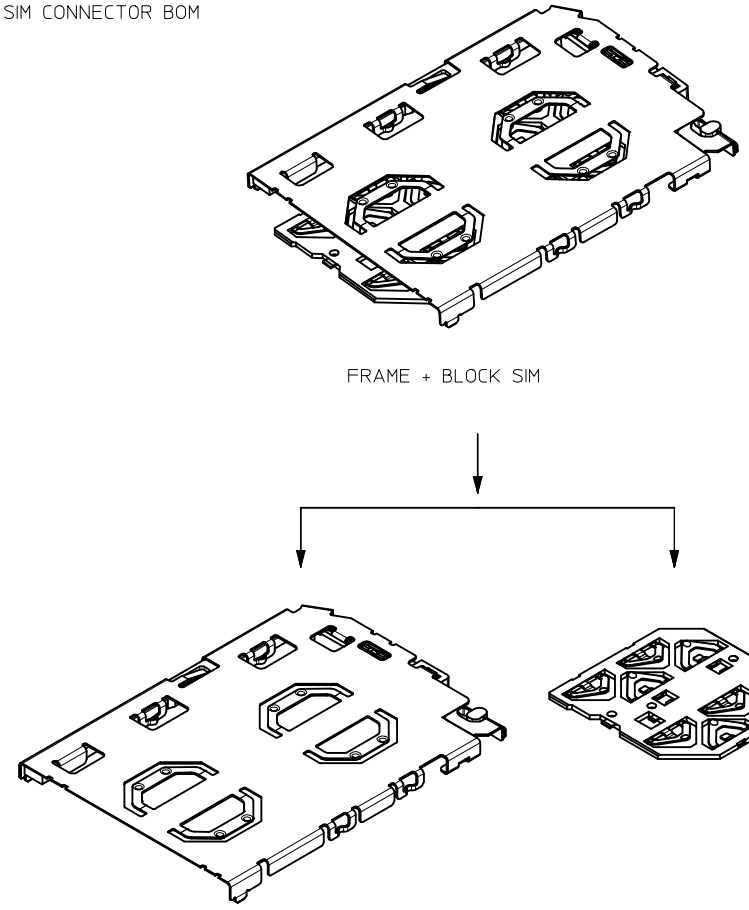

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

SEE SHEET1
EC NO: S2014-0434
DRWN:JZENG 2013/12/13
CH'KD:JTANG2 2014/01/02
APPR:KHLIM 2014/01/27
REV: 3
DESCRIPTION

QUALITY SYMBOLS
FA=0
FC=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/12/13
CHECKED BY: DATE:
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0002
SHEET NO.: 2 OF 4
SIZE: A3

SIM CONNECTOR FRAME AND TRAY

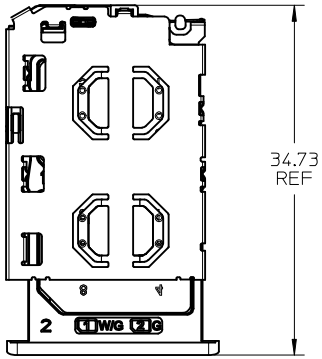

TRAY EJECTED POSITION



TRAY INSERTION POSITION

TRAY DETECT PIN DEFINITION	
TRAY DETECT PIN GND NORMAL SHORT (WITHOUT TRAY)	TRAY DETECT PIN AFTER TRAY INSERTED AFTER TRAY INSERTED OPEN

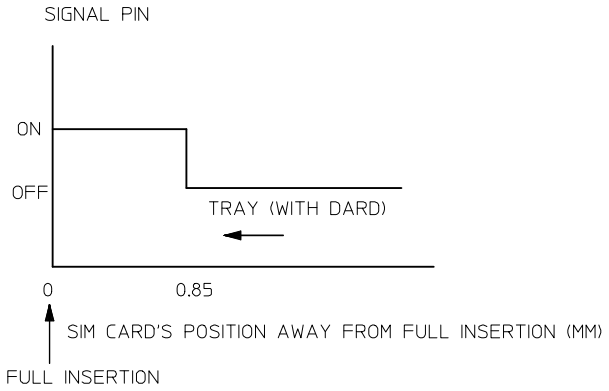

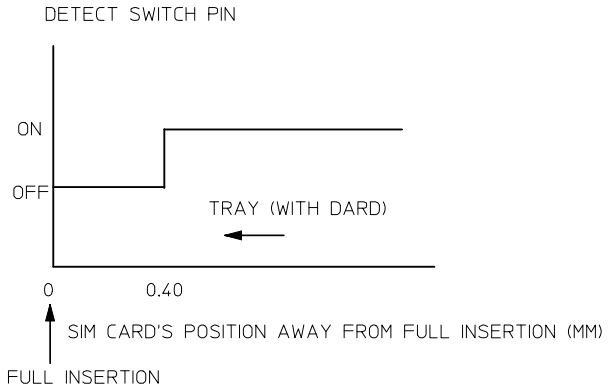

SEE SHEET 1
EC NO: S2014-0434 2013/12/13
DRWN:JZENG 2014/01/02
CH'KD:JTANG2 2014/01/27
APPR:KHLIM
DESCRIPTION
REV
3

QUALITY SYMBOLS
FA=0
FC=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE:
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/12/13
CHECKED BY: DATE:
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0002
SHEET NO.: 3 OF 4
SIZE: A3

151031 FRAME SOLDERING AREA:
151032 BLOCK SIM SOLDERING AREA:
KEEP OUT ZONE:

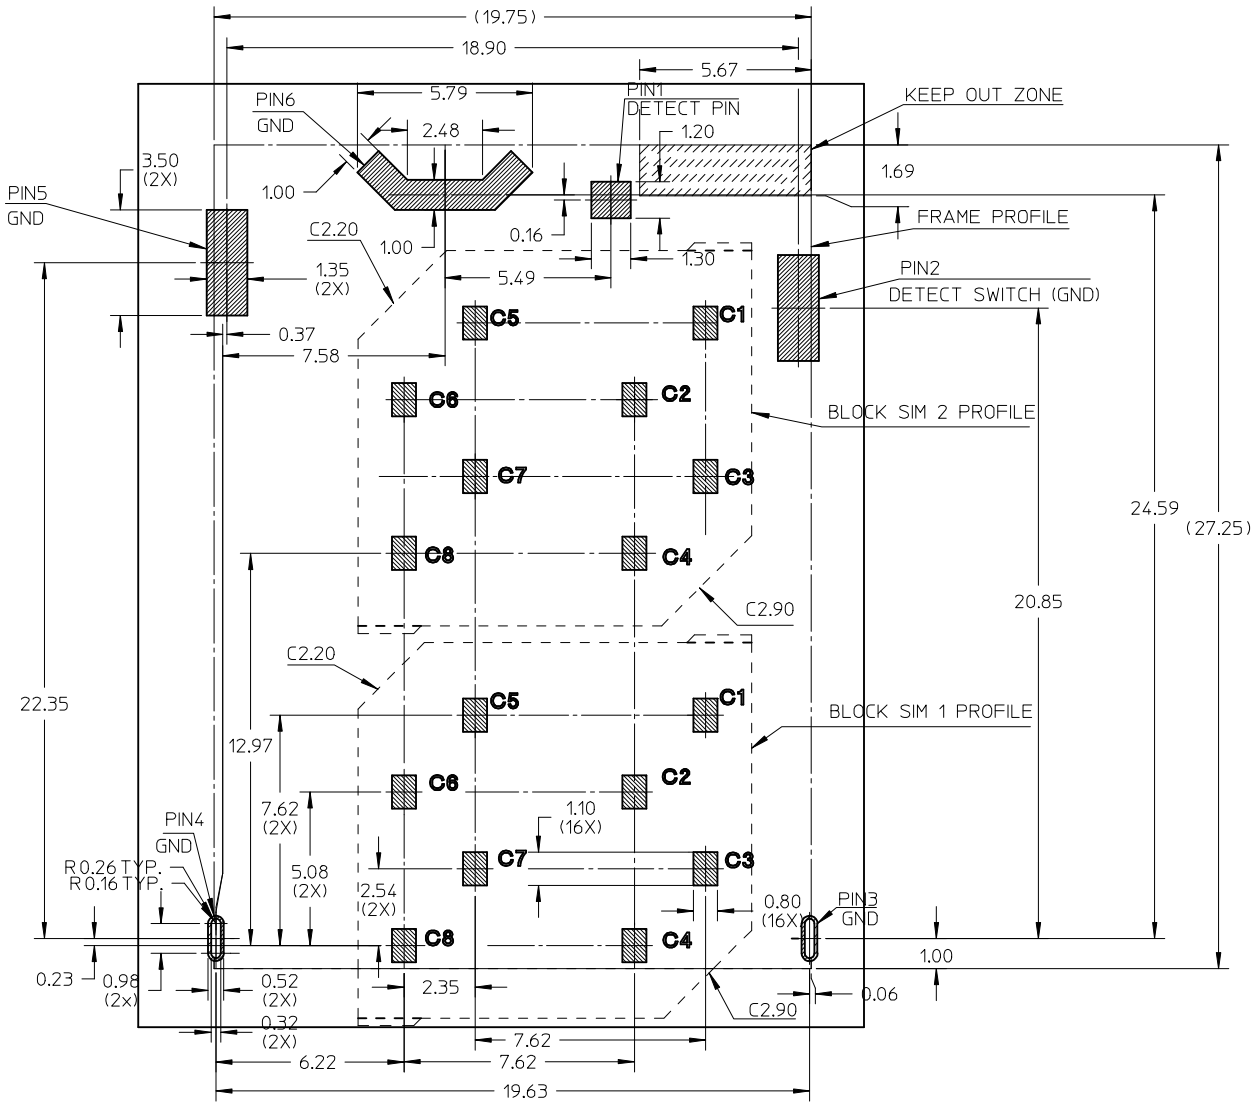

THIS DESIGN IS BASED ON DESIGN OBJECTIVES AND IS STRICTLY TENTATIVE. IT MAY CHANGE BASED ON RESULTS OF ADDITIONAL DESIGN REVIEWS & VERIFICATIONS.

RECOMMENDED PCB LAYOUT: TOLERANCE ±0.05
RECOMMENDED PCB THICKNESS: 0.80MM
RECOMMENDED STENCIL THICKNESS: 0.10MM

SEE SHEET 1
EC NO: S2014-0434 2013/12/13
DRWN:JZENG 2014/01/02
CH'KD:JTANO2 2014/01/27
APPR:KHLIM
DESCRIPTION
REV
3

QUALITY SYMBOLS
$\sqrt{F_A}$=0
$\sqrt{F_C}$=0
$\sqrt{F_P}$=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.20	± ---
1 PLACE	± 0.20	± ---
0 PLACE	± ---	± ---

ANGULAR ± 3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: NTS
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: JZENG DATE: 2013/12/13
CHECKED BY: DATE:
APPROVED BY: KHLIM DATE: 2014/01/27

TITLE: DUAL MICRO SIM FRAME 1.40H

molex

MATERIAL NO.: 1510310001
DOCUMENT NO.: SD-151031-0002
SHEET NO.: 4 OF 4
SIZE: A3

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru