Ha-VIS preLink© System

General information

Mating Face	RJ45 acc. to IEC 60603-7, M12 D-coded acc. to IEC 61076-2-101 or M12 X-coded acc. to IEC 61076-2-109		
Number of contacts	8		
Transmission performance	RJ45/ M12 X-coded		M12 D-coded
	acc. to ISO 11801 category 6 / class E_A up to 500 MHz		acc. to ISO 11801 category 5 / class D up to 100 MHz
Transmission rate	10/100Mbits / 1/10 Gbits/s		10/100Mbits
Shielding	Fully shielded, 360°shielding contact		
Termination technology	HA-VIS preLink® IDC termination acc. to IEC 60352-4		
Power over Ethernet	usable for PoE (IEEE 802.3af) and PoE+ (IEEE 802.3at)		
Calbe diameter	see table HA-VIS preLink® types		
Conductor cross section (solid and stranded)	wire gauge		wire diameter
20 82 000 0001	AWG 23 - 22 (contact block yellow)		1,3- 1,6mm
20 82 000 0003	AWG 27 - 26 (contact block white)		0,8- 1,1mm
Current	1,18A at 20°C (see derating diagram)		
Opperating voltage	max. 57V DC		
contact resistance	≤ 20mΩ		
insulating resistance between contacts	≥ 500MΩ		
electric strength contact - contact	RJ45/ M12 d-coded 1,0kV	M12 x-coded 0,5kV	
electric strength contact - shielding	RJ45/ M12 d-coded 1,5kV	M12 x-coded 0,5kV	
Degree of protetion	see table HA-VIS preLink® types		
Temperatur range	-40°C ... +70°C		
Mating cycles	RJ45 termination	M12 termination	preLink termination
	min. 750	min. 250	min. 10
UL file	pending		
RoHS - compliant	Yes		

Material

Housing material	see table HA-VIS preLink® types

Contact plating

Plating contact zone	50µm Au over Ni

Derating diagram acc. to IEC 60512-5 (current carrying capacity)

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals.

The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5

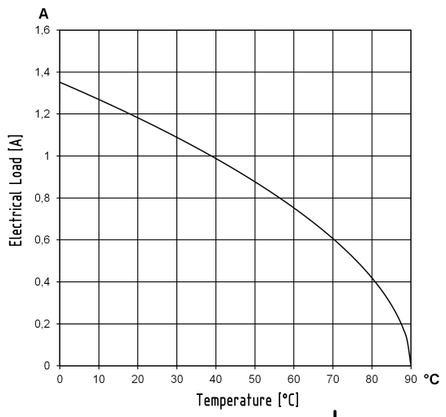

Wire map

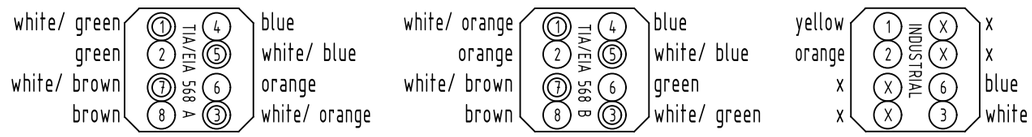

HA-VIS preLink® types

p/n	type	cable diameter	material	degree protection
20 82 500 0001	Ha-VIS preLink® RJ45 Keystone jack w/o preLink block	5 ... 9 mm	zinc die-cast	IP20
20 82 500 0002	Ha-VIS preLink® RJ45 Keystone jack angled w/o preLink block	5 ... 9 mm	zinc die-cast	IP20
20 82 501 0001	Ha-VIS preLink® RJ45 Keystone jack AWG 24-22	5 ... 9 mm	zinc die-cast	IP20
20 82 001 0001	Ha-VIS preLink® RJ45 HIFF jack AWG 24-22	5 ... 9 mm	zinc die-cast	IP20
20 82 001 0002	Ha-VIS preLink® RJ45 HIFF jack AWG 27-26	5 ... 9 mm	zinc die-cast	IP20
20 82 000 0002	Ha-VIS preLink® RJ45 HIFF jack w/o preLink block	5 ... 9 mm	zinc die-cast	IP20
20 82 101 0001	Ha-VIS preLink® extender	5 ... 9 mm	zinc die-cast	IP20
20 82 101 0010	Ha-VIS preLink® RJ45 plug w/o preLink block	5 ... 9 mm	zinc die-cast	IP20
20 82 002 0001	Han® 3 A preLink® RJ45 plug insert	5 ... 9 mm	plastic	IP 65/67
20 82 204 0001	Han® PushPull RJ45 plug plastic	6.3 ... 8.8 mm	plastic	IP 65/67
20 82 104 0001	Han® PushPull RJ45 plug metal	6.3 ... 8.8 mm	zinc die-cast	IP 65/67
20 82 104 0045	Han® PushPull RJ45 plug metal 45°	6.3 ... 8.8 mm	zinc die-cast	IP 65/67
20 82 005 0001	preLink® M12 connector D-coding, 4 poles	6.3 ... 8.8 mm	zinc die-cast	IP 65/67
20 82 005 1214	preLink® connector insert, male, M12 D-coding, 4 poles			
20 82 005 0002	preLink® M12 connector X-coding, 8 poles	6.3 ... 8.8 mm	zinc die-cast	IP 65/67
20 82 006 1218	preLink® connector insert, male, M12 X-coding, 8 poles			
20 82 000 1210	preLink® M12 housing, empty	6.3 ... 8.8 mm	zinc die-cast	IP 65/67

All rights reserved

HARTING Electronics GmbH
D-32339 Espelkamp

All Dimensions in mm
Original Size DIN A3

Scale 1:1 | Free size tol. | Ref. | Sub.

Department EC PD - DE

Created by	Inspected by	Standardisation	Date	State
ELLERMANN	DAHMS	HOFFMANN	2014-11-03	Final Release

Title: Ha-VIS preLink System

Doc-Key / ECM-Nr.: 100571828/UGD/001/B 500000081410

Type: DS | Number: 20820000000 | Rev.: B | Page: 1/1

A3

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru