

## Hermetically Sealed High Precision Bulk Metal® Foil Technology Aerospace Resistors

TCR of  $\pm 1$  ppm/°C, Tolerance to  $\pm 0.005\%$  and Load-Life Stability of  $\pm 0.005\%$

### FEATURES

- **Temperature coefficient of resistance (TCR):**  
–55°C to +125°C, + 25 °C ref.:
  - VH102K:  $\pm 1$  ppm/°C typical
  - VHS102:  $\pm 2$  ppm/°C typical
  - VHS555:  $\pm 5$  ppm/°C maximum
- Tolerance: to  $\pm 0.005\%$
- Resistance range: 1  $\Omega$  to 150 k $\Omega$  (higher or lower resistance values are available)
- Load-life stability: 0.005% (70°C for 2000 h at rated power)
- Electrostatic discharge (ESD) >25 000 V
- Power rating: 0.6 W at +70°C; 0.3 W at +125°C
- Non-inductive, non-capacitive design
- Non hot spot design
- Rise time: 1.0 ns without ringing
- Current noise: <–40 dB
- Thermal EMF: 0.05  $\mu\text{V}/^\circ\text{C}$  typical
- Voltage coefficient: <0.1 ppm/V
- Non-inductive: <0.08  $\mu\text{H}$
- Terminal finishes available: lead (Pb)-free; tin/lead alloy
- Impervious to harmful environments—oil filled
- For better performance, please see VH102Z datasheet



Pb-free  
Available  
**RoHS\***  
COMPLIANT

Any value at any  
tolerance available  
within resistance range

### INTRODUCTION

The “VH” series of resistors is the hermetic version of several molded “S” series devices. Hermetic sealing eliminates the ingress of both oxygen, which degrades resistors over long periods, and moisture which degrades resistors more quickly. These parts are made with glass to metal seal enclosures employing Kovar eyelets which allow the copper leads to pass through the enclosure to minimize the thermal EMF from the lead junctions. Rubber fill between the metal housing and resistance element acts both as a mechanical damper and thermal transfer path.

VHS102 and VH102K are the hermetically-sealed counterpart of the S102C and S102K high-performance molded resistors. VHS555 is the hermetically-sealed version of the S555, MIL style RNC90Y.

**Table 1 – Model Selection**


| Model Number          | Resistance Range ( $\Omega$ ) | Standard Resistance Tolerance <sup>(1)</sup> (%) |           | Maximum Working Voltage <sup>(2)</sup> | Ambient Power Rating <sup>(3)(4)</sup> |           |
|-----------------------|-------------------------------|--|-----------|--|--|-----------|
|                       |                               | Tightest   | Loosest   |  | at +70°C                               | at +125°C |
| VH102K <sup>(5)</sup> | 30.1 to 150k                  | $\pm 0.005$                                      | $\pm 1.0$ | 300                                    | 0.6 W                                  | 0.3 W     |
| VHS102                | 20 to <30.1                   | $\pm 0.01$                                       |           |  |  |           |
|                       | 10 to <20                     | $\pm 0.05$                                       |           |  |  |           |
| VHS555 <sup>(6)</sup> | 5 to <10                      | $\pm 0.10$                                       | $\pm 1.0$ | 300                                    | 0.6 W                                  | 0.3 W     |
|                       | 1 to <5                       | $\pm 0.25$                                       |           |  |  |           |
|                       | 30.1 to 150k                  | $\pm 0.005$                                      |           |  |  |           |
|                       | 16.2 to <30.1                 | $\pm 0.05$                                       |           |  |  |           |
| VHS555 <sup>(6)</sup> | 4.99 to <16.2                 | $\pm 0.10$                                       | $\pm 1.0$ | 300                                    | 0.6 W                                  | 0.3 W     |
|                       | 1 to <4.99                    | $\pm 0.25$                                       |           |  |  |           |
|                       | 1 to <4.99                    | $\pm 0.25$                                       |           |  |  |           |

**Notes:**

- (1) Standard resistance tolerance:  $\pm 0.005\%$ ;  $\pm 0.01\%$ ;  $\pm 0.02\%$ ;  $\pm 0.05\%$ ;  $\pm 0.1\%$ ;  $\pm 0.25\%$ ;  $\pm 0.5\%$ ;  $\pm 1.0\%$ .  
 (2) Not to exceed power rating of resistor.  
 (3) See Figure 2.  
 (4) Above 100 k $\Omega$ , VHS102 power is derated to 0.4 W at +70°C, and 0.2 W at +125°C.  
 (5) Available from 1  $\Omega$  to 100 k $\Omega$  only.  
 (6) Contains RNC90Y inside (4.99  $\Omega$  to 121 k $\Omega$ ).

\* Pb containing terminations are not RoHS compliant, exemptions may apply

**Figure 1 – Standard Imprinting and Dimensions**

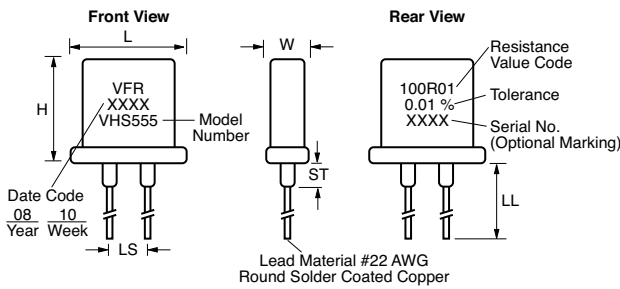

| Parameter | Dimensions                  |            | Ave. Weight<br>g |
|-----------|-----------------------------|------------|------------------|
|           | inches                      | mm         |                  |
| W         | 0.185 max                   | 4.70 max   | 1.4              |
| L         | 0.435 max                   | 11.05 max  |                  |
| H         | 0.430 max <sup>(1)</sup>    | 10.92 max  |                  |
| LL        | 1 ±0.125                    | 25.4 ±3.18 |                  |
| LS        | 0.150 ±0.010 <sup>(2)</sup> | 3.81 ±0.25 |                  |
| ST        | 0.095 max                   | 2.41 max   |                  |

**Notes**


<sup>(1)</sup> 0.375 H available.

<sup>(2)</sup> 0.200" (5.08 mm) lead spacing available (except VHS555)—specify VH102J (S102C type), VH102L (S102K type).

**Table 2 – Tolerance and TCR vs. Resistance**

| Resistor | Resistance Value (Ω) | Typical TCR and Max. Spread -55°C to +125°C, +25°C ref. (ppm/°C) |
|----------|----------------------|--|
| VHS102   | 80 to 150k           | ±2 ±2.5  |
| VH102K   | 80 to 100k           | ±1 ±2.5  |
| VHS102   | 50 to <80            | ±2 ±3.5  |
| VH102K   |                      | ±1 ±3.5  |
| VHS102   | 1 to <50             | ±2 ±4.5  |
| VH102K   |                      | ±1 ±4.5  |


**Figure 2 – Trimming to Values (conceptual illustration)**

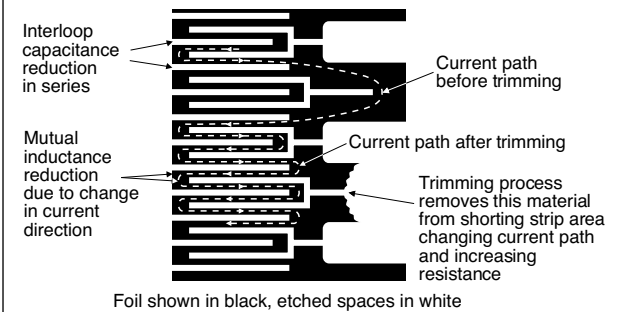

**Note**

To acquire a precision resistance value, the Bulk Metal Foil chip is trimmed by selectively removing built-in “shorting bars.” To increase the resistance in known increments, marked areas are cut, producing progressively smaller increases in resistance. This method reduces the effect of “hot spots” and improves the long-term stability of VFR resistors.

**Figure 3 – Power Derating Curve**

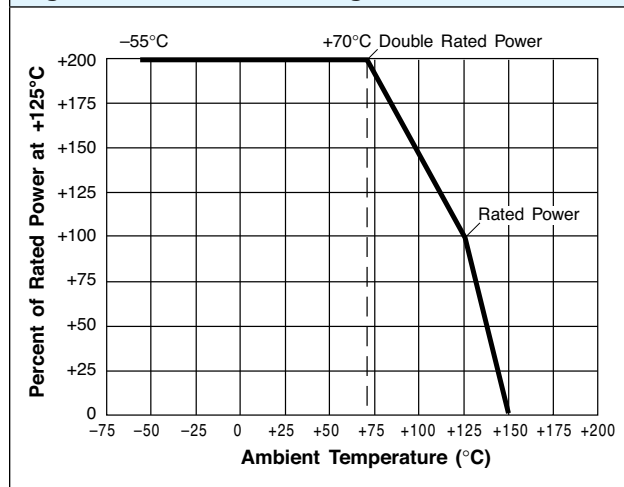


**Table 3—Specifications<sup>(1) (2) (3)</sup>**

| Parameter   |                  | Value   |                   |                   |
|---|------------------|---|-------------------|-------------------|
| Selected <sup>(4)</sup> TCR Tracking <sup>(5)</sup>   |                  | 0.5 ppm/°C  |                   |                   |
| Stability <sup>(6)</sup><br>Load life at 2000 h:  | at 0.3 W/+125°C  | VH102K<br>±0.025%   | VHS102<br>±0.025% | VHS555<br>±0.015% |
|   | at 0.1 W/+60°C   | ±0.005%   | ±0.005%           | ±0.0025%          |
| Load life at 10 000 h:  | at 0.05 W/+125°C | ±0.02%  | ±0.02%            | ±0.01%            |
| Shelf Life Stability  |                  | ±5 ppm (0.0005%) maximum ΔR after 1 year<br>±10 ppm (0.001%) maximum ΔR after 3 years |                   |                   |
| Current Noise   |                  | <0.010 μV <sub>RMS</sub> /V of applied voltage (−40 dB)                               |                   |                   |
| High Frequency Operation  |                  | 1.0 ns  |                   |                   |
| Rise time   |                  | 0.1 μH maximum; 0.08 μH typical   |                   |                   |
| Inductance (L) <sup>(7)</sup>   |                  | 1.0 pF maximum; 0.5 pF typical  |                   |                   |
| Capacitance (C)   |                  |   |                   |                   |
| Voltage Coefficient   |                  | < 0.1 ppm/V <sup>(8)</sup>  |                   |                   |
| Thermal EMF <sup>(9)</sup>  |                  | 0.1 μV/°C maximum; 0.05 μV/°C typical 1 μV/W  |                   |                   |
| Hermeticity   |                  | 10 <sup>−7</sup> atmospheric cc/s maximum   |                   |                   |
| <p><b>Notes:</b></p> <p>(1) Maximum is 1.0 % A.Q.L. standard for all specifications except TCR. (For TCR information see notes <sup>(4)</sup> to <sup>(7)</sup>.) Typical is a designers reference which represents that 85% of the units supplied, over a long period of time, will be at least the figure shown or better.</p> <p>(2) Resistance figures are obtained by measuring the leads at point 0.5" (12.7 mm) ±0.13" (3.2 mm) away from the root.</p> <p>(3) Selected TCR tracking is available for specially ordered lots of resistors.</p> <p>(4) Vishay Foil Resistors (VFR) maximum TCR spread is defined as the 3 σ (sigma) limit of a normal Gaussian distribution (99.73% of a production lot) which is within a band, centered on the nominal curve. This VFR maximum TCR spread is no greater than ±2.5 ppm/°C from nominal throughout the full temperature range. This definition of the VFR maximum TCR spread from nominal applies to all resistance values. However, as the resistance value decreases below 80 Ω, the VFR maximum TCR spread from nominal specification starts to increase.</p> <p>(5) TCR tracking is a measure of the similarity of resistance value change in two or more resistors which are undergoing the same temperature changes. Tracking could be expressed as the difference in the temperature coefficients of the resistors, expressed in ppm/°C as <math>(\Delta R_1/R_1 - \Delta R_2/R_2) \times 10^{-6}/\Delta T^{\circ}\text{C}</math>. When a number of resistors are referenced to a nominal TCR, the spread or envelope around the nominal would be the difference. If the spread is ±1.5 ppm/°C about a nominal, the tracking, as defined above, will be 3 ppm/°C.</p> <p>(6) Load life ΔR maximum can be reduced through in-house oriented processes.</p> <p>(7) Inductance (L) due mainly to the leads.</p> <p>(8) The resolution limit of existing test equipment (within the measurement capability of the equipment, or “essentially zero”).</p> <p>(9) μV/°C relates to EMF due to lead temperature difference and μV/W due to power applied to the resistor.</p> <p>* <b>Precaution in Usage:</b> When soldering to mount hermetically sealed resistors on a board, keep the resistor over 0.39" (10 mm) away from board surface by the use of an insulating tube.</p> |                  |   |                   |                   |

| Table 4—Environmental Performance  |                    |   |  |  |  |
|--|--------------------|---|--|--|--|
| Group/Parameter  |                    | MIL-PRF-55182/9<br>Characteristic Y Maximum $\Delta R$                          | VH102K<br>Typical <sup>(1)</sup> $\Delta R$                                    | VHS102<br>Typical <sup>(1)</sup> $\Delta R$                                    | VHS555<br>Typical <sup>(1)</sup> $\Delta R$                                    |
| <b>Test Group I</b><br>Thermal shock<br>Overload   |                    | $\pm 0.05\%$<br>$\pm 0.05\%$  | $\pm 0.002\%$<br>$\pm 0.003\%$   | $\pm 0.002\%$<br>$\pm 0.003\%$   | $\pm 0.002\%$<br>$\pm 0.003\%$   |
| <b>Test Group II</b><br>Resistance temperature characteristics<br>Temperature storage<br>Low temperature operation<br>Terminal strength  |                    | $\pm 5$ ppm/ $^{\circ}\text{C}$<br>$\pm 0.05\%$<br>$\pm 0.05\%$<br>$\pm 0.02\%$ | $\pm 0.005\%$<br>$\pm 0.005\%$<br>$\pm 0.002\%$                                | $\pm 0.005\%$<br>$\pm 0.005\%$<br>$\pm 0.002\%$                                | $\pm 0.0025\%$<br>$\pm 0.005\%$<br>$\pm 0.002\%$                               |
| <b>Test Group III</b><br>Dielectric withstanding voltage (DWW)<br>Insulation resistance<br>Resistance to solder heat<br>Moisture resistance  |                    | $\pm 0.02\%$<br>$10^4$ M $\Omega$<br>$\pm 0.02\%$<br>$\pm 0.05\%$               | $\pm 0.005\%$<br>$40 \times 10^5$ M $\Omega$<br>$\pm 0.002\%$<br>$\pm 0.005\%$ | $\pm 0.005\%$<br>$40 \times 10^5$ M $\Omega$<br>$\pm 0.002\%$<br>$\pm 0.005\%$ | $\pm 0.002\%$<br>$40 \times 10^5$ M $\Omega$<br>$\pm 0.002\%$<br>$\pm 0.005\%$ |
| <b>Test Group IV</b><br>Shock<br>Vibration   |                    | $\pm 0.01\%$<br>$\pm 0.02\%$  | $\pm 0.002\%$<br>$\pm 0.002\%$   | $\pm 0.002\%$<br>$\pm 0.002\%$   | $\pm 0.002\%$<br>$\pm 0.002\%$   |
| <b>Test Group V</b><br>Life test at 0.3 W/+125 $^{\circ}\text{C}$  | 2000 h<br>10 000 h | $\pm 0.05\%$<br>$\pm 0.5\%$   | $\pm 0.03\%$<br>$\pm 0.05\%$   | $\pm 0.03\%$<br>$\pm 0.05\%$   | $\pm 0.01\%$<br>$\pm 0.02\%$   |
| <b>Test Group Va</b><br>+70 $^{\circ}\text{C}$ power rating  |                    | $\pm 0.05\%$  | $\pm 0.02\%$   | $\pm 0.02\%$   | $\pm 0.02\%$   |
| <b>Test Group VI</b><br>High temperature exposure  |                    | $\pm 0.05\%$  | $\pm 0.05\%$   | $\pm 0.05\%$   | $\pm 0.04\%$   |
| <b>Test Group VII</b><br>Voltage coefficient   |                    | 0.0005%/V   | <0.00001%  | <0.00001%/V  | <0.00001%/V  |
| <p><b>Note:</b><br/> <sup>(1)</sup> Maximum is 1.0 % A.Q.L. standard for all specifications except TCR. (For TCR information see notes <sup>(3)</sup> to <sup>(7)</sup> on previous page.)<br/>                     Typical is a designers reference which represents that 85% of the units supplied, over a long period of time, will be at least the figure shown or better.</p> |                    |   |  |  |  |

**Figure 4 – Global Part Number Information**


**NEW GLOBAL PART NUMBER: Y578780K5000V9L (preferred part number format)**

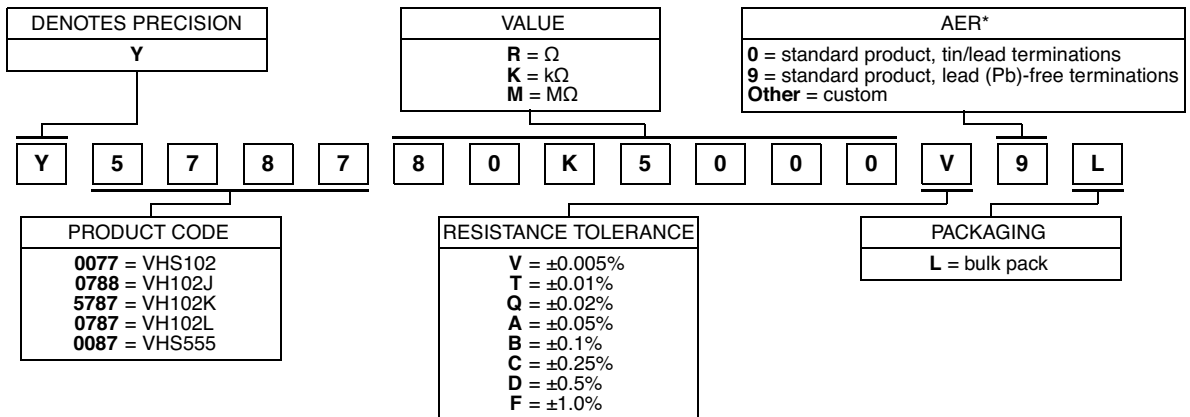

FOR EXAMPLE: ABOVE GLOBAL ORDER Y5787 80K5000 V 9 L:

TYPE: VH102K  
 VALUE: 80.5 kΩ  
 ABSOLUTE TOLERANCE: ±0.005%  
 TERMINATION: lead (Pb)-free  
 PACKAGING: bulk pack

**HISTORICAL PART NUMBER: VH102KT 8K500 V B (will continue to be used)**

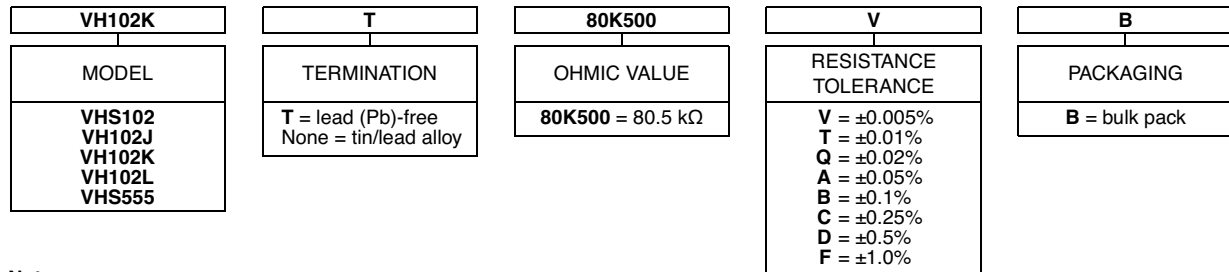

**Note**

\* Application engineering release: for non-standard requests, please contact application engineering.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)