

OCRU Series

Features

- 125°C, 1000 ~ 2,000 hours assured
- Ultra low ESR with large permissible ripple current
- RoHS Compliance



Marking color: Blue


Specifications

Items	Performance																													
Category Temperature Range	-55℃ ~ +125℃																													
Capacitance Tolerance	±20% (at 120Hz, 20℃)																													
Leakage Current (at 20℃)*	Rated voltage applied, after 2 minutes at 20℃ . See Standard Ratings																													
Tanδ (at 120Hz, 20℃)	See Standard Ratings																													
ESR (at 100k ~ 300k Hz, 20℃)	See Standard Ratings																													
Endurance	<table><tr><td>Test Time</td><td colspan="4">1,000 Hrs for 2.5 ~ 4V; 2,000 Hrs for 6.3~ 20V</td></tr><tr><td>Capacitance Change</td><td colspan="4">Within ±20% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Less than 200% of specified value</td></tr><tr><td>ESR</td><td colspan="4">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Test Time	1,000 Hrs for 2.5 ~ 4V; 2,000 Hrs for 6.3~ 20V				Capacitance Change	Within ±20% of initial value				Tanδ	Less than 200% of specified value				ESR	Less than 200% of specified value				Leakage Current	Within specified value			
	Test Time	1,000 Hrs for 2.5 ~ 4V; 2,000 Hrs for 6.3~ 20V																												
	Capacitance Change	Within ±20% of initial value																												
	Tanδ	Less than 200% of specified value																												
	ESR	Less than 200% of specified value																												
	Leakage Current	Within specified value																												
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage applied for specified hours at 125℃.																														
Moisture Resistance	<table><tr><td>Test Time</td><td colspan="4">1,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="4">Within ±20% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Less than 150% of specified value</td></tr><tr><td>ESR</td><td colspan="4">Less than 150% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Test Time	1,000 Hrs				Capacitance Change	Within ±20% of initial value				Tanδ	Less than 150% of specified value				ESR	Less than 150% of specified value				Leakage Current	Within specified value			
	Test Time	1,000 Hrs																												
	Capacitance Change	Within ±20% of initial value																												
	Tanδ	Less than 150% of specified value																												
	ESR	Less than 150% of specified value																												
	Leakage Current	Within specified value																												
* The above specifications shall be satisfied when the capacitors are restored to 20℃ after subjecting them at 60℃, 90 to 95% RH for 1,000 hours. Leakage current should be tested voltage treatment*.																														
Resistance to Soldering Heat * (Please refer to page 11 for soldering conditions)	<table><tr><td>Capacitance Change</td><td colspan="4">Within ±10% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Within specified value</td></tr><tr><td>ESR</td><td colspan="4">Within specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Capacitance Change	Within ±10% of initial value				Tanδ	Within specified value				ESR	Within specified value				Leakage Current	Within specified value								
	Capacitance Change	Within ±10% of initial value																												
	Tanδ	Within specified value																												
	ESR	Within specified value																												
	Leakage Current	Within specified value																												
Ripple Current and Frequency Multipliers	<table><tr><td>Frequency (Hz)</td><td>120 ≤ f < 1k</td><td>1k ≤ f < 10k</td><td>10k ≤ f < 100k</td><td>100k ≤ f < 500k</td></tr><tr><td>Multiplier</td><td>0.05</td><td>0.3</td><td>0.7</td><td>1.0</td></tr></table>					Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k	Multiplier	0.05	0.3	0.7	1.0															
	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k																									
Multiplier	0.05	0.3	0.7	1.0																										

* For any doubt about measured values, measure the leakage current again after the following voltage treatment.

Voltage treatment: DC rated voltage is applied to the capacitors for 2 hours at 105 °C.

Diagram of Dimensions

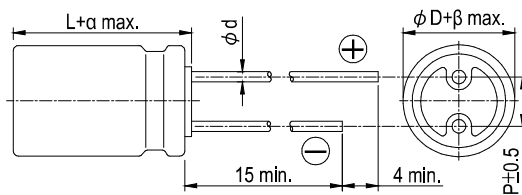


Lead Spacing and Diameter

Unit: mm

φ D	8	10
L	11.5	12
P	3.5	5.0
φ d	0.6	
α	1.0	
β	0.5	

Marking



Dimension: $\phi D \times L$ (mm)

Ripple Current: mA/rms at 100k Hz

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μ F)	Size $\phi D \times L$ (mm)	Tan δ (120Hz, 20°C)	L C (μ A)	E S R (m Ω /at 100k ~ 300k Hz, 20°C max.)	Rated R. C.(mA/rms at 100k Hz)	
							T $\leq$ 105°C	105°C < T $\leq$ 125°C
2.5V (0E)	2.9	680	8 $\times$ 11.5	0.18	340	13	4,520	1,430
		1,200	10 $\times$ 12	0.18	600	13	5,440	1,721
4V (0G)	4.6	560	8 $\times$ 11.5	0.18	448	13	4,520	1,430
		1,200	10 $\times$ 12	0.18	960	12	5,440	1,721
6.3V (0J)	7.2	470	8 $\times$ 11.5	0.15	592	15	4,210	1,332
		820	10 $\times$ 12	0.15	1,033	12	5,440	1,721
10V (1A)	12.0	330	8 $\times$ 11.5	0.12	660	16	3,950	1,250
		560	10 $\times$ 12	0.12	1,120	13	5,230	1,655
16V (1C)	18.0	180	8 $\times$ 11.5	0.12	576	18	3,640	1,151
		330	10 $\times$ 12	0.12	1,056	16	4,720	1,493
20V (1D)	23.0	100	8 $\times$ 11.5	0.15	400	24	3,320	1,050
		150	10 $\times$ 12	0.15	600	20	4,320	1,367

Part Numbering System

OCRU Series	470 μ F	$\pm 20\%$	6.3V	Bulk Package	Gas Type	8 ϕ $\times$ 11.5L	Pb-free and PET coating case
ORU	471	M	0J	BK	-	0811	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration & Package	Rubber Type	Case Size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 13.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru