

Features

- 6 Bit Digital Phase Shifter
- 360° Coverage with LSB = 5.6°
- Integrated CMOS Driver
- Serial or Parallel Control
- Low RMS Phase Error: 2°
- Minimal Attenuation Variation over Phase Shift Range
- Low RMA Attenuation Error: 0.4 dB
- EAR99
- Lead-Free 4 mm 24-Lead PQFN Package
- RoHS* Compliant

Description

The MAPS-011007 is a GaAs pHEMT 6-bit digital phase shifter with an integrated CMOS driver in a 4 mm PQFN plastic surface mount package. Step size is 5.6° providing phase shift from 0° to 360° in 5.6° steps. This design has been optimized to minimize variation in attenuation over the phase shift range.


The MAPS-011007 is ideally suited for use where high phase accuracy with minimum loss variation over the phase shift range are required. The 4 mm PQFN package provides a smaller footprint than is typically available for a digital phase shifter with an internal driver. Typical applications include communications antennas and phased array radars.

Ordering Information ¹

| Part Number | Package |
|--------------------|-------------------|
| MAPS-011007 | Bulk |
| MAPS-011007-TR0500 | 500 piece reel |
| MAPS-011007-001SMB | Sample Test Board |

1. Reference Application Note M513 for reel size information.

Functional Schematic

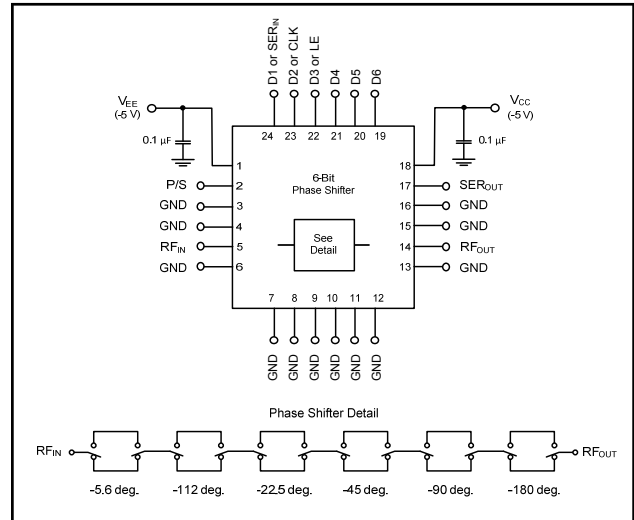

Pin Configuration ²

| Pin No. | Function | Pin No. | Function |
|---------|----------|---------|--------------|
| 1 | VEE | 13 | GND |
| 2 | P/S | 14 | RF OUT |
| 3 | GND | 15 | GND |
| 4 | GND | 16 | GND |
| 5 | RF IN | 17 | SER OUT |
| 6 | GND | 18 | VCC |
| 7 | GND | 19 | D6 |
| 8 | GND | 20 | D5 |
| 9 | GND | 21 | D4 |
| 10 | GND | 22 | D3 or LE |
| 11 | GND | 23 | D2 or CLK |
| 12 | GND | 24 | D1 or SER IN |

2. The exposed pad centered on the package bottom must be connected to RF and DC ground.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

Digital Phase Shifter 6-Bit, 1.2 - 1.4 GHz

Rev. V2

Electrical Specifications:

Freq. = 1.2 - 1.4 GHz, $T_A = 25^\circ\text{C}$, $Z_0 = 50 \Omega$, $V_{CC} = +5.0 \text{ V}$, $V_{EE} = -5.0 \text{ V}$

| Parameter | Test Conditions | Units | Min. | Typ. | Max. |
|--|---|-------|-----------------------|----------------|----------------------------|
| Operating Power ³ | 1.2 - 1.4 GHz | dBm | — | — | +25 |
| Insertion Loss (Any Phase State) | Any Phase State | dB | — | 3.8 | 5.4 |
| Attenuation Variation | Across All Phase States | dB | — | ± 0.5 | — |
| RMS Attenuation Error ⁴ | All Values Relative to Insertion Loss at Reference Phase | dB | — | 0.4 | — |
| RMS Phase Error ⁴ | All Values Relative to Reference Phase | deg | — | 2 | — |
| Phase Accuracy Relative to Reference Loss State | 5.6 Degree Bit | deg | — | ± 0.5 | — |
| | 11.2 Degree Bit | | — | ± 0.3 | — |
| | 22.5 Degree Bit | | — | ± 1 | — |
| | 45 Degree Bit | | — | ± 2 | — |
| | 90 Degree Bit | | — | ± 2 | — |
| | 180 Degree Bit Sum of All Bits | | — | ± 1 ± 4 | — — |
| VSWR | RF IN RF OUT | Ratio | — — | 1.4:1 1.4:1 | — — |
| 1 dB Compression | Reference State | dBm | — | 30 | — |
| Input IP3 | Two-tone inputs up to +5 dBm | dBm | — | 48 | — |
| T_{RISE} , T_{FALL} | 10% to 90% RF, 90% to 10% RF | ns | — | 50 | — |
| V_{CC} V_{EE} | — — | V | 3.0 -5.5 | — -5.0 | 5.5 -3.0 |
| V_{IL} V_{IH} | LOW-level input voltage HIGH-level input voltage | V | 0.0 0.7 x V_{CC} | — — | 0.3 x V_{CC} V_{CC} |
| I_{IN} (Input Control Current) | $V_{IN} = V_{CC}$ or GND | µA | — | 1 | — |
| V_{OH} V_{OL} | For serial out; $I_{OH} = -100 \mu\text{A}$ For serial out; $I_{OL} = 100 \mu\text{A}$ | V | $V_{CC} - 0.2$ — | — — | — 0.2 |
| I_{CC} (Quiescent Supply Current) | $V_{cntrl} = V_{CC}$ or GND | µA | — | — | 5 |
| I_{EE} | V_{EE} min to max $V_{in} = V_{IL}$ or V_{IH} | mA | -1.0 | -0.1 | — |

3. Maximum operating power is the maximum power where the specifications are guaranteed.


4. RMS is calculated across all 63 amplitude or phase states relative to the amplitude or phase in the 0° phase state at a given frequency.

Absolute Maximum Ratings ^{5,6}

| Parameter | Absolute Maximum |
|----------------------------------|---|
| Input Power 1.2 - 1.4 GHz | +27 dBm |
| V_{CC} | $-0.5V \leq V_{CC} \leq +7.0V$ |
| V_{EE} | $-7.0V \leq V_{EE} \leq +0.5V$ |
| D1-D6, P/S, LE, CLK or SER IN | $-0.5V \leq V_{IN} \leq V_{CC} + 0.5V$ |
| SER OUT | $-0.5V \leq V_{OUT} \leq V_{CC} + 0.5V$ |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -65°C to +125°C |

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM Technology Solutions does not recommend sustained operation near these survivability limits.

Sample Board Header Pin Labels

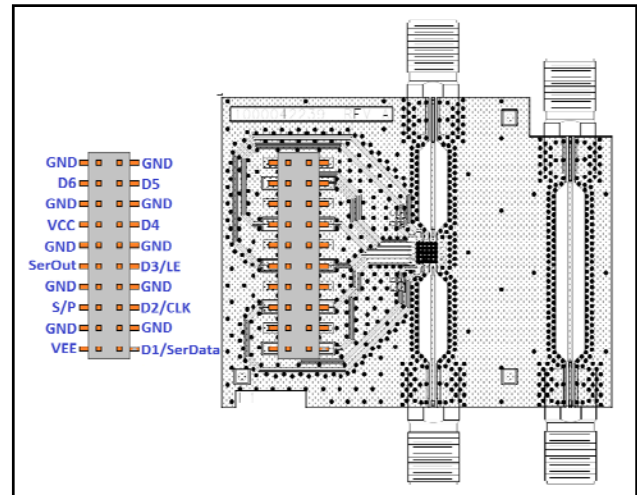

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity


Gallium Arsenide and Silicon Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Typical Performance Curves


RF_{IN} Return Loss vs. Frequency (All States)

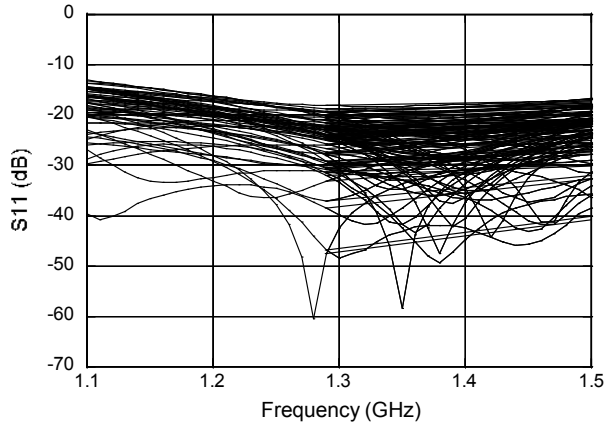


RF_{OUT} Return Loss vs. Frequency (All States)

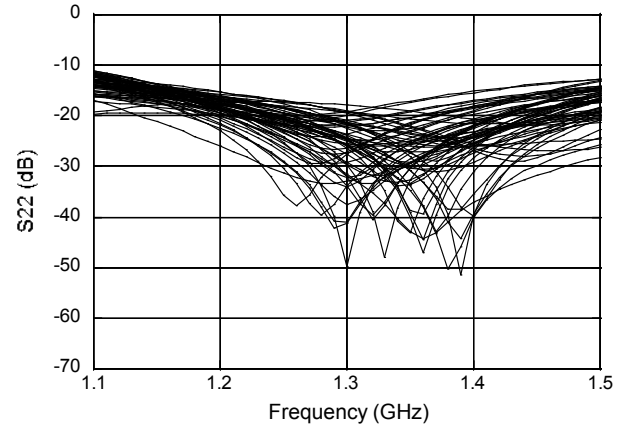


Mean RMS Phase Error vs. Frequency

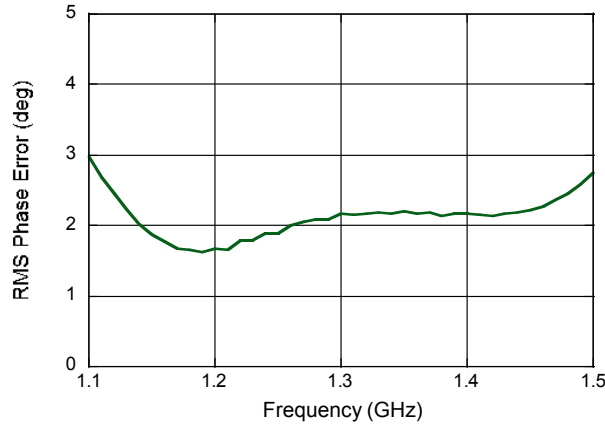


Mean RMS Amplitude Error vs. Frequency

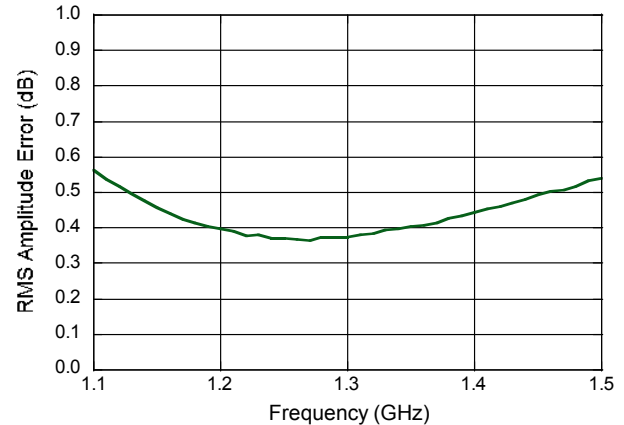

Phase Error (degrees) vs. State

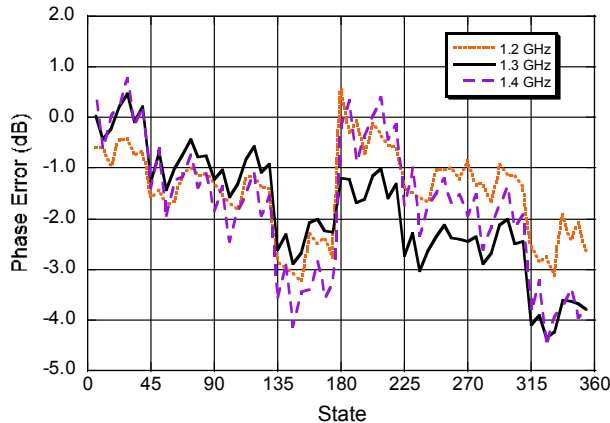


Amplitude Error (dB) vs. State

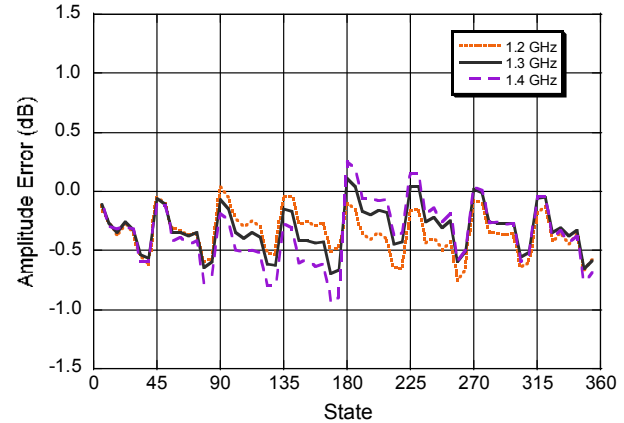


Typical Performance Curves


Amplitude Variation vs. Phase State

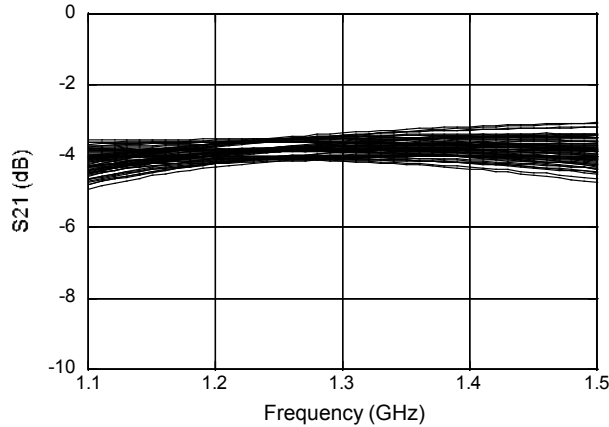

RMS Phase Error vs. Input Power @ 1.3 GHz

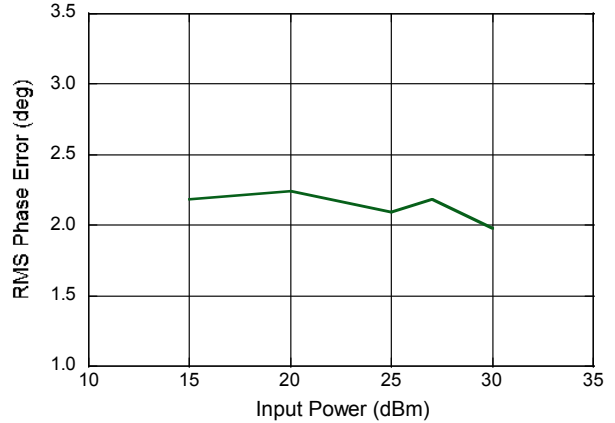

Phase Shift vs. Frequency (All States)

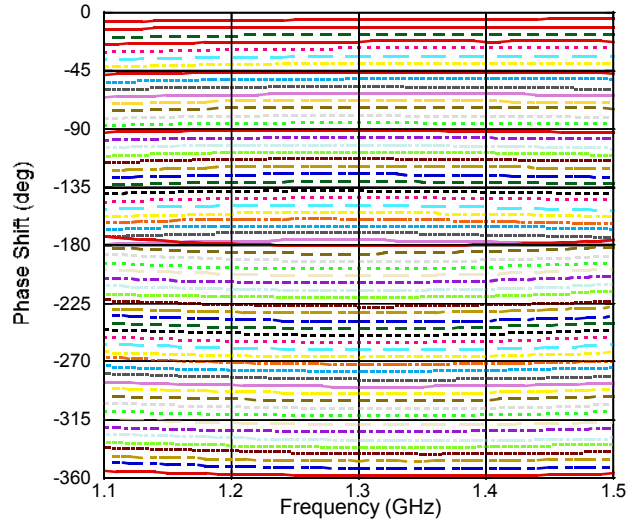

| | | | |
|--------|--------|--------|--------|
| 5.6° | 118.1° | 230.6° | 343.1° |
| 11.2° | 123.7° | 236.2° | 348.7° |
| 16.8° | 129.3° | 241.8° | 354.3° |
| 22.5° | 135° | 247.5° | |
| 28.1° | 140.6° | 253.1° | |
| 33.7° | 146.2° | 258.7° | |
| 39.3° | 151.8° | 264.3° | |
| 45° | 157.5° | 270° | |
| 50.6° | 163.1° | 275.6° | |
| 56.2° | 168.7° | 281.2° | |
| 61.8° | 174.3° | 286.8° | |
| 67.5° | 180° | 292.5° | |
| 73.1° | 185.6° | 298.1° | |
| 78.7° | 191.2° | 303.7° | |
| 84.3° | 196.8° | 309.3° | |
| 90° | 202.5° | 315° | |
| 95.6° | 208.1° | 320.6° | |
| 101.2° | 213.7° | 326.2° | |
| 106.8° | 219.3° | 331.8° | |
| 112.5° | 225° | 337.5° | |

Modes of Operation: Serial and Direct Parallel

Serial Mode

The serial control interface (SERIN, CLK, LE, SEROUT) is compatible with the SPI protocol. SPI mode is activated when P/S is kept high. The 6-bit serial word must be loaded with the MSB first. After shifting in the 6 bit word, a rising edge on LE will set the phase shifter to the desired state. While LE is high the CLK is masked to protect the data while implementing the change. SEROUT is SERIN delayed by 6 clock cycles.

When P/S is low, the serial control interface is disabled. When P/S is set high, Pins 22, 23, and 24 have the LE, CLK, and SER IN function.

In serial mode operation, the outputs will stay constant while LE is kept low.

Direct Parallel Mode

The parallel mode is enabled when P/S is set low. In the direct parallel mode, the phase shifter is controlled by the parallel control inputs directly. When P/S is set low, Pins 22, 23, and 24 have the D3, D2, and D1 function.

Mode Truth Table

| P/S | LE | Mode |
|-----|-----|-----------------|
| 1 | X | Serial |
| 0 | N/A | Direct Parallel |

Truth Table (Digital Phase Shifter)⁷

| D6 | D5 | D4 | D3 | D2 | D1 | Phase Shift |
|----|----|----|----|----|----|-----------------|
| 0 | 0 | 0 | 0 | 0 | 0 | Loss, Reference |
| 0 | 0 | 0 | 0 | 0 | 1 | 5.6 deg |
| 0 | 0 | 0 | 0 | 1 | 0 | 11.2 deg |
| 0 | 0 | 0 | 1 | 0 | 0 | 22.5 deg |
| 0 | 0 | 1 | 0 | 0 | 0 | 45 deg |
| 0 | 1 | 0 | 0 | 0 | 0 | 90 deg |
| 1 | 0 | 0 | 0 | 0 | 0 | 180 deg |
| 1 | 1 | 1 | 1 | 1 | 1 | 354.4 deg |


7. 0 = CMOS Low; 1 = CMOS High, X is CMOS Low or High

Serial Interface Timing Characteristics


| Symbol | Parameter | Typical Performance | | | Units |
|------------------|-------------------------------------|---------------------|------|-------|-------|
| | | -40°C | 25°C | +85°C | |
| t _{SCK} | Min. Serial Clock Period | 100 | 100 | 100 | ns |
| t _{CS} | Min. Control Set-up Time | 20 | 20 | 20 | ns |
| t _{CH} | Min. Control Hold Time | 20 | 20 | 20 | ns |
| t _{LS} | Min. LE Set-up Time | 10 | 10 | 10 | ns |
| t _{LEW} | Min. LE Pulse Width | 10 | 10 | 10 | ns |
| t _{LH} | Min. Serial Clock Hold Time from LE | 10 | 10 | 10 | ns |
| t _{LES} | Min. LE Pulse Spacing | 630 | 630 | 630 | ns |

Functionality Modes of Operation: Serial and Direct Parallel

Serial Input Interface Timing Diagram

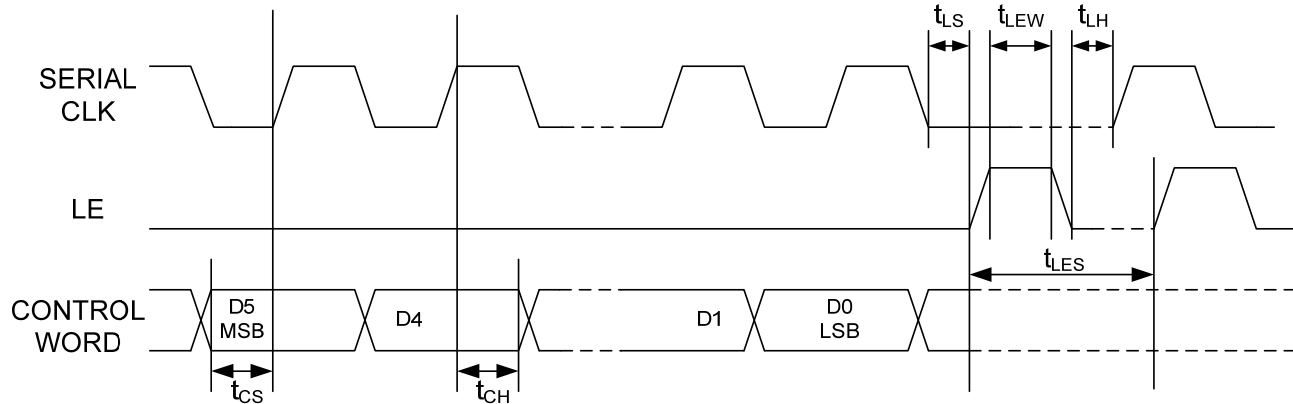

Lead Free 4 mm 24-Lead PQFN †

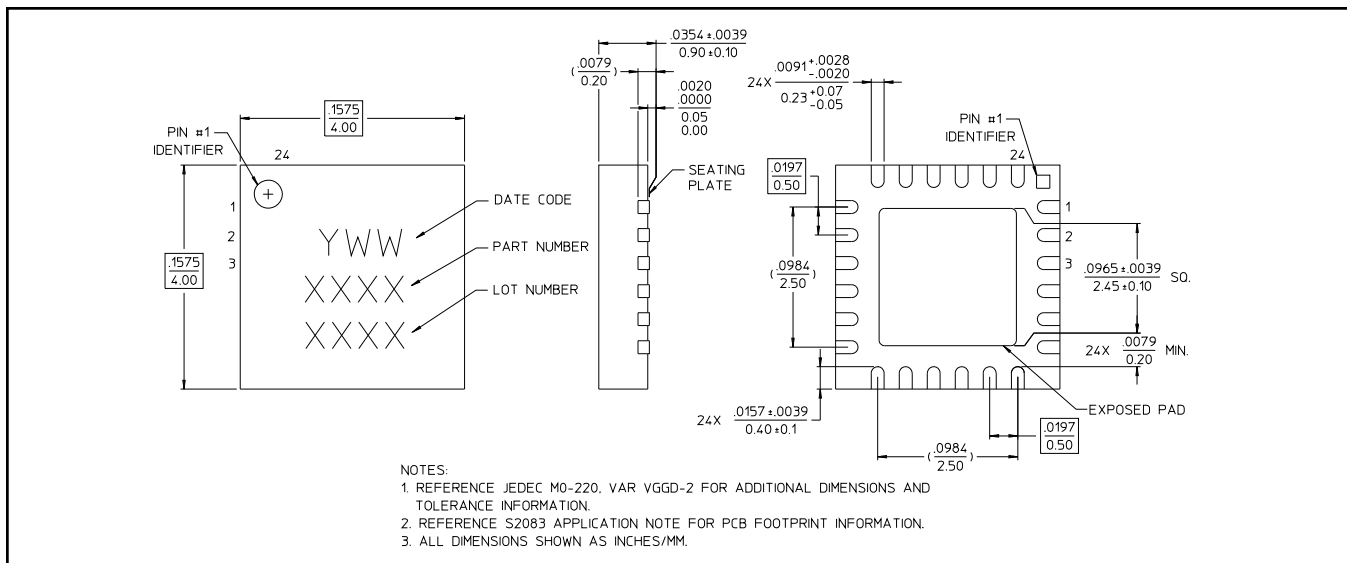

† Reference Application Note S2083 for lead-free solder reflow recommendations.
Meets JEDEC moisture sensitivity level 1 requirements.
Plating is 100% matte tin over copper.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru