

K-No.: 22743

10-16-25-50 Current-Sensor-Module (MiniComp)
Date: 28.11.2008

 For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic
 Isolation between the primary circuit
 (high power) and the secondary circuit

Customer: Standard Type

Cutomers Part No.:
Page 1 **of** 2

Description

- Closed loop (compensation)
Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Low response time
- Wide frequency bandwidth
- Compact design

Applications

Mainly used for stationary operation in industrial applications:

- AC variabel speed drives and servo motor drives
- Static converters for for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptable Power Supplies (UPS)

Electrical Data - Ratings

I_{PN}	Primary rated current, r.m.s	50	A
R_M	Load resistance	0 ... 200	Ω
I_{SN}	Output rated current, r.m.s	50	mA
K_N	Turns ratio	1...5 : 1000	

Accuracy – Dynamic performance data

		min.	typ	max.	Unit
X^*	Measuring accuracy @ $I_{PN}, T_A=25^\circ\text{C}$ (Module)			0,5	%
ϵ_L	Linearity			0,2	%
I_{OH}	Hystersis		0,05	0,1	mA
t_r	Response time			1	μs
$\Delta t(I_{p,max})$	Delay time at $di/dt = 100 \text{ A}/\mu\text{s}$		0,05	1	μs
f	Frequency range	DC...200			kHz

General Data

		min.	typ.	max.	Unit
T_A	Ambient temperature	-40		+85	$^\circ\text{C}$
T_S	Storage temperature	-40		+85	$^\circ\text{C}$
m	Mass		15	16	g
R_S	Secondary coil resistance @ $T_A=85^\circ\text{C}$			23	Ω
R_P	Primary coil resistance per turn @ $T_A=25^\circ\text{C}$		0,95	1,1	m Ω
C_k	Coupling capacity			5	pF
	Mechanical Stress according to M3209/3 Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours		5g		
V_b	Rated insulation voltage, according to EN50178 reinforced insulation Insulation material group 1, Pollution degree 2 mains supply, rms non mains supply (peak od DC)			600 940	V V
	HV transient test according to M3064 Pin 1 - 4 to Pin 5 - 14				
	Settings:				
				$V_{d,max} = 8 \text{ kV}$	
				$R_i = 40 \Omega$	
				1,2 μs / 50 μs -waveform	
				3 pulses in a cycle t = 10 seconds with changing polarity	
	Test voltage and partial discharge voltage according to M3024 Pin 1 - 4 to Pin 5 - 14				
		$V_d =$	3,5	kV	60s
		$V_e \geq$	0,9	kV	

All data marked with * is verified by final inspection, other values are typetested.

Datum	Name	Index	Änderung
28.11.08	Le	82	Write error: Pinning changed. See connection at page 2. Insignificant

Hrsg.: KB-E editor	Bearb.: T_r designer	KB-E: Le check	KB-PM IA: KRe check	freig.: prs. released
-----------------------	---------------------------	-------------------	------------------------	--------------------------

K-No.: 22743

10-16-25-50 Current-Sensor-Module (MiniComp)

For the electronic measurement of currents:
DC, AC, pulsed, mixed ..., with a galvanic
Isolation between the primary circuit
(high power) and the secondary circuit



Date: 28.11.2008


Customer: Standard Type

Cutomers Part No.:

Page 2 of 2

Mechanical outline (mm):

General tolerances DIN ISO 2768-c

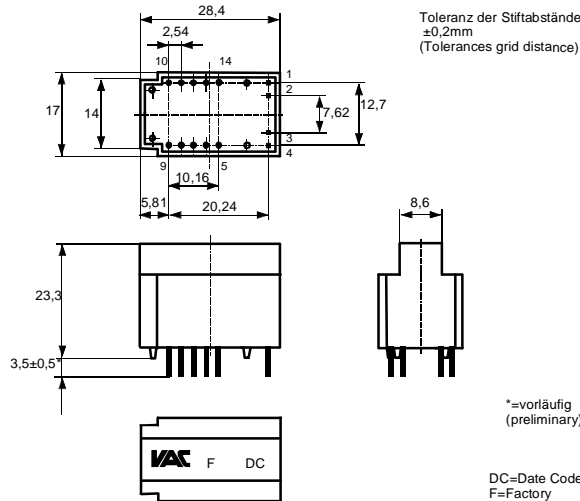


Connections:

1...4 : 0,7 x 0,7 mm
5...14: Ø 1,0 mm

Marking:

VAC
4645X211
F DC

Schematic diagram

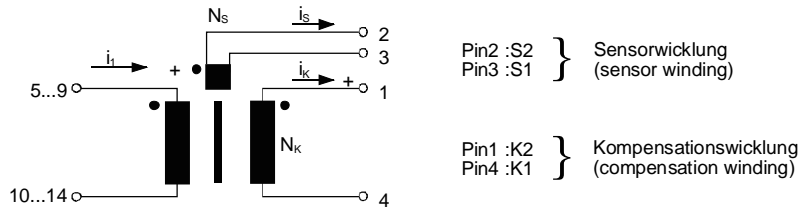

Pin2 :S2 } Sensorwicklung
Pin3 :S1 } (sensor winding)

Pin1 :K2 } Kompensationswicklung
Pin4 :K1 } (compensation winding)

Inspection (Measurements after temperature balance of the samples at room temperature.)

$K_N (N1/N2)^*$	(V)	M3011/6c:	Turns ratio ($I_1=5A, 40-80 Hz$)	1 : 1000 ± 0,5	%
I_0^*		M3226:	Offset current	< 0,1	mA
$\Delta\Phi (S1-S2)^*$	(V)	M3090:	Magnetic Flux sensor	20...35	nVs
$R_S (K1-K2)^*$	(V)	M3011/5:	Winding resistance compensation coil	15...17,5	Ω
$R (S1-S2)^*$	(V)	M3011/5:	Winding resistance magnetic probe coil	2,5...3,5	Ω
V_d^*	(V)	M3014:	Testing voltage, rms, 1s Pin 1 - 10 to Pin 11 - 13	3,5	kV
V_e^*	(AQL1/S4)	M3024:	Partial discharge voltage	>900	V

Applicable documents

Current direction: A positive output current appears at point I_s , by primary current in direction of the arrow.
Constructed, manufactured and tested in accordance with EN 50178 (VDE 0160) and agrees with the standards.
Housing and bobbin material: UL-listed. Flammability class UL 94V-0.
This component is recognized and controlled by VDE Institution
Enclosures according to IEC 60529: IP50.

Additional data available on request.
This specification is no declaration of warranty acc. BGB §443.

Hrsg.: KB-E editor	Bearb.: T _r designer	KB-E: Le check	KB-PM IA: KRe check	freig.: prs. released
-----------------------	------------------------------------	-------------------	------------------------	--------------------------

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru