

SEMTECH INDUSTRIAL HIGH VOLTAGE CAPACITORS MONOLITHIC CERAMIC TYPE


Semtech's Industrial Capacitors employ a new body design for cost efficient, volume manufacturing. This capacitor body design also expands our voltage capability to 10 KV and our capacitance range to .47 μ F. If your requirement exceeds our single device ratings, Semtech can build a custom capacitor assembly to reach the values you need.

- X7R AND NPO DIELECTRICS • 100 pF TO .47 μ F CAPACITANCE RANGE • 1 TO 10 KV VOLTAGE RANGE
- 14 CHIP SIZES


CAPABILITY MATRIX

Size	Bias Voltage (Note 2)	Dielectric Type	Maximum Capacitance—EIA Code (Note 1)									
			1 KV	2 KV	3 KV	4 KV	5 KV	6 KV	7 KV	8 KV	9 KV	10 KV
1515	— VDCW 0	NPO	102	561	271	181	121					
		X7R	562	222	102	471	271					
		X7R	123	472	222	821	561					
2020	— VDCW 0	NPO	182	122	561	331	221	181				
		X7R	103	472	182	681	471	271				
		X7R	223	103	392	152	102	561				
2520	— VDCW 0	NPO	222	152	681	391	271	221	101			
		X7R	153	682	222	821	561	331	181			
		X7R	333	123	472	182	122	681	391			
3333	— VDCW 0	NPO	682	472	222	122	821	561	271			
		X7R	473	153	562	272	182	102	561			
		X7R	104	333	123	562	392	222	122			
3530	— VDCW 0	NPO	562	392	182	102	681	471	221			
		X7R	393	153	562	272	182	102	561			
		X7R	823	333	123	562	392	222	122			
4020	— VDCW 0	NPO	152	102	821	681	391	331	271	181	121	101
		X7R	123	562	272	122	821	681	471	391	391	331
		X7R	223	123	562	272	182	152	102	821	681	561
4040	— VDCW 0	NPO	103	682	332	222	122	102	391	331		
		X7R	563	273	103	392	272	182	471	471		
		X7R	124	563	223	822	562	392	182	102		
4540	— VDCW 0	NPO	123	822	332	222	152	122	471	331		
		X7R	683	333	123	472	332	222	102	561		
		X7R	154	683	273	103	682	472	222	122		
5040	— VDCW 0	NPO	182	122	102	681	471	391	271	221	151	121
		X7R	153	682	332	152	102	821	561	471	391	391
		X7R	273	153	682	332	222	182	122	102	821	681
5440	— VDCW 0	NPO	153	103	472	272	182	122	561	391		
		X7R	104	333	153	562	392	272	122	681		
		X7R	224	683	333	123	822	562	272	152		
5550	— VDCW 0	NPO	183	123	562	332	222	152	681	561		
		X7R	124	393	183	682	472	332	152	821		
		X7R	274	823	393	153	103	682	332	182		
6560	— VDCW 0	NPO	273	183	822	562	332	272	122	821		
		X7R	184	563	273	103	682	472	272	122		
		X7R	394	124	563	223	153	103	562	272		
6666	— VDCW 0	NPO	123	682	562	472	272	222	152	122	102	681
		X7R	823	473	183	822	682	472	332	272	182	122
		X7R	154	104	393	183	153	103	682	562	392	272
7565	— VDCW 0	NPO	333	223	103	682	392	332	152	102		
		X7R	224	683	333	123	822	562	332	152		
		X7R	474	154	683	273	183	123	682	332		

NOTES: 1. EIA Capacitance Code: Value in Picofarads; two significant figures followed by number of zeros: 562 = 5600 pf, 273 = 27000 pf (.027 mfd).
2. • Class I Dielectric (NPO) has zero voltage coefficient. Values shown are at 0 volt bias, or at working volts (VDCW).
• Class II Dielectric (X7R) has voltage coefficient, and values derate at VDCW by up to 50% of value at 0 volt bias. Capacitance @ VDCW is function of design of unit and may vary.

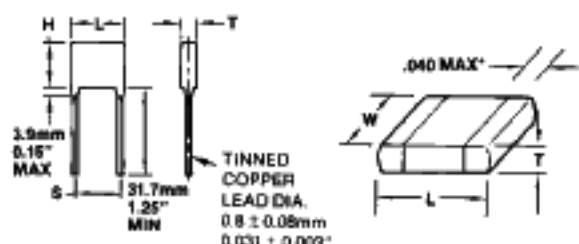

INDUSTRIAL CAPACITOR DC VOLTAGE COEFFICIENTS

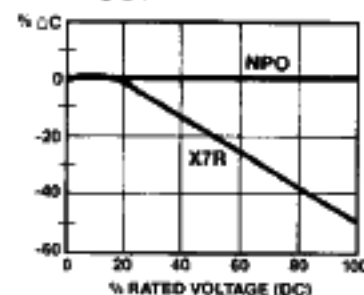

GENERAL SPECIFICATIONS

- **OPERATING TEMPERATURE RANGE**
-55°C to 125°C
- **TEMPERATURE COEFFICIENT**
NPO: ± 30 ppm/ $^{\circ}$ C
X7R: $\pm 15\%$ Δ C Max.
- **DISSIPATION FACTOR**
NPO: 0.1% Max, 0.02% typical
X7R: 2.5% Max, 1.5% typical
- **INSULATION RESISTANCE**
@ 25°C, 1.0 KV: > 100 G Ω or 1000 Ω F, whichever is less
@ 125°C, 1.0 KV: > 10 G Ω or 100 Ω F, whichever is less
- **DIELECTRIC WITHSTANDING VOLTAGE**
1.2 $\times$ VDCW Min, 50 m-amp Max, 5 seconds
- **AGING RATE**
NPO: 0% per decade hour
X7R: $< 2.0\%$ per decade hour
- **TEST PARAMETERS**
1 KHz, 1.0 VRMS ± 0.2 VRMS, 25°C
0 Volts

SEMTECH INDUSTRIAL HIGH VOLTAGE CAPACITORS MONOLITHIC CERAMIC TYPE (cont.)

CHIP DIMENSIONS

Size	(Nom.) Len. In. (mm)	(Nom.) Wid. In. (mm)	T (Max) In. (mm)
1515	.150±.015 (3.81±.38)	.150±.015 (3.81±.38)	.120 (3.05)
2020	.200±.020 (5.08±.51)	.200±.020 (5.08±.51)	.120 (3.05)
2520	.230±.023 (5.84±.58)	.190±.019 (4.82±.48)	.120 (3.05)
3333	.330±.033 (8.38±.84)	.330±.033 (8.38±.84)	.150 (3.81)
3530	.350±.035 (8.89±.89)	.300±.030 (7.62±.76)	.150 (3.81)
4020	.400±.040 (10.2±1.0)	.200±.020 (5.08±.51)	.150 (3.81)
4040	.400±.040 (10.2±1.0)	.400±.040 (10.2±1.0)	.150 (3.81)
4540	.450±.045 (11.4±1.1)	.400±.040 (10.2±1.0)	.150 (3.81)
5040	.460±.046 (11.7±1.2)	.380±.038 (9.65±.97)	.150 (3.81)
5440	.540±.054 (13.7±1.4)	.400±.040 (10.2±1.0)	.150 (3.81)
5550	.550±.055 (14.0±1.4)	.500±.050 (12.7±1.3)	.150 (3.81)
6560	.650±.065 (16.5±1.7)	.600±.060 (15.2±1.5)	.175 (4.45)
6666	.660±.066 (16.8±1.7)	.660±.066 (16.8±1.7)	.175 (4.45)
7565	.750±.075 (19.0±1.9)	.650±.065 (16.5±1.7)	.175 (4.45)

ENCAPSULATED DIMENSIONS

Size	Len. (Max) In. (mm)	Wid. (Max) In. (mm)	T (Max) In. (mm)	S In. (mm)
1515	.300 (7.62)	.300 (7.62)	.220 (5.59)	.180±.03 (4.57±.46)
2020	.350 (8.89)	.350 (8.89)	.220 (5.59)	.230±.03 (5.84±.58)
2520	.380 (9.65)	.340 (8.64)	.220 (5.59)	.260±.03 (6.60±.66)
3333	.480 (12.2)	.480 (12.2)	.250 (6.35)	.360±.033 (9.14±.91)
3530	.500 (12.7)	.450 (11.4)	.250 (6.35)	.380±.035 (9.65±.97)
4020	.550 (13.97)	.350 (8.89)	.250 (6.35)	.430±.040 (10.9±1.1)
4040	.550 (13.97)	.550 (13.97)	.250 (6.35)	.430±.040 (10.9±1.1)
4540	.600 (15.24)	.550 (13.97)	.250 (6.35)	.480±.045 (12.2±1.2)
5040	.610 (15.49)	.530 (12.46)	.250 (6.35)	.490±.046 (12.4±1.2)
5440	.690 (17.53)	.550 (13.97)	.250 (6.35)	.570±.054 (14.5±1.4)
5550	.700 (17.78)	.650 (16.51)	.250 (6.35)	.580±.058 (14.7±1.5)
6560	.800 (20.32)	.750 (19.05)	.275 (6.99)	.680±.065 (17.3±1.7)
6666	.810 (20.57)	.810 (20.57)	.275 (6.99)	.690±.066 (17.5±1.8)
7565	.900 (22.86)	.800 (20.32)	.275 (6.99)	.780±.075 (19.8±2)

ORDERING INSTRUCTIONS

2020	A	X	103	K	2
PART SIZE CODE	FORM	DIELECTRIC MATERIAL	CAPACITANCE (EIA CODE)	CAPACITANCE TOLERANCE	VOLTAGE RATING
1515	CHIP	X=X7R	Last digit	J=5%	1 KV
2020	A=Silver		indicates number	K=10%	2 KV
"	Termination	N=NPO	of zeroes	M=20%	"
"	D=Palladium /		following the first	Z=+80%-20%	"
7565	Silver		two digits.		10 KV
	Termination		Ex. 103=10000 pF		
	LEADED				
	E=Epoxy				
	Encapsulated				
	L=Leaded Only				

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru