

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0424104170](#)
Status: **Active**
Description: Modular Jack, Vertical, 4/4

Documents:

3D Model	Product Specification PS-42410 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E107635

General

Product Family	Modular Jacks/Plugs
Series	42410
Component Type	PCB Jack
Magnetic	No
Performance Category	3
Power over Ethernet (PoE)	N/A
Product Name	RJ9

Physical

Boot Color	N/A
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Inverted / Top Latch	N/A
Keying to Mating Part	None
Lightpipes/LEDs	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Orientation	Vertical (Top Entry)
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.57 mm
Packaging Type	Tray
Panel Mount	With Flange
Pitch - Mating Interface (in)	0.040 In
Pitch - Mating Interface (mm)	1.02 mm
Pitch - Term. Interface (in)	0.050 In
Pitch - Term. Interface (mm)	1.27 mm
Plating min: Mating (µin)	50
Plating min: Mating (µm)	1.25
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.5
Ports	1
Positions / Loaded Contacts	4/4
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No
Wire/Cable Type	N/A



Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[42410Series](#)

Electrical

Current - Maximum per Contact	1.5A
Grounding to PCB	No
Grounding to Panel	None
Shielded	No
Voltage - Maximum	150V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	235

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-42410-492
Product Specification	PS-42410
Sales Drawing	SDA-42410-****
Test Summary	TS-42878-001

This document was generated on 06/07/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20

19

18

17

16

15

14

13

12

11

42410

9

8

7

6

5

4


3

2


1

NOTES:

- 1) MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL, 94 V-0. COLOR IS BLACK; TERMINALS ARE .015/(0.38) THICK PHOSPHOR BRONZE.
- 2) TERMINAL PLATING OPTIONS PER ES-88-****:
 - A - SELECT GOLD IN CONTACT AREA: 50 MICRONS MIN.
 - *SELECT TIN IN PC TAIL AREA: 100 MICRONS MIN.
 - WITH OVERALL NICKEL UNDERPLATE: 50 MICRONS MIN.
 - *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD IN THE PC TAIL.
- 3) THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
- 4) CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
- 5) ALL JACKS ARE DESIGNED TO BE USED WITH .062/(1.57) OR .125/(3.18) THICK P.C. BOARDS.
- 6) ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICRONS GOLD.
- 7) ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
- 8) SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
- 9) SEE SHEETS 3 & 4 FOR CONNECTOR SIZE 8.
- 10) SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
- 11) THIS MODULAR JACK ASSEMBLY IS ALSO AVAILABLE IN A UL 94V-0 RATED, GLASS-FILLED NYLON. (SEE MOLEX DRAWING SDA-43576)
- 12) ENGRAVED NUMBERS ON HOUSING BODY ARE FOR MOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
- 13) ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

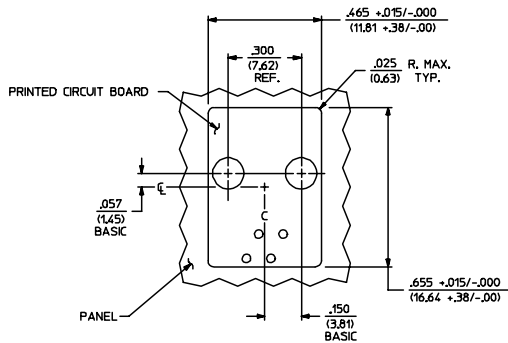





PANEL CUT-OUT FOR CONNECTOR SIZE 4

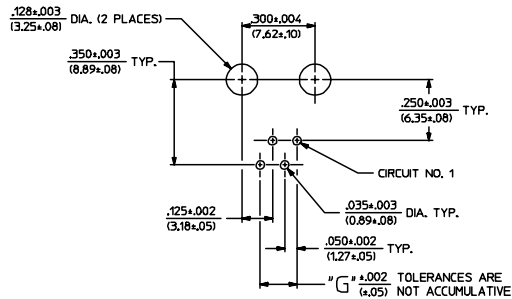

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 4

P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)
0.062"	.128 (3.25)	.120 ±.015/-.025 (3.05 ±.38/- .63)
0.125"	.191 (4.85)	.205 ±.015/-.025 (5.21 ±.38/- .63)

CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
4	4	.150 (3.81)
4	2	.050 (1.27)

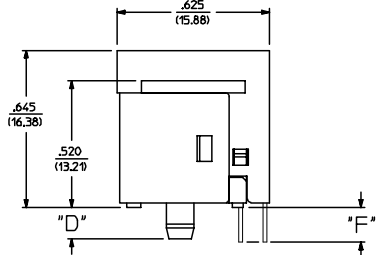

SIZE 4 MODULAR JACK LOADED WITH 4 TERMINALS SHOWN ABOVE
(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

LEAD FREE PLATING EC NO: UFP2004-1617 DRAWN: SCHMIDT 2004/03/03 CHKD: SCHMIDT 2004/03/03 APPR: F. SMITH 2004/03/03 N	QUALITY SYMBOLS ▽ 0 ▽ 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION REVISE ON CAD ONLY	TITLE ASSEMBLY: VERTICAL MODULAR JACKS (CONNECTOR SIZE 4) MOLEX INCORPORATED	MATERIAL NO. DOCUMENT NO. SEE SHEET 4 SDA-42410-****	SHEET NO. 1 OF 4		
				DIMENSION STYLE						DRAWN BY GLT CHECKED BY BAP APPROVED BY RAS	DATE 1990/10/12 1990/10/12 1990/10/12
				IN/MM							
		4 PLACES	±	±							
		3 PLACES	±	±							
		2 PLACES	±	±							
		1 PLACE	±	±							
		ANGULAR ±1/2°									
		DRAFT WHERE APPLICABLE									
		MUST REMAIN WITHIN DIMENSIONS									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											

	20	19	18	17	16	15	14	13	12	11	42410	9	8	7	6	5	4	3	2	1	
	SIZE 4 VERTICAL MODJACK ASSEMBLIES																				
	PART CHARACTERISTICS																				
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION															
	42410-4168	4 POS. BODY	4	.062/(1.57)	YES	A															
	42410-4170	↑	↑	.062/(1.57)	NO	A															
	42410-4264	↓	↓	.125/(3.18)	YES	A															
	42410-4266	4 POS. BODY	4	.125/(3.18)	NO	A															
	42410-4312	4 POS. BODY	2	.062/(1.57)	YES	A															
	42410-4314	↑	↑	.062/(1.57)	NO	A															
	42410-4408	↓	↓	.125/(3.18)	YES	A															
	42410-4410	4 POS. BODY	2	.125/(3.18)	NO	A															
	SIZE 6 VERTICAL MODJACK ASSEMBLIES																				
	PART CHARACTERISTICS																				
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION															
	42410-6168	6 POS. BODY	6	.062/(1.57)	YES	A															
	42410-6170	↑	↑	.062/(1.57)	NO	A															
	42410-6264	↓	↓	.125/(3.18)	YES	A															
	42410-6266	6 POS. BODY	6	.125/(3.18)	NO	A															
	42410-6312	6 POS. BODY	4	.062/(1.57)	YES	A															
	42410-6314	↑	↑	.062/(1.57)	NO	A															
	42410-6320			.062/(1.57)	YES	B															
	42410-6408	↓	↓	.125/(3.18)	YES	A															
	42410-6410	6 POS. BODY	4	.125/(3.18)	NO	A															
	42410-6456	6 POS. BODY	2	.062/(1.57)	YES	A															
	42410-6458	↑	↑	.062/(1.57)	NO	A															
	42410-6552	↓	↓	.125/(3.18)	YES	A															
	42410-6554	6 POS. BODY	2	.125/(3.18)	NO	A															
	SIZE 8 VERTICAL MODJACK ASSEMBLIES																				
	PART CHARACTERISTICS																				
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	KEYING OPTION	MOUNTING EARS OPTION	TERMINAL PLATING OPTION														
	42410-8312	8 POS. BODY	8	.062/(1.57)	NO	YES	A														
	42410-8314	↑	↑	.062/(1.57)	NO	NO	A														
	42410-8360			.062/(1.57)	YES	YES	A														
	42410-8362			.062/(1.57)	YES	NO	A														
	42410-8504			.125/(3.18)	NO	YES	A														
	42410-8506			.125/(3.18)	NO	NO	A														
	42410-8552	↓	↓	.125/(3.18)	YES	YES	A														
	42410-8554	8 POS. BODY	8	.125/(3.18)	YES	NO	A														
	42410-8600	8 POS. BODY	6	.062/(1.57)	NO	YES	A														
	42410-8602	↑	↑	.062/(1.57)	NO	NO	A														
	42410-8648			.062/(1.57)	YES	YES	A														
	42410-8650			.062/(1.57)	YES	NO	A														
	42410-8792			.125/(3.18)	NO	YES	A														
	42410-8794			.125/(3.18)	NO	NO	A														
	42410-8840	↓	↓	.125/(3.18)	YES	YES	A														
	42410-8842	8 POS. BODY	6	.125/(3.18)	YES	NO	A														
	42410-8888	8 POS. BODY	4	.062/(1.57)	NO	YES	A														
	42410-8890	↑	↑	.062/(1.57)	NO	NO	A														
	42410-8936			.062/(1.57)	YES	YES	A														
	42410-8938			.062/(1.57)	YES	NO	A														
	42410-9080			.125/(3.18)	NO	YES	A														
	42410-9082			.125/(3.18)	NO	NO	A														
	42410-9128	↓	↓	.125/(3.18)	YES	YES	A														
	42410-9130	8 POS. BODY	4	.125/(3.18)	YES	NO	A														
	42410-9176	8 POS. BODY	2	.062/(1.57)	NO	YES	A														
	42410-9178	↑	↑	.062/(1.57)	NO	NO	A														
	42410-9224			.062/(1.57)	YES	YES	A														
	42410-9226			.062/(1.57)	YES	NO	A														
	42410-9368			.125/(3.18)	NO	YES	A														
	42410-9370			.125/(3.18)	NO	NO	A														
	42410-9416	↓	↓	.125/(3.18)	YES	YES	A														
	42410-9418	8 POS. BODY	2	.125/(3.18)	YES	NO	A														

SEE SHEET ONE
EC NO: UFP2004-1617
DRAWN: SCHMIDT 2004/03/03
CHKD: SCHMIDT 2004/03/03
APPR: F. SMITH 2004/03/03
N

QUALITY SYMBOLS
▽ 0
▽ 0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± .0005 ± .0005
3 PLACES ± .0005 ± .0005
2 PLACES ± .0005 ± .0005
1 PLACE ± .0005 ± .0005
ANGULAR ±1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE
--- INCH
DIMENSION STYLE
IN/MM
DRAWN BY DATE
GLT 1990/10/12
CHECKED BY DATE
BAP 1990/10/12
APPROVED BY DATE
RAS 1990/10/12

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY
TITLE
ASSEMBLY, VERTICAL MODULAR JACKS
MATERIAL NO. MOLEX INCORPORATED
DOCUMENT NO. SDA-42410-****
SHEET NO. 4 OF 4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru