

REVISIONS						
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	A5	REVISED PER ECO-15-015220	27OCT2015	NK	RH	
	A6	REVISED PER ECO-16-018654	15MAY2017	RK	PO	

MATERIAL
BASE, PPS,UL94V-0, BLACK
COVER, PPS, UL94V-0, BLACK
ACTUATOR, PA6T, UL94V-0, WHITE
FIXED CONTACT/TERMINAL, CU ALLOY-GOLD FLASH OVER NICKEL
MOVING CONTACT, CU ALLOY, PLATE-GOLD FLASH/NICKEL
TAPE SEAL-POLYIMIDE FILM, AMBER, SEE P/N TABLE FOR OPTIONS

ELECTRICAL
MAX CONTACT RATING SWITCHING, 100MILLIAMPS @ 24 VDC
MIN CONTACT RATING SWITCHING, .1MICROAMP @ 1 MILLIVOLT
MAX CONTACT NON-SWITCHING, 1AMP @ 5 VDC
INITIAL CONTACT RESISTANCE, 50 MILLIOHMS MAX.
CONTACT RESISTANCE (AFTER ENVIRONMENTAL TEST), 100 MILLIOHMS
CONTACT RESISTANCE (AFTER GAS TEST), 300 MILLIOHMS
INSULATION RESISTANCE, 1,000 MEGOHMS MIN. @ 100 VDC
DIELECTRIC STRENGTH, 500 VAC RMS @ SEA LEVEL
LIFE EXPECTANCY, 1,000 CYCLES

MECHANICAL
OPERATING FORCE, LESS THAN 800 GRAMS
CONTACT PRESSURE, 280,000 PSI

ENVIRONMENTAL
OPERATING TEMPERATURE, -30 TO +85 DEGREES C
STORAGE TEMPERATURE, -45 TO +105 DEGREES C
CLEANING, AQUEOUS OR SOLVENT
SOLDER HEAT RESISTANCE, PER 109-201, COND B, SWITCH "OFF".
SOLDERABILITY PER JIS C 0050 & JIS C 0053.

- 1 SWITCHES TO BE RECEIVED IN THE "OFF" POSITION AND
PACKAGED IN CLEAR TUBES TO ACCOMMODATE AUTO-
INSERTION OR PACKAGED ON TAPE AND REEL
- 2 TOP SURFACE TO BE CLEARLY MARKED AS SHOWN
- 3 SWITCHES TO BE BLACK WITH WHITE ACTUATORS AND
MARKINGS.
- 4 TERMINAL OPTION: OLD T&B P/N ADExxS, SA OR SB
S= OUTSIDE "L" TERMINALS; SA= INSIDE "L" TERMINALS;
SB= BUTT TERMINALS
- 5 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU
DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- 6 TOP TAPE SEAL AVAILABLE, SEE TABLE FOR OPTIONS.
- 7 TAPE AND REEL PACKAGING PER EIA 481.

4 TERMINAL OPTION: OLD T&B P/N ADExxS, SA OR SB
S= OUTSIDE "L" TERMINALS; SA= INSIDE "L" TERMINALS;
SB= BUTT TERMINALS


5 ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU
DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

6 TOP TAPE SEAL AVAILABLE, SEE TABLE FOR OPTIONS.

7 TAPE AND REEL PACKAGING PER EIA 481.

8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SEE SHEET 3 FOR PART NUMBER TABLE
SEE SHEET 2 FOR MOUNTING OPTIONS

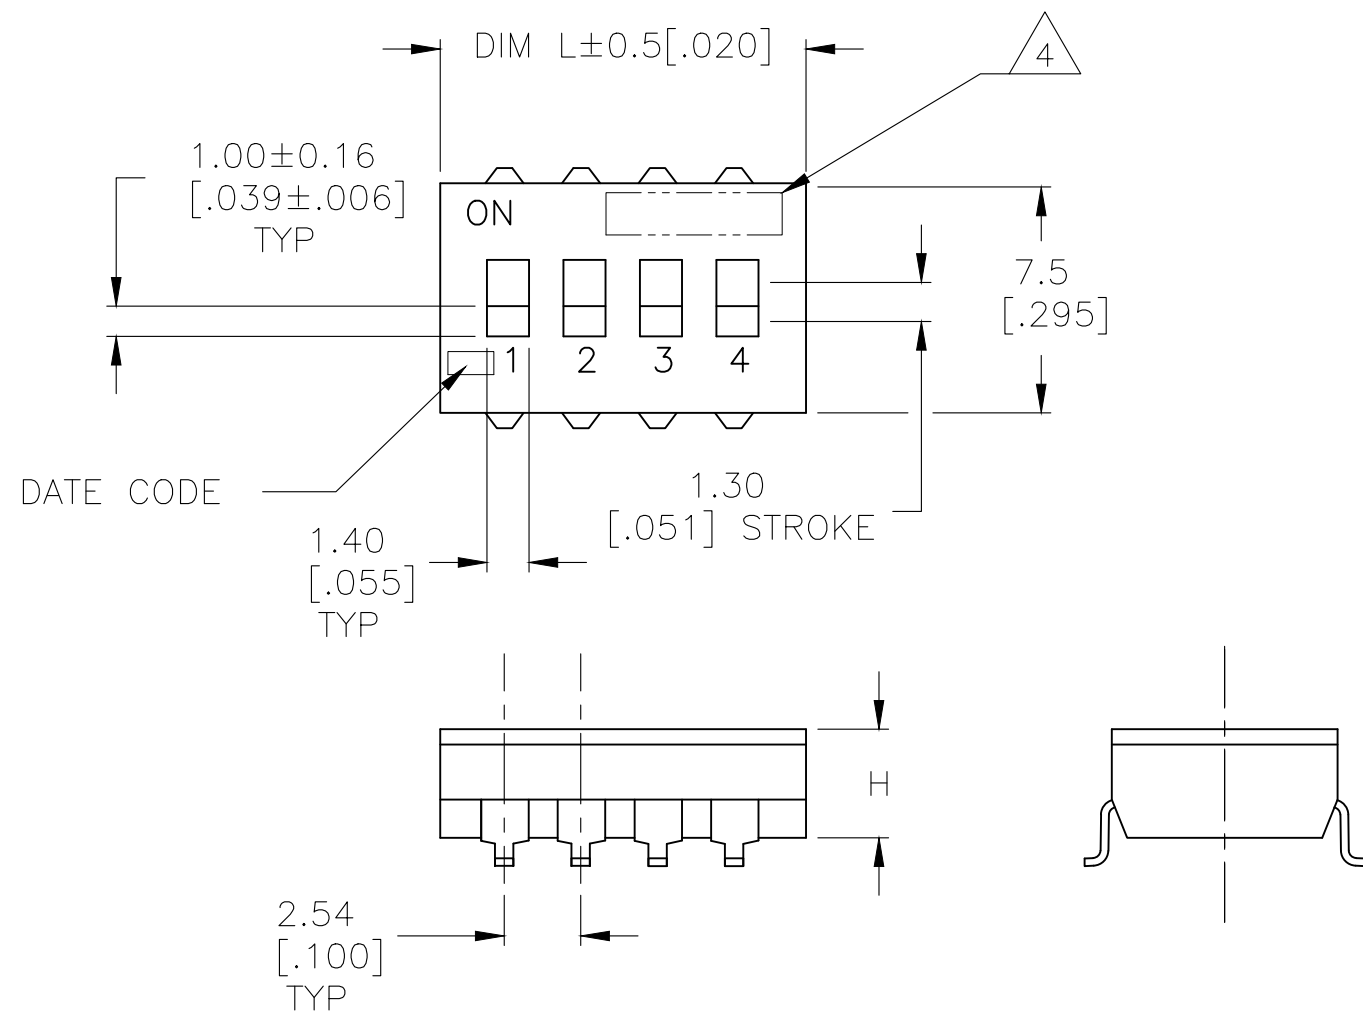

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA 11FEB05		 TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK M.SARVER APVD M.SARVER				NAME		
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.30[.012] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC -				
		APPLICATION SPEC -		DIP SWITCH, ADF-SMT SERIES				
MATERIAL -		FINISH -		SIZE A2	CAGE CODE -	DRAWING NO C=1825059	RESTRICTED TO -	
CUSTOMER DRAWING						SCALE 4:1	SHEET 1 of 3	REV A6

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

D

D

C


C

B


B

A


A

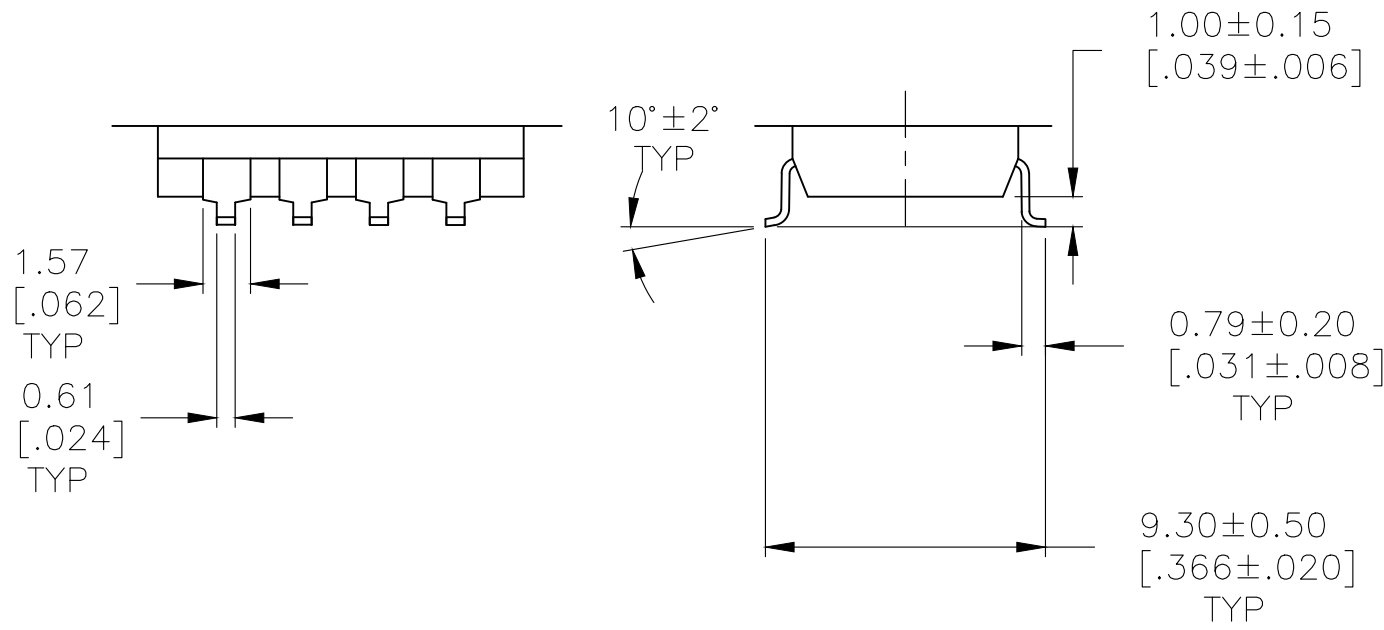


SURFACE MOUNT
S (OUTSIDE "L")

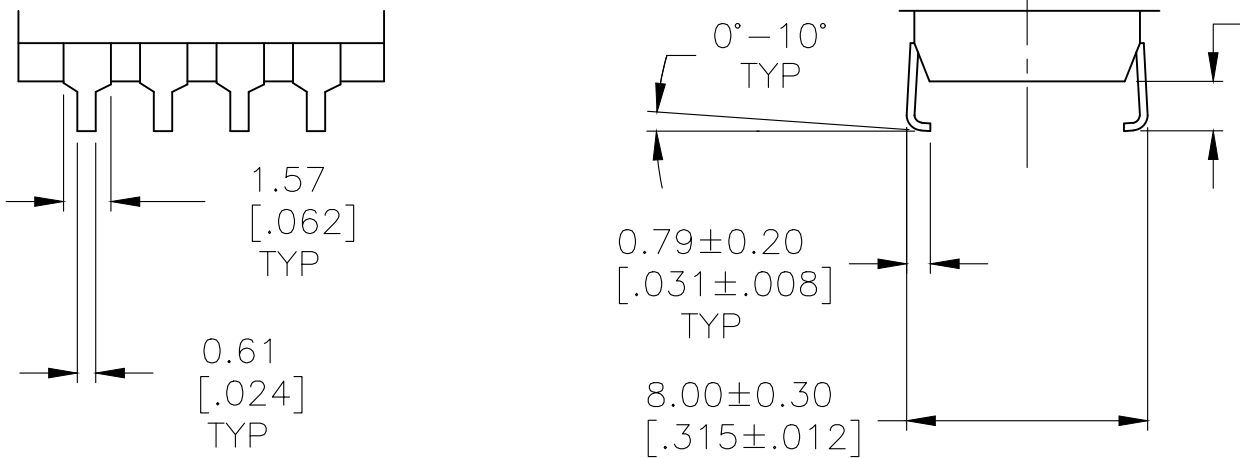

SURFACE MOUNT
SA (INSIDE "L")

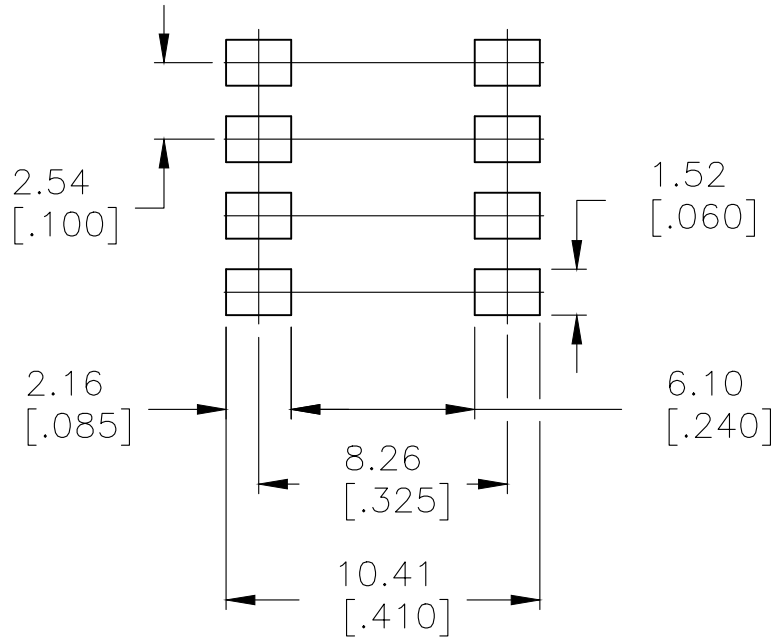

RECOMMENDED PAD LAYOUT

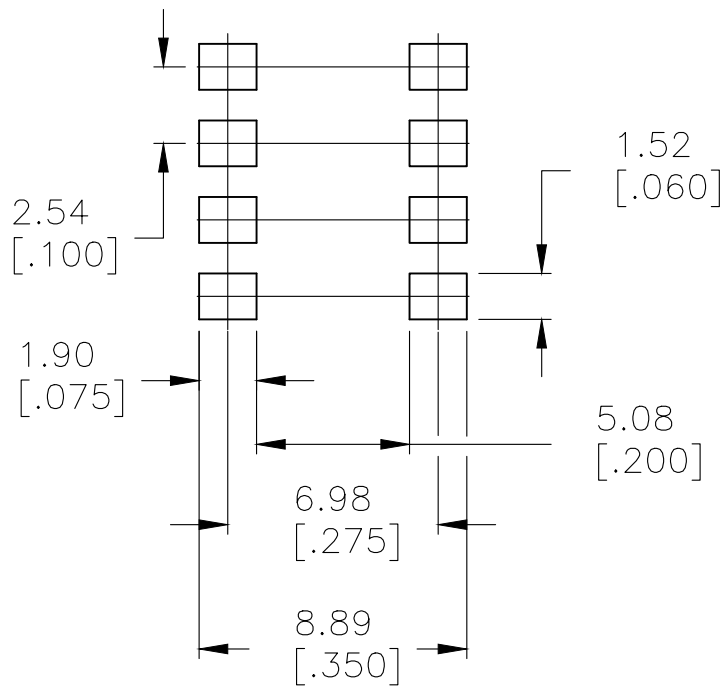

RECOMMENDED PAD LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA CHK M.SARVER APVD M.SARVER PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	11FEB05 - - - - -	TE Connectivity	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME		DIP SWITCH, ADF-SMT SERIES	
	0 PLC ± - 1 PLC ± - 2 PLC ± 0.30[.012] 3 PLC ± - 4 PLC ± - ANGLES ± -	SIZE A2	CAGE CODE -	DRAWING NO 1825059	RESTRICTED TO -
MATERIAL -	FINISH -	SCALE 4:1	SHEET 2 OF 3	REV A6	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	1825059, 1825059
© COPYRIGHT 1825059y -		ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

OBSOLETE	ADF09S04	3.50[.138]	24.54[.978]	NO	9	4-1825059-3	
	ADF08STTR04	3.50[.138]	22.30[.878]	YES	8	4-1825059-2	
	ADF08ST04	3.50[.138]	22.30[.878]	YES	8	4-1825059-1	
	ADF08SATTR04	3.50[.138]	22.30[.878]	YES	8	4-1825059-0	
	OBSOLETE	ADF08SAT04	3.50[.138]	22.30[.878]	YES	8	3-1825059-9
	ADF08SA04	3.50[.138]	22.30[.878]	NO	8	3-1825059-8	
	ADF08S04	3.50[.138]	22.30[.878]	NO	8	3-1825059-7	
	ADF07STTR04	3.50[.138]	19.76[.778]	YES	7	3-1825059-6	
	ADF07ST04	3.50[.138]	19.76[.778]	YES	7	3-1825059-5	
OBSOLETE	ADF07SATTR04	3.50[.138]	19.76[.778]	YES	7	3-1825059-4	
OBSOLETE	ADF07SAT04	3.50[.138]	19.76[.778]	YES	7	3-1825059-3	
OBSOLETE	ADF07SA04	3.50[.138]	19.76[.778]	NO	7	3-1825059-2	
	ADF07S04	3.50[.138]	19.76[.778]	NO	7	3-1825059-1	
	ADF06STTR04	3.50[.138]	17.22[.678]	YES	6	3-1825059-0	
	ADF06ST04	3.50[.138]	17.22[.678]	YES	6	2-1825059-9	
	OBSOLETE	ADF06SATTR04	3.50[.138]	17.22[.678]	YES	6	2-1825059-8
OBSOLETE	ADF06SAT04	3.50[.138]	17.22[.678]	YES	6	2-1825059-7	
OBSOLETE	ADF06SA04	3.50[.138]	17.22[.678]	NO	6	2-1825059-6	
	ADF06S04	3.50[.138]	17.22[.678]	NO	6	2-1825059-5	
	ADF05STTR04	3.50[.138]	14.68[.578]	YES	5	2-1825059-4	
	ADF05ST04	3.50[.138]	14.68[.578]	YES	5	2-1825059-3	
	OBSOLETE	ADF05SATTR04	3.50[.138]	14.68[.578]	YES	5	2-1825059-2
OBSOLETE	ADF05SAT04	3.50[.138]	14.68[.578]	YES	5	2-1825059-1	
OBSOLETE	ADF05SA04	3.50[.138]	14.68[.578]	NO	5	2-1825059-0	
	ADF05S04	3.50[.138]	14.68[.578]	NO	5	1-1825059-9	
	ADF04STTR04	3.50[.138]	12.14[.478]	YES	4	1-1825059-8	
	ADF04ST04	3.50[.138]	12.14[.478]	YES	4	1-1825059-7	
	ADF04SATTR04	3.50[.138]	12.14[.478]	YES	4	1-1825059-6	
	ADF04SAT04	3.50[.138]	12.14[.478]	YES	4	1-1825059-5	
	ADF04SA04	3.50[.138]	12.14[.478]	NO	4	1-1825059-4	
	ADF04S04	3.50[.138]	12.14[.478]	NO	4	1-1825059-3	
	ADF03STTR04	3.50[.138]	9.60[.378]	YES	3	1-1825059-2	
	ADF03ST04	3.50[.138]	9.60[.378]	YES	3	1-1825059-1	
	OBSOLETE	ADF03SATTR04	3.50[.138]	9.60[.378]	YES	3	1-1825059-0
8	ADF03SAT04	3.50[.138]	9.60[.378]	YES	3	1825059-9	
	ADF03SA04	3.50[.138]	9.60[.378]	NO	3	1825059-8	
	ADF03S04	3.50[.138]	9.60[.378]	NO	3	1825059-7	
	ADF02STTR04	3.50[.138]	7.06[.278]	YES	2	1825059-6	
	ADF02ST04	3.50[.138]	7.06[.278]	YES	2	1825059-5	
	OBSOLETE	ADF02SATTR04	3.50[.138]	7.06[.278]	YES	2	1825059-4
	ADF02SAT04	3.50[.138]	7.06[.278]	YES	2	1825059-3	
	OBSOLETE	ADF02SA04	3.50[.138]	7.06[.278]	NO	2	1825059-2
	ADF02S04	3.50[.138]	7.06[.278]	NO	2	1825059-1	
	T&B P/N	DIM H	DIM L	SEAL	POS	PART NO.	

	ADF10STR04	3.50[.138]	27.36[1.078]	NO	10	6-1825059-2
	ADF03STR04	3.50[.138]	9.60[.378]	NO	3	6-1825059-1
OBSOLETE	ADF12STTR04	3.61[.142]	32.51[1.280]	YES	12	6-1825059-0
OBSOLETE	ADF12ST04	3.61[.142]	32.51[1.280]	YES	12	5-1825059-9
OBSOLETE	ADF12SATTR04	3.61[.142]	32.51[1.280]	YES	12	5-1825059-8
OBSOLETE	ADF12SAT04	3.61[.142]	32.51[1.280]	YES	12	5-1825059-7
OBSOLETE	ADF12SA04	3.61[.142]	32.51[1.280]	NO	12	5-1825059-6
OBSOLETE	ADF12S04	3.61[.142]	32.51[1.280]	NO	12	5-1825059-5
	ADF10STTR04	3.50[.138]	27.36[1.078]	YES	10	5-1825059-4
	ADF10ST04	3.50[.138]	27.36[1.078]	YES	10	5-1825059-3
OBSOLETE	ADF10SATTR04	3.50[.138]	27.36[1.078]	YES	10	5-1825059-2
OBSOLETE	ADF10SAT04	3.50[.138]	27.36[1.078]	YES	10	5-1825059-1
OBSOLETE	ADF10SA04	3.50[.138]	27.36[1.078]	NO	10	5-1825059-0
	ADF10S04	3.50[.138]	27.36[1.078]	NO	10	4-1825059-9
	ADF09STTR04	3.50[.138]	24.54[.978]	YES	9	4-1825059-8
OBSOLETE	ADF09ST04	3.50[.138]	24.54[.978]	YES	9	4-1825059-7
OBSOLETE	ADF09SATTR04	3.50[.138]	24.54[.978]	YES	9	4-1825059-6
OBSOLETE	ADF09SAT04	3.50[.138]	24.54[.978]	YES	9	4-1825059-5
OBSOLETE	ADF09SA04	3.50[.138]	24.54[.978]	NO	9	4-1825059-4
	T&B P/N	DIM H	DIM L	SEAL	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.S.VISWESWARA 11FEB05		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.30[.012] 3 PLC ± - 4 PLC ± - ANGLES ± -			
		PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		NAME DIP SWITCH, ADF-SMT SERIES	
MATERIAL —		FINISH —		SIZE A2	CAGE CODE —
		CUSTOMER DRAWING		DRAWING NO C=1825059	
				SCALE 4:1	SHEET 3 of 3
				RESTRICTED TO — REV A6	

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru