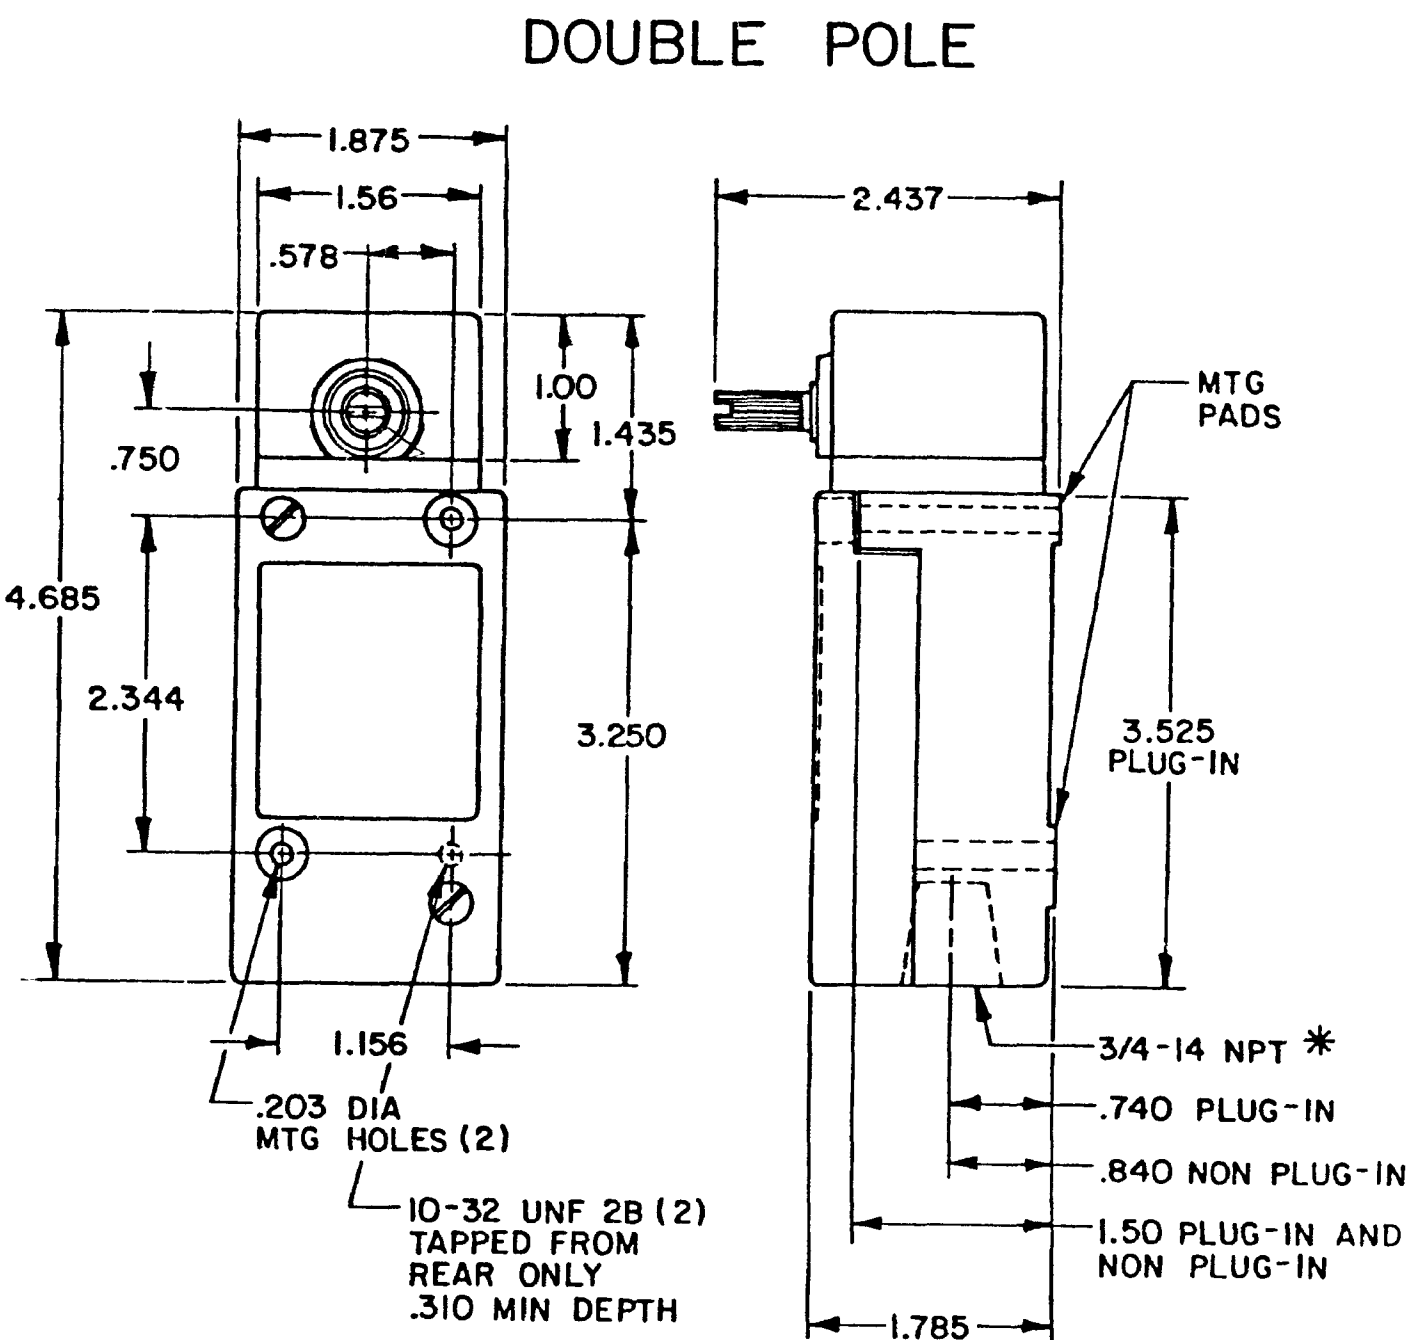


[illegible]


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2  
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP


1.900

.180 X .400 LENS  
(FLUSH WITH HOUSING)

240 LAMP VOLTAGE -  
TYPE LSA8, LSH8, LSN8, LSP8, LSR8

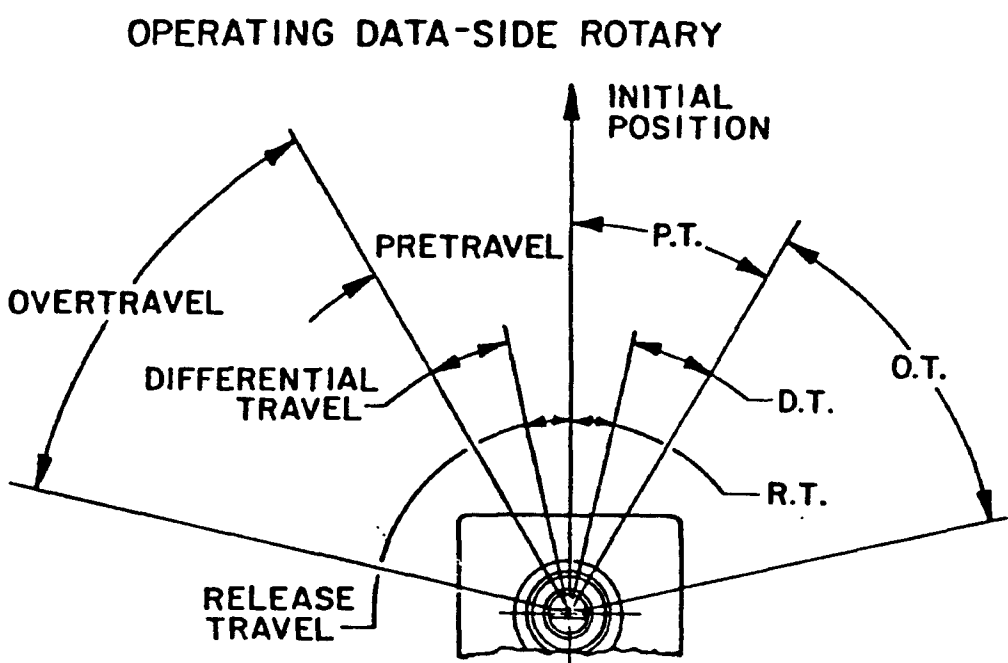

MANIFOLD MOUNT (PLUG-IN ONLY)  
SINGLE POLE AND DOUBLE POLE  
TYPE LSA THROUGH LSW SERIES

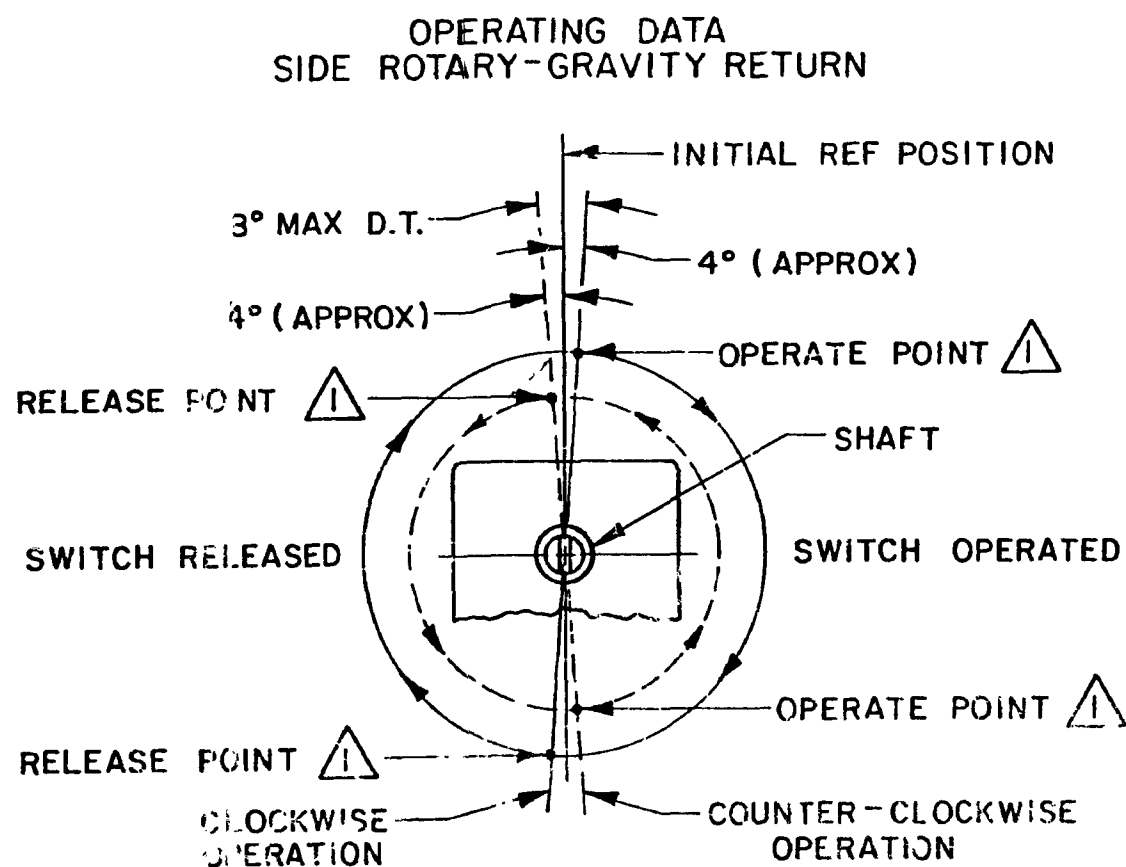


NOTE  
 OPERATE AND RELEASE POINTS WILL EXCHANGE LOCATIONS IF SHAFT IS ROTATED 180°


|                                                                                                                                                                                     |                          |                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------|
| THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. |                          |                                          |
| <b>MICRO SWITCH</b><br>a Honeywell Division<br>FED. MFG. CODE 91929                                                                                                                 | <b>SWITCH - ENCLOSED</b> | CATALOG LISTING<br><b>LSA-LSW SERIES</b> |
|                                                                                                                                                                                     |                          | <b>CHART 1</b>                           |

|                                                                                       |                                                                                       |       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-------|
| THIRD ANGLE PROJECTION                                                                |                                                                                       |       |
|  |  |       |
| SCALE NONE                                                                            |                                                                                       |       |
| DO NOT SCALE PRINT                                                                    |                                                                                       |       |
| UNLESS OTHERWISE SPECIFIED<br>TOLERANCES ARE                                          |                                                                                       |       |
| ONE PLACE                                                                             | (.0)                                                                                  | ±.030 |
| TWO PLACES                                                                            | (.00)                                                                                 | ±.015 |
| THREE PLACES                                                                          | (.000)                                                                                | ±.005 |
| ANGLES                                                                                |                                                                                       | ±.    |
| WEIGHT                                                                                |                                                                                       |       |


# SIDE ROTARY CAM TRACKING

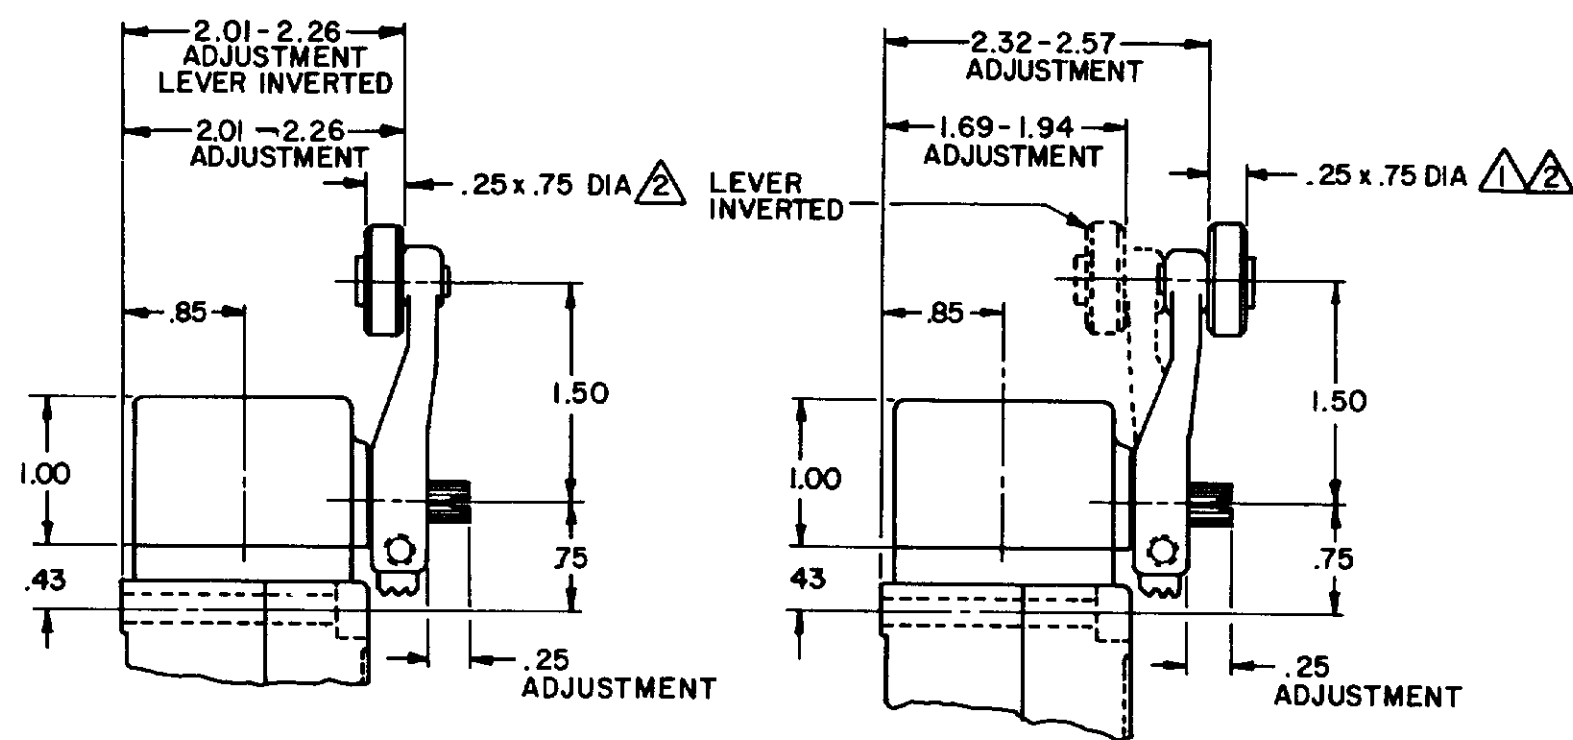


LSZ51 TYPE LEVERS

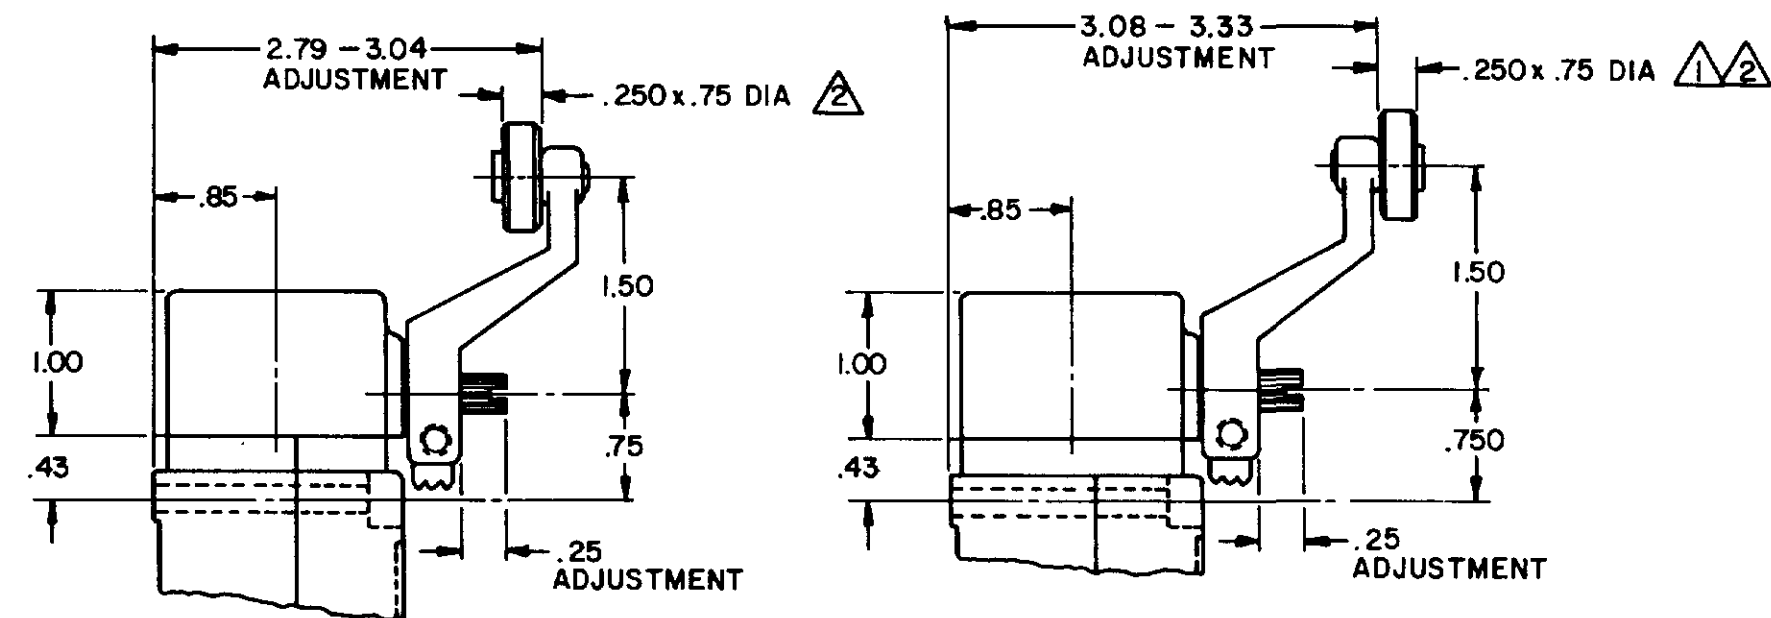


LSZ55 TYPE LEVERS

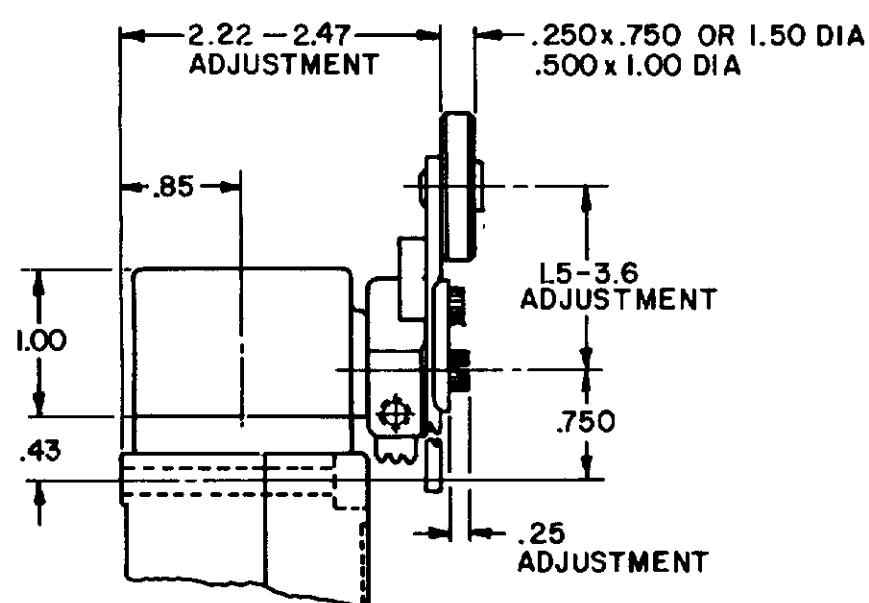


LSZ52 TYPE LEVER

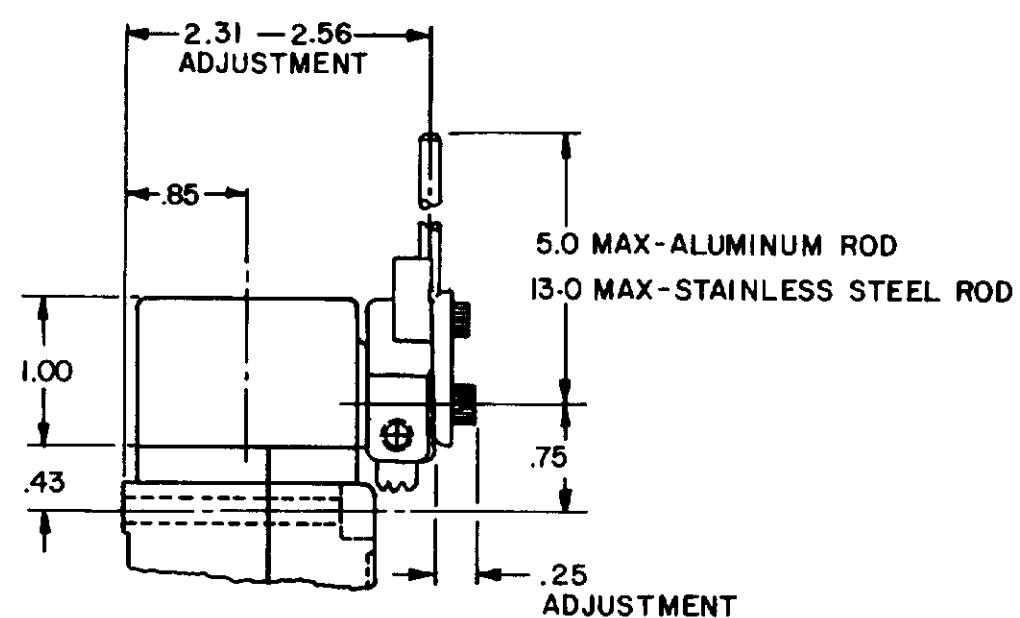

LSZ54 TYPE LEVER

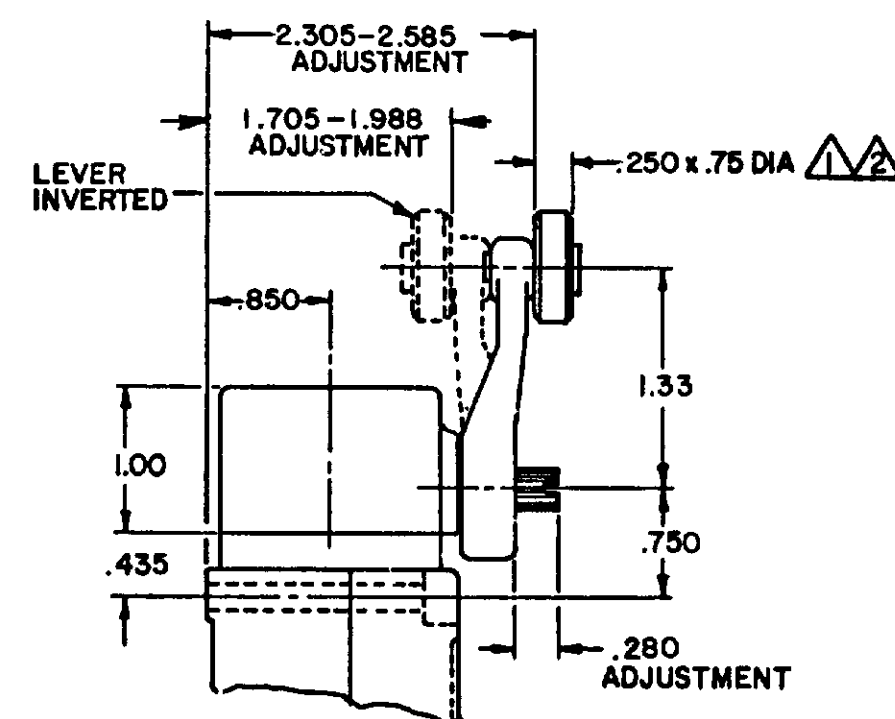

OPEN MOUNTED ROLLER

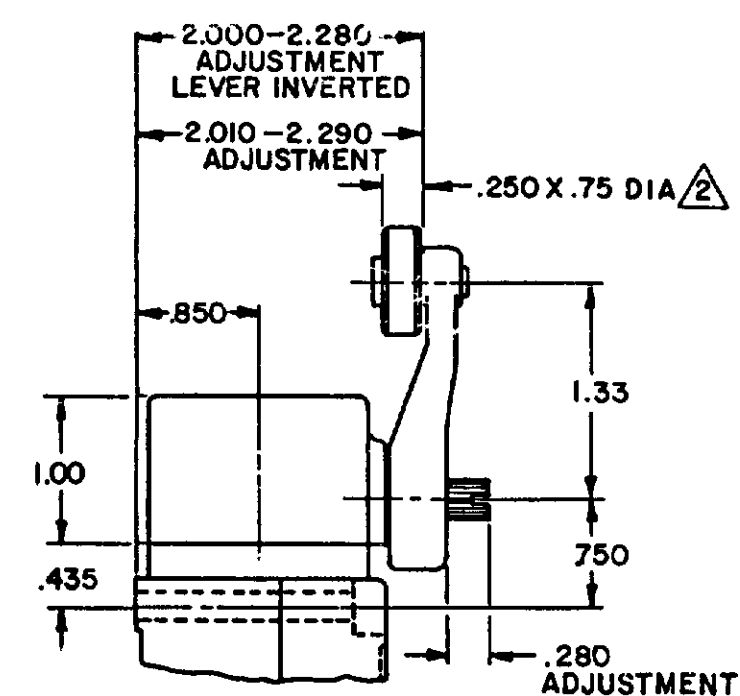

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

## NOTES

- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING  
LSA-LSW SERIES CHART 1  
PAGE 2 OF 10  
REPLACES LSA-LSW SERIES  
10JUL07 RELEASE NO. CO-78498  
PSR  
CHECK  
11AUG04  
AK  
11JUL94  
JAF  
15JUN94  
MAM  
DRAWN  
MASTER


| REV | DATE    | BY   | CHK | DESCRIPTION |
|-----|---------|------|-----|-------------|
| 1   | 0031956 |      |     |             |
| 2   | 10JUL07 | BS   |     |             |
| 3   | 201004  | B    |     |             |
| 4   | 10AUG00 | C SL |     |             |
| 5   | 201748  | C    |     |             |
| 6   | 17NOV00 | C SL |     |             |
| 7   | 202198  | D    |     |             |
| 8   | 20JAN01 | E    |     |             |
| 9   | 204871  | F    |     |             |
| 10  | 206581  | F    |     |             |
| 11  | 14OCT02 | G    |     |             |
| 12  | 206763  | G    |     |             |
| 13  | 31OCT02 | H    |     |             |
| 14  | 207178  | H    |     |             |
| 15  | 207474  | J    |     |             |
| 16  | 18FEB03 | K    |     |             |
| 17  | 0006871 | K    |     |             |

| THIRD ANGLE PROJECTION                    |        |       |  |
|-------------------------------------------|--------|-------|--|
| SCALE NONE                                |        |       |  |
| DO NOT SCALE PRINT                        |        |       |  |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |        |       |  |
| ONE PLACE                                 | (0)    | ±.030 |  |
| TWO PLACES                                | (.00)  | ±.015 |  |
| THREE PLACES                              | (.000) | ±.005 |  |
| ANGLES                                    |        | ±     |  |
| WEIGHT                                    |        |       |  |

# TOP ROTARY

# SINGLE POLE

# DOUBLE POLE

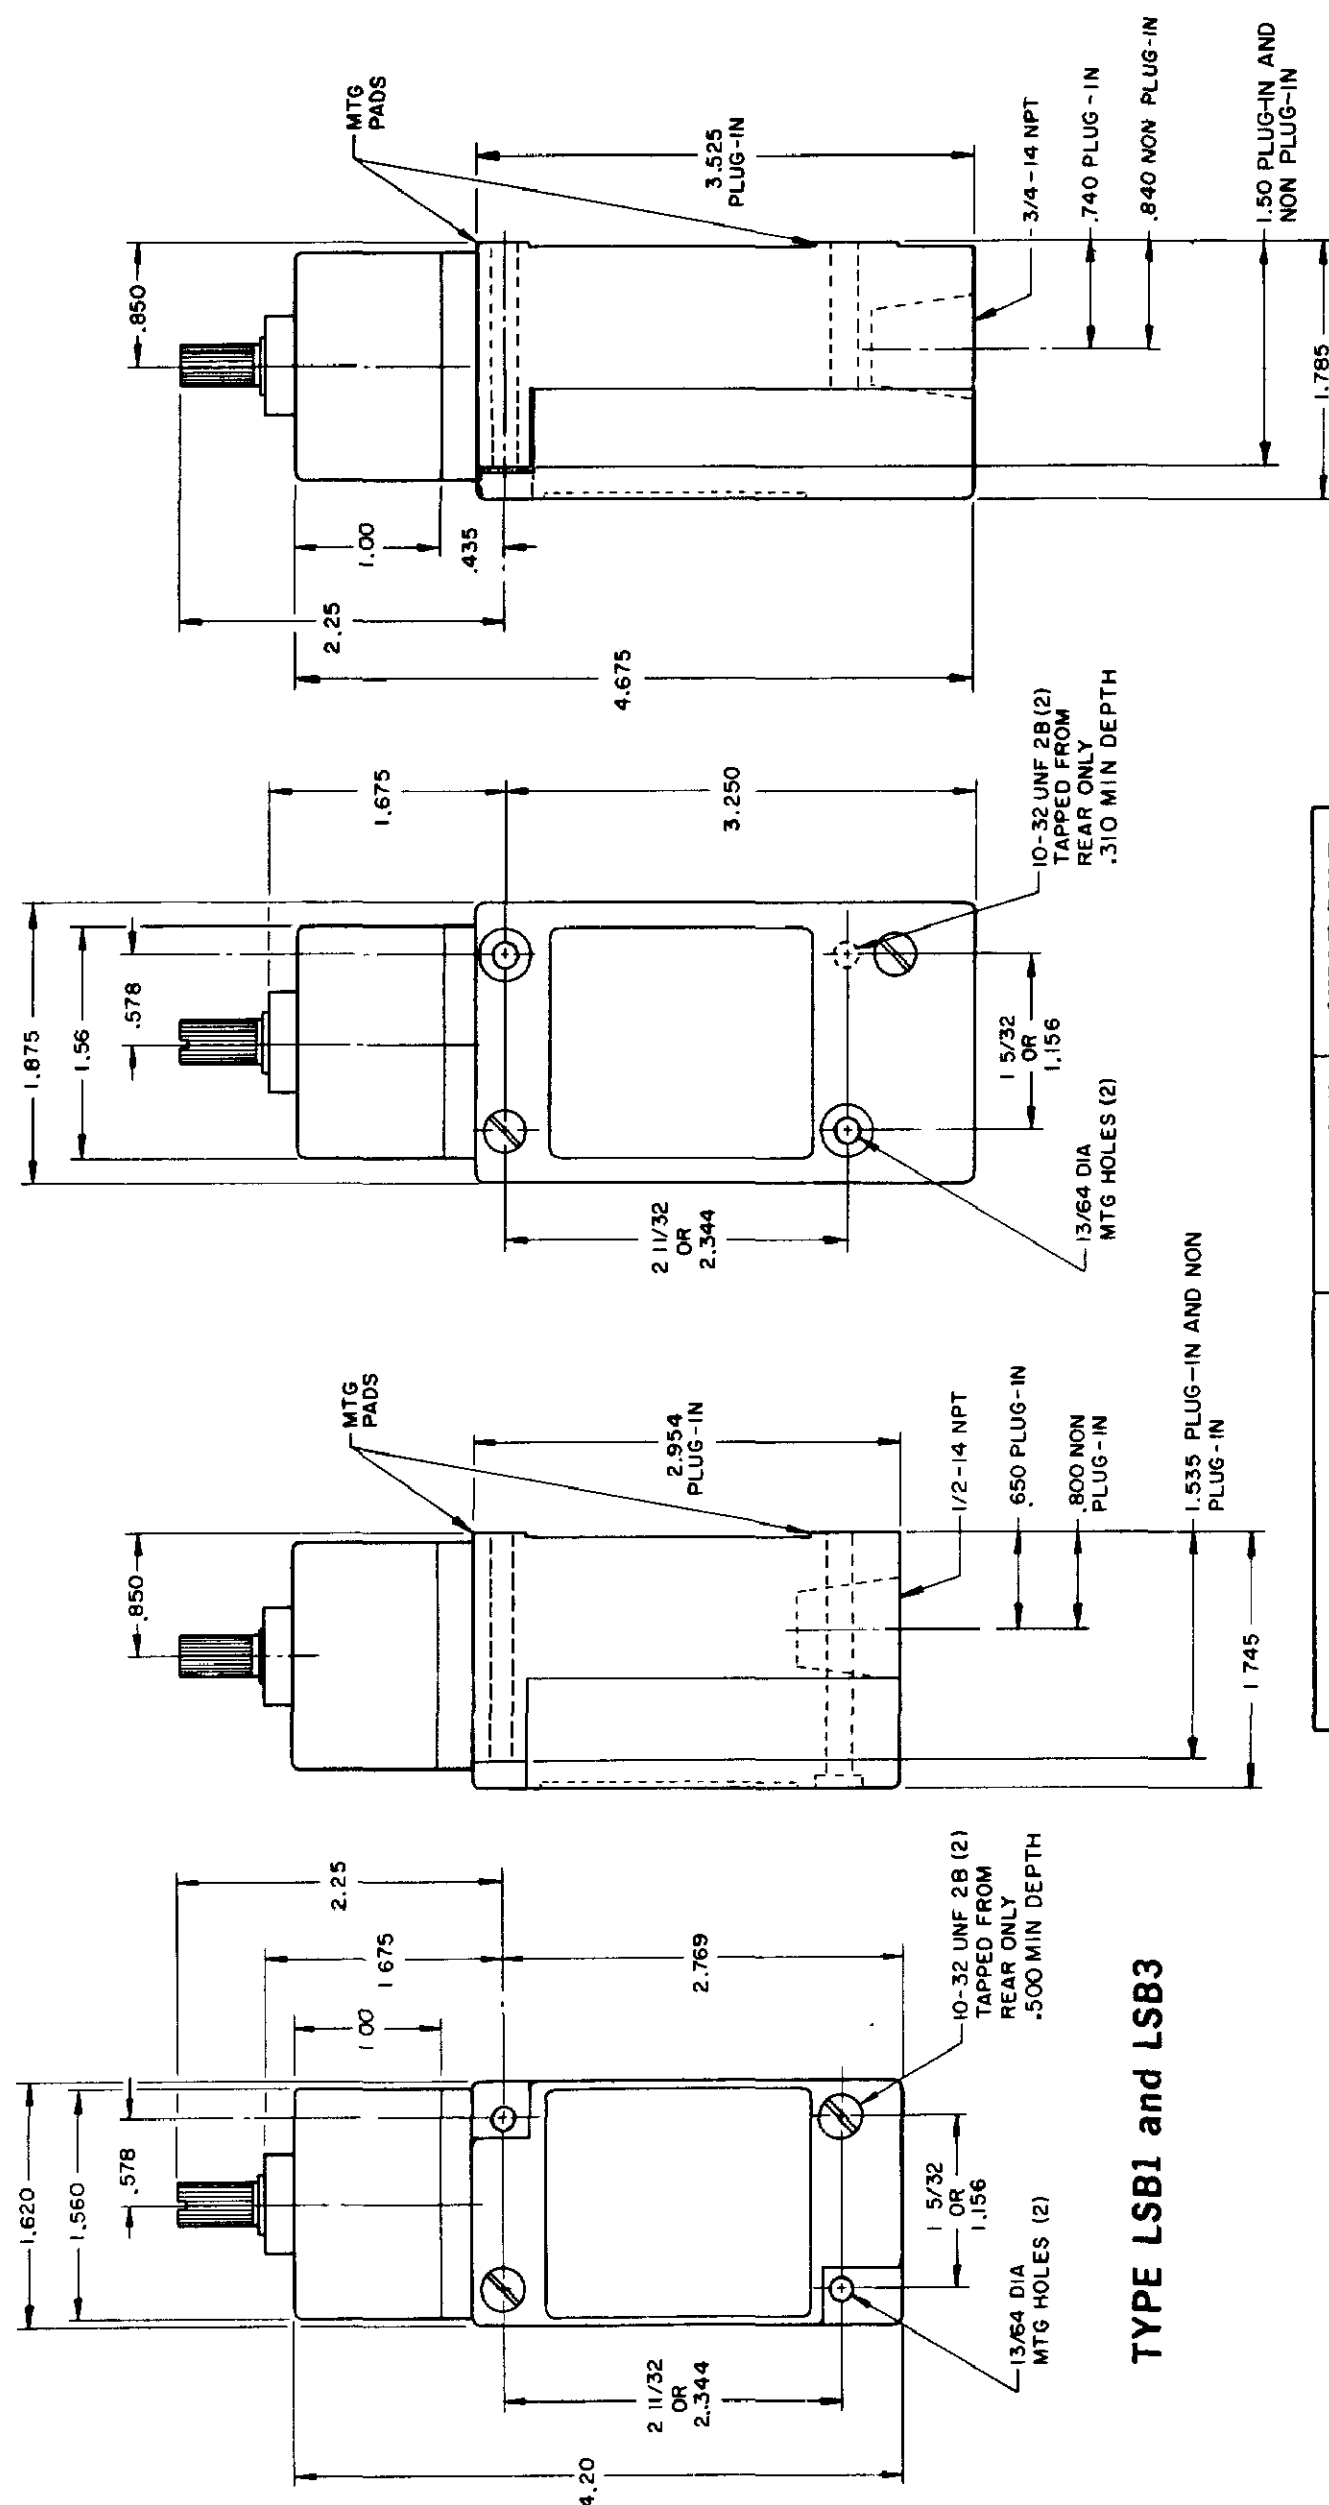

### TYPE LSB1 and LSB3

**TYPE LSB2 and LSB4  
LSB6 and LSB7 have 1/2" - 14 NPT  
CONDUIT HOLE**

|                         |                    |                    |
|-------------------------|--------------------|--------------------|
| PRETRAVEL MAX           | SINGLE POLE<br>25° | DOUBLE POLE<br>25° |
| OVERTRAVEL MIN          | 110°               | 110°               |
| DIFFERENTIAL TRAVEL MAX | 10°                | 12°                |
| OPERATING TORQUE MAX    | 2 5 IN. LBS        | 2 5 IN. LBS        |
| TOTAL TRAVEL (REF)      | 135°               | 135°               |

## ELECTRICAL RATINGS

| 10 AMP CONT. | A.C. VOLTAGE | AMPS AT 35 POWER FACTOR |       |             |       |       |       |
|--------------|--------------|-------------------------|-------|-------------|-------|-------|-------|
|              |              | SINGL POLE              |       | DOUBLE POLE |       | BREAK |       |
|              |              | MAKE                    | BREAK | MAKE        | BREAK | MAKE  | BREAK |
|              | 120          | 60                      | 6     | 30          | 3     |       |       |
|              | 240          | 30                      | 3     | 15          | 1.5   |       |       |
|              | 480          | 15                      | 1.5   | 7.5         | 75    |       |       |
|              | 600          | 12                      | 1.2   | 6           | 6     |       |       |

| D. C. VOLTAGE | MAKE & BREAK<br>INDUCTIVE | RESISTIVE |
|---------------|---------------------------|-----------|
| 120           | 0.25                      | 0.80      |
| 240           | 0.15                      | 0.40      |

ELECTRONIC DUTY BASIC SWITCH  
10 AMP CONT


|                |            |
|----------------|------------|
| VOLTAGE        |            |
| 5 AC OR DC MIN | 01 AMP MIN |
| 600 AC         | 720 VA     |
| 240 DC         | 30 WATT    |

**DIRECT ACTING (ALSO RATED AT A. C. 10  
AMP CONT.)**


| D. C. VOLTAGE | MAKE AND BREAK AMPS |           |
|---------------|---------------------|-----------|
|               | INDUCTIVE           | RESISTIVE |
| 30            | 4.2                 | 4.2       |
| 120           | 1.1                 | 1.1       |
| 240           | .55                 | .55       |

**WIRING BASIC SWITCH  
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE

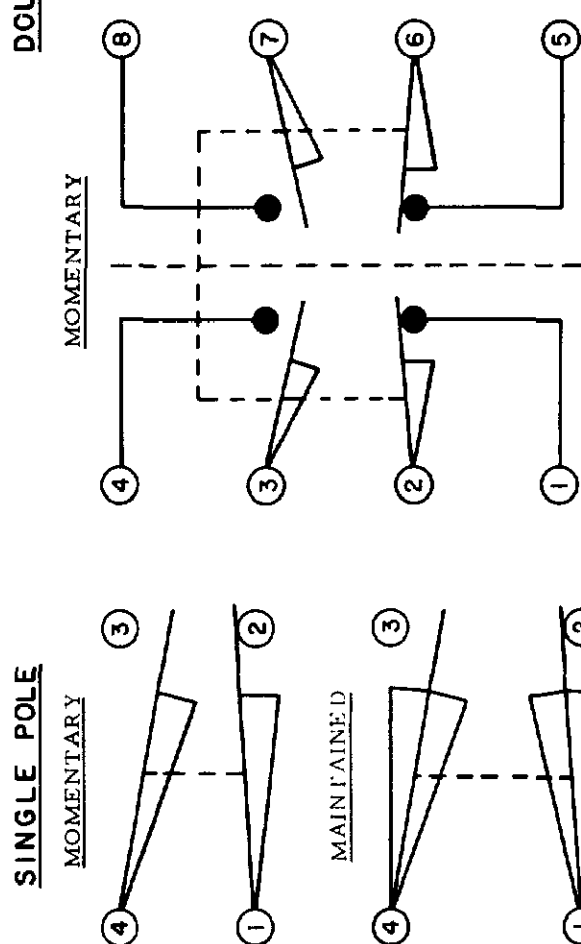


**SINGLE POLE**

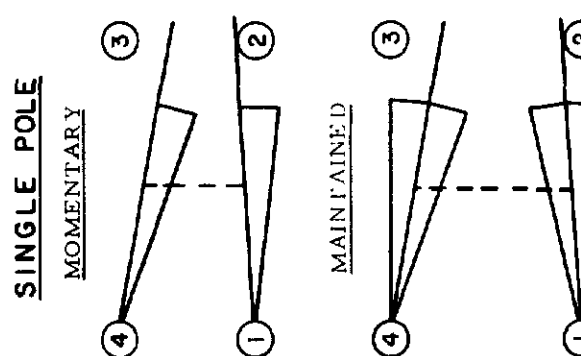

**SINGLE POLE**

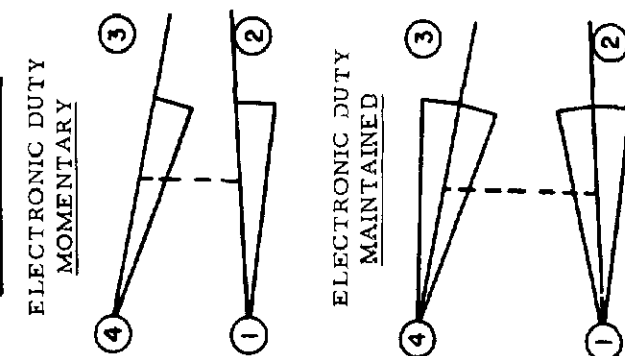


## ELECTRONIC DUTY

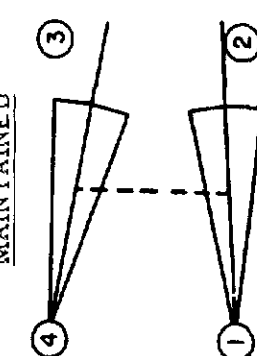

**DIRECT ACTING** 




# SINGLE POLE

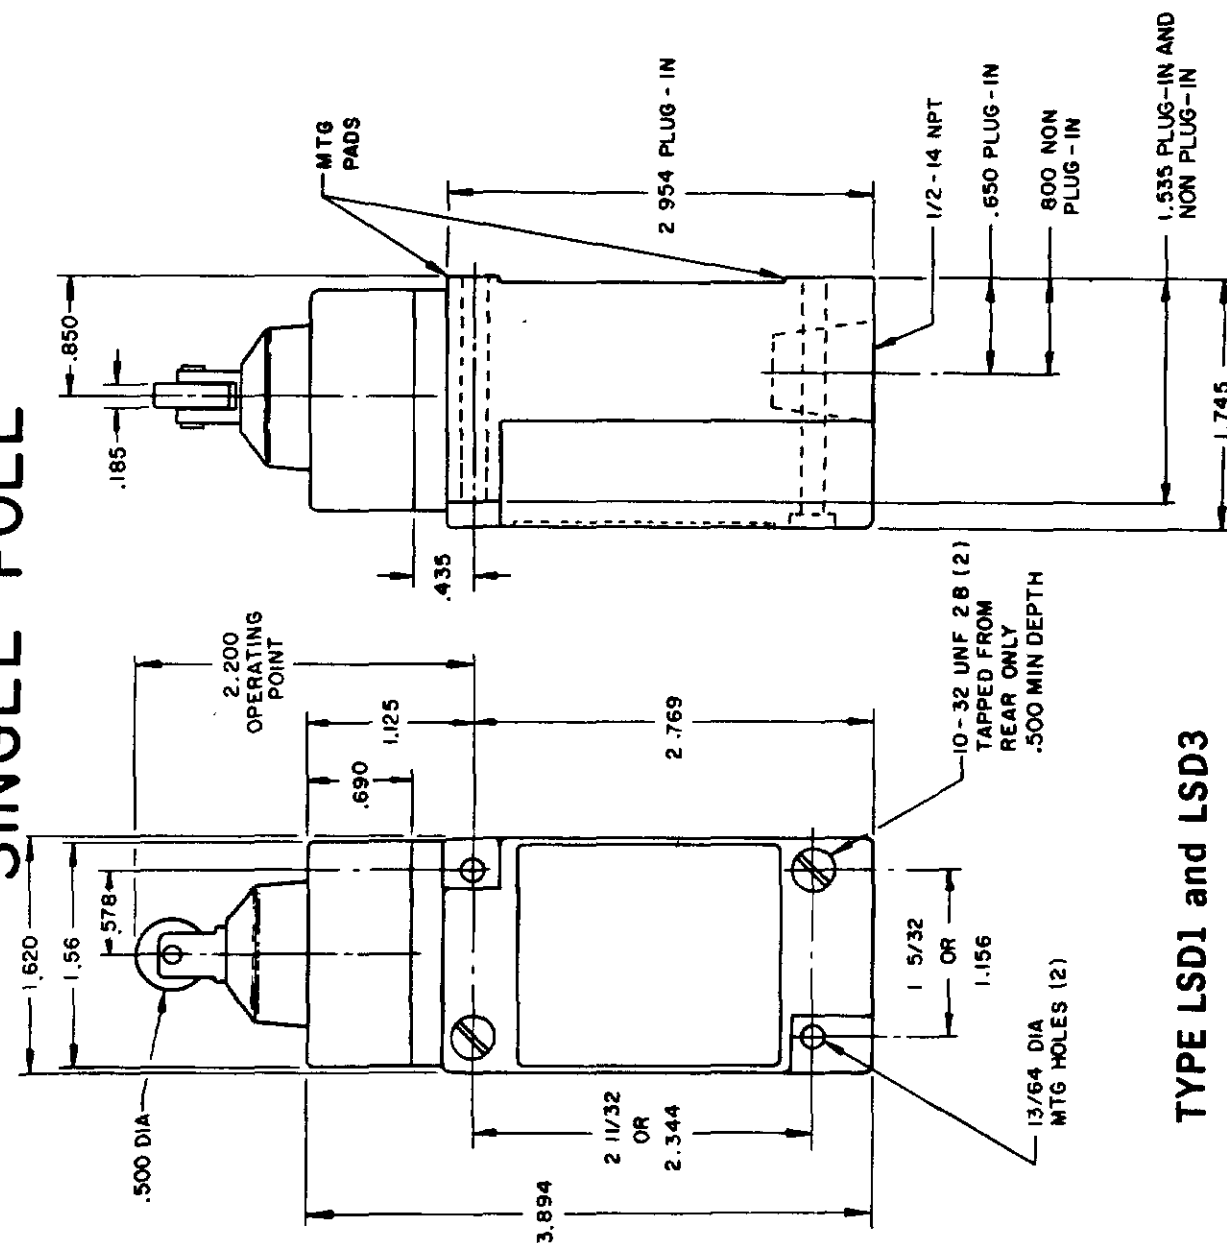


### TYPE LSD1 and LSD3

# DOUBLE POLE

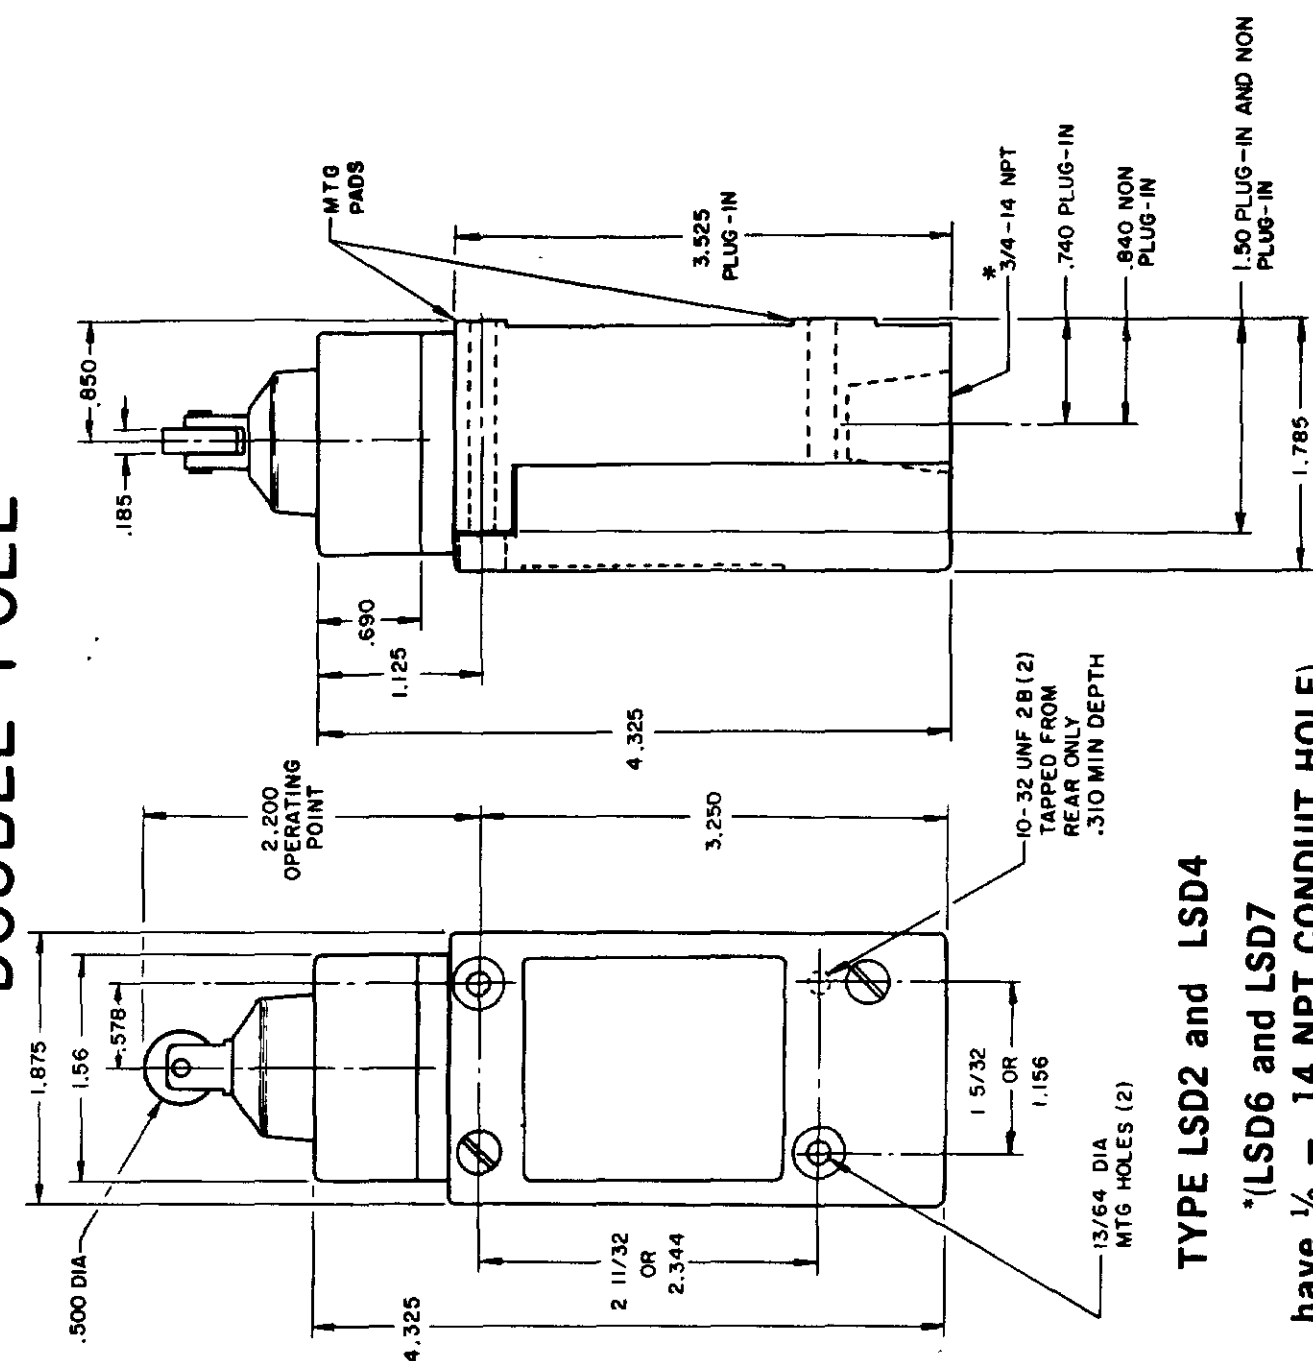


#### TYPE LSD2 and LSD4


\*(LSD6 and LSD7 have 1/2 - 14 NPT CON

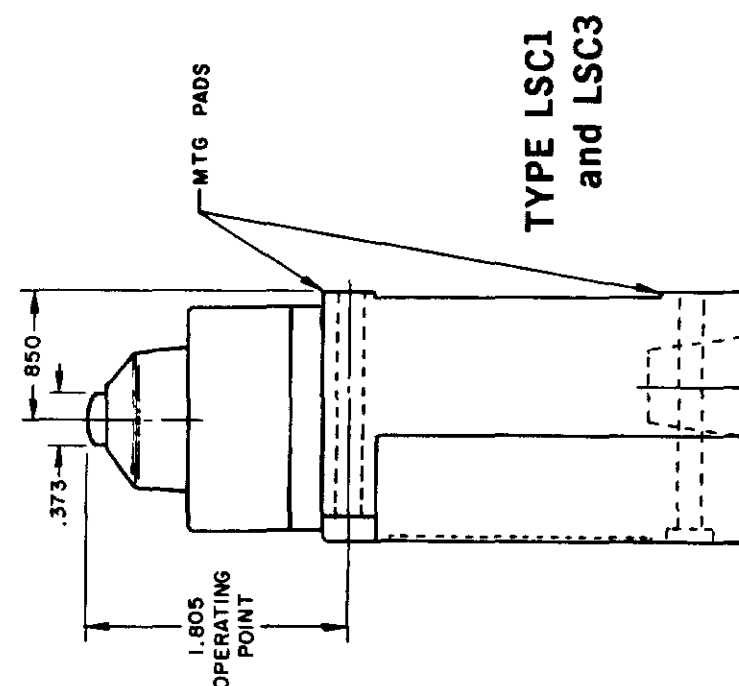

### TYPE LSC1 and LSC3

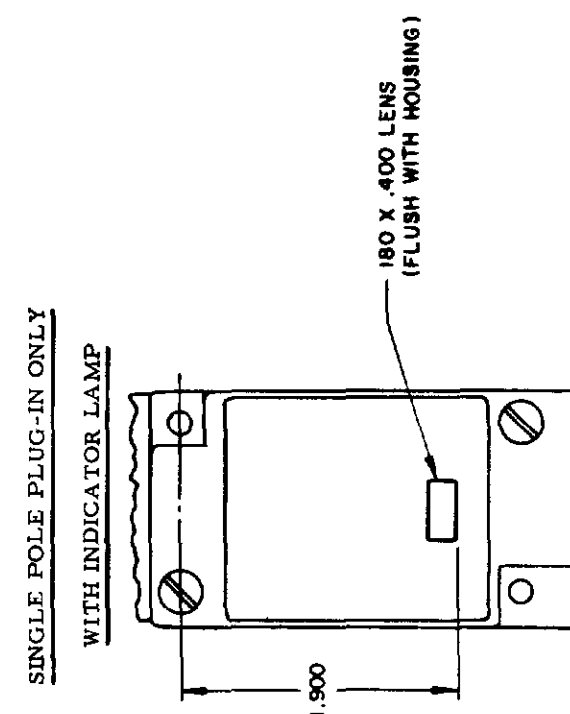


**TYPE LSC2  
and LSC4**

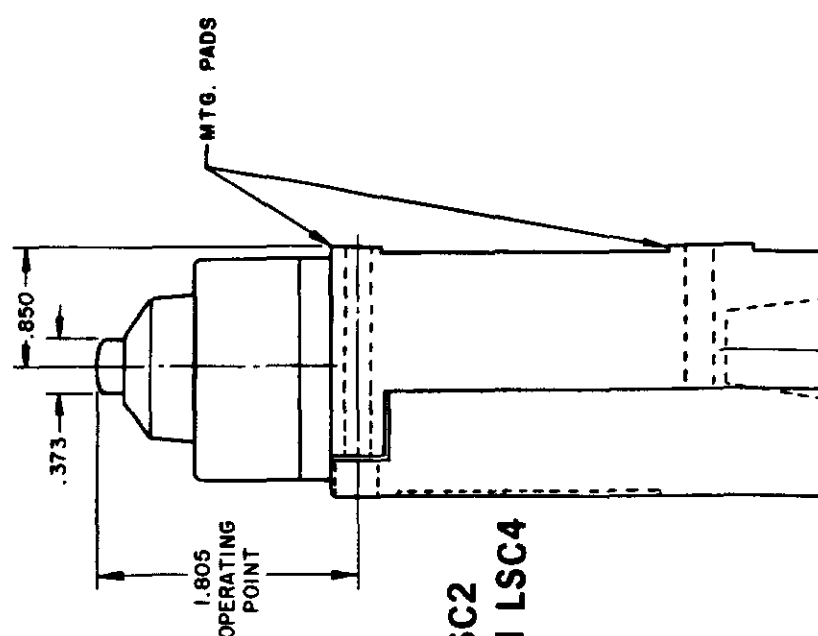


**120 LAMP VOLTAGE -  
TYPE LSC5, LSD5 or LSV5**


**240 LAMP VOLTAGE .  
TYPE LSC8, LSD8 or LSV8**

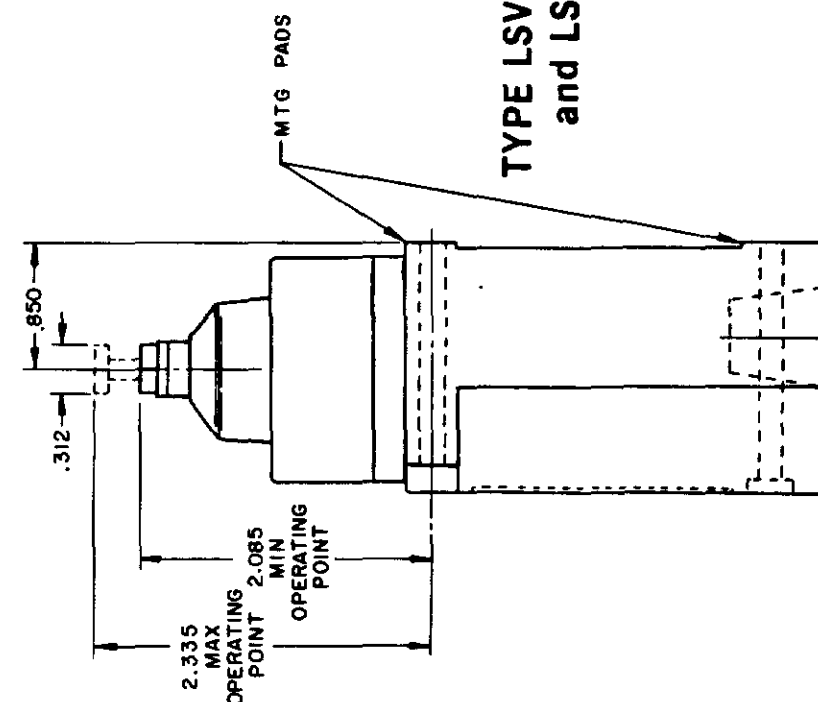

## TYPE LSV1 and LSV3

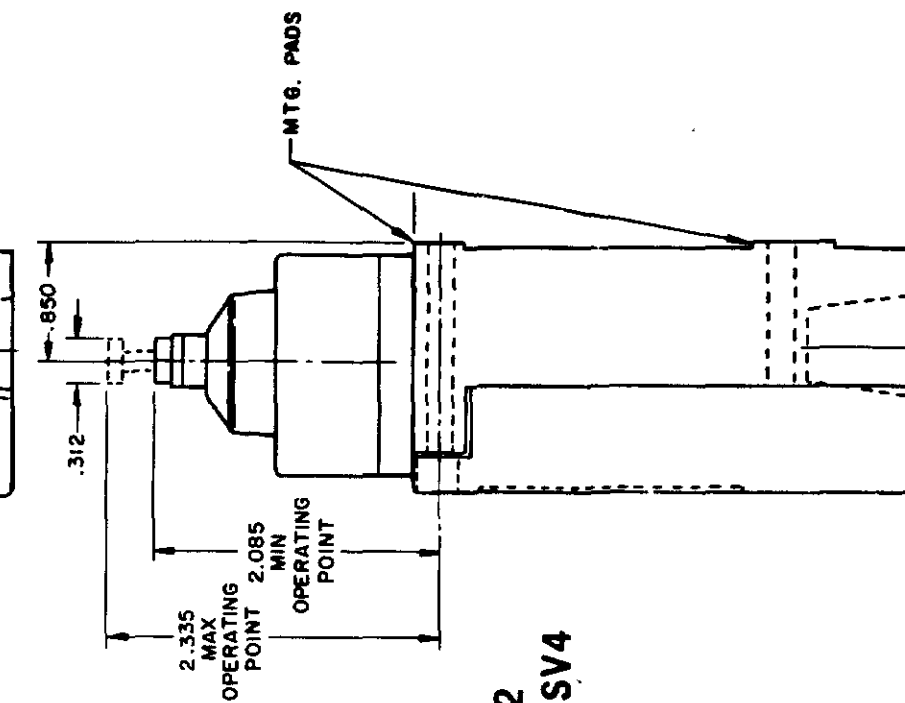

**TYPE LSV2  
and LSV4**

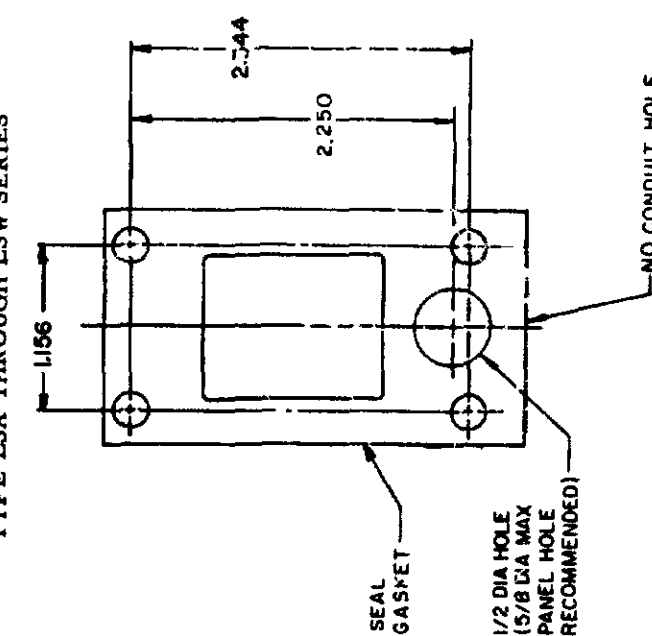

PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

**MICRO SWITCH**  
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING



**LSA-LSW SERIES**

**CHART 1**

SCALE NONE

~~DO NOT SCALE PRINT~~

SINGLE POLE DOUBLE POLE

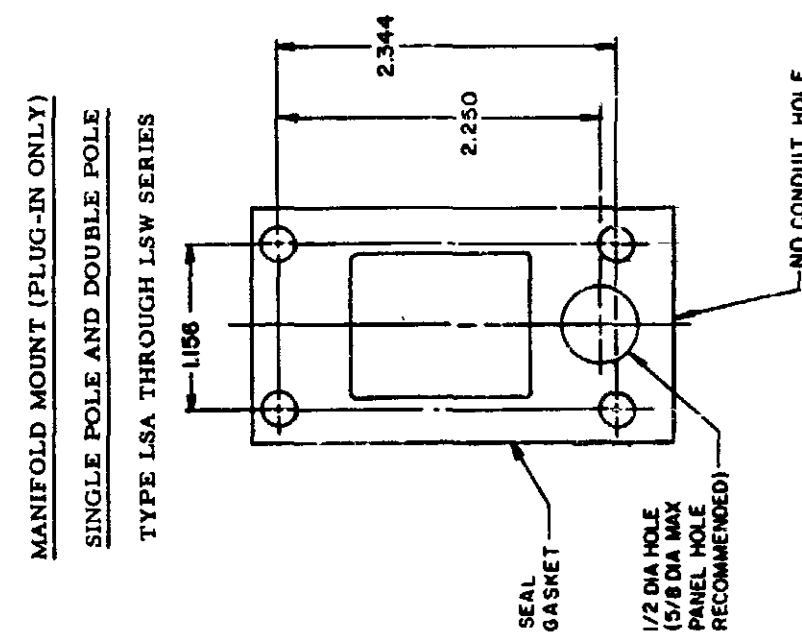


FED MFG CODE 91929

|                 |
|-----------------|
| CATALOG LISTING |
| LSA-LSW SERIES  |
| CHART 1         |

SCALE NONE

DO NOT SCALE PRINT

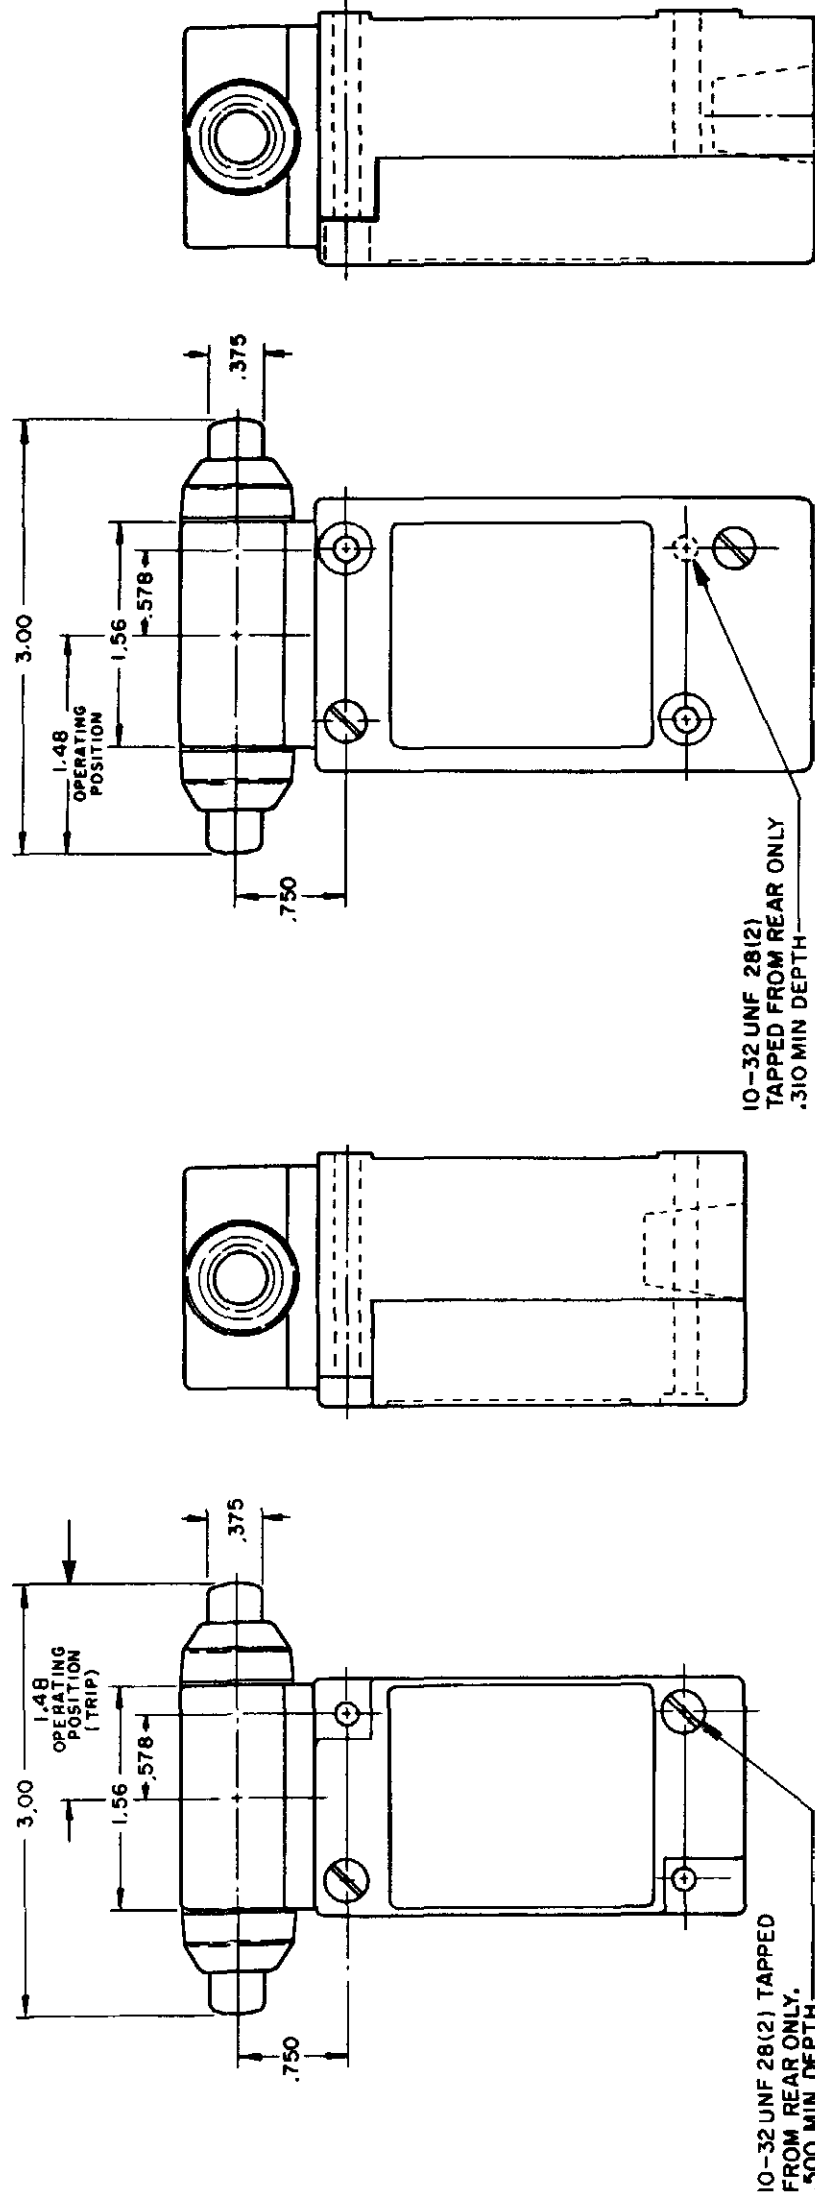


TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —  
(FREE POSITION) } PRETRAVEL  
OPERATING POINT } DIFFERENTIAL TRAVEL  
FULL TRAVEL — } OVERTRAVEL

| TOP PLUNGER TYPES                                            |                                      |                                      |                                        |
|--------------------------------------------------------------|--------------------------------------|--------------------------------------|----------------------------------------|
| OPERATING POINT GIVEN<br>IN RELATION TO TOP<br>MOUNTING HOLE |                                      | SEQUENCE BASIC                       |                                        |
| CHARACTERISTICS                                              | LSC PLUNGER                          | LSD ROLLER PLUNGER                   | LSV ADJ PLUNGER                        |
| PRETRAVEL (MAX)                                              | .070                                 | .070                                 | .070                                   |
| DIFFERENTIAL<br>TRAVEL (MAX)                                 | SINGLE POLE DOUBLE POLE<br>.015 .020 | SINGLE POLE DOUBLE POLE<br>.015 .020 | SINGLE POLE DOUBLE POLE<br>.015 .020   |
| OVERTRAVEL (MIN)                                             | .190                                 | .190                                 | .170                                   |
| OPERATING FORCE<br>(MAX)                                     | 4 LBS                                | 4 LBS                                | 4 LBS                                  |
| OPERATING POINT                                              | 1.805 ± .030                         | 2.200 ± .040                         | 2.085 MIN 2.335 MAX                    |
| FULL OVERTRAVEL<br>FORCE (MAX)                               | 7 LBS                                | 7 LBS                                | 7 LBS                                  |
| SIDE PLUNGER TYPES                                           |                                      |                                      |                                        |
| OPERATING POINT GIVEN IN<br>RELATION TO CENTER OF HEAD       |                                      | SEQUENCE BASIC                       |                                        |
| CHARACTERISTICS                                              | LSE PLUNGER                          | LSF ROLLER PLUNGER                   | LSG PLUNGER MAINTAINED                 |
| PRETRAVEL (MAX)                                              | .100                                 | .100                                 | .170                                   |
| DIFFERENTIAL<br>TRAVEL (MAX)                                 | .045                                 | .045                                 | .090                                   |
| OVERTRAVEL (MIN)                                             | .190                                 | .190                                 | .170                                   |
| OPERATING FORCE<br>(MAX)                                     | 6 LBS                                | 6 LBS                                | 10 LBS                                 |
| OPERATING POINT                                              | 1.300 ± .030                         | 1.735 ± .040                         | ADJUSTABLE FROM<br>1.615 MIN 1.865 MAX |
| FULL OVERTRAVEL<br>FORCE (MAX)                               | 6 LBS                                | 6 LBS                                | 10 LBS                                 |

WOBBLE STICK      SINGLE POLE      DOUBLE POLE

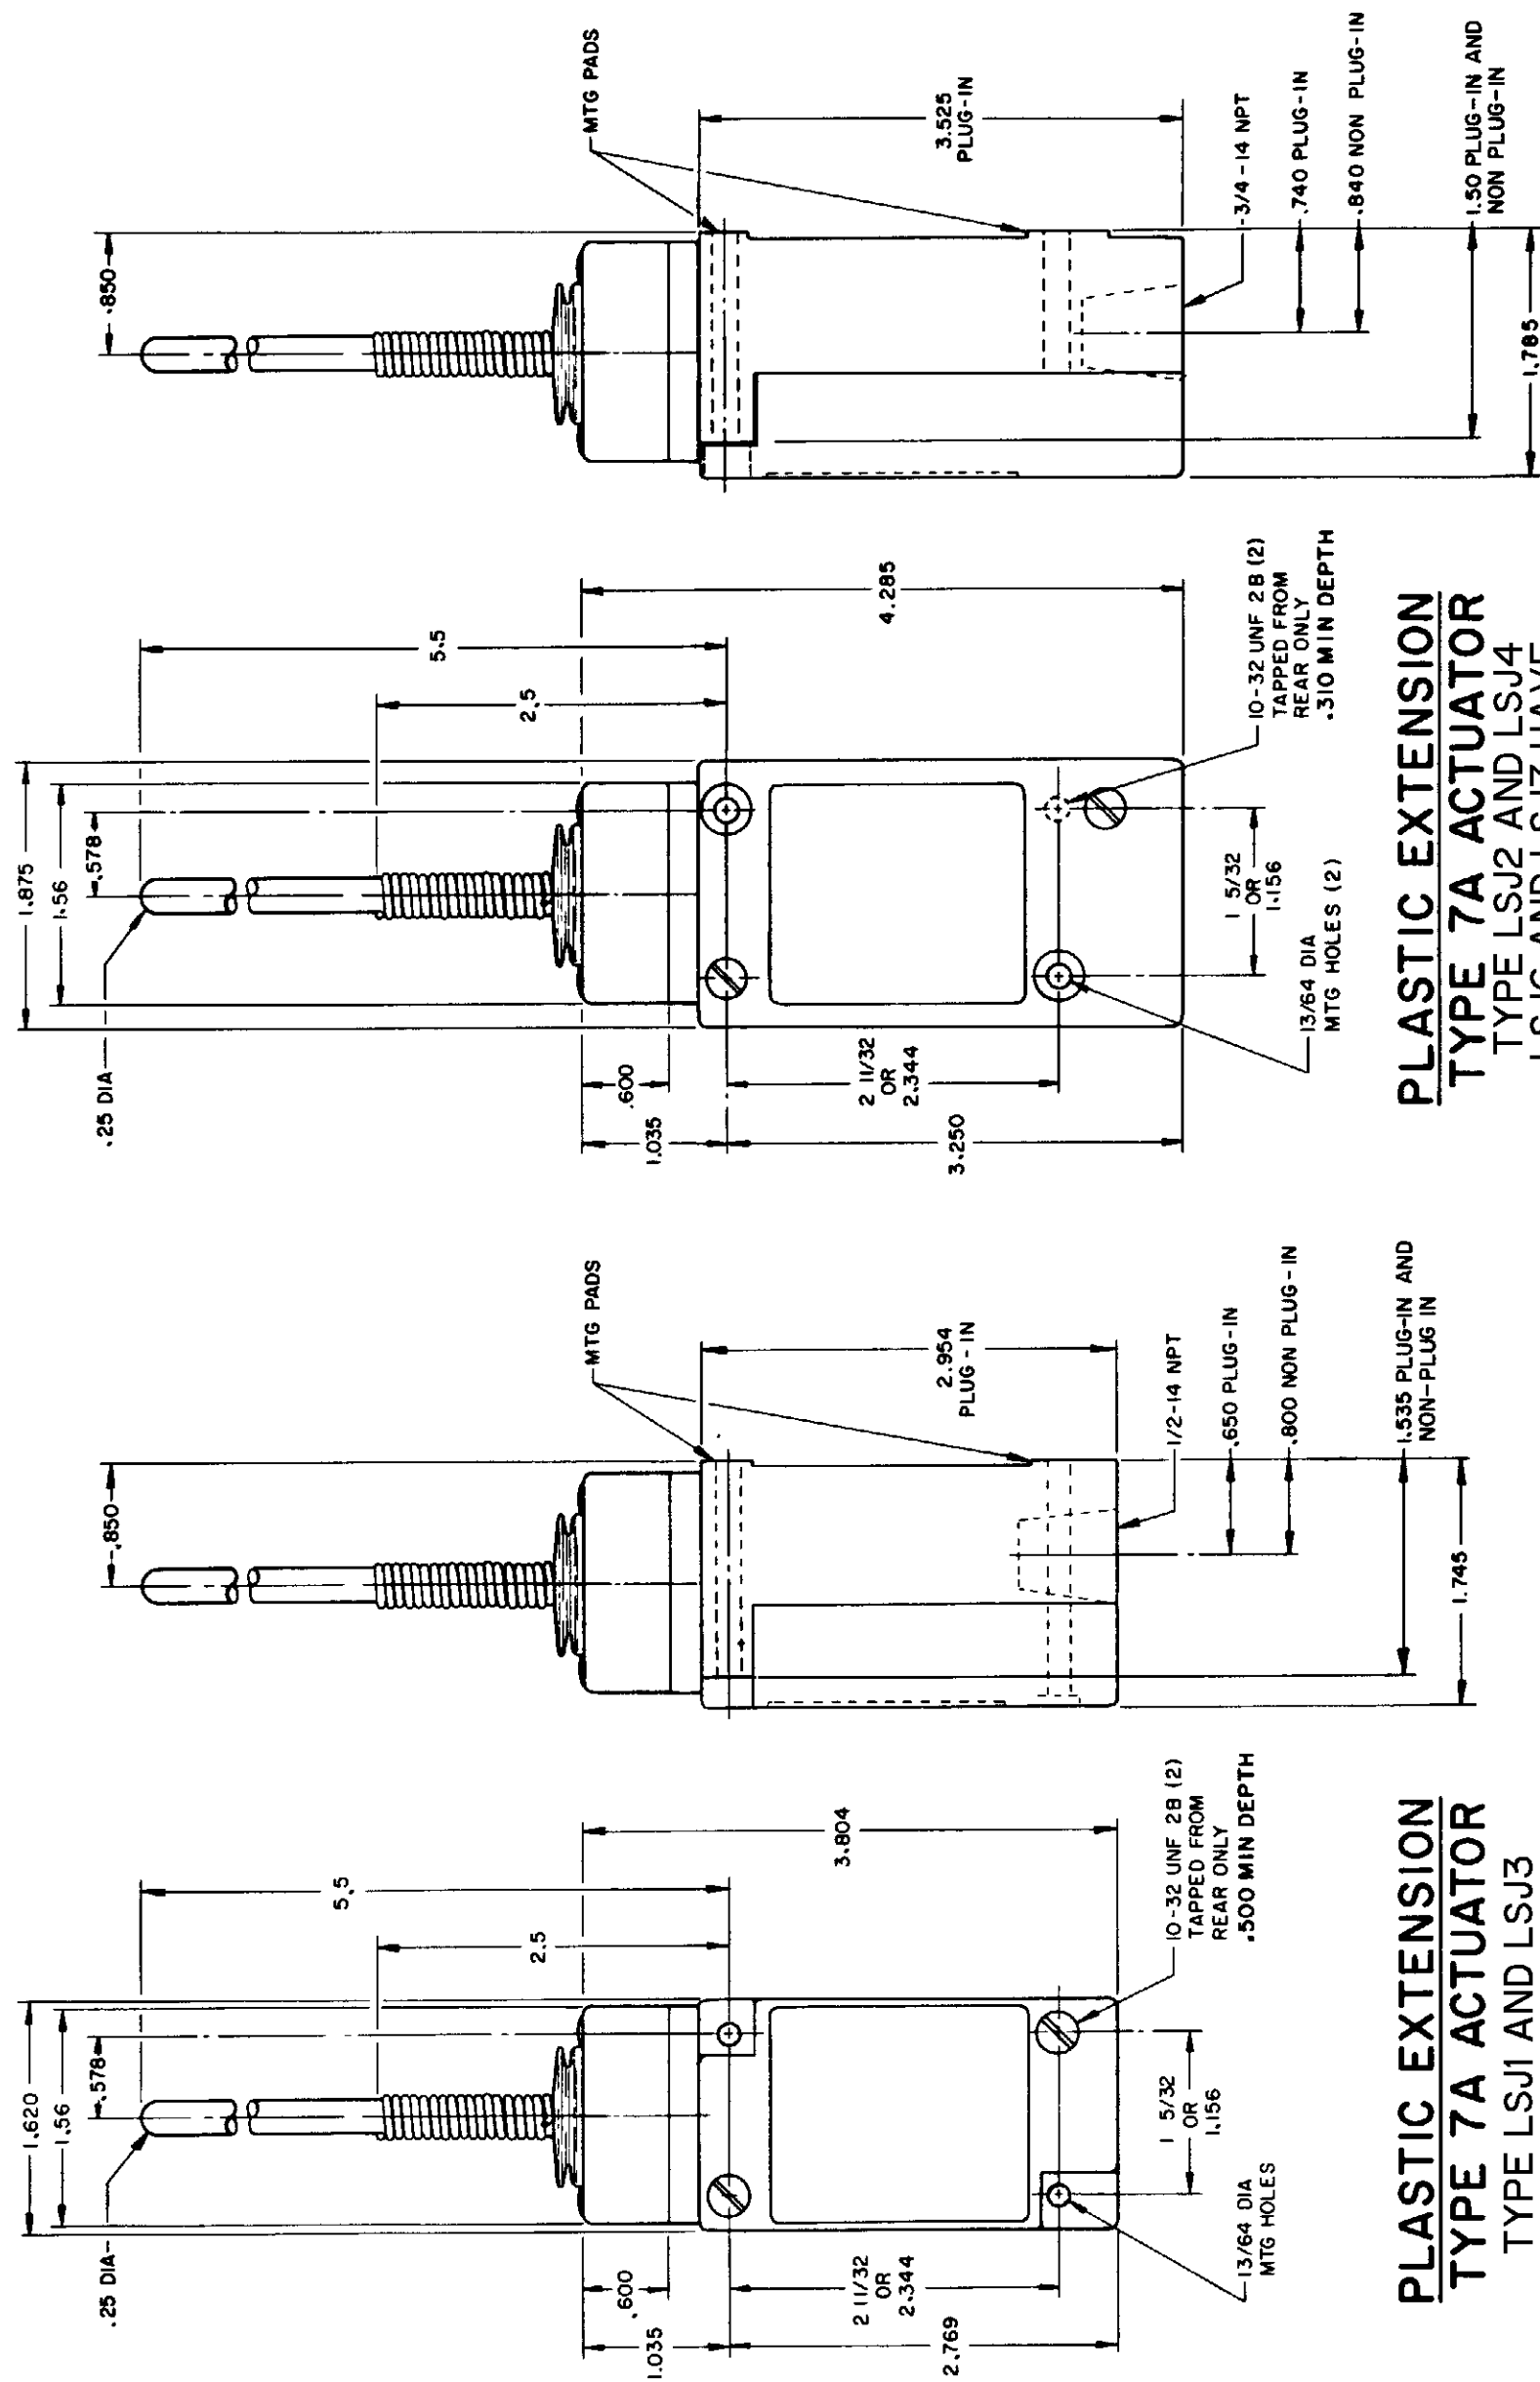

**PLASTIC EXTENSION**  
**TYPE 7A ACTUATOR**  
TYPE LSJ1 AND LSJ3

**PLASTIC EXTENSION**  
**TYPE 7A ACTUATOR**  
TYPE LSJ2 AND LSJ4  
LSJ6 AND LSJ7 HAVE  
1/2 - 14 NPT CONDUIT HOLE

**MICRO SWITCH**  
Honeywell Division

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

SWITCH - ENCLOSED


## LSA-LSW SERIES

PAGE 7 OF 10


SCALE NONE

DO NOT SCALE PRINT


**REPLACEMENT ACTUATOR**  
**LSZ-4009**

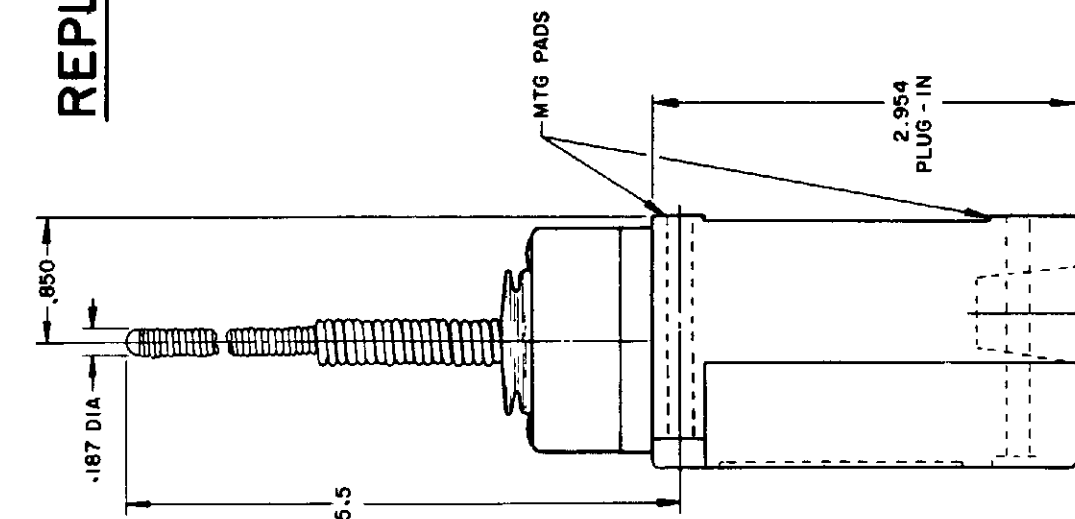

# CABLE EXTENSION TYPE 7N ACTUATOR

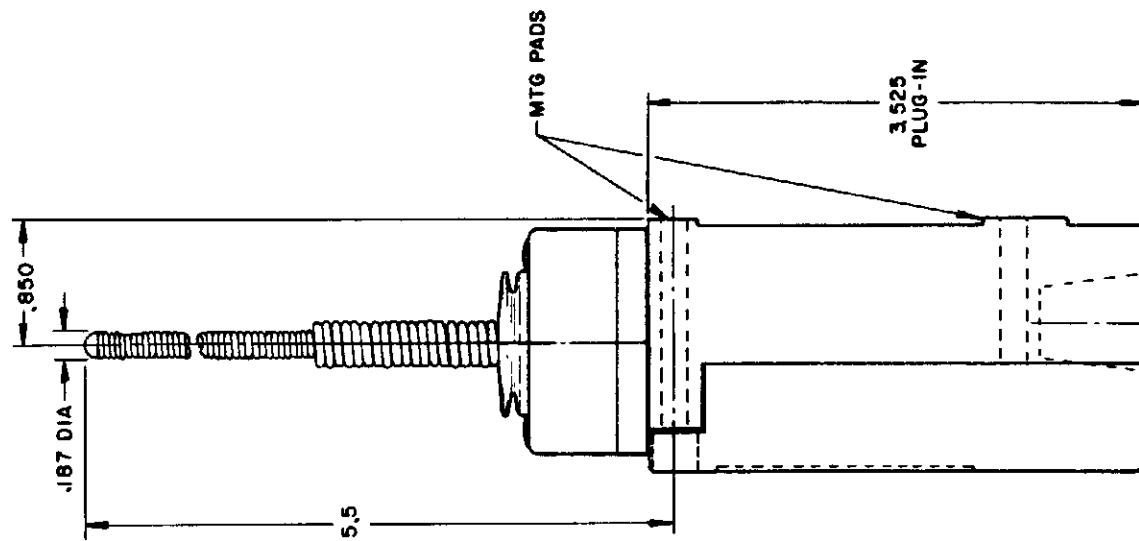

**CABLE EXTENSION**  
**TYPE 7 N ACTUATOR**

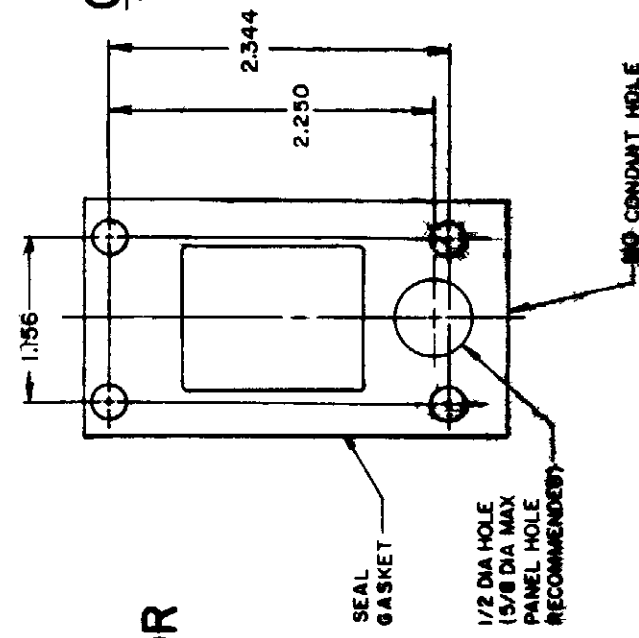


**REPLACEMENT ACTUATOR**  
**LSZ-40II**

**120 LAMP VOLTAGE TYPE LSJ5**  
**240 LAMP VOLTAGE TYPE LSJ8**  
**24 LED VOLTAGE TYPE LSJ9**

**SINGLE POLE PLUG-IN ONLY**  
**WITH INDICATOR LAMP**

-180 X 400 LENS  
(FLUSH WITH  
HOUSING)

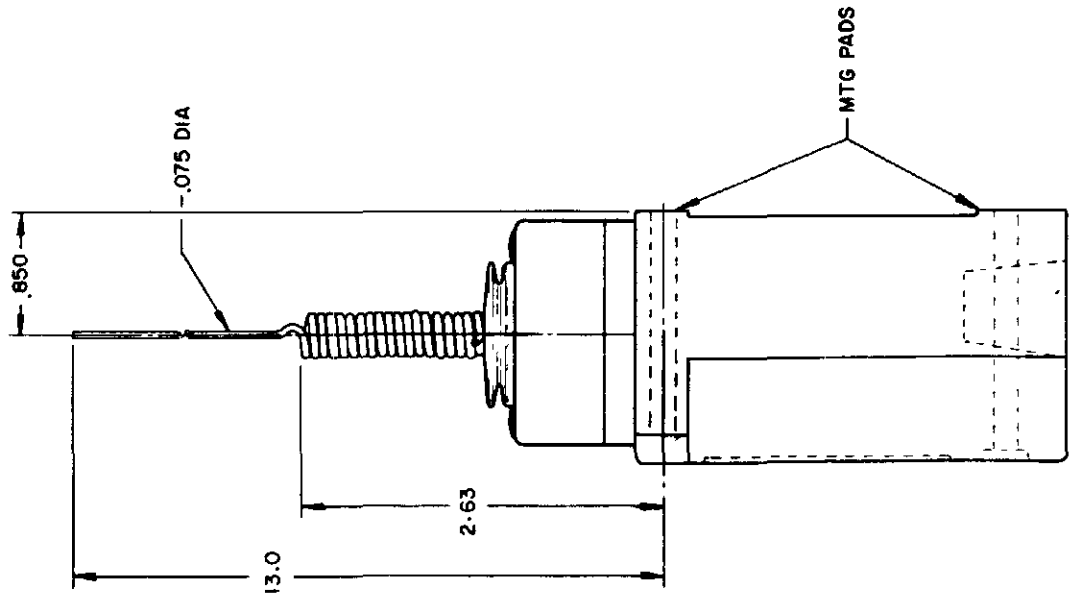


WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010

SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

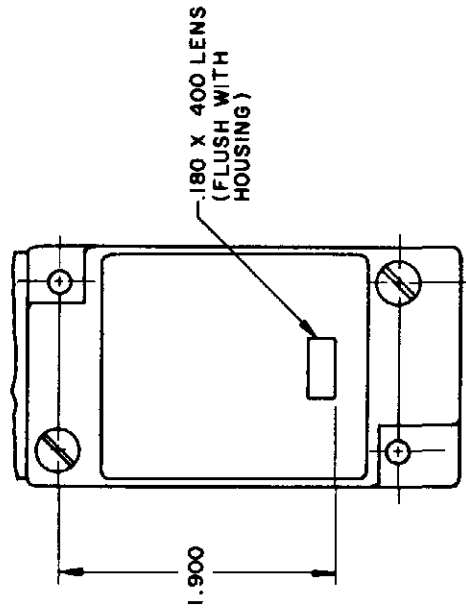

120 LAMP VOLTAGE TYPE LSJ5  
240 LAMP VOLTAGE TYPE LSJ8

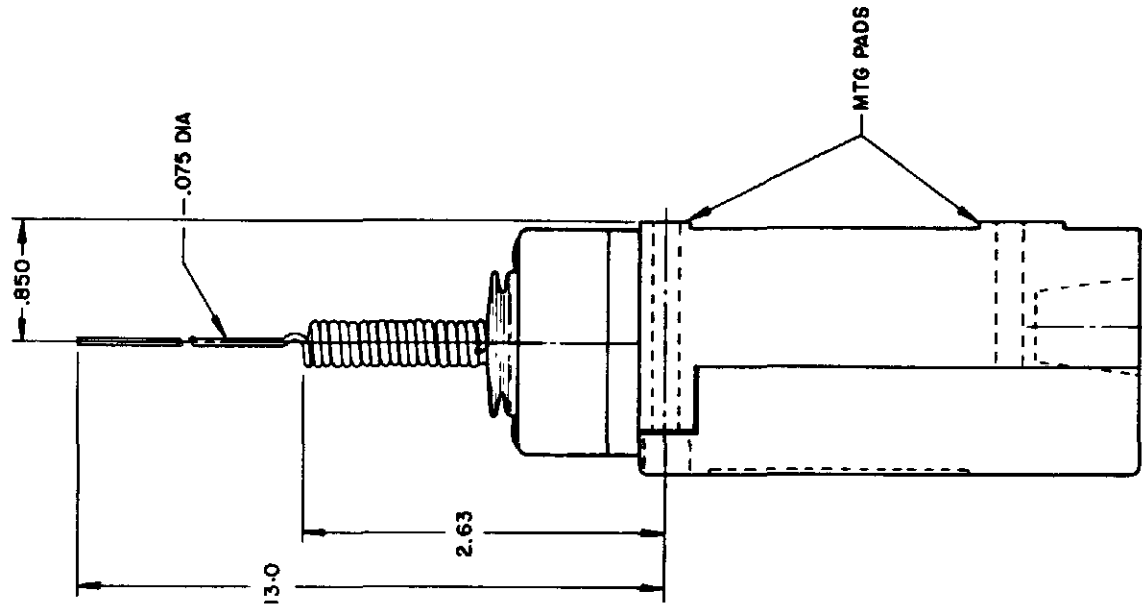


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE


## CAT WHISKER

### SINGLE POLE

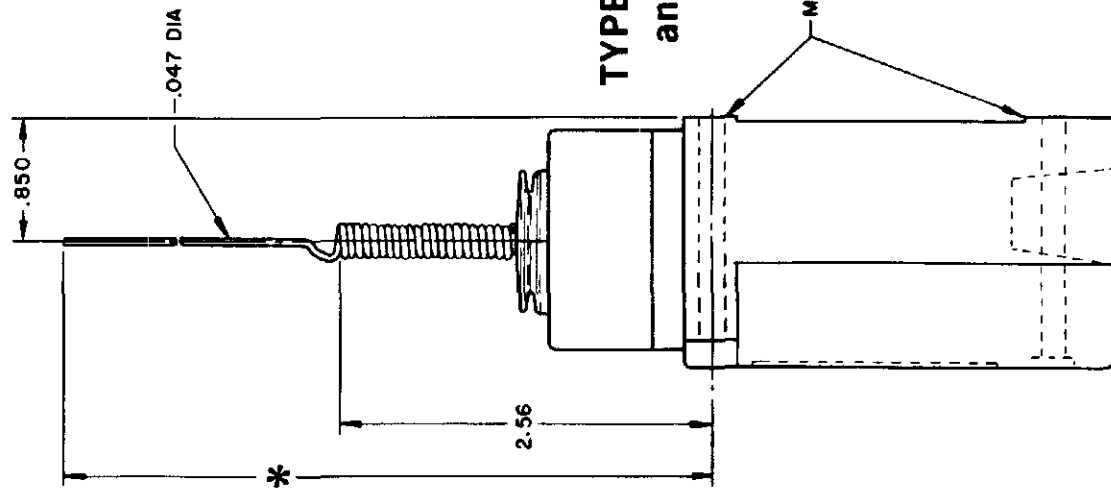


TYPE LSK1  
and LSK3

SINGLE POLE PLUG-IN ONLY  
WITH INDICATOR LAMP

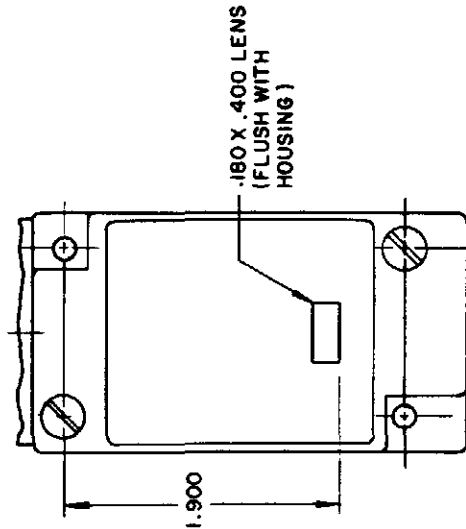

120 LAMP VOLTAGE  
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY  
240 LAMP VOLTAGE  
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

### DOUBLE POLE

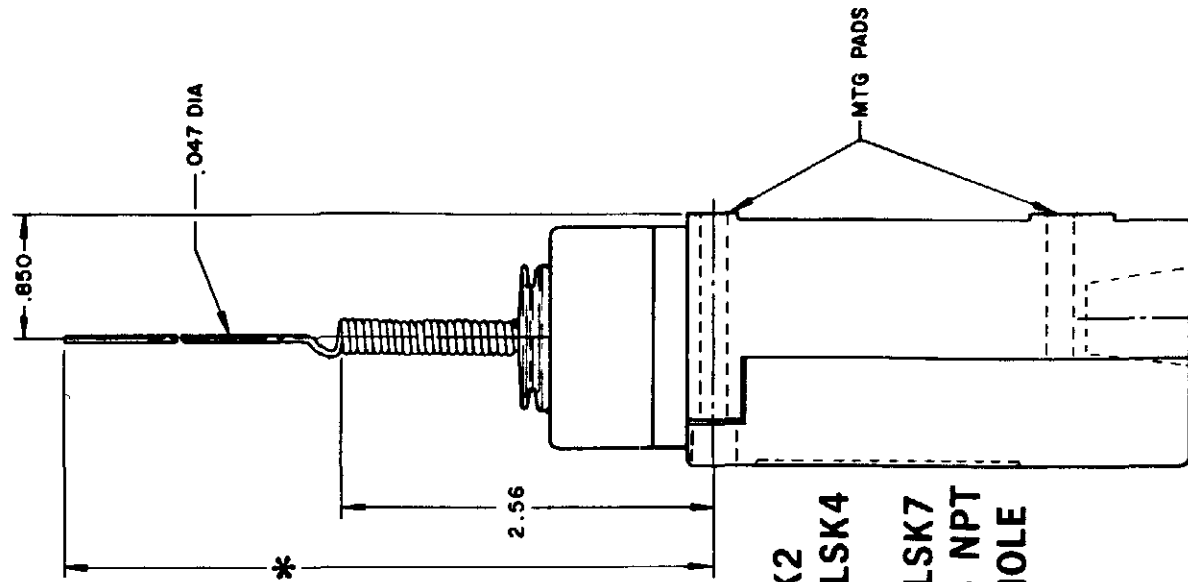

TYPE LSK2  
and LSK4  
LSK6 and LSK7  
have 1/2 - 14 NPT  
CONDUIT HOLE

\* WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014  
ACTUATOR 9.5 IN. - LSZ 4036

WIRE EXTENSION

\* TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

**MICRO SWITCH**  
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING  
**LSA-LSW SERIES**  
CHART 1

SCALE NONE  
DO NOT SCALE PRINT

| PRETRAVEL (APPROX) IN. RADIUS | CAT. WHISKER |            | WOBBLE STICK |            |
|-------------------------------|--------------|------------|--------------|------------|
|                               | 5/16" COIL   | 5/16" WIRE | 7/16" WIRE   | 7/16" WIRE |
|                               | 2            | 2          | 4.5          | 4.0        |
| OPERATING FORCE-OZ (MAX)      | 7.0          |            | 10.0         | 5.0        |
|                               | 5.0          |            | 3.0          | 7.0        |


| REV | DATE    | BY | CHKD | DESCRIPTION |
|-----|---------|----|------|-------------|
| L   | 0031956 |    |      | BS          |
| B   | 10JUL07 |    |      | 201004      |
| C   | 201748  |    |      | 201748      |
| D   | 202198  |    |      | 202198      |
| E   | 204871  |    |      | 204871      |
| F   | 206581  |    |      | 206581      |
| G   | 206763  |    |      | 206763      |
| H   | 207179  |    |      | 207179      |
| J   | 207474  |    |      | 207474      |
| K   | 0006871 |    |      | 0006871     |

|       |                        |              |     |           |            |          |           |                |
|-------|------------------------|--------------|-----|-----------|------------|----------|-----------|----------------|
| ISSUE | CATALOG LISTING        | 12           | PSR | 10JUL07   | RELEASE NO | CO-78498 | REPLACES  | LSA-LSW SERIES |
| M     | LSA-LSW SERIES CHART 1 | PAGE 9 OF 10 |     |           |            |          |           |                |
| MAM   | 15 JUN 94              | CHKD         | JAF | 11 JUL 94 | CHKD       | AK       | 11 AUG 04 | CHKD           |

# CONVERSION BASES


SINGLE POLE  
(SIDE ROTARY)  
LSZ 4003

DOUBLE POLE  
(SIDE ROTARY)  
LSZ4004

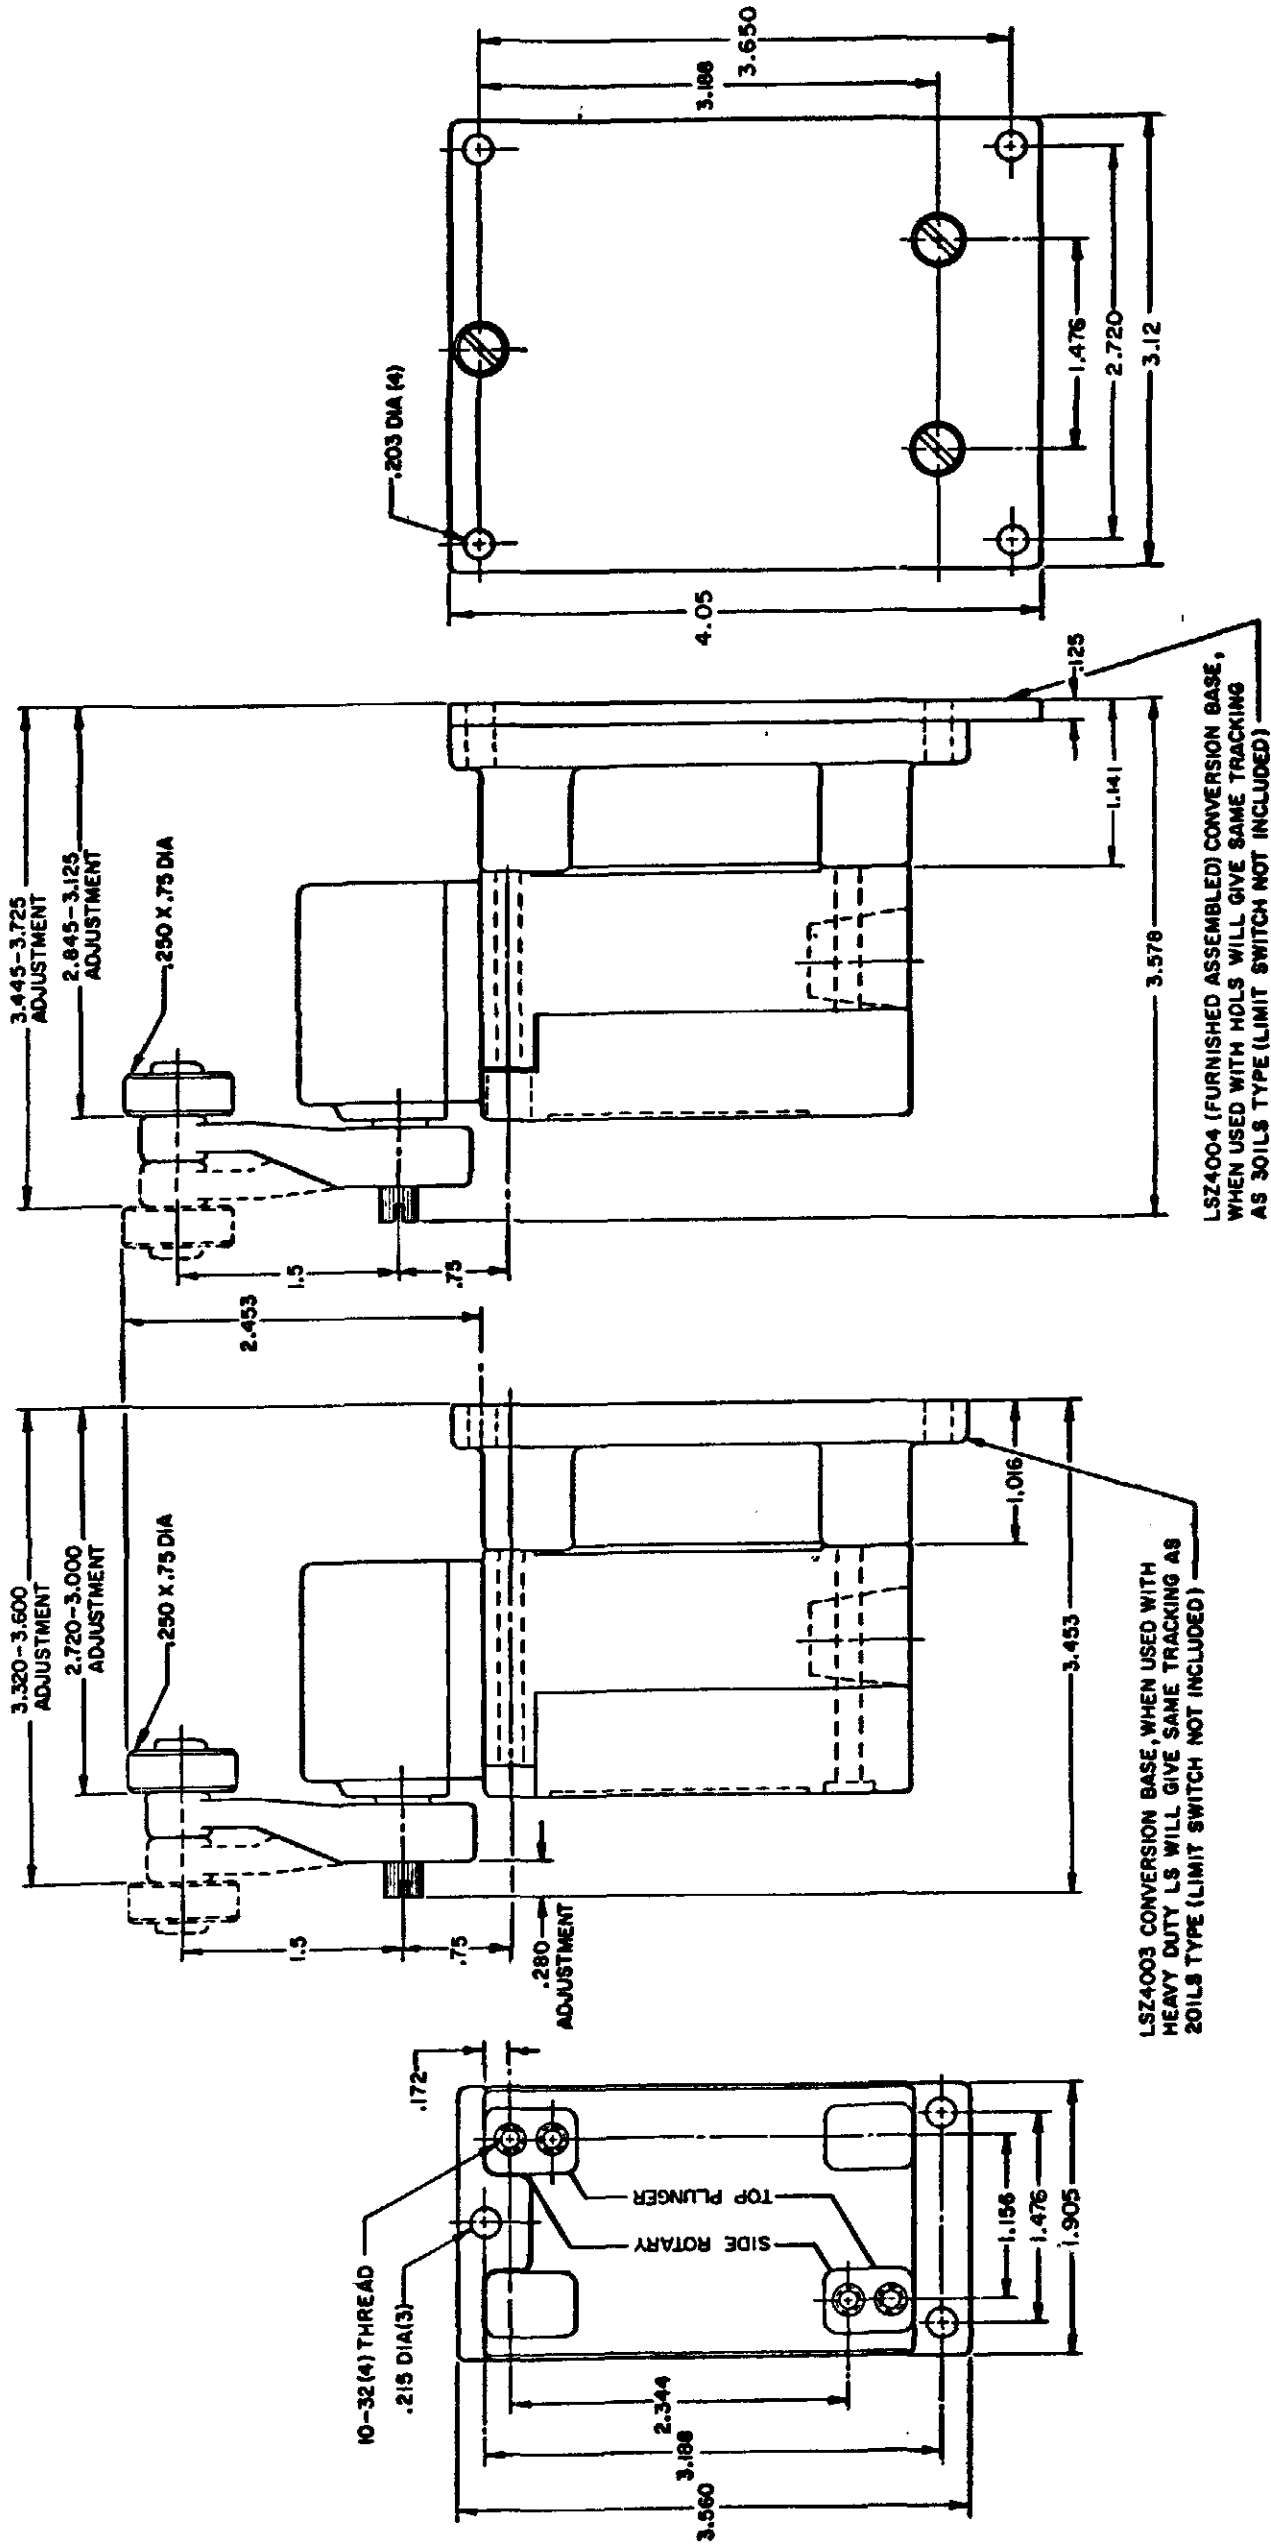

NOTE  
SEE OTHER PAGES OF LSA-LSW  
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE  
TOP PLUNGER  
LSZ4003

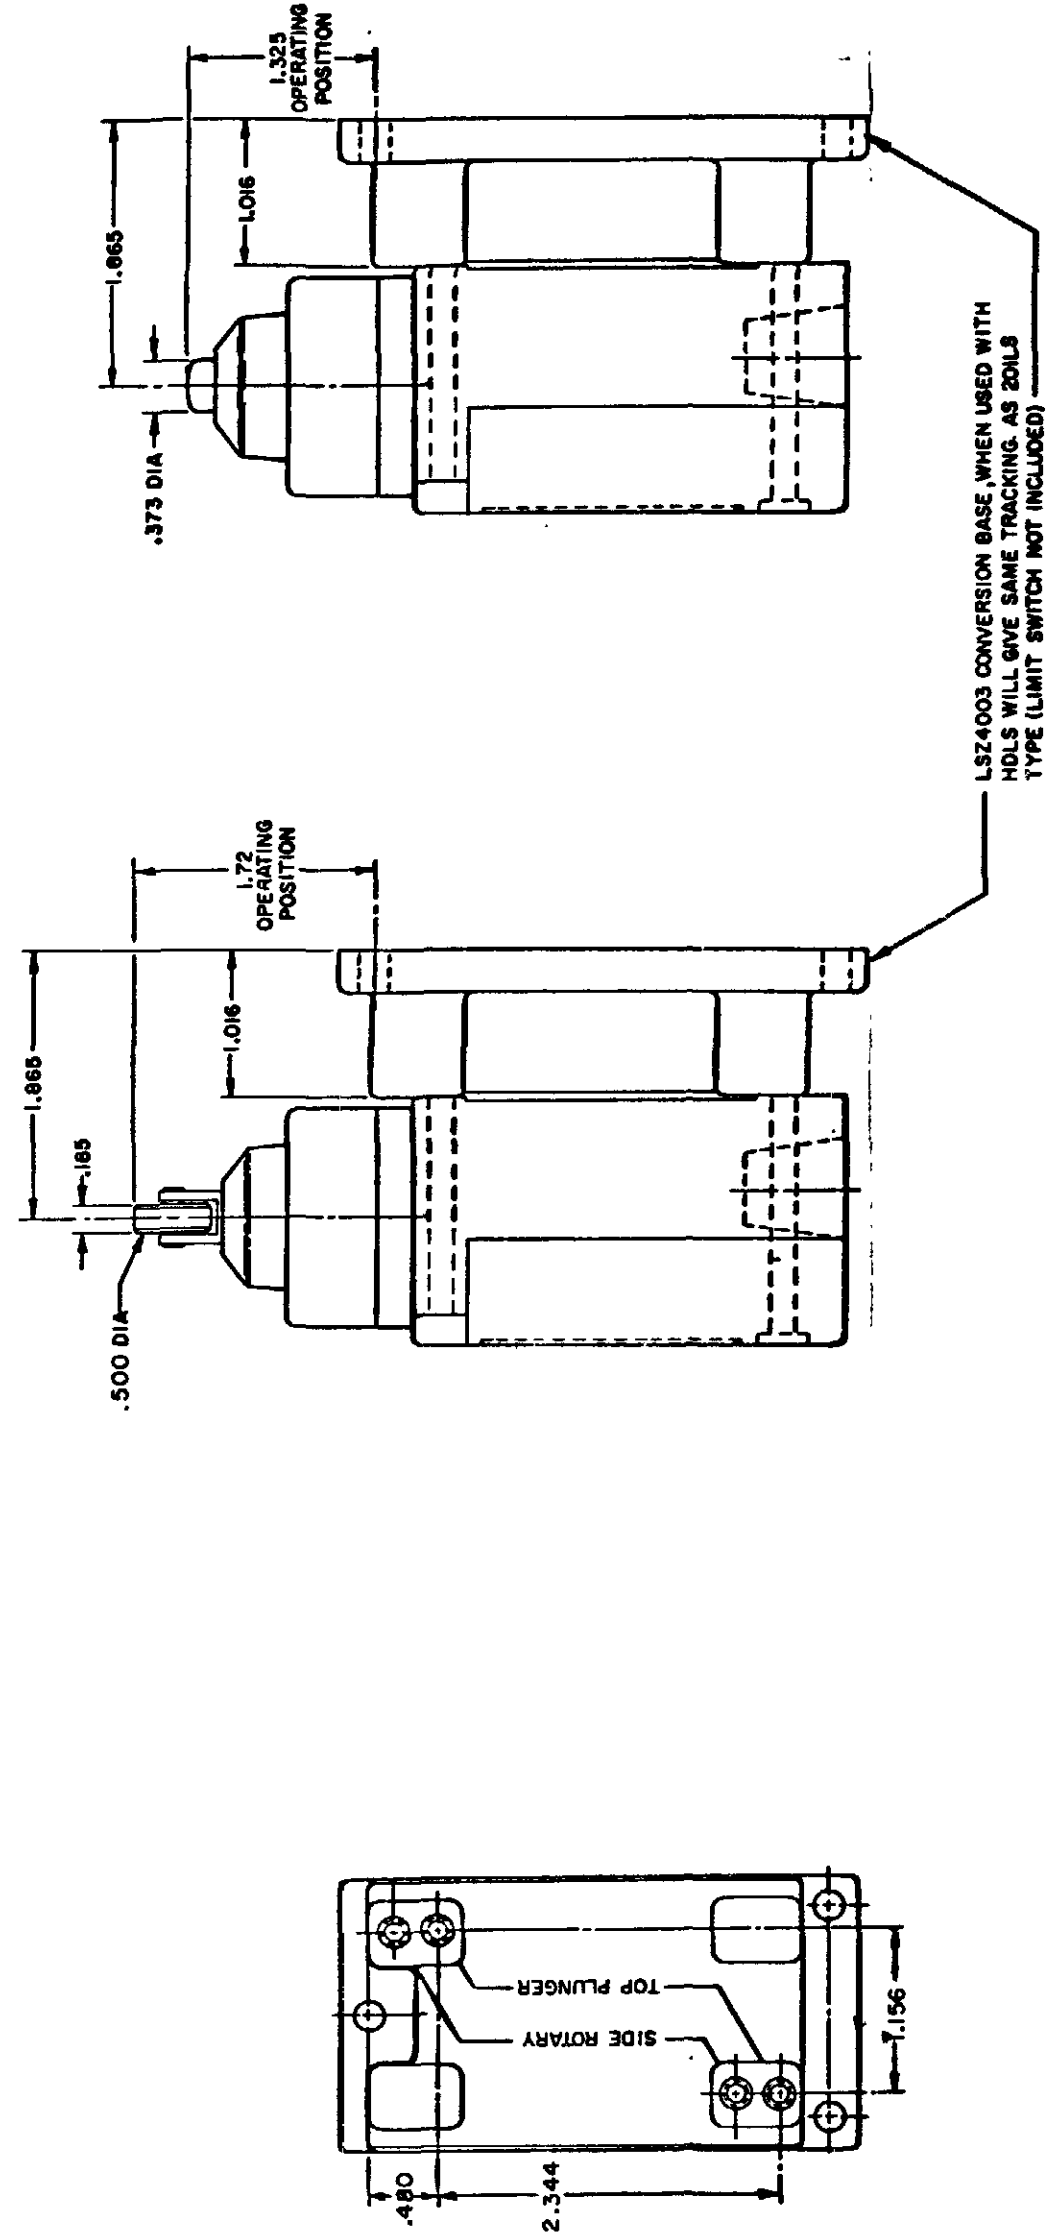

NOTE  
SEE OTHER PAGES OF LSA-LSW  
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

| HEAD TYPE | CELLULOSE                                     | DETERGENT | 5 STAR | ASTM #1 | ASTM #2 | ASTM #3 | ASTM #4 | HOUGHTON SAFE 271 | HOUGHTON SAFE 620 | 1010, 1035, 1120 | MINERAL OIL | PETR. OIL CRUDE | SILICON GR & OIL | SUNSAFE | BEER | STODDARD SOLV. | CHLORINATED SOLVENTS | CITRIC ACID | DI-ESTER SYN. LUBRICANTS | OZONE | PYDRAUL | PROGUARD | PETRO. BASE HYDRAULIC OIL | LARD OIL | SILICATE ESTERS |
|-----------|-----------------------------------------------|-----------|--------|---------|---------|---------|---------|-------------------|-------------------|------------------|-------------|-----------------|------------------|---------|------|----------------|----------------------|-------------|--------------------------|-------|---------|----------|---------------------------|----------|-----------------|
| LSA       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSB       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSC       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSD       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSE       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSF       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 2                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSG       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSH       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSJ       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSK       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSL       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSM       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSN       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSP       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSR       | 4                                             | 1         | 1      | 1       | 1       | 2       | 1       | 4                 | 1                 | 1                | 1           | 1               | 1                | 1       | 4    | 1              | 2                    | 4           | 4                        | 4     | 1       | 1        | 2                         |          |                 |
| LSV       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 3                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LSW       | 4                                             | 2         | 2      | 1       | 2       | 4       | 4       | 2                 | 4                 | 2                | 2           | 1               | 2                | 1       | 2    | 4              | 1                    | 4           | 2                        | 4     | 4       | 2        | 2                         | 2        |                 |
| LST       | UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY |           |        |         |         |         |         |                   |                   |                  |             |                 |                  |         |      |                |                      |             |                          |       |         |          |                           |          |                 |
| LSS       | UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY |           |        |         |         |         |         |                   |                   |                  |             |                 |                  |         |      |                |                      |             |                          |       |         |          |                           |          |                 |

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

| TEMPERATURE LIMITATIONS FOR STANDARD DEVICES |           |            |
|----------------------------------------------|-----------|------------|
| TYPES                                        | LOW LIMIT | HIGH LIMIT |
| LSA                                          | +10°F     | +250°F     |
| LSB                                          | +30°F     | +250°F     |
| LSC                                          | +10°F     | +200°F     |
| LSD                                          | +10°F     | +200°F     |
| LSE                                          | +10°F     | +200°F     |
| LSF                                          | +10°F     | +200°F     |
| LSG                                          | +30°F     | +200°F     |
| LSH                                          | +30°F     | +250°F     |
| LSJ                                          | +10°F     | +200°F     |
| LSK                                          | +10°F     | +200°F     |
| LSL                                          | +10°F     | +250°F     |
| LSM                                          | +30°F     | +250°F     |
| LSN                                          | +30°F     | +250°F     |
| LSP                                          | +10°F     | +250°F     |
| LSR                                          | +30°F     | +250°F     |
| LSV                                          | +10°F     | +200°F     |
| LSW                                          | +10°F     | +200°F     |
| LST                                          | +30 F     | +170°F     |
| LSS                                          | +30°F     | +170°F     |

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH  
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING  
LSA-LSW SERIES  
CHART 1

FED. MFG. CODE 91929

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)