



[illegible]

DOUBLE POLE

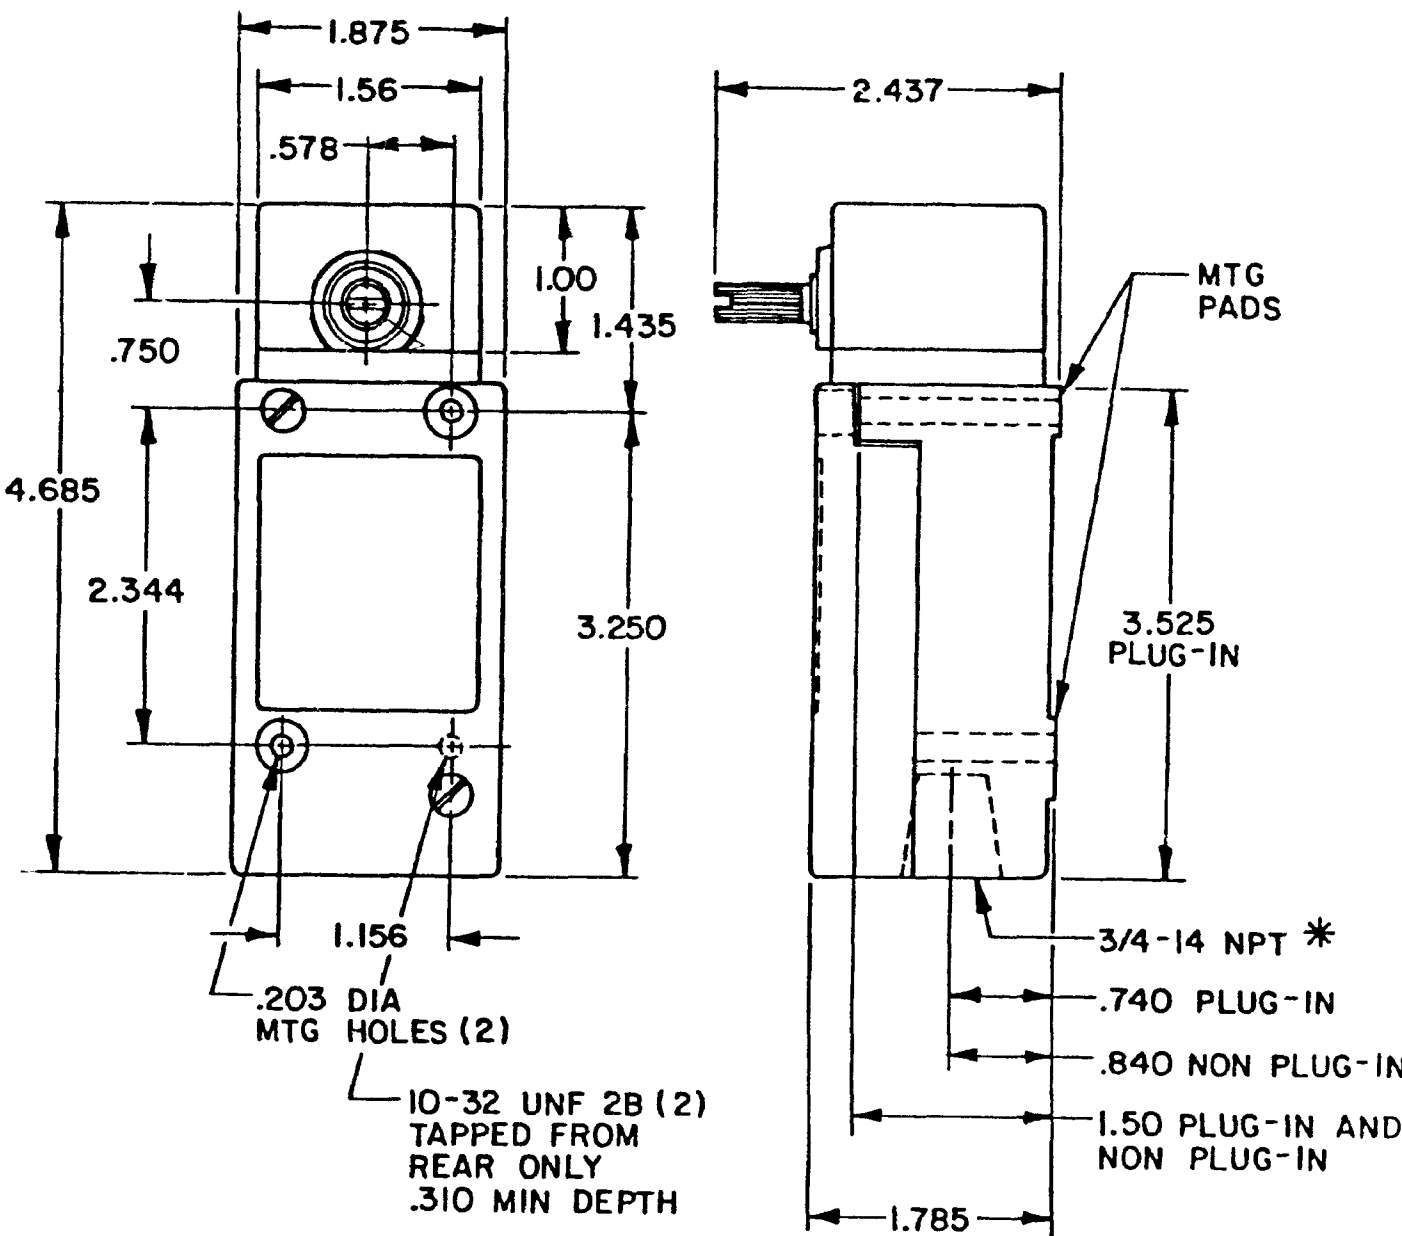


TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

*(LSA6, LSH6, LSM6, LSN6, LSP6, LSR6
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE
1/2-14 NPT CONDUIT HOLE)

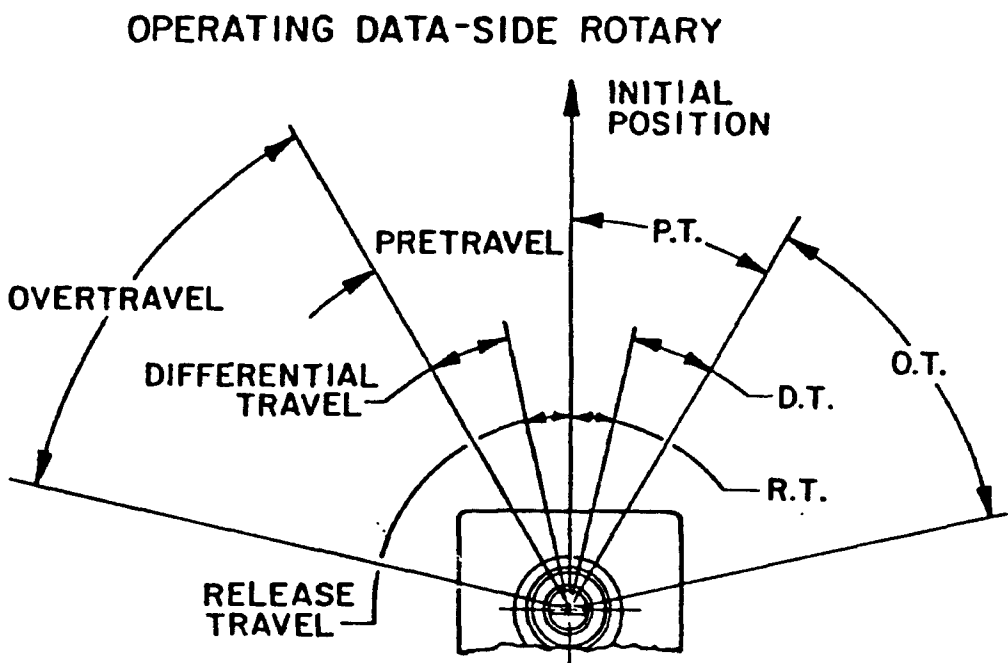

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

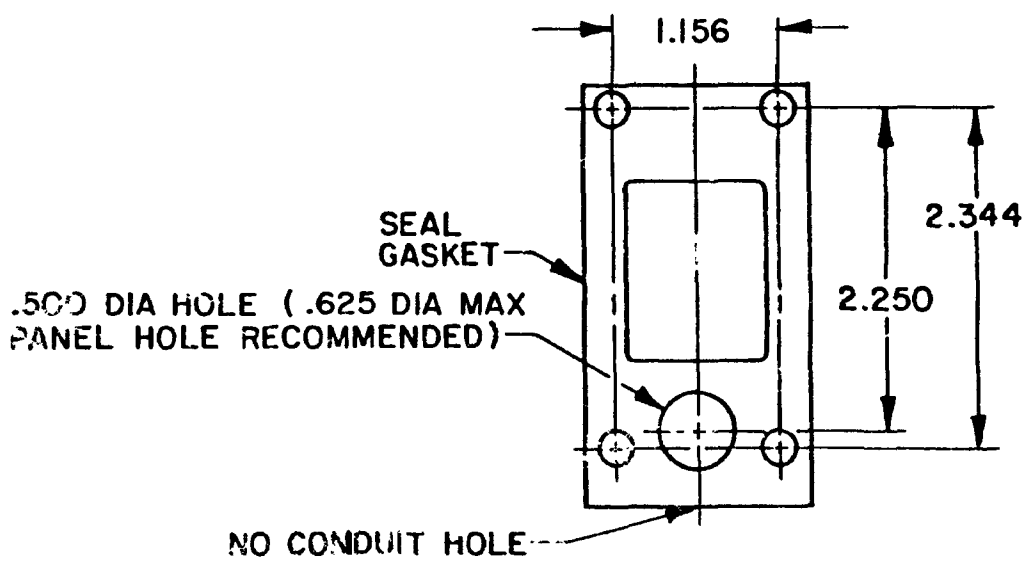

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
MICRO SWITCH a Honeywell Division FED. MFG. CODE 91929	SWITCH - ENCLOSED	CATALOG LISTING LSA-LSW SERIES
		CHART 1

THIRD ANGLE PROJECTION

SCALE NONE


DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE


ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT


SIDE ROTARY CAM TRACKING

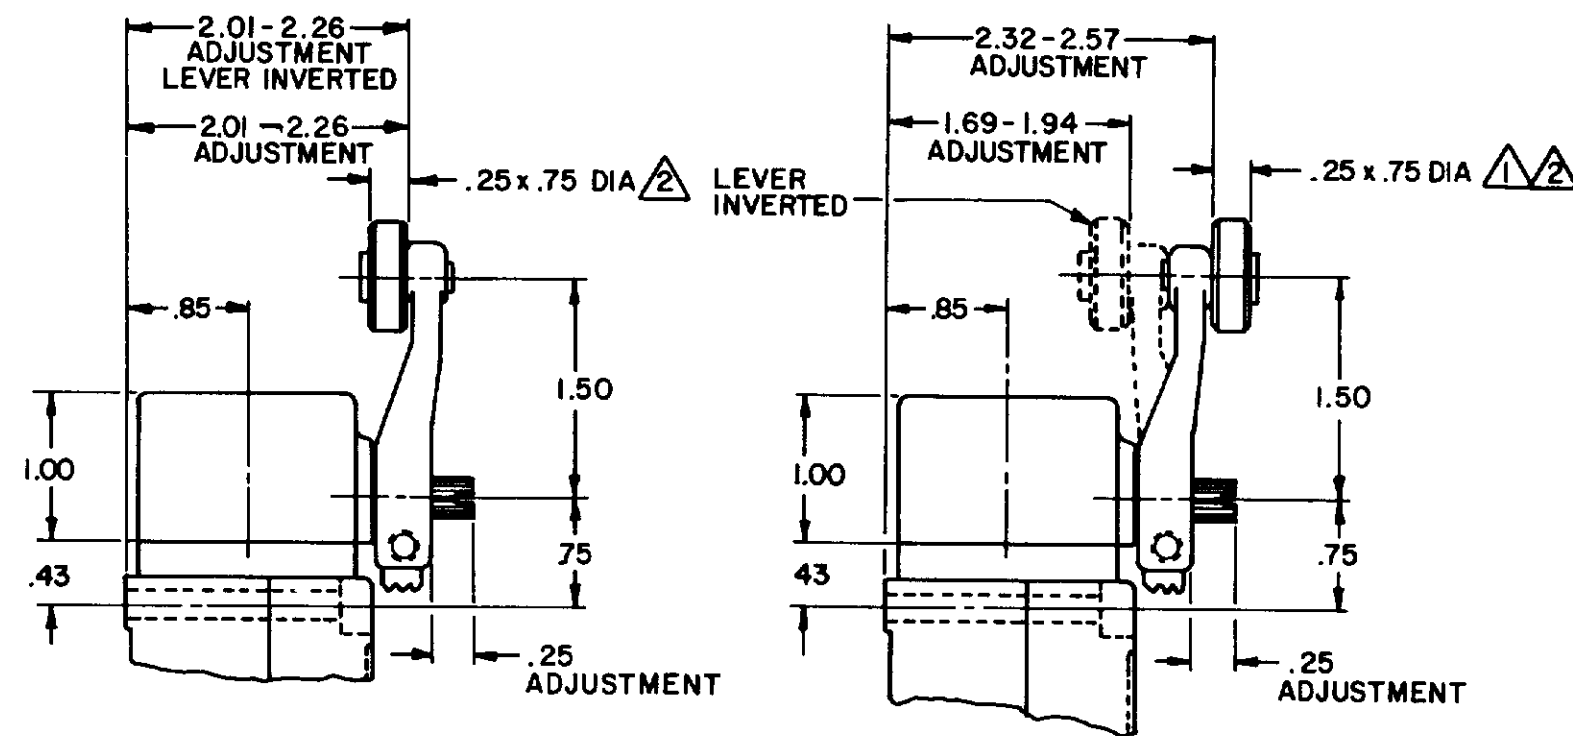


LSZ51 TYPE LEVERS

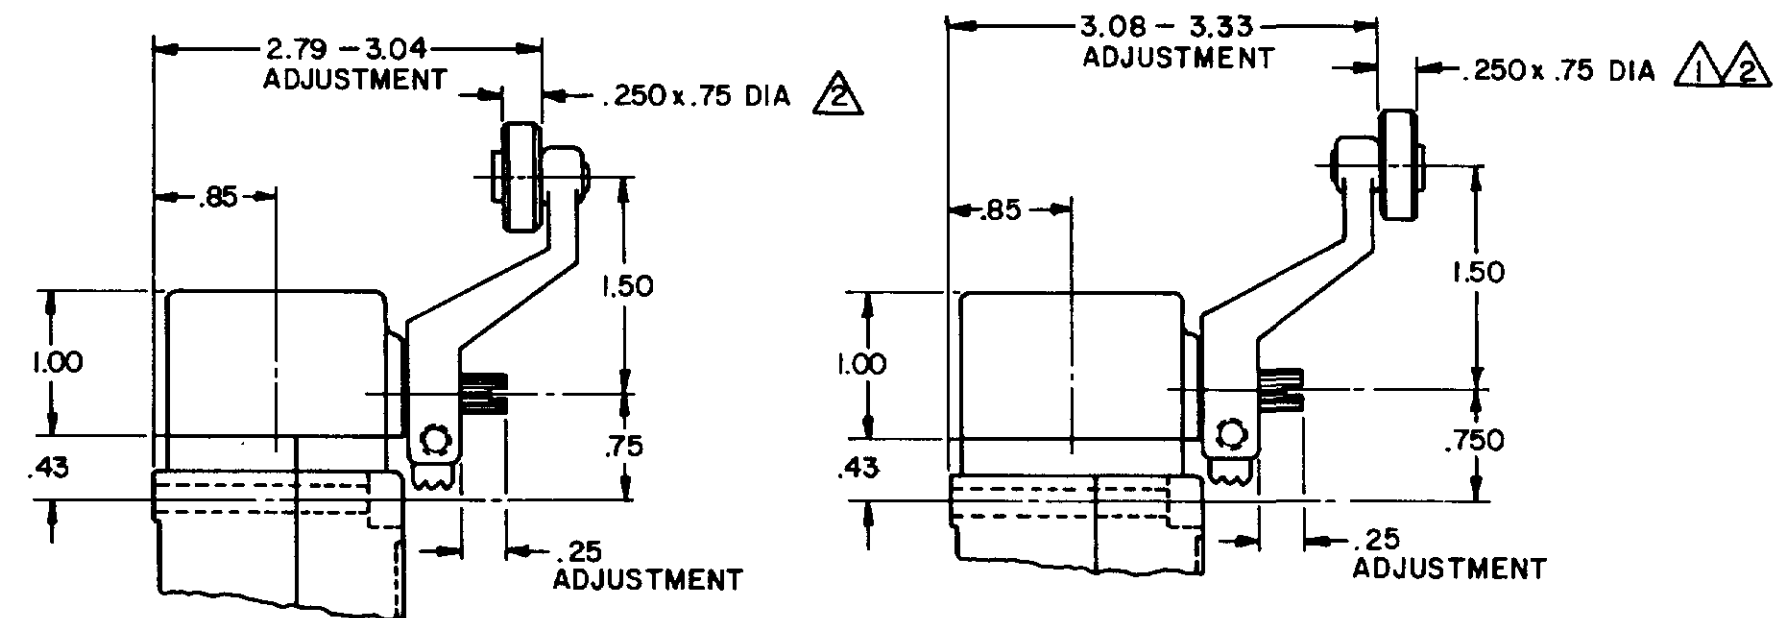


LSZ55 TYPE LEVERS

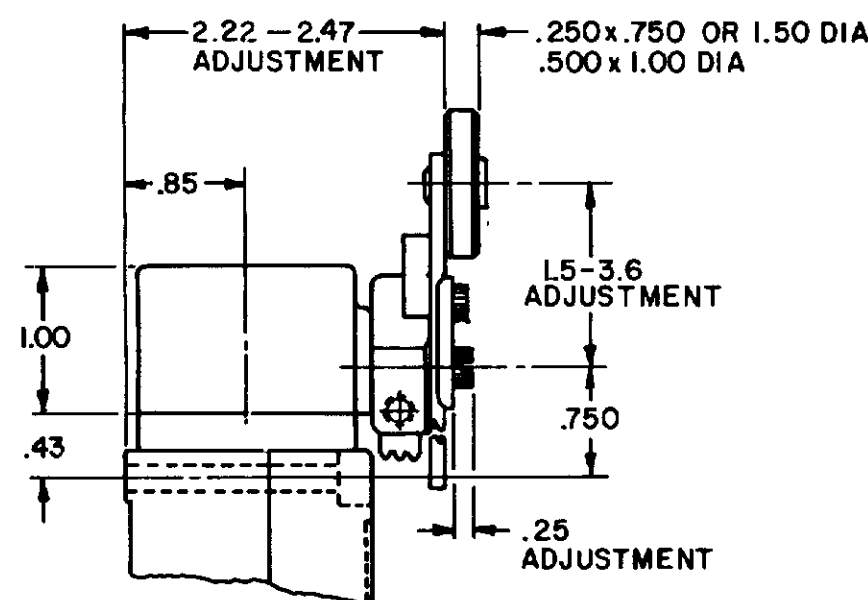


LSZ52 TYPE LEVER

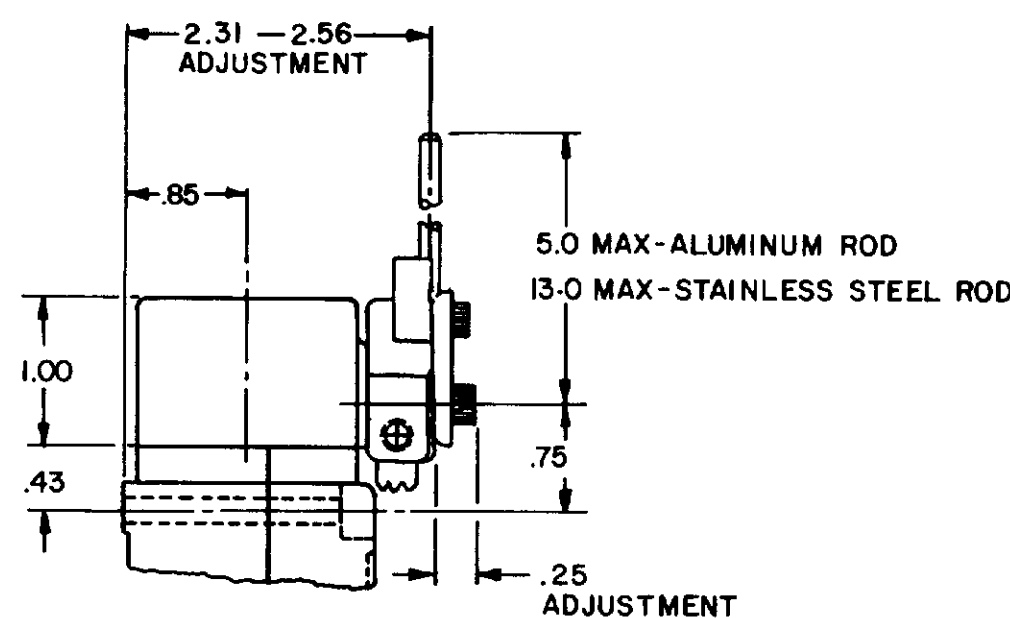

LSZ54 TYPE LEVER

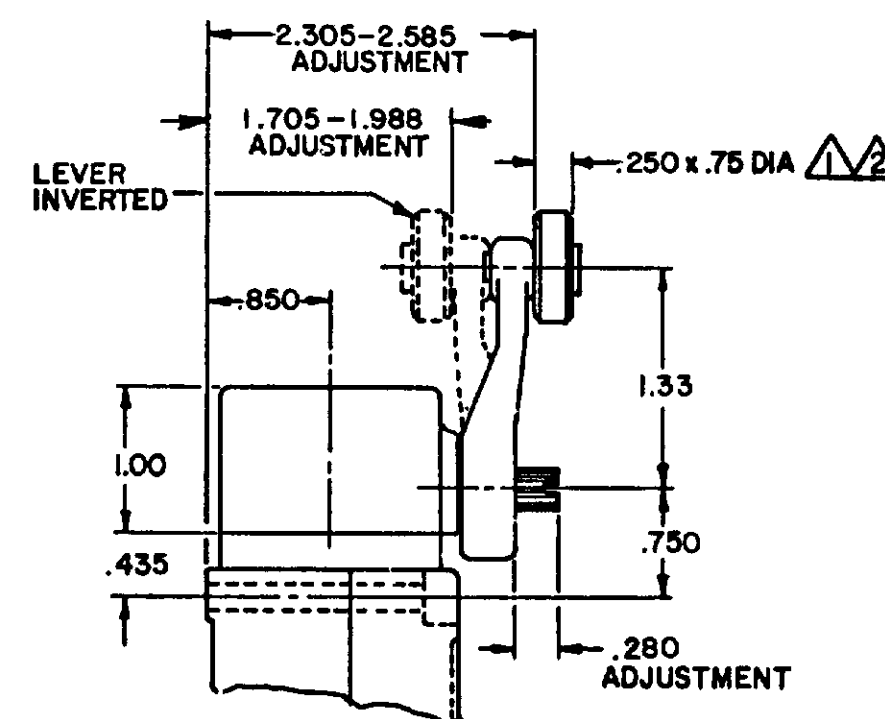

OPEN MOUNTED ROLLER

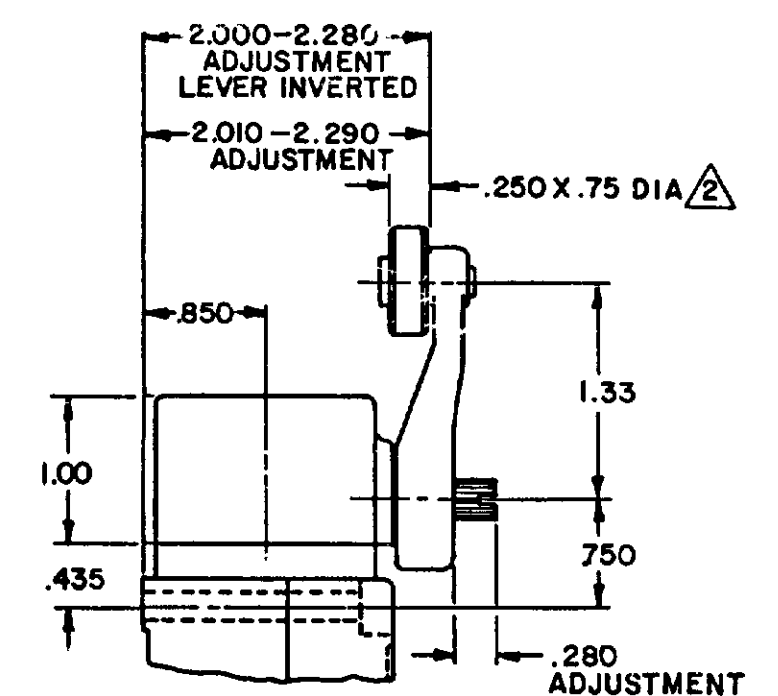

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- 1 ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- 2 FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING


CATALOG LISTING
LSA-LSW SERIES CHART 1
PAGE 2 OF 10
REPLACES LSA-LSW SERIES
10JUL07 RELEASE NO. CO-78498
PSR
CHECK
11AUG04
AK
11JUL94
JAF
15JUN94
MAM
15JUN94
JAF
15JUN94
MAM

REVISIONS
L 0031956
BS 10JUL07
B 201004
C SL 10AUG00
C 201748
C SL 17NOV00
D 202198
20JAN01
E 204871
F 206581
GLH 14OCT02
G 206763
C SL 31OCT02
H 207178
GLH 14JAN03
J 207474
18FEB03
K 0006871
RR 11NOV04

TOP ROTARY

SINGLE POLE

DOUBLE POLE

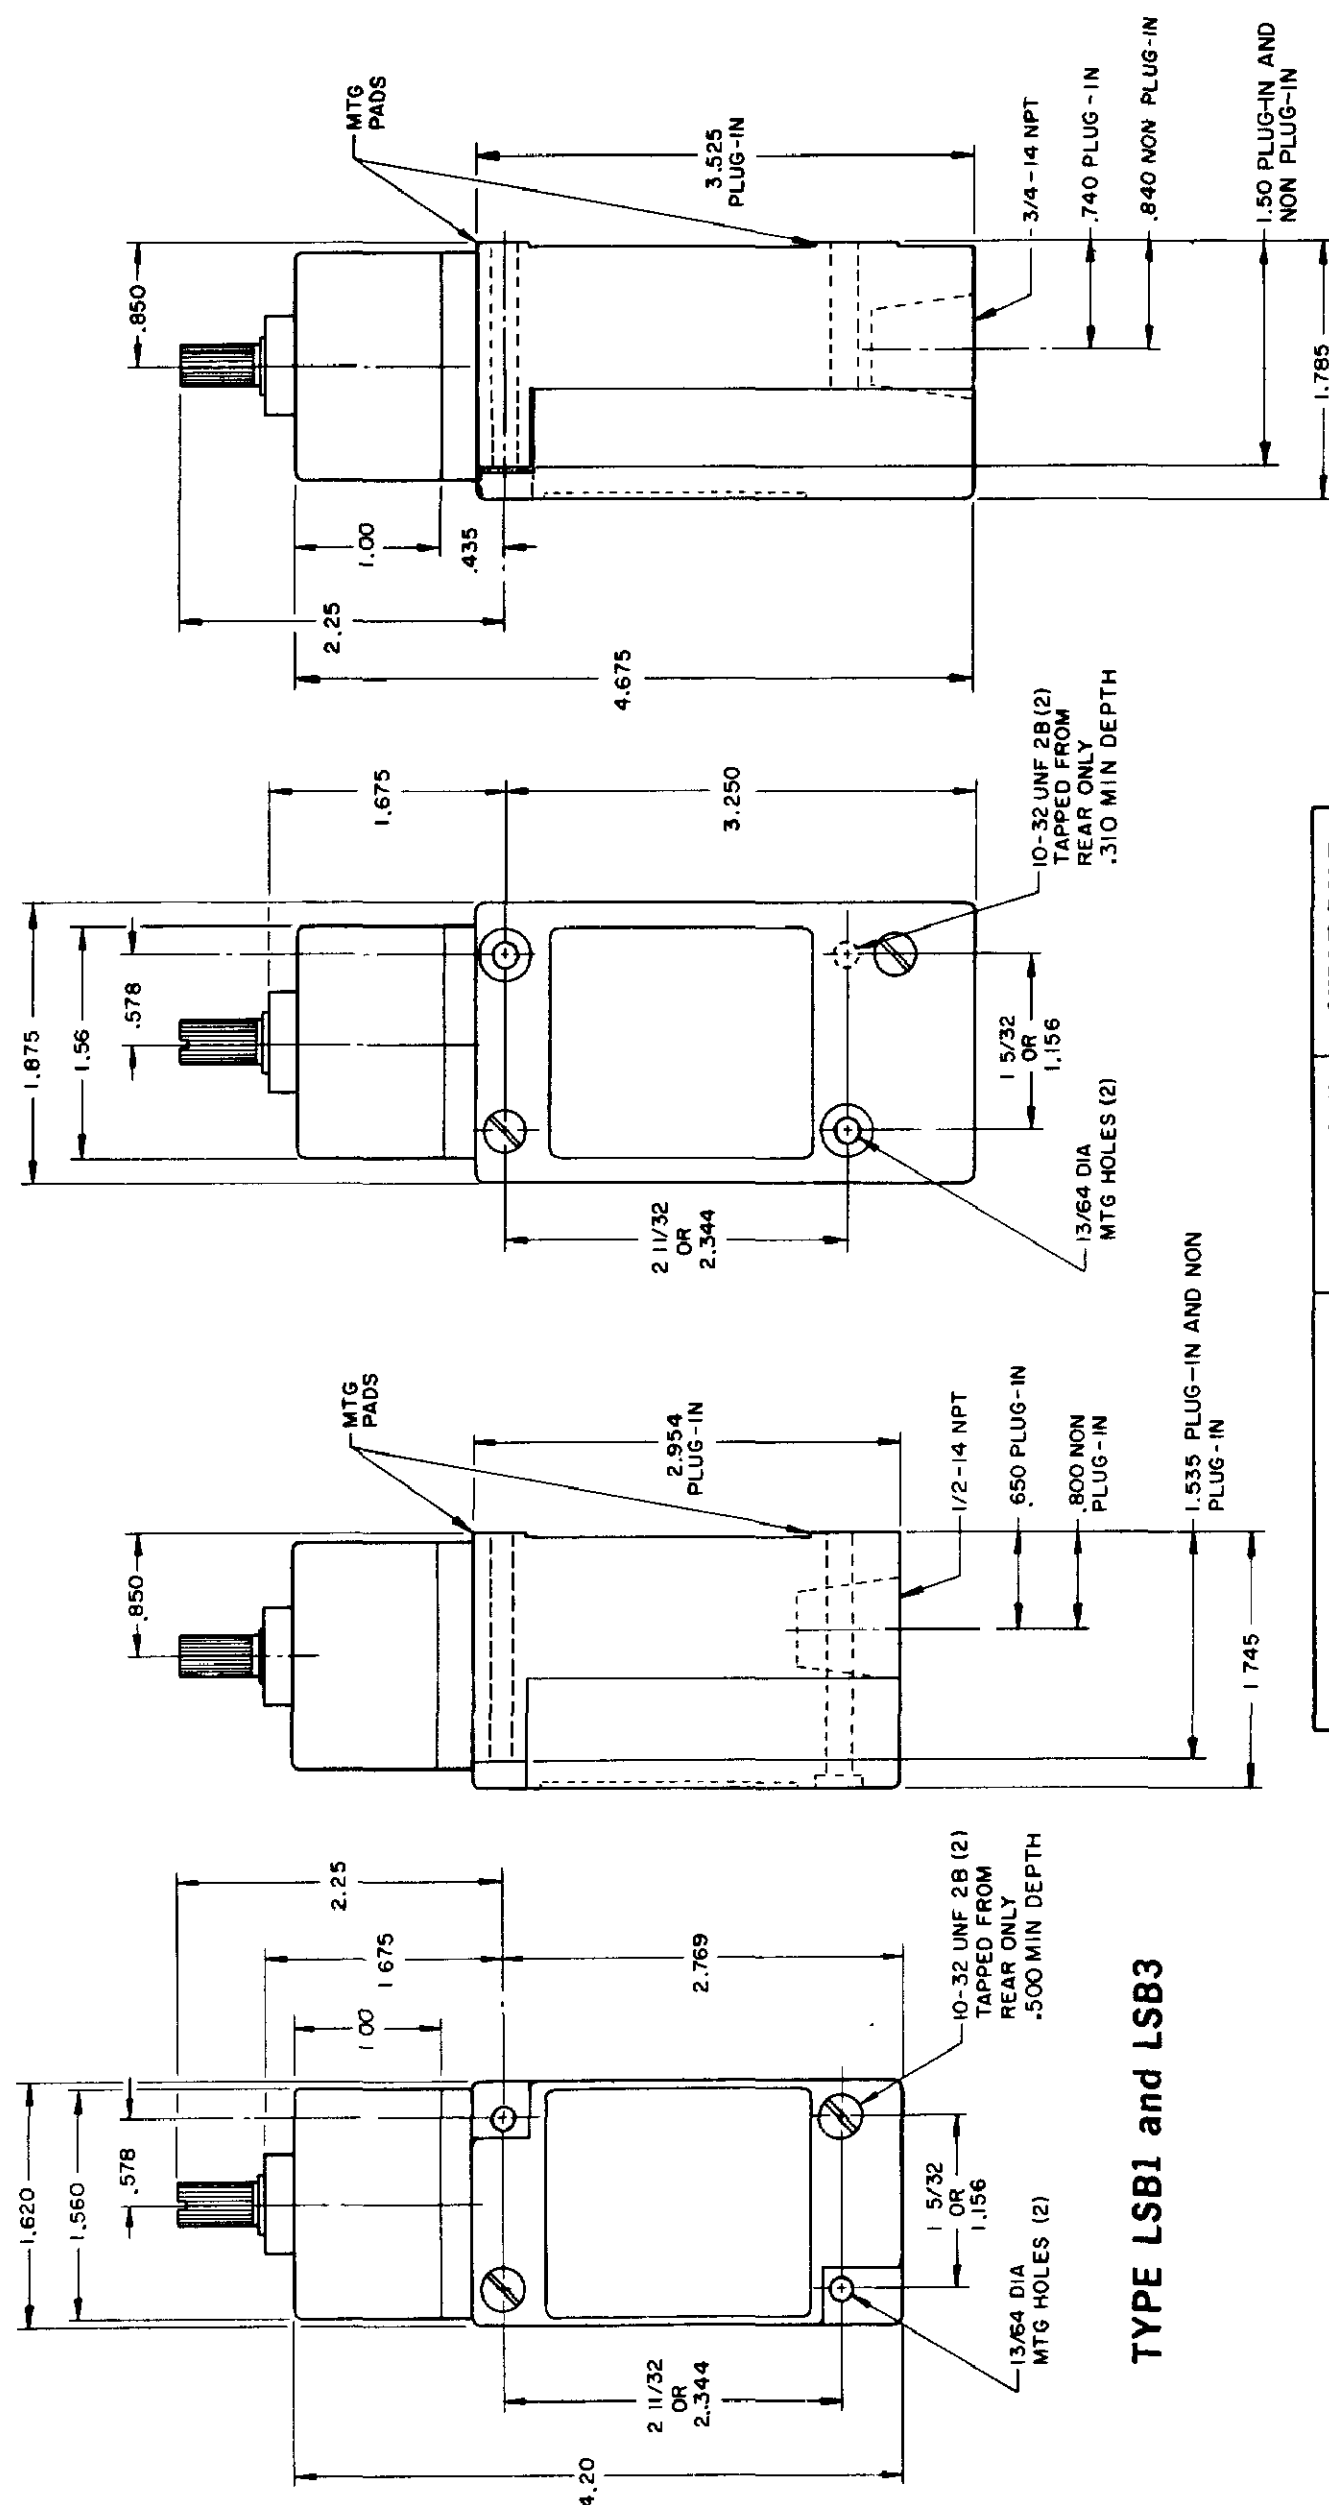

TYPE LSB1 and LSB3

TYPE LSB2 and LSB4
LSB6 and LSB7 have 1/2" - 14 NPT
CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2 5 IN. LBS	2 5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.	A.C. VOLTAGE	AMPS AT 35 POWER FACTOR					
		SINGL POLE		DOUBLE POLE		BREAK	
		MAKE	BREAK	MAKE	BREAK	MAKE	BREAK
	120	60	6	30	3		
	240	30	3	15	1.5		
	480	15	1.5	7.5	75		
	600	12	1.2	6	6		

D. C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT


VOLTAGE	
5 AC OR DC MIN	01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

**DIRECT ACTING (ALSO RATED AT A. C. 10
AMP CONT.)**


D. C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

**WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)**


DOUBLE POLE

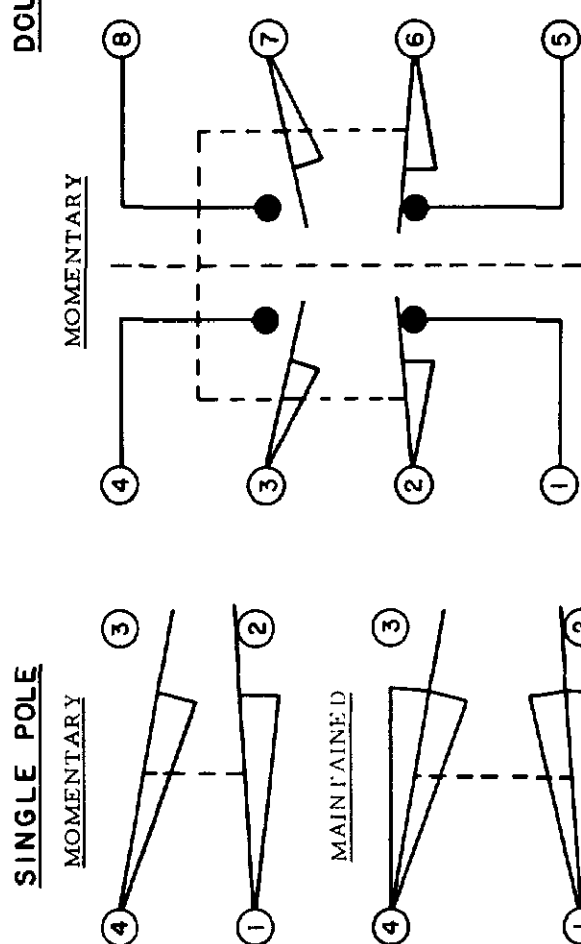


SINGLE POLE

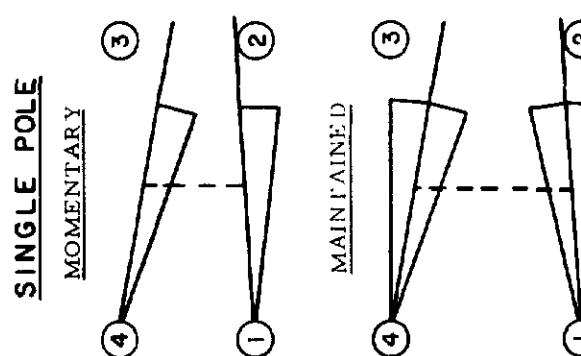

SINGLE POLE

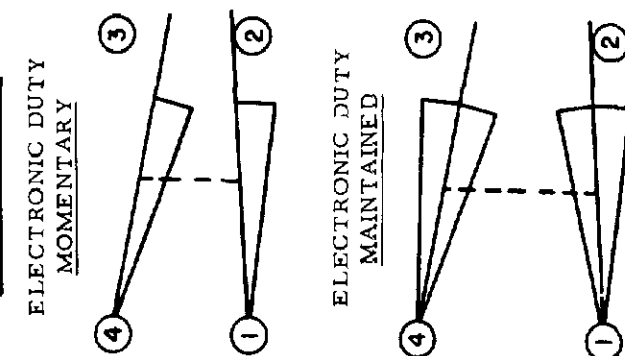


ELECTRONIC DUTY

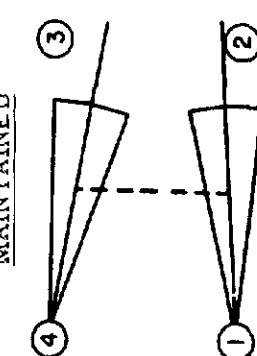

DIRECT ACTING




SINGLE POLE DOUBLE POLE



**120 LAMP VOLTAGE .
TYPE LSC5, LSD5 or LSV5**

**240 LAMP VOLTAGE .
TYPE LSC8, LSD8 or LSV8**



PAGE 4 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING



LSA-LSW SERIES

CHART 1

SCALE NON8


100% SCALE PRINT

SINGLE POLE DOUBLE POLE

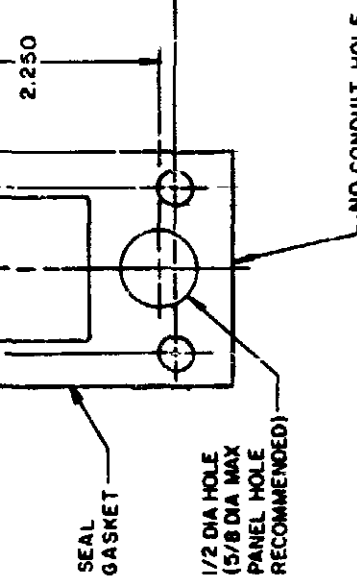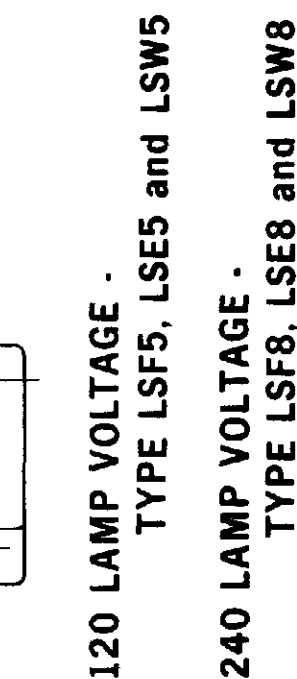

SCALE NONE

DO NOT SCALE PRINT

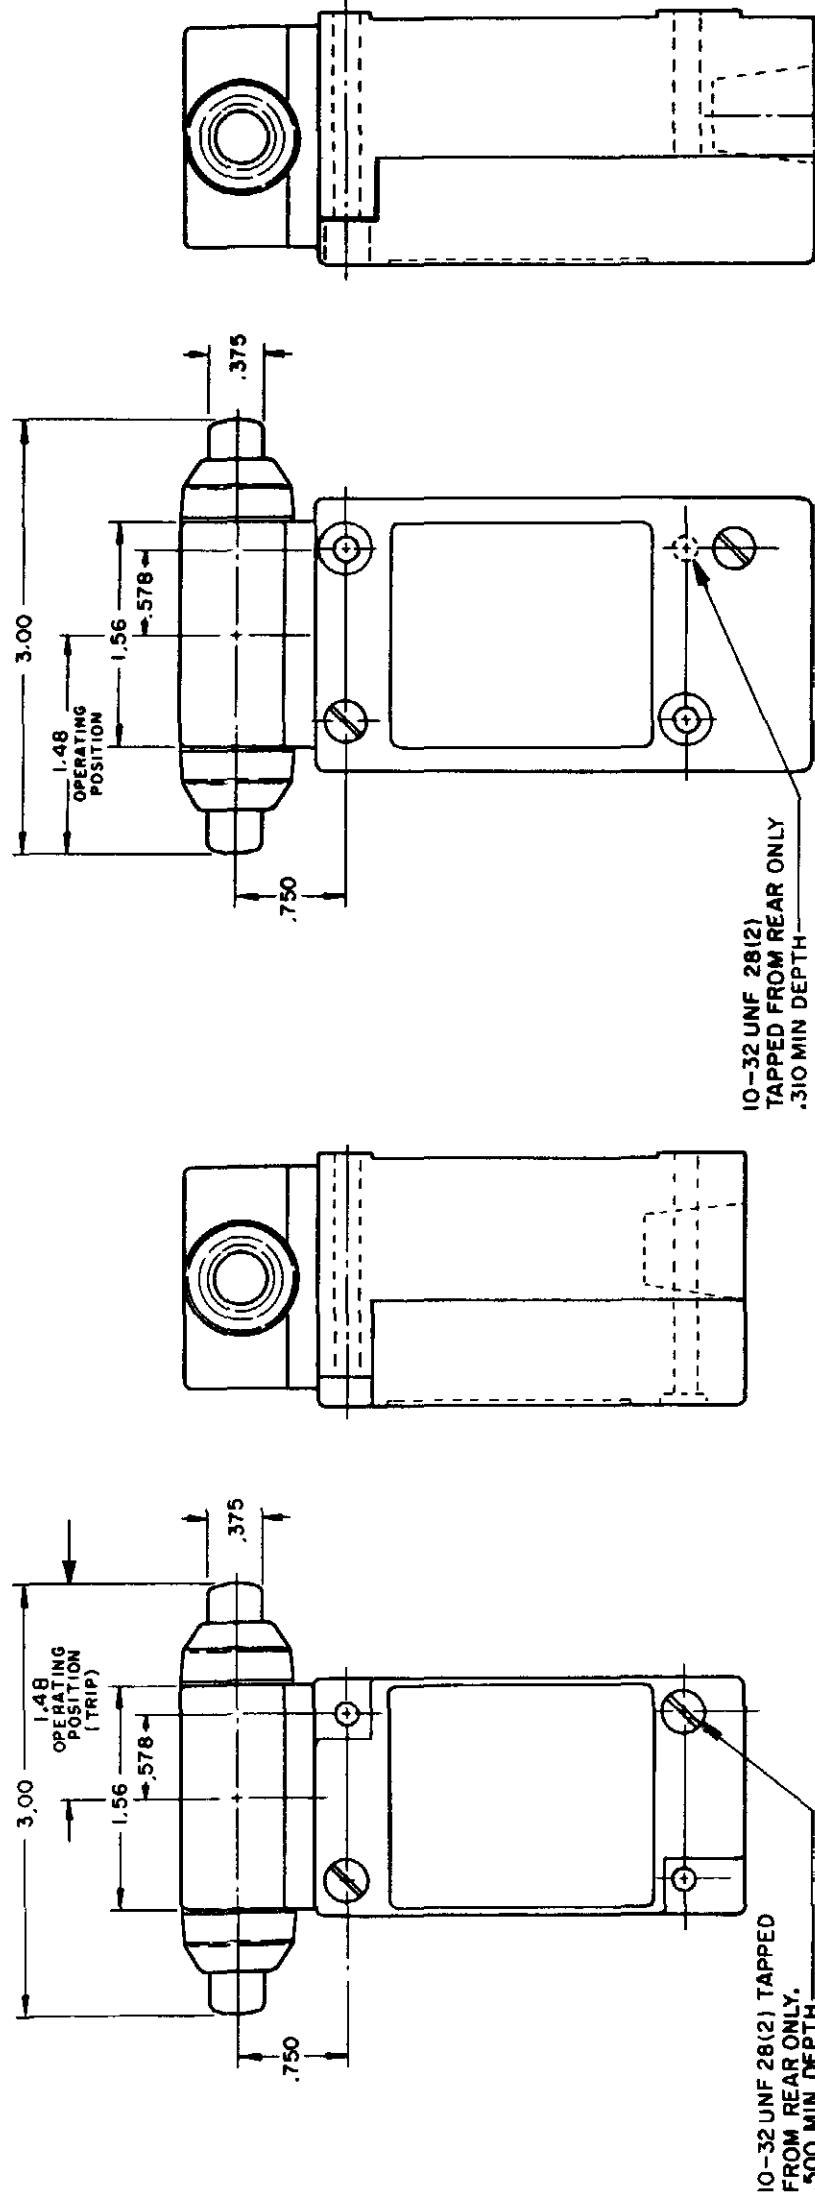

TYPE LSG1 and LSG3

TYPE LSG2 and LSG4

INITIAL POSITION —
(FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL — } OVERTRAVEL

TOP PLUNGER TYPES

OPERATING POINT GIVEN
IN RELATION TO TOP
MOUNTING HOLE

CHARACTERISTICS	LSC PLUNGER	LSD ROLLER PLUNGER	LSV ADJ PLUNGER	SEQUENCE BASIC		
				LSC	LSD	LSV
PRETRAVEL (MAX)	.070	.070	.070	1ST STEP .070		
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015 DOUBLE POLE .020	SINGLE POLE .015 DOUBLE POLE .020	SINGLE POLE .015 DOUBLE POLE .020	2ND STEP .016 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.015 EACH STEP		
OPERATING FORCE (MAX)	4 LBS	4 LBS	4 LBS	.170		
OPERATING POINT	1.805 ± .030	2.200 ± .040	2.085 MIN	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	7 LBS	7 LBS	7 LBS	1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX		

SIDE PLUNGER TYPES

OPERATING POINT GIVEN IN
RELATION TO CENTER OF HEAD

CHARACTERISTICS	LSE PLUNGER	LSF ROLLER PLUNGER	LSW ADJ PLUNGER	LSG PLUNGER MAINTAINED	SEQUENCE BASIC		
					LSE	LSF	LSW
PRETRAVEL (MAX)	.100	.100	.100	.170	1ST STEP .100		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.045	.090	2ND STEP .020 MIN ADD'L		
OVERTRAVEL (MIN)	.190	.190	.190	.080	.025 EACH STEP		
OPERATING FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	.170		
OPERATING POINT	1.300 ± .030	1.735 ± .040	ADJUSTABLE FROM 1.615 MIN 1.865 MAX	1.480 ± .030	1ST STEP		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		

REVISIONS	BS	10 JUL 07	10031956
	B	201004	
C	10 AUG 00		
	C	201748	
D	17 NOV 00		
	D	202198	
E	23 JAN 01		
	E	204871	
F	14 FEB 02		
	F	206581	
G	14 OCT 02		
	G	206763	
H	31 OCT 02		
	H	207179	
J	14 JAN 03		
	J	207474	
K	18 FEB 03		
	K	0006871	
11 AUG 04			


ISSUE	12	PSR	10 JUL 07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
LSA-LSW SERIES CHART 1							
PAGE 7 OF 10							

CATALOG LISTING		LSA-LSW SERIES CHART 1	
M		LSA-LSW SERIES	
12		PAGE 7 OF 10	
PSR		RELEASE NO CO-78498	
10 JUL 07		REPLACES LSA-LSW SERIES	

MAST
DRAWN
MAM 15 JUN 94


WOBBLE STICK DOUBLE POLE

SINGLE POLE

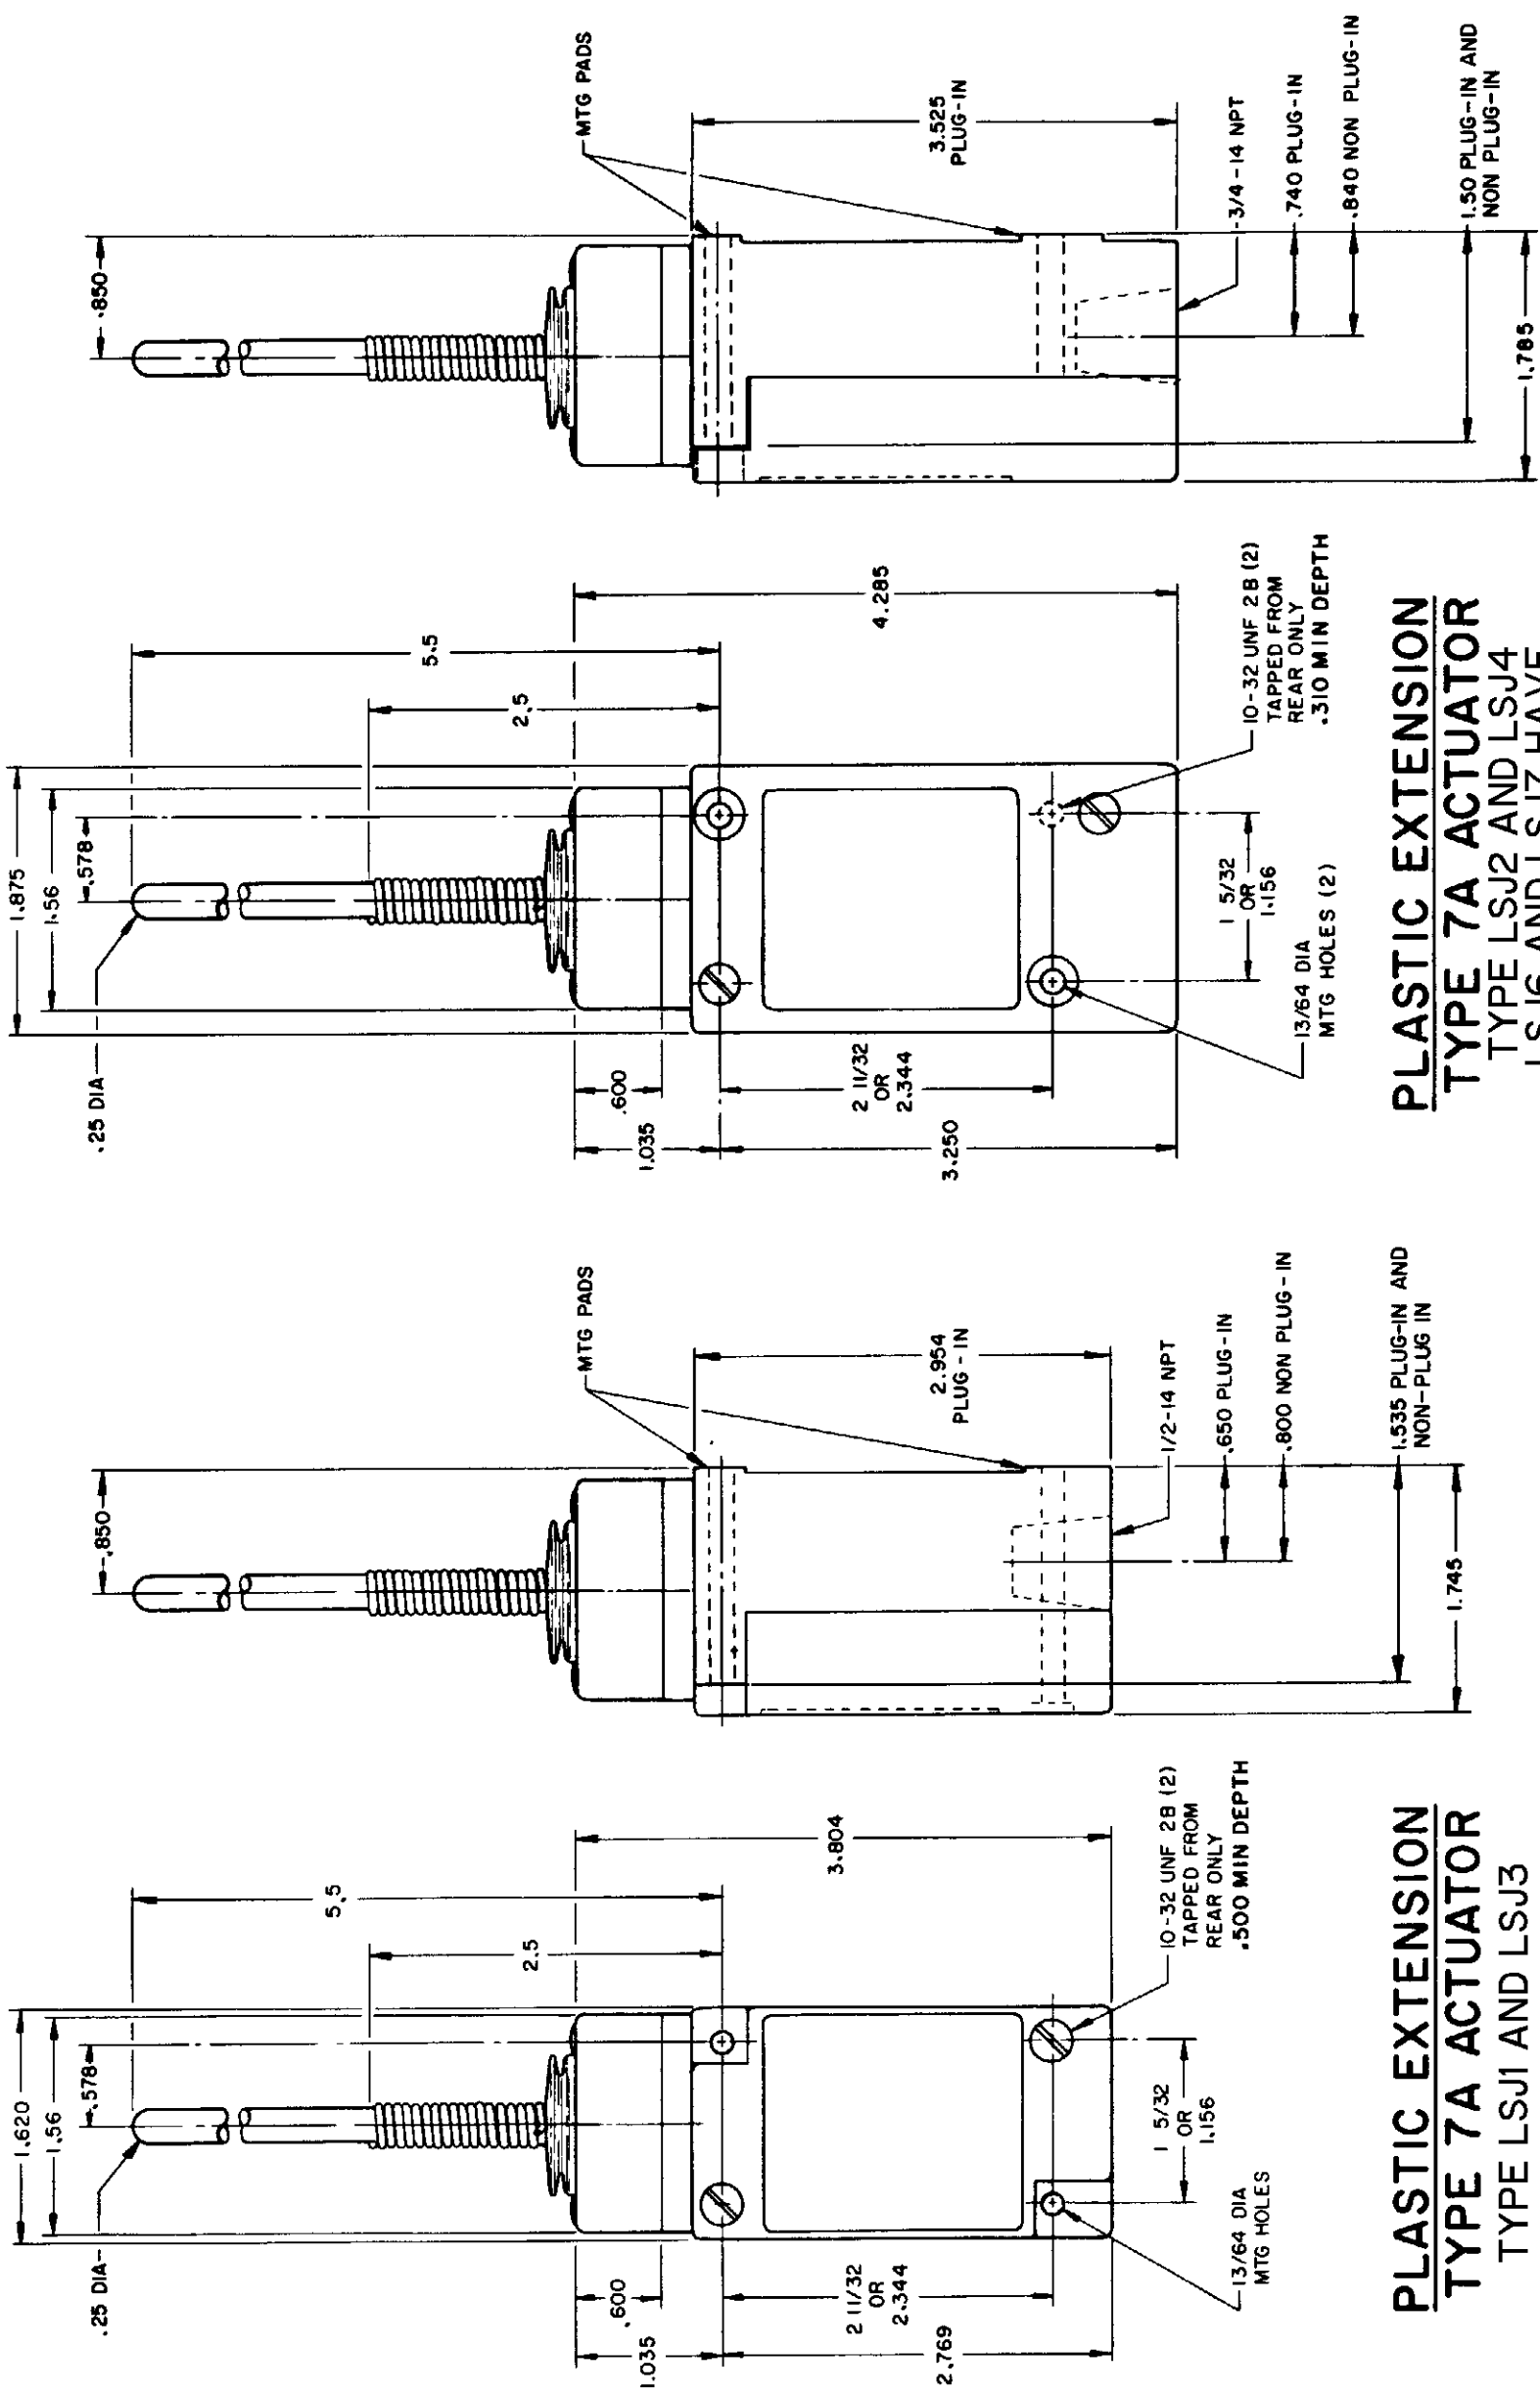


PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ1 AND LSJ3

PLASTIC EXTENSION
TYPE 7A ACTUATOR
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

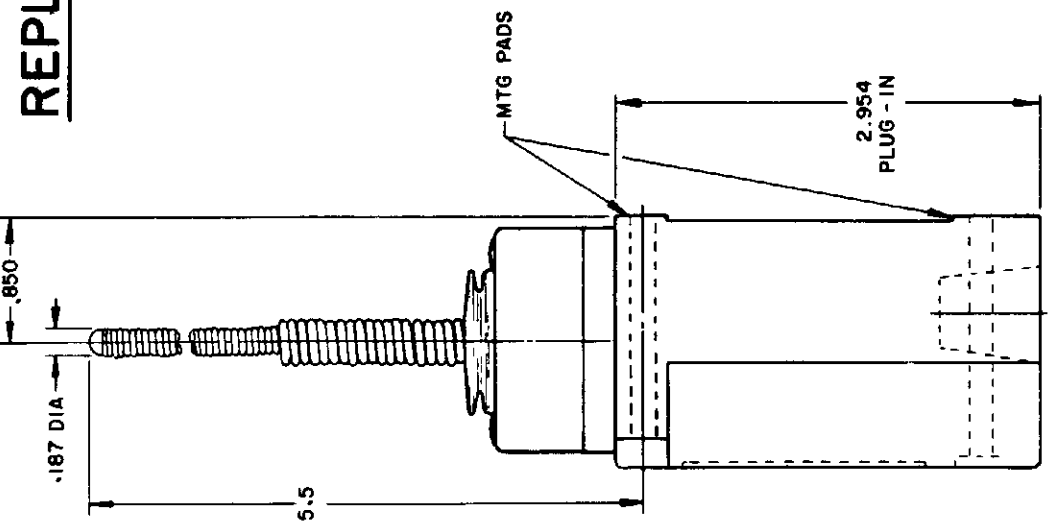


REPLACEMENT ACTUATOR
LSZ-4009

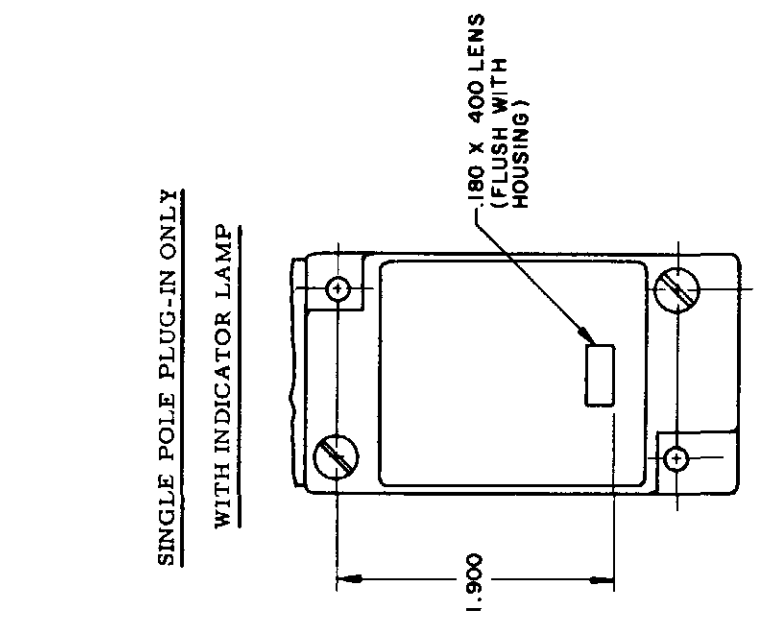


120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8
24 LED VOLTAGE TYPE LSJ9

CABLE EXTENSION
TYPE 7N ACTUATOR


CABLE EXTENSION
TYPE 7N ACTUATOR

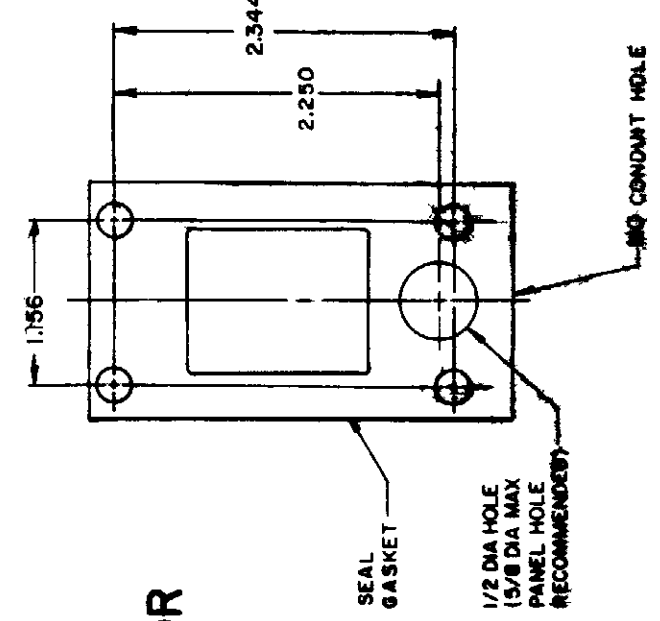


REPLACEMENT ACTUATOR
LSZ-4011

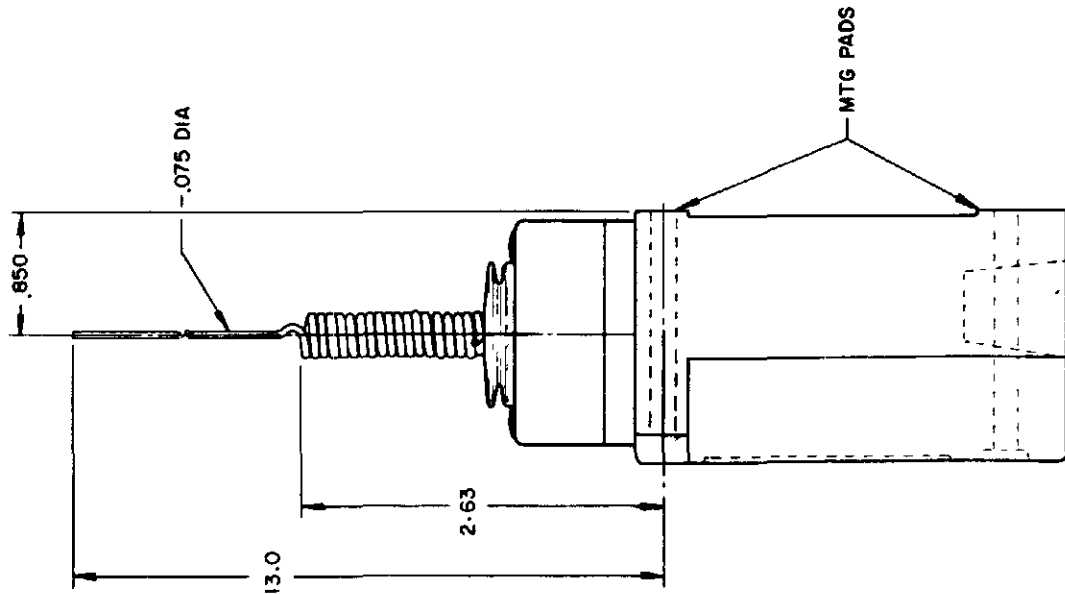

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

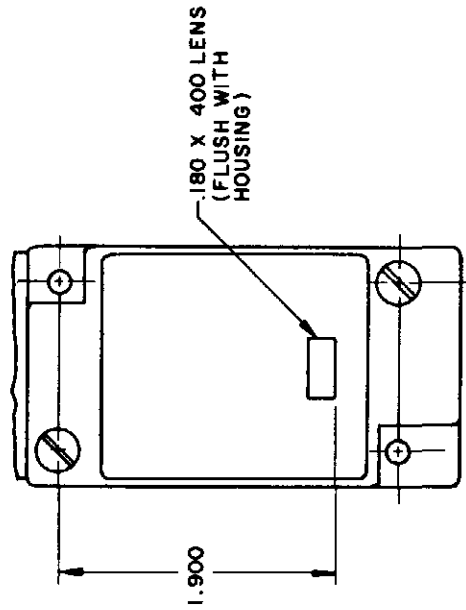

120 LAMP VOLTAGE TYPE LSJ5
240 LAMP VOLTAGE TYPE LSJ8

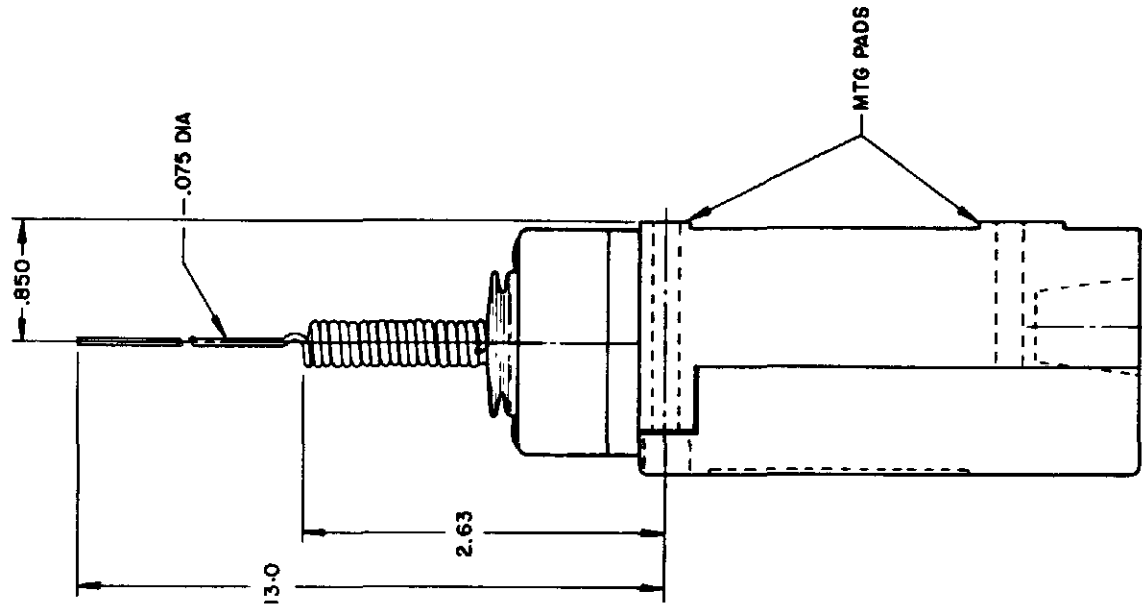

WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ1 and LSJ3

WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE

REPLACEMENT ACTUATOR - LSZ 4010


CAT WHISKER

SINGLE POLE

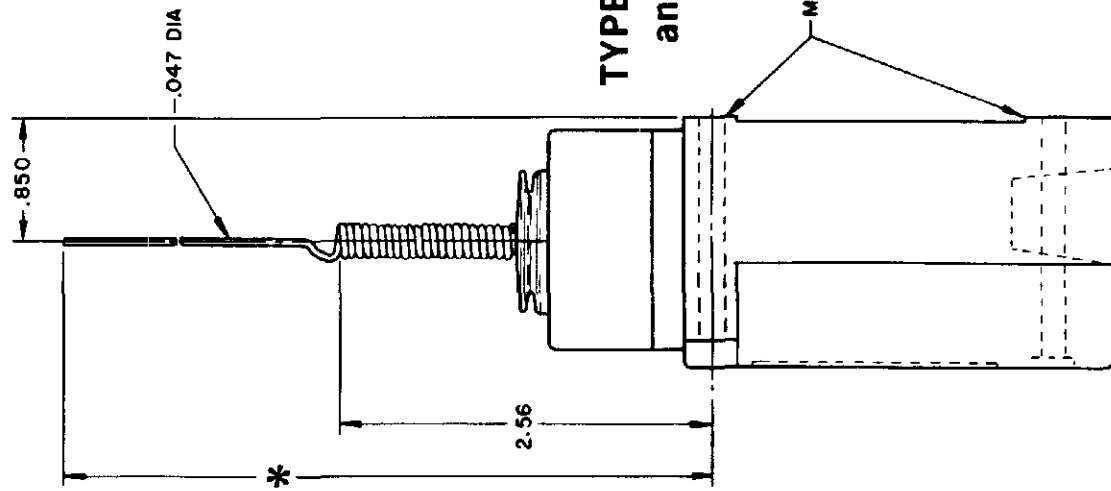


TYPE LSK1
and LSK3

SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

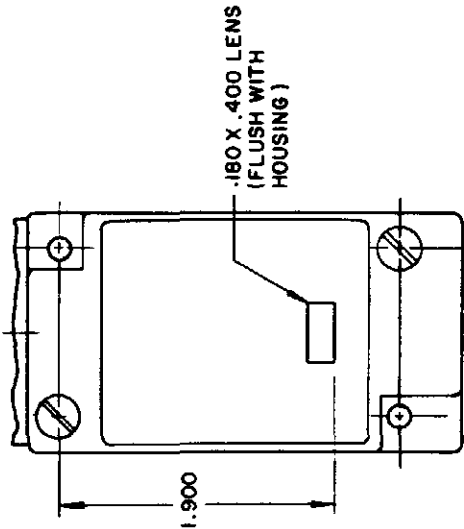

120 LAMP VOLTAGE
TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
240 LAMP VOLTAGE
TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

DOUBLE POLE

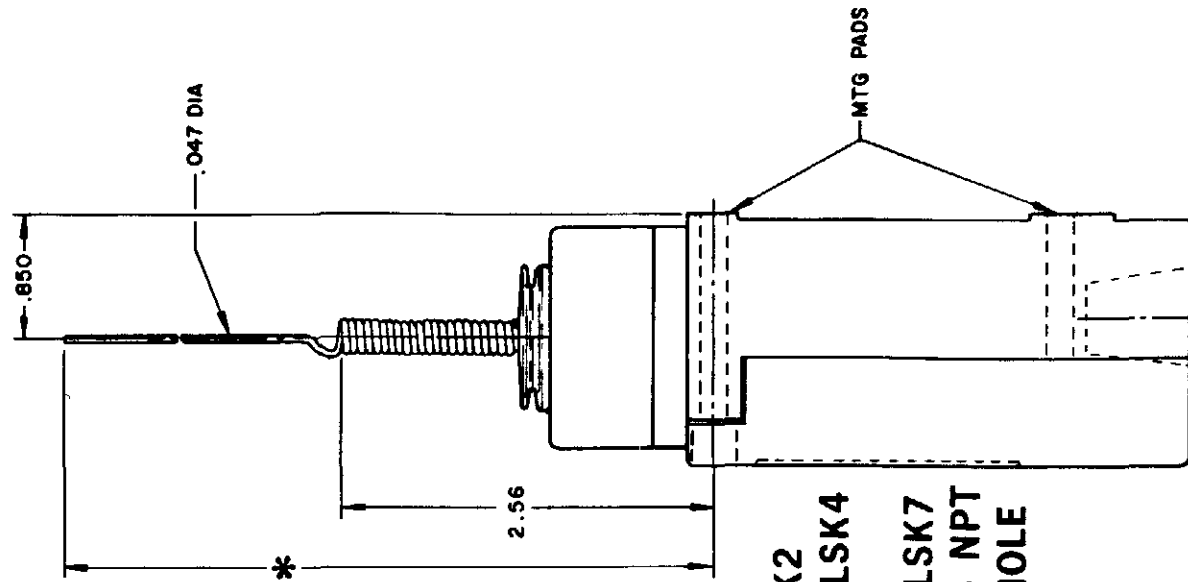

TYPE LSK2
and LSK4
LSK6 and LSK7
have 1/2 - 14 NPT
CONDUIT HOLE

*WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
ACTUATOR 9.5 IN. - LSZ4036

WIRE EXTENSION

*TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
a Honeywell Division

FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

PAGE 8 OF 10

SCALE NONE
DO NOT SCALE PRINT

CAT. WHISKER	WOBBLE STICK			
	5/16" WIRE	7/16" WIRE	ROD	CABLE
PRETRAVEL (APPROX) IN. RADIUS	2	2	1.0	1.5
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	7.0

REV	DATE	BY	CHKD	DESCRIPTION
L	0031956			BS
B	10JUL07			201004
C	201748			201748
D	202198			202198
E	204871			204871
F	206581			206581
G	206763			206763
H	207179			207179
J	207474			207474
K	0006871			0006871


ISSUE	12	PSR	10JUL07	RELEASE NO	CO-78498	REPLACES	LSA-LSW SERIES
CATALOG LISTING	LSA-LSW SERIES CHART 1						
PAGE	9 OF 10						

MASTER
DRAWN

CONVERSION BASES


**SINGLE POLE
(SIDE ROTARY)
LSZ 4003**

**DOUBLE POLE
(SIDE ROTARY)
LSZ 4004**

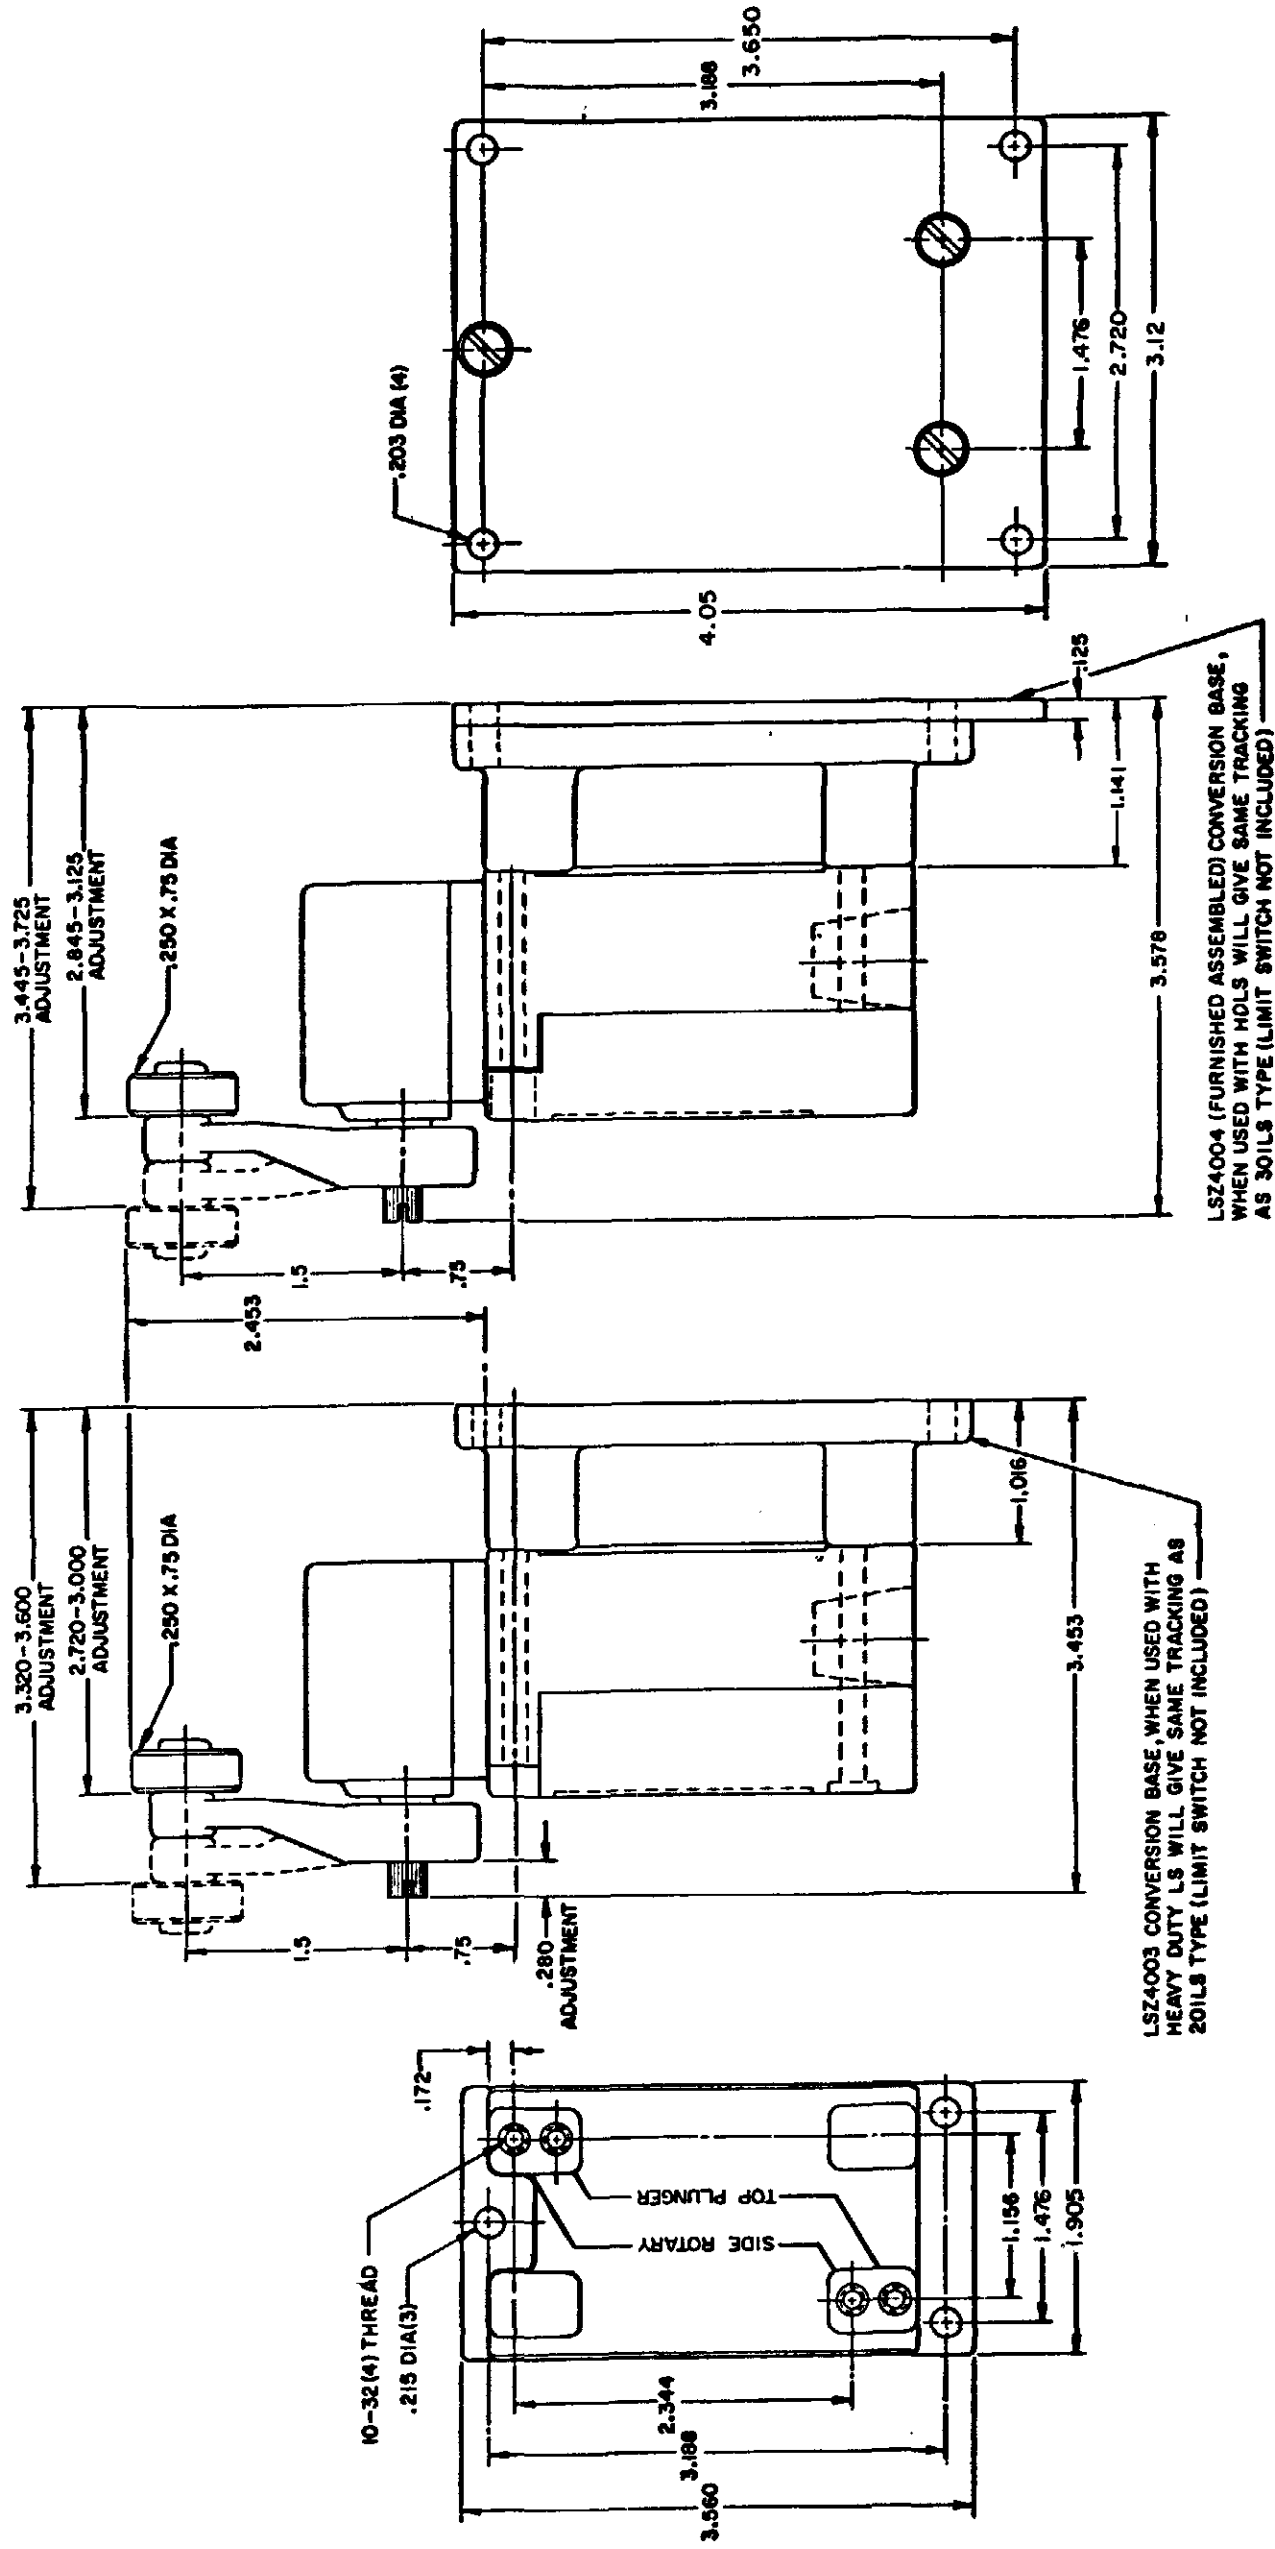

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

**SINGLE POLE
TOP PLUNGER
LSZ 4003**

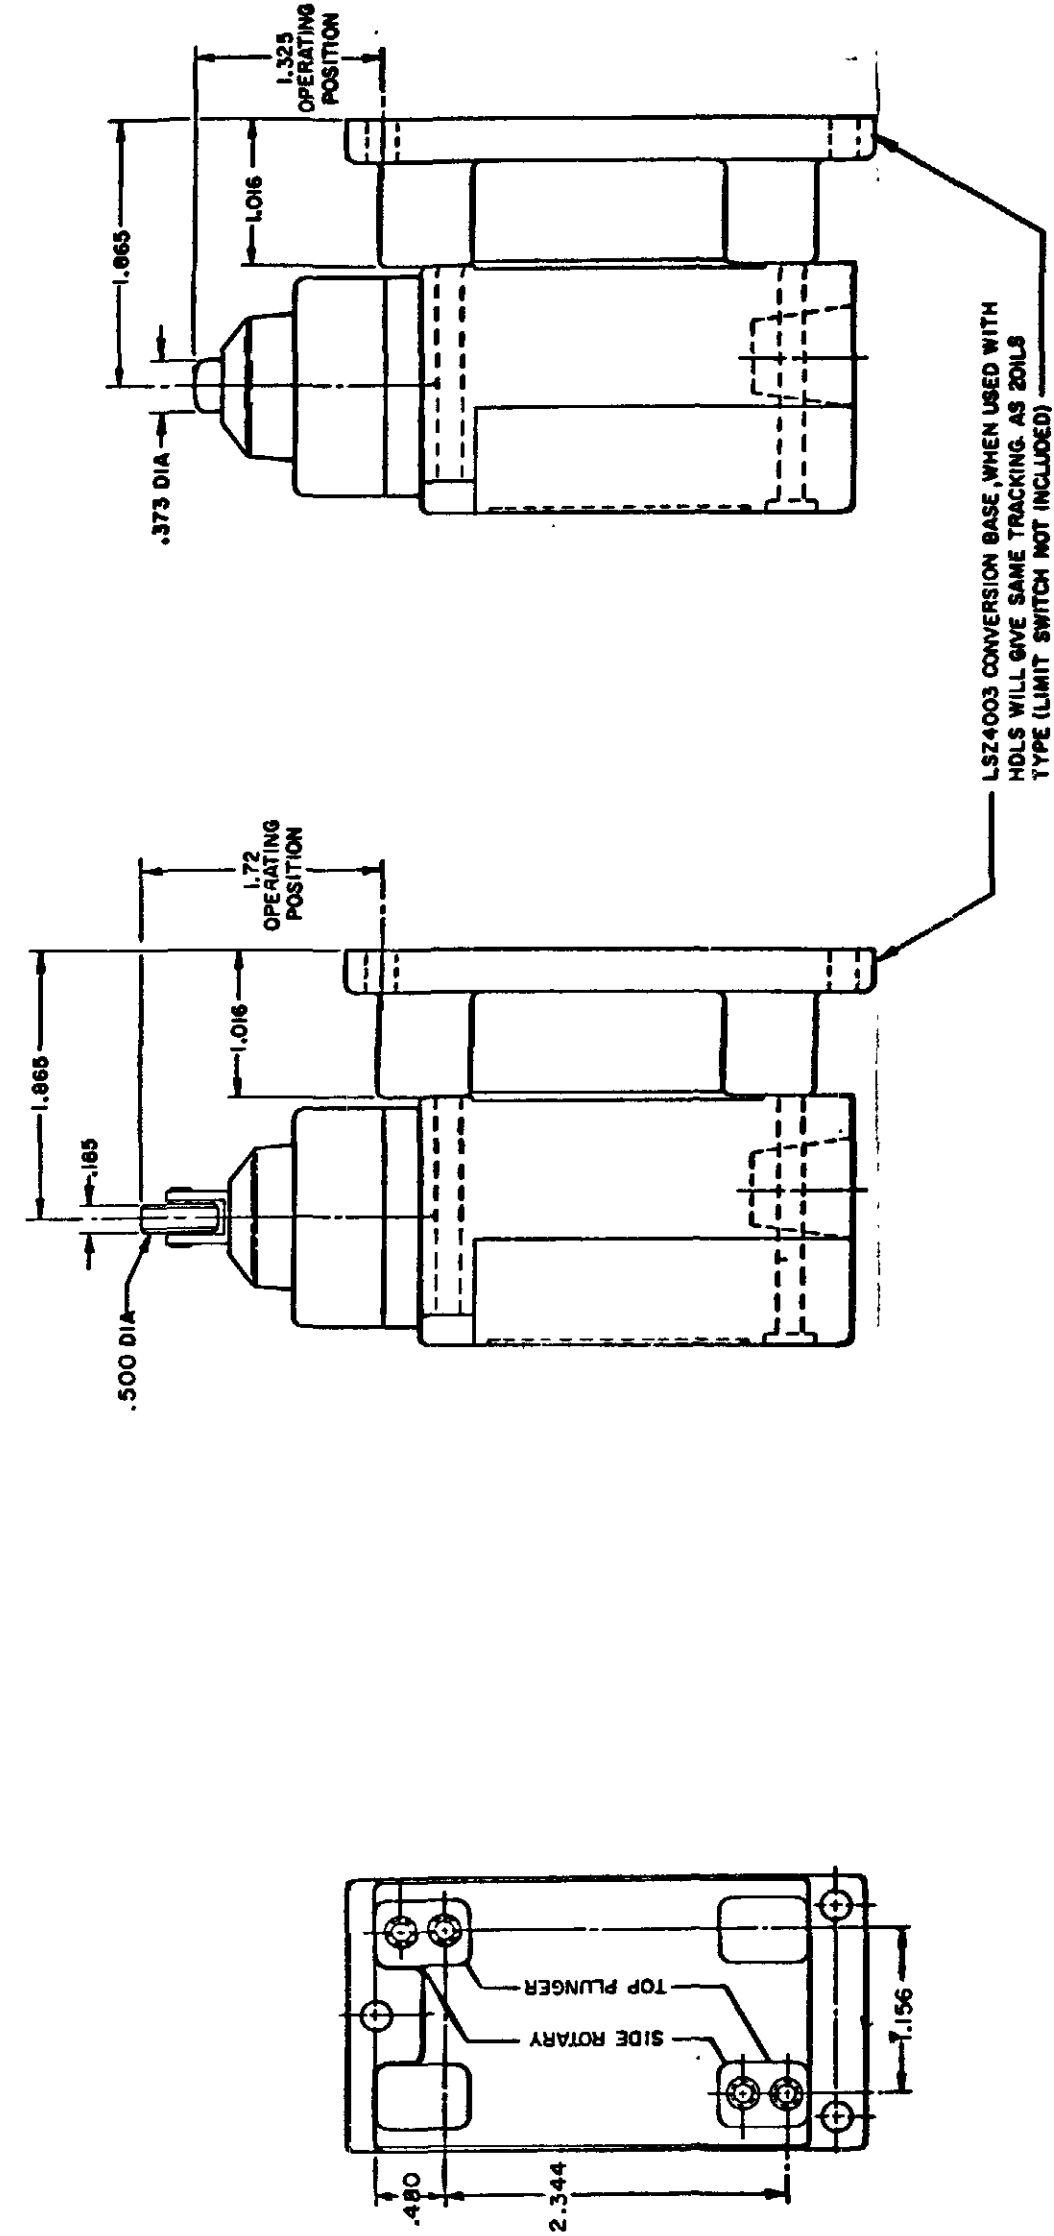

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			PAGE 9 OF 10	
MICRO SWITCH a Honeywell Division		SWITCH - ENCLOSED		CATALOG LISTING
FED MFG CODE 91829		LSA-LSW SERIES		CHART 1

SCALE FULL
DO NOT SCALE PRINT

HEAD TYPE	CELLULOSE DETERGENT 5 STAR ASTM #1 ASTM #2 ASTM #3 ASTM #4 HOUGHTON SAFE 271 HOUGHTON SAFE 820 1010, 1035, 1120 MINERAL OIL PETR. OIL CRUDE SILICON GR & OIL SUNSAFE BEER STODDARD SOLV. CHLORINATED SOLVENTS CITRIC ACID DI-ESTER SYN. LUBRICANTS OZONE PYDRAUL PROGUARD PETRO. BASE HYDRAULIC OIL LARD OIL SILICATE ESTERS																							
	LSA	LSB	LSC	LSD	LSE	LSF	LSG	LSH	LSJ	LSK	LSL	LSM	LSN	LSP	LSR	LSV	LSW							
LST	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																							
LSS	UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY																							

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

TEMPERATURE LIMITATIONS FOR STANDARD DEVICES		
TYPES	LOW LIMIT	HIGH LIMIT
LSA	+10°F	+250°F
LSB	+30°F	+250°F
LSC	+10°F	+200°F
LSD	+10°F	+200°F
LSE	+10°F	+200°F
LSF	+10°F	+200°F
LSG	+30°F	+200°F
LSH	+30°F	+250°F
LSJ	+10°F	+200°F
LSK	+10°F	+200°F
LSL	+10°F	+250°F
LSM	+30°F	+250°F
LSN	+30°F	+250°F
LSP	+10°F	+250°F
LSR	+30°F	+250°F
LSV	+10°F	+200°F
LSW	+10°F	+200°F
LST	+30 F	+170°F
LSS	+30°F	+170°F

CATALOG LISTING

LSA-LSW SERIES CHART 1

12

PSR

10JUL07

RELEASE NO. CO-78498

REPLACES LSA-LSW SERIES

REVISIONS

L 0031956

BS 10JUL07

B 201004

C 201748

D 202198

E 204871

F 206581

G 206783

H 207179

J 207474

K 0006871

11AUG04

AK

11JUL94

JAF

15JUN94

MAM

RASTER

DRAWN

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru