

M4 x 0.7 - 6g Thread
4.75mm Hexagonal Head

Electrical Details

Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	N/A



Mechanical Details

Head (A/F)	4.75mm (0.187")
Nut A/F	6.35mm (0.250")
Washer diameter	8mm (0.315")
Mounting Torque	0.5Nm (4.42bf in) max. if using nut 0.25Nm (2.41bf in) max. into tapped hole
Mounting Hole Diameter	4.2mm ±0.1 (0.165" ±0.004")
Max. Panel Thickness	2.9mm (0.114")
Weight (Typical)	1.2g (0.04oz)
Finish	Silver plate on copper undercoat



Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)							
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz		
*SFBLC5000100ZC	10pF -20% / +80%	COG/NPO	500#	750	-	-	-	-	-	4		
SFBLC5000150ZC	15pF -20% / +80%				-	-	-	-	-	7		
SFBLC5000220ZC	22pF -20% / +80%				-	-	-	-	-	10		
SFBLC5000330ZC	33pF -20% / +80%				-	-	-	-	-	12		
*SFBLC5000470ZC	47pF -20% / +80%				-	-	-	-	1	15		
*SFBLC5000680MC	68pF				-	-	-	-	2	18		
*SFBLC5000101MC	100pF				-	-	-	-	4	22		
SFBLC5000151MC	150pF				-	-	-	-	7	25		
*SFBLC5000221MC	220pF				-	-	-	-	10	29		
*SFBLC5000331MC	330pF				-	-	-	-	13	33		
*SFBLC5000471MX	470pF	†X7R			200	500	-	-	-	1	16	35
SFBLC5000681MX	680pF	-					-	-	2	19	36	
*SFBLC5000102MX	1.0nF	X7R					-	-	-	4	23	41
SFBLC5000152MX	1.5nF						-	-	-	7	26	45
*SFBLC5000222MX	2.2nF						-	-	-	10	30	50
SFBLC5000332MX	3.3nF						-	-	-	13	33	52
*SFBLC5000472MX	4.7nF						-	-	1	16	36	55
SFBLC5000682MX	6.8nF						-	-	2	19	39	57
*SFBLC5000103MX	10nF						-	-	4	22	41	60
*SFBLC5000153MX	15nF						-	-	7	25	44	62
*SFBLC5000223MX	22nF						-	-	10	29	46	65
SFBLC5000333MX	33nF						-	-	13	33	48	68
*SFBLC2000473MX	47nF	100	250	-			1	16	35	50	70	
SFBLC2000683MX	68nF			-			2	19	39	54	>70	
*SFBLC1000104MX	100nF			-			4	22	41	57	>70	
*SFBLC0500154MX	150nF			-			7	25	45	60	>70	

Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NPO.

Ordering Information - SFBLC range

SF	B	L	C	500	0102	M	X	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Hardware
Syfer Filter	4.75mm Hex Head	M4	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part. Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

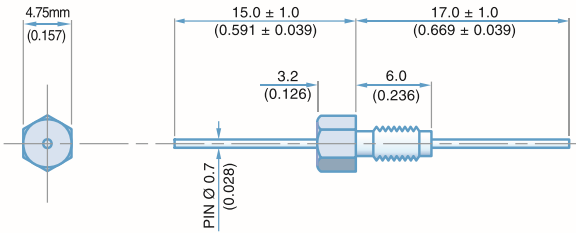

M4 x 0.7 - 6g Thread
4.75mm Hexagonal Head

Electrical Details

Electrical Configuration	L-C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	50nH



Mechanical Details

Body Flange Diameter	4.75mm (0.187")
Head (A/F)	6.0mm (0.236")
Nut A/F	8.0mm (0.315")
Mounting Torque	0.5Nm (4.42lbf in) max. if using nut 0.25Nm (2.21lbf in) max. into tapped hole
Mounting Hole Diameter	4.2mm ±0.1 (0.165" ±0.004")
Max. Panel Thickness	2.9mm (0.114")
Weight (Typical)	1.2g (0.04oz)
Finish	Silver plate on copper undercoat


Product Code	Capacitance (±20%) UOS	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)						
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz	
*SFBLL5000100ZC	10pF -20% / +80%	COG/NP0	500#	750	-	-	-	-	-	6	
SFBLL5000150ZC	15pF -20% / +80%				-	-	-	-	-	9	
SFBLL5000220ZC	22pF -20% / +80%				-	-	-	-	-	12	
SFBLL5000330ZC	33pF -20% / +80%				-	-	-	-	1	15	
*SFBLL5000470ZC	47pF -20% / +80%				-	-	-	-	2	19	
*SFBLL5000680MC	68pF				-	-	-	-	4	20	
*SFBLL5000101MC	100pF				-	-	-	-	7	24	
SFBLL5000151MC	150pF				-	-	-	-	10	27	
*SFBLL5000221MC	220pF				-	-	-	-	12	30	
*SFBLL5000331MC	330pF				-	-	-	1	16	34	
*SFBLL5000471MX	470pF	†X7R			-	-	-	2	19	38	
SFBLL5000681MX	680pF				-	-	-	3	22	41	
*SFBLL5000102MX	1.0nF	X7R			-	-	-	6	25	44	
SFBLL5000152MX	1.5nF				-	-	-	9	29	48	
*SFBLL5000222MX	2.2nF				-	-	-	12	31	51	
SFBLL5000332MX	3.3nF				-	-	-	15	35	54	
*SFBLL5000472MX	4.7nF				-	-	1	18	39	57	
SFBLL5000682MX	6.8nF				-	-	2	21	41	60	
*SFBLL5000103MX	10nF				-	-	4	23	43	63	
*SFBLL5000153MX	15nF				-	-	7	27	46	66	
*SFBLL5000223MX	22nF				-	-	10	30	48	68	
SFBLL5000333MX	33nF				-	-	13	34	50	70	
*SFBLL2000473MX	47nF		200	500	-	1	17	37	51	>70	
SFBLL2000683MX	68nF				-	2	20	40	55	>70	
*SFBLL1000104MX	100nF			100	250	-	4	22	44	60	>70
*SFBLL0500154MX	150nF			50	125	-	7	25	47	62	>70

Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NP0.

Ordering Information - SFBLL range


SF	B	L	L	500	0102	M	X	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Nuts & Washers
Syfer Filter	4.75mm Hex Head	M4	L = L-C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NP0 X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.
Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

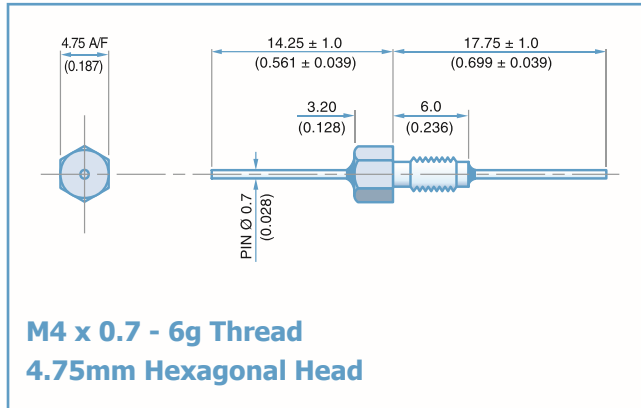

Electrical Details

Electrical Configuration	Pi Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	75nH



Mechanical Details

Head (A/F)	4.75mm (0.187")
Nut A/F	6.0mm (0.236")
Washer diameter	7.90mm (0.311")
Mounting Torque	0.5Nm (4.42lbf in) max. if using nut 0.25Nm (2.21lbf in) max. into tapped hole
Mounting Hole Diameter	4.2mm ±0.1 (0.165" ±0.004")
Max. Panel Thickness	2.9mm (0.114")
Weight (Typical)	1.2g (0.04oz)
Finish	Silver plate on copper undercoat

Product Code	Capacitance (-20%+80%)	Dielectric	Rated Voltage (Vdc)	DWV (Vdc)	Typical No-Load Insertion Loss (dB)					
					0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFBLP5000200ZC	20pF	C0G/NP0	500#	750	-	-	-	-	1	11
SFBLP5000440ZC	44pF				-	-	-	-	3	19
SFBLP5000940ZC	94pF				-	-	-	-	6	25
*SFBLP5000201ZC	200pF				-	-	-	-	11	33
SFBLP5000441ZC	440pF				-	-	-	2	18	45
SFBLP5000941ZX	940pF	X7R	200	500	-	-	-	5	25	60
*SFBLP5000202ZX	2nF				-	-	-	10	40	70
SFBLP5000442ZX	4.4nF				-	-	1	17	47	>70
*SFBLP5000942ZX	9.4nF				-	-	4	24	60	>70
*SFBLP2000203ZX	20nF				-	-	9	28	70	>70
*SFBLP1000443ZX	44nF				-	0	14	42	>70	>70
*SFBLP0500943ZX	94nF				-	2	18	57	>70	>70

Also rated for operation at 115Vac 400Hz. Self heating will occur - evaluation in situ recommended. * Recommended values. † Also available in COG/NP0.

Ordering Information - SFBLP range

SF	B	L	P	050	0943	Z	X	0
Type	Case style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Tolerance	Dielectric	Nuts & Washers
Syfer Filter	4.75mm Hex Head	M4	P = Pi Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following Example: 0201 = 200pF 0943 = 94000pF	Z = -20+80%	C = COG/NP0 X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part. Options include for example: change of finish / alternative voltage rating / non-standard intermediate capacitance values / test requirements. Please refer specific requests to the factory.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru