

Description

The AS358/358A/358B consists of two independent, high gain and internally frequency compensated operational amplifiers, they are specifically designed to operate from a single power supply. Operation from split power supply is also possible and the low power supply current drain is independent of the magnitude of the power supply voltages. Typical applications include transducer amplifiers, DC gain blocks and most conventional operational amplifier circuits.

The AS358/358A/358B series is compatible with industry standard 358. The AS358A has more stringent input offset voltage than the AS358.

The AS358 is available in PDIP-8, TDIP-8, SO-8, TSSOP-8 and MSOP-8 packages, the AS358A is available in PDIP-8 and SO-8 packages and AS358B is available in TSSOP-8 package.



Features

- Internally Frequency Compensated for Unity Gain
- Large Voltage Gain: 100dB (Typical)
- Low Input Bias Current: 20nA (Typical)
- Low Input Offset Voltage: 2mV (Typical)
- Low Supply Current: 0.5mA (Typical)
- Wide Power Supply Voltage:
 - Single Supply: 3V to 36V
 - Dual Supplies: $\pm 1.5V$ to $\pm 18V$
- Input Common Mode Voltage Range Includes Ground
- Large Output Voltage Swing: 0V to $V_{CC} - 1.5V$
- Lead-Free Packages: SO-8, PDIP-8 and TSSOP-8
 - **Totally Lead-Free; RoHS Compliant (Notes 1 & 2)**
- Lead-Free Packages, Available in "Green" Molding Compound: SO-8, PDIP-8, TDIP-8, TSSOP-8 and MSOP-8
 - **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
 - **Halogen and Antimony Free. "Green" Device (Note 3)**

Notes:

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


Pin Assignments

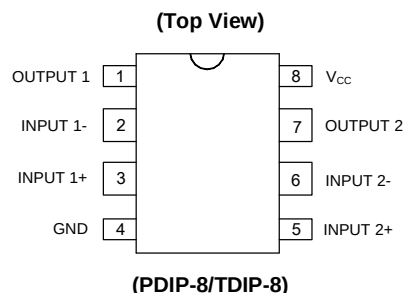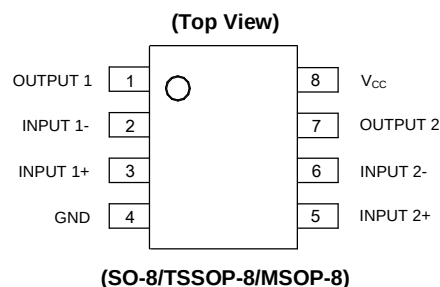


Applications

- Battery Charger
- Cordless Telephone
- Switching Power Supply


Typical Applications Circuit

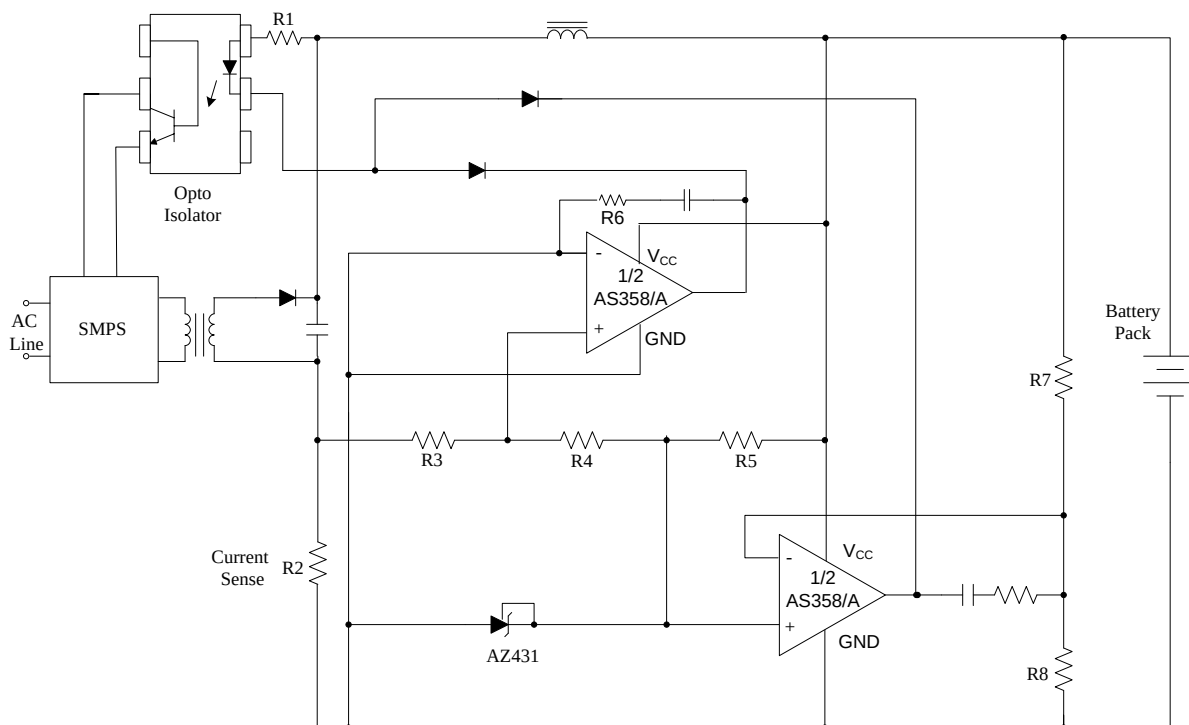

Battery Charger

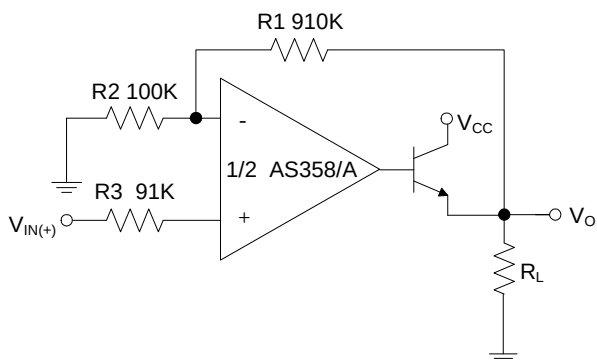


Power Amplifier

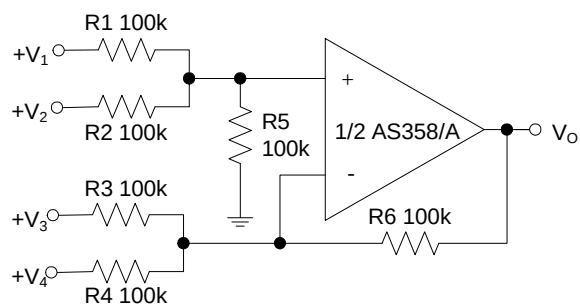


DC Summing Amplifier


Typical Applications Circuit (Cont.)

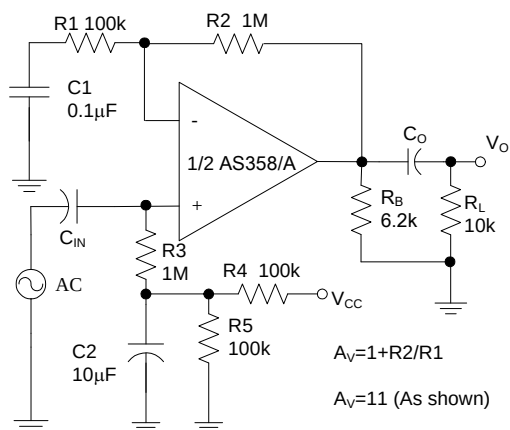


AC Coupled Non-Inverting Amplifier

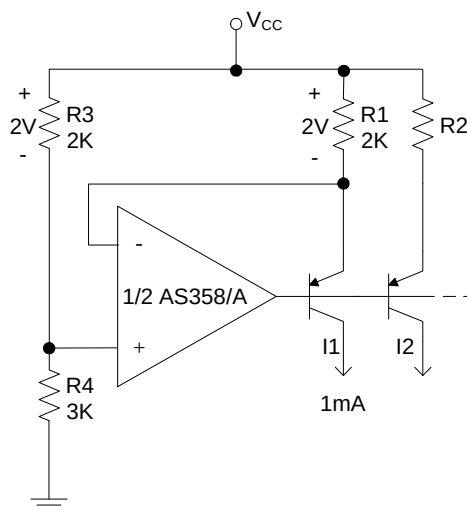

Fixed Current Sources

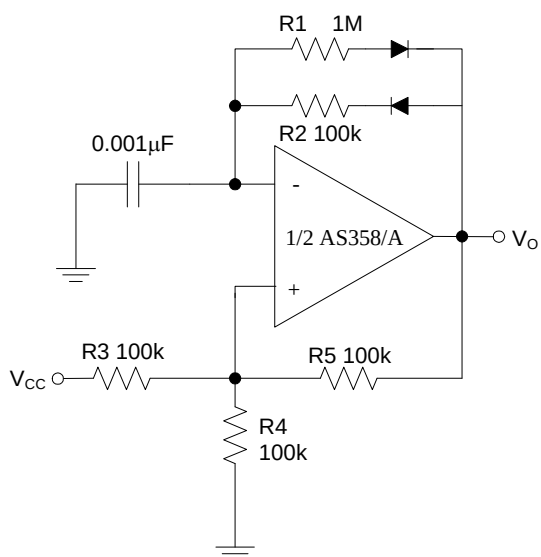


Pulse Generator

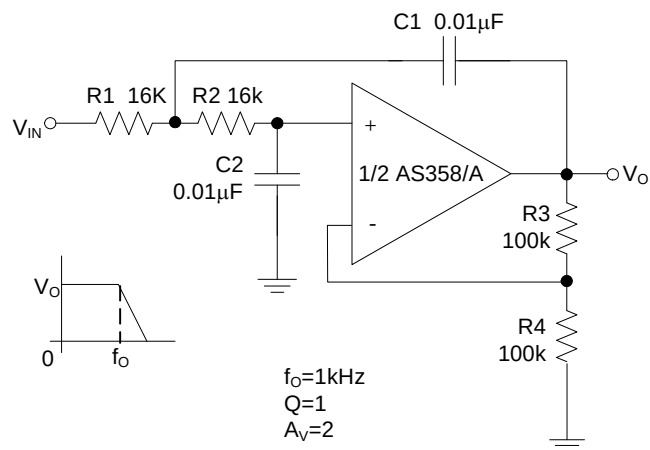

DC Coupled Low-Pass Active Filter

Functional Block Diagram

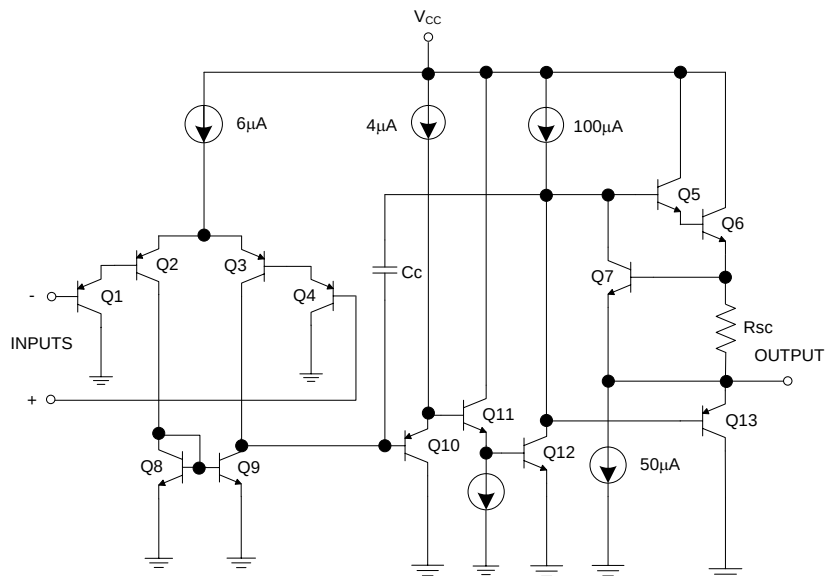

Absolute Maximum Ratings (Notes 4 & 5)

Symbol	Parameter	Rating		Unit
V_{CC}	Power Supply Voltage	40		V
V_{ID}	Differential Input Voltage	40		V
V_{IC}	Input Voltage	-0.3 to 40		V
P_D	Power Dissipation ($T_A = +25^\circ\text{C}$)	PDIP-8	830	mW
		SO-8	550	
		TSSOP-8	500	
		MSOP-8	470	
T_J	Operating Junction Temperature	+150		$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-65 to +150		$^\circ\text{C}$
T_{LEAD}	Lead Temperature (Soldering, 10 Seconds)	+260		$^\circ\text{C}$

Notes: 4. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

5. ESD sensitivity.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{CC}	Supply Voltage	3	36	V
T_A	Ambient Operating Temperature Range	-40	+85	$^\circ\text{C}$


Electrical Characteristics (Limits in standard typeface are for $T_A = +25^\circ\text{C}$, **bold** typeface applies over -40°C to $+85^\circ\text{C}$ (Note 6), $V_{CC} = 5\text{V}$, $\text{GND} = 0\text{V}$, unless otherwise specified.)

Symbol	Parameter		Conditions		Min	Typ	Max	Unit
V _{IO}	Input Offset Voltage		V _O = 1.4V, R _S = 0Ω, V _{CC} = 5V to 30V	AS358	—	2	5	mV
					—	—	7	
				AS358A	—	2	3	
					—	—	5	
				AS358B	—	—	2	
—	—	4						
ΔV _{IO} /ΔT	Average Temperature Coefficient of Input Offset Voltage		T _A = -40°C to +85°C		—	7	—	μV/°C
I _{BIAS}	Input Bias Current		I _{IN+} or I _{IN-} , V _{CM} = 0V		—	20	200	nA
					—	—	200	
I _{IO}	Input Offset Current		I _{IN+} - I _{IN-} , V _{CM} = 0V		—	5	30	nA
					—	—	100	
V _{IR}	Input Common Mode Voltage Range (Note 7)		V _{CC} = 30V		0	—	V _{CC} -1.5	V
I _{CC}	Supply Current		T _A = -40°C to +85°C, R _L = ∞, V _{CC} = 30V		—	0.7	2	mA
			T _A = -40°C to +85°C, R _L = ∞, V _{CC} = 5V		—	0.5	1.2	
G _V	Large Signal Voltage Gain		V _{CC} = 15V, V _O = 1V to 11V, R _L ≥ 2kΩ		85	100	—	dB
					80	—	—	
CMRR	Common Mode Rejection Ratio		DC, V _{CM} = 0V to (V _{CC} -1.5)V		60	70	—	dB
					60	—	—	
PSRR	Power Supply Rejection Ratio		V _{CC} = 5V to 30V		70	100	—	dB
					60	—	—	
CS	Channel Separation		f = 1kHz to 20kHz		—	-120	—	dB
I _{SOURCE}	Output Current	Source	V _{IN+} = 1V, V _{IN-} = 0V, V _{CC} = 15V, V _O = 2V	20	40	—	mA	
20				—	—			
I _{SINK}		Sink		V _{IN+} = 0V, V _{IN-} = 1V, V _{CC} = 15V, V _O = 2V	10	15	—	mA
				5	—	—		
		V _{IN+} = 0V, V _{IN-} = 1V, V _{CC} = 15V, V _O = 0.2V	12	50	—	μA		
I _{SC}	Output Short Circuit Current to Ground		V _{CC} = 15V		—	40	60	mA
V _{OH}	Output Voltage Swing		V _{CC} = 30V, R _L = 2kΩ		26	—	—	V
					26	—	—	
			V _{CC} = 30V, R _L = 10kΩ		27	28	—	
					27	—	—	
V _{OL}			V _{CC} = 5V, R _L = 10kΩ		—	5	20	mV
					—	—	30	
θ _{JC}	Thermal Resistance (Junction to Case)		SO-8	—	17	—	°C/W	
			TSSOP-8					
			MSOP-8					
θ _{JA}	Thermal Resistance (Junction to Ambient)		SO-8	—	115	—		
			TSSOP-8		209			
			MSOP-8		160			


Notes: 6. Limits over the full temperature are guaranteed by design, but not tested in production.
7. The input common-mode voltage of either input signal voltage should not be allowed to go negatively by more than 0.3V (at $+25^\circ\text{C}$). The upper end of the common-mode voltage range is $V_{CC} - 1.5\text{V}$ (at $+25^\circ\text{C}$), but either or both inputs can go to $+36\text{V}$ without damages, independent of the magnitude of the V_{CC} .

Performance Characteristics


Input Voltage Range

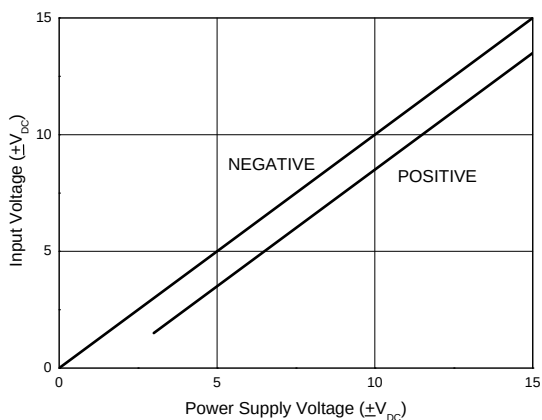


Input Current

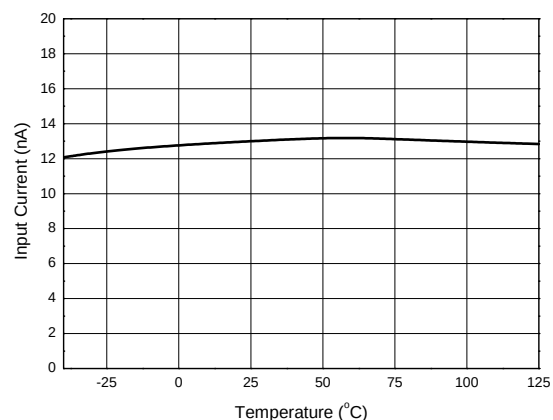


Supply Current

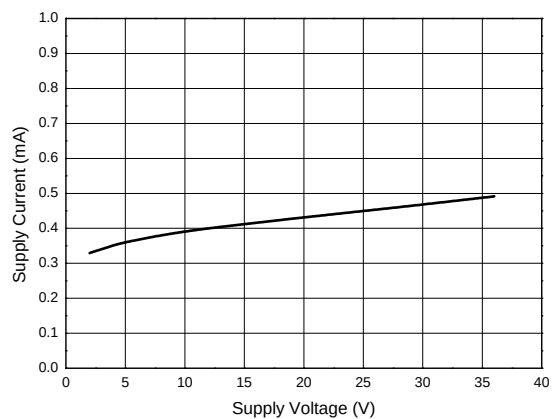


Voltage Gain

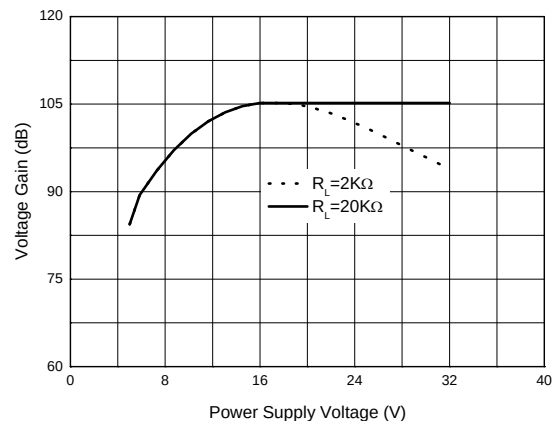

Open Loop Frequency Response

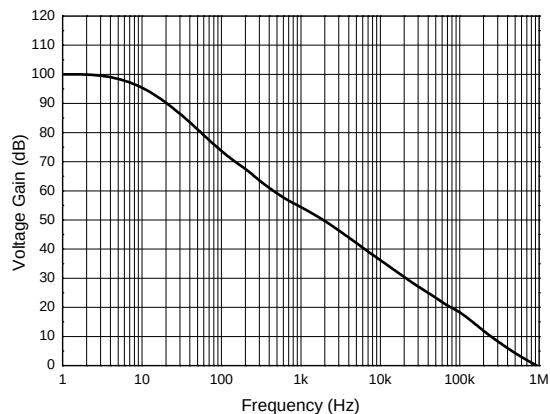


Voltage Follower Pulse Response

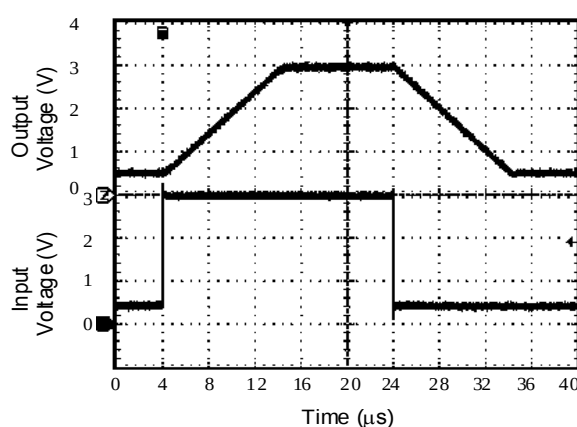


Performance Characteristics (Cont.)


Voltage Follower Pulse Response (Small Signal)

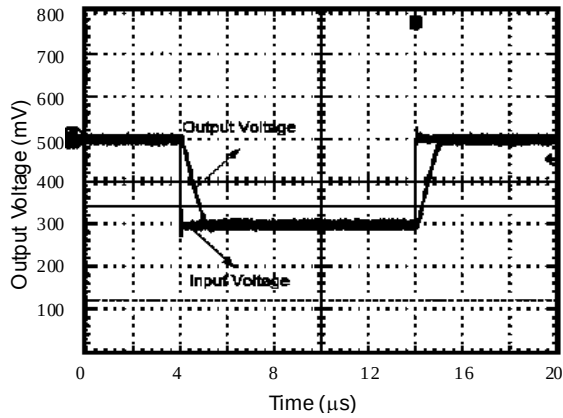


Large Signal Frequency Response

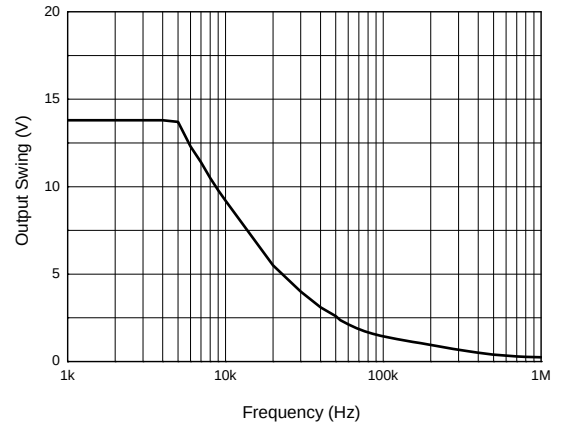


Output Characteristics: Current Sourcing

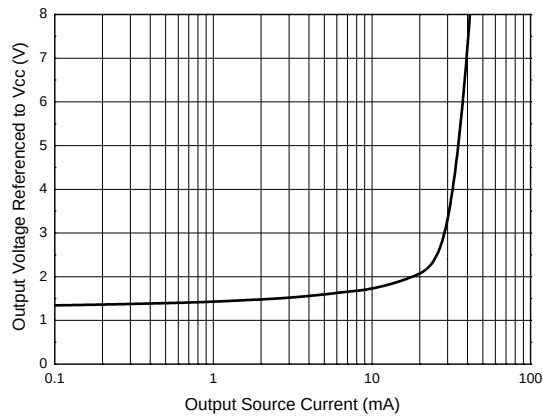


Output Characteristics: Current Sinking

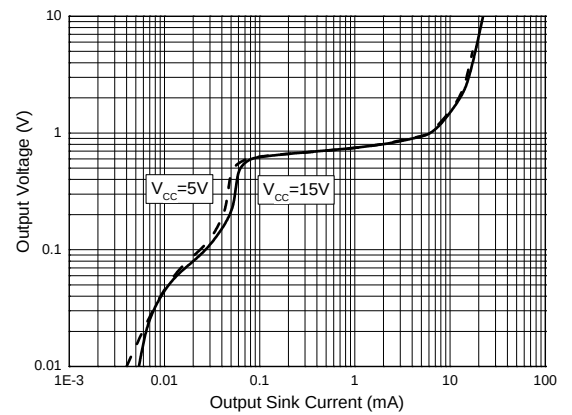

Current Limiting

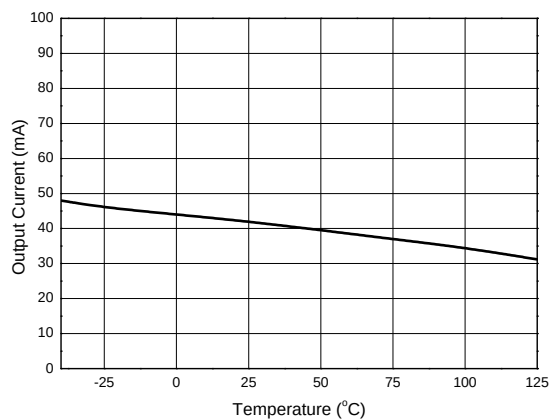

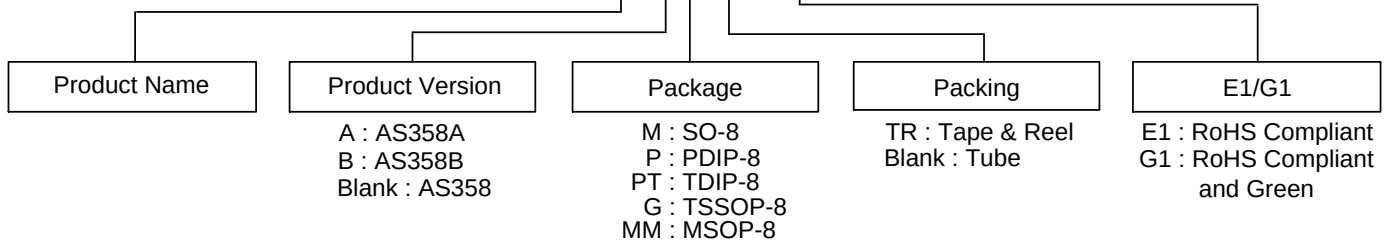Ordering Information
AS358X XX XX - XX


	Part Number	Package (Note 9)	Temperature Range	RoHS Compliant Lead Free / Green	Marking ID	Packing	Status (Note 8)	Alternative
 Lead-Free	AS358M-E1	SO-8	-40°C to +85°C	Lead Free	AS358M-E1	100/Tube	End of Life	AS358MTR-G1
 Lead-Free Green	AS358M-G1			Green	AS358M-G1			
 Lead-Free	AS358MTR-E1			Lead Free	AS358M-E1	4000/Tape & Reel	NRND	AS358MTR-G1
 Lead-Free Green	AS358MTR-G1			Green	AS358M-G1		In Production	—
 Lead-Free	AS358AM-E1			Lead Free	AS358AM-E1	100/Tube	End of Life	AS358AMTR-G1
 Lead-Free Green	AS358AM-G1			Green	AS358AM-G1			
 Lead-Free	AS358AMTR-E1			Lead Free	AS358AM-E1	4000/Tape & Reel	NRND	AS358AMTR-G1
 Lead-Free Green	AS358AMTR-G1			Green	AS358AM-G1		In Production	—
 Lead-Free	AS358P-E1	PDIP-8	-40°C to +85°C	Lead Free	AS358P-E1	50/Tube	In Production	—
 Lead-Free Green	AS358P-G1			Green	AS358P-G1		In Production	—
 Lead-Free	AS358AP-E1			Lead Free	AS358AP-E1		In Production	—
 Lead-Free Green	AS358AP-G1			Green	AS358AP-G1		End of Life	—
 Lead-Free Green	AS358PT-G1	TDIP-8	-40°C to +85°C	Green	AS358PT-G1	50/Tube	In Production	—
 Lead-Free	AS358GTR-E1	TSSOP-8	-40°C to +85°C	Lead Free	EG3A	4000/Tape & Reel	NRND	AS358GTR-G1
 Lead-Free Green	AS358GTR-G1			Green	GG3A		In Production	—
 Lead-Free Green	AS358BGTR-G1			Green	GG3F		In Production	—
 Lead-Free	AS358MMTR-E1	MSOP-8	-40°C to +85°C	Lead Free	AS358MM-E1	3000/Tape & Reel	End of Life	AS358MMTR-G1
 Lead-Free Green	AS358MMTR-G1			Green	AS358MM-G1		In Production	—


Notes:

8. NRND: Not Recommended for New Design

 9. For packaging details, go to our website at: <https://www.diodes.com/design/support/packaging/diodes-packaging/>.


Marking Information

(1) SO-8

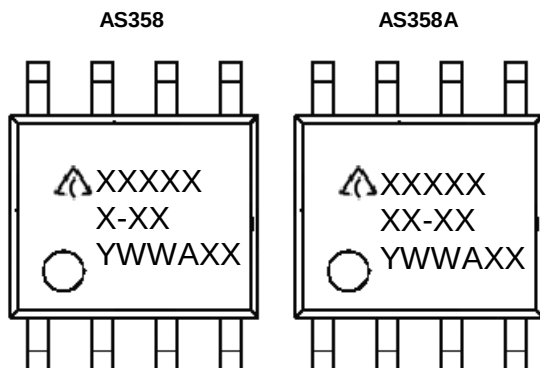


First and Second Lines: Logo and Marking ID
Third Line: Date Code
Y: Year
WW: Work Week of Molding
A: Assembly House Code
XX: Internal Code

(2) MSOP-8

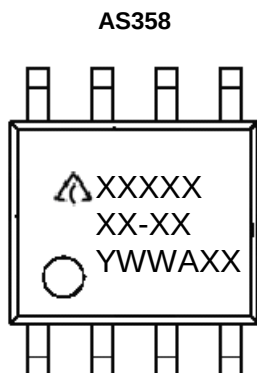

First and Second Lines: Logo and Marking ID
Third Line: Date Code
Y: Year
WW: Work Week of Molding
A: Assembly House Code
XX: Internal Code


(3) PDIP-8

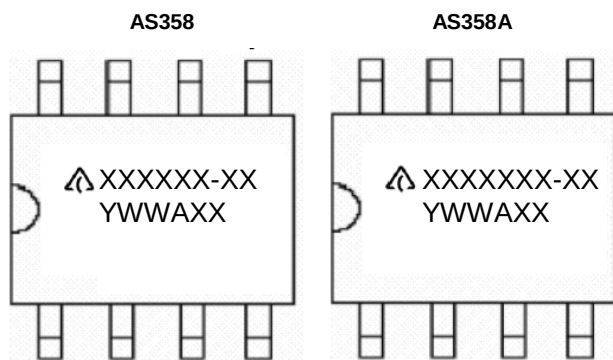

First Line: Logo and Marking ID
Second Line: Date Code
Y: Year
WW: Work Week of Molding
A: Assembly House Code
XX: Internal Code


Marking Information (Cont.)

(4) TDIP-8

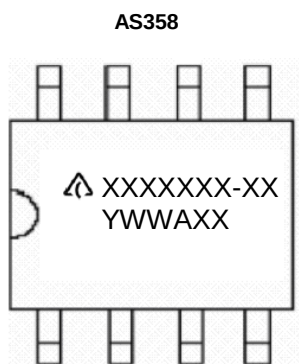


First Line: Logo and Marking ID
Second Line: Date Code
Y: Year
WW: Work Week of Molding
A: Assembly House Code
XX: Internal Code

(5) TSSOP-8

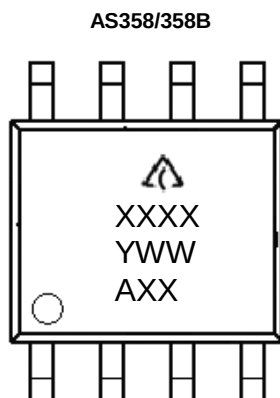

First Line: Logo
Second Line: Marking ID
Third and Fourth Lines: Date Code
Y: Year
WW: Work Week of Molding
A: Assembly House Code
XX: Internal Code


Package Outline Dimensions (All dimensions in mm(inch).)

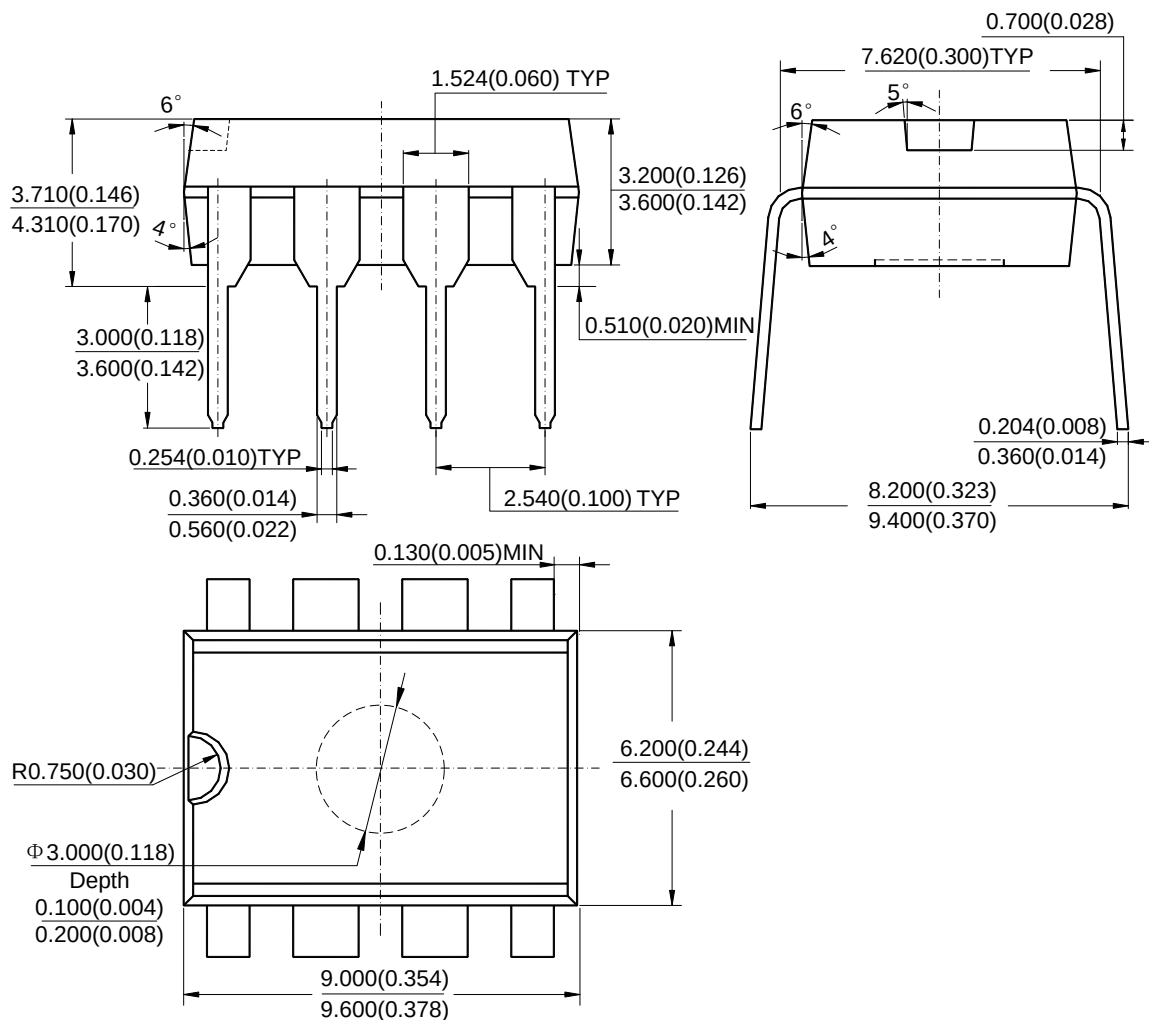(1) Package Type: PDIP-8


Note: Eject hole, oriented hole and mold mark is optional.


Package Outline Dimensions (Cont. All dimensions in mm(inch).)

(2) Package Type: TDIP-8

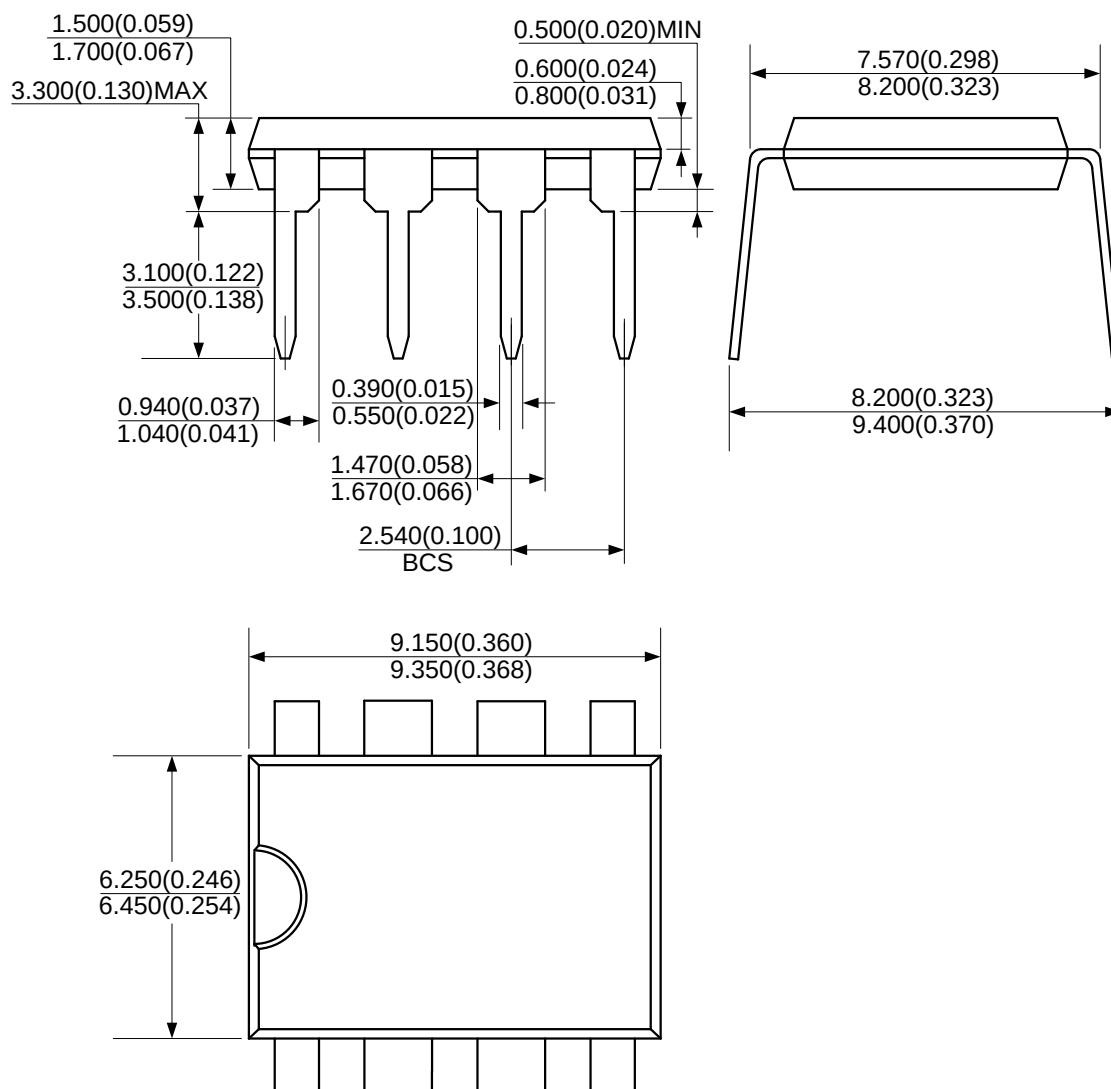


Note: Eject hole, oriented hole and mold mark is optional.

Package Outline Dimensions (Cont. All dimensions in mm(inch).)

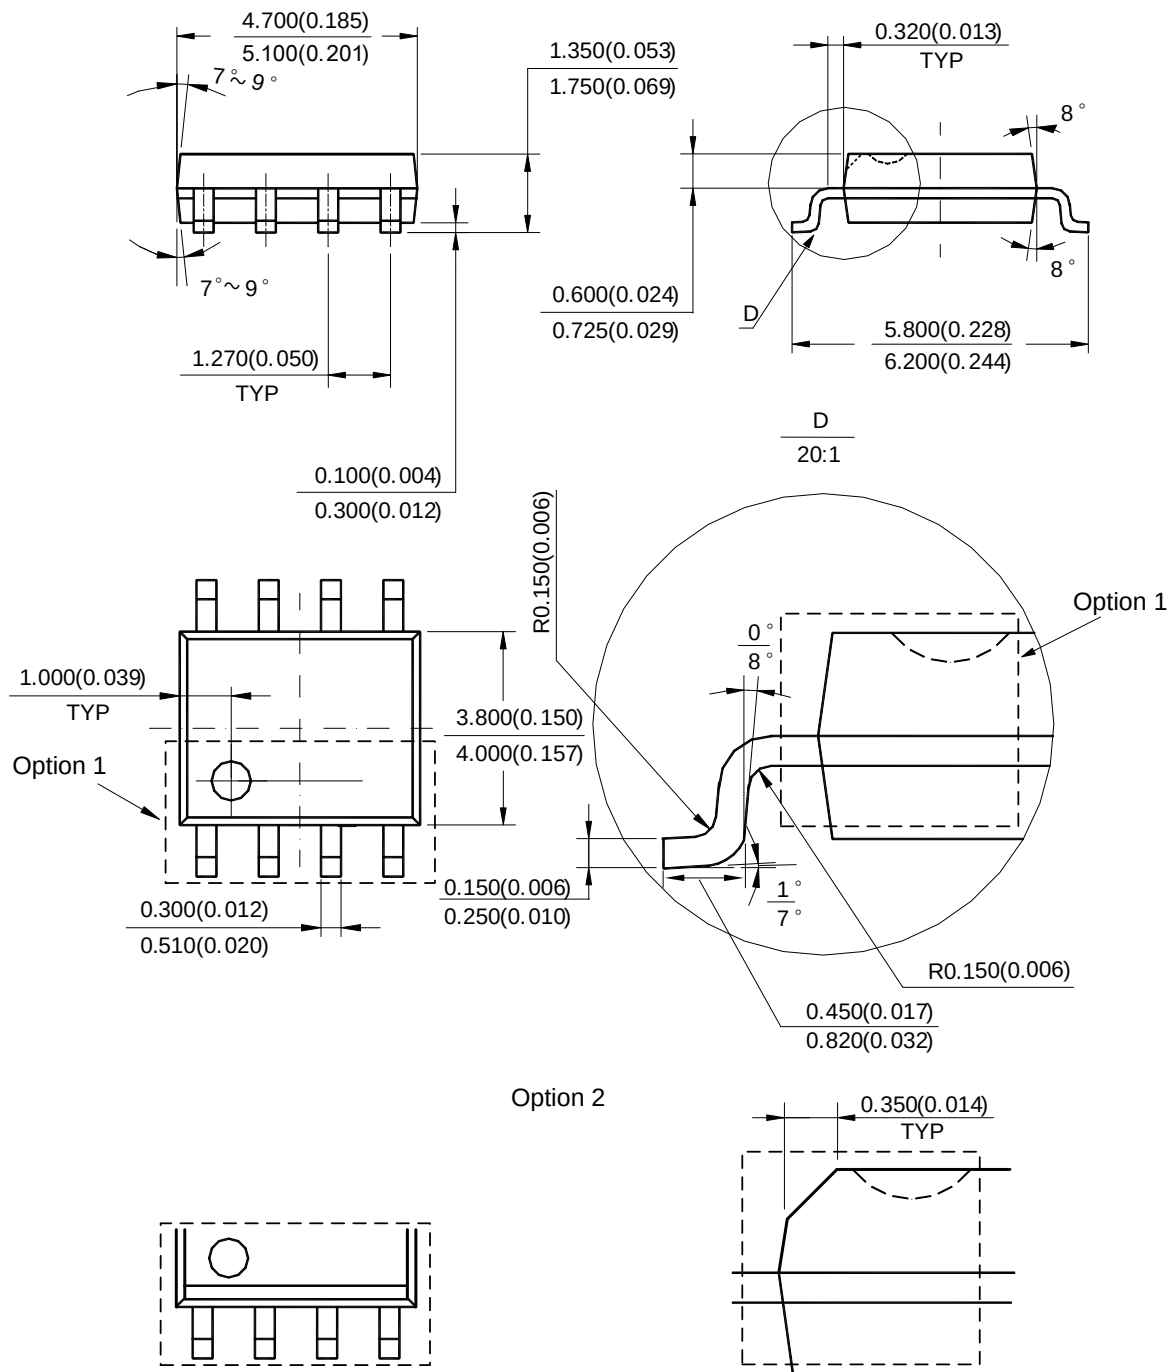(3) Package Type: SO-8


Note: Eject hole, oriented hole and mold mark is optional.


Package Outline Dimensions (Cont. All dimensions in mm(inch).)

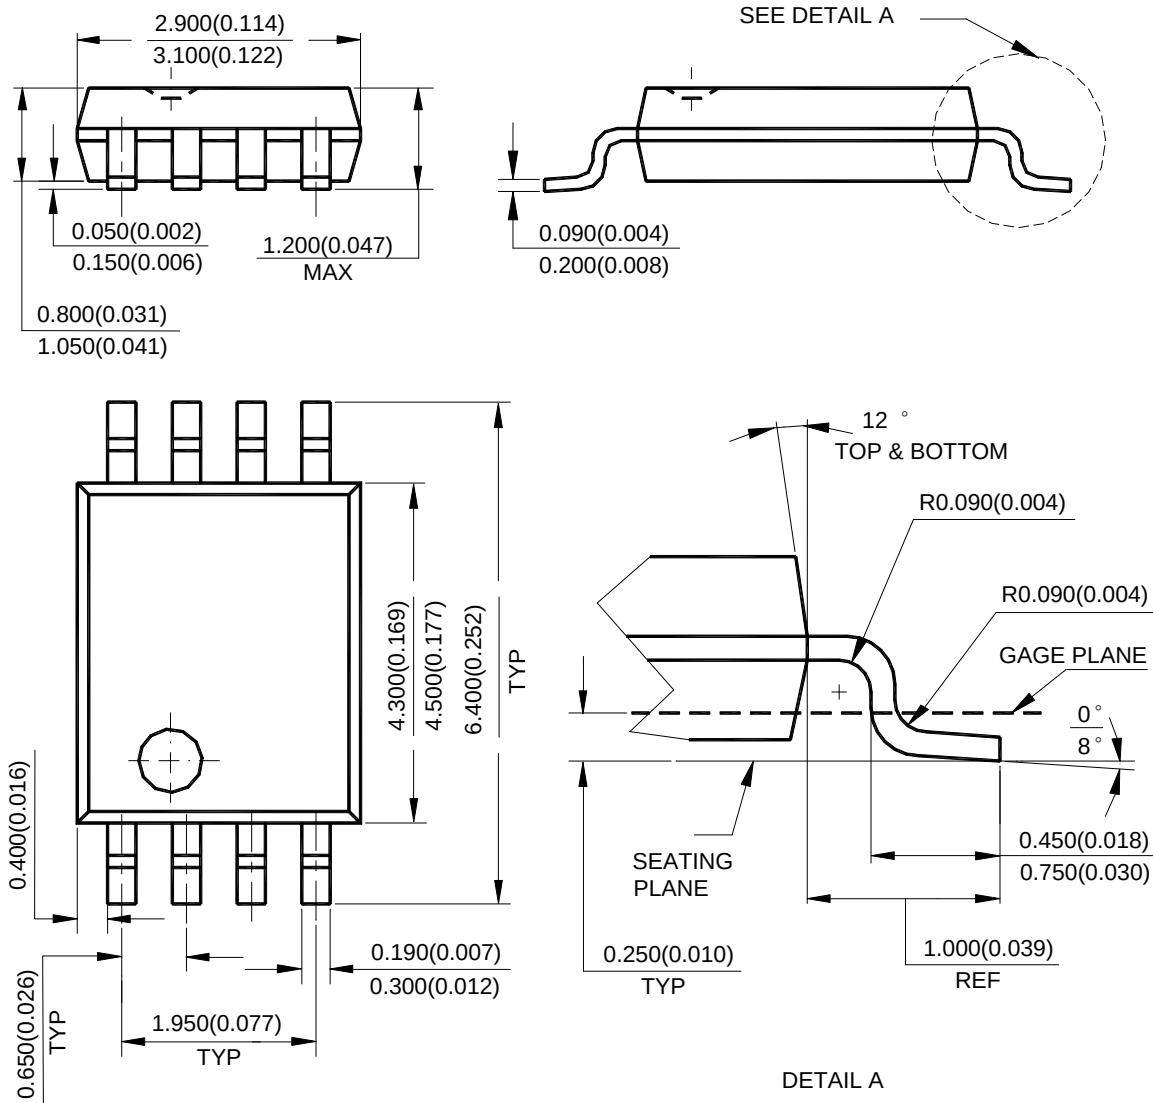(4) Package Type: TSSOP-8


Note: Eject hole, oriented hole and mold mark is optional.

Package Outline Dimensions (Cont. All dimensions in mm(inch).)


(5) Package Type: MSOP-8

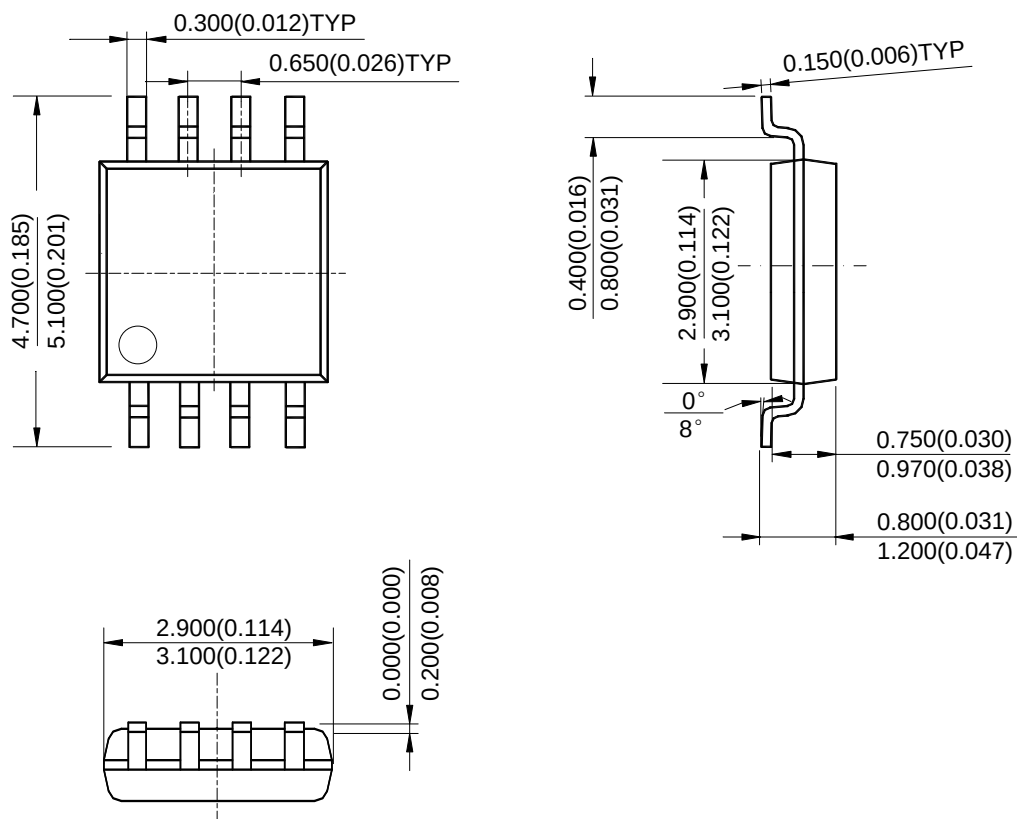

Note: Eject hole, oriented hole and mold mark is optional.

Suggested Pad Layout


(1) Package Type: SO-8

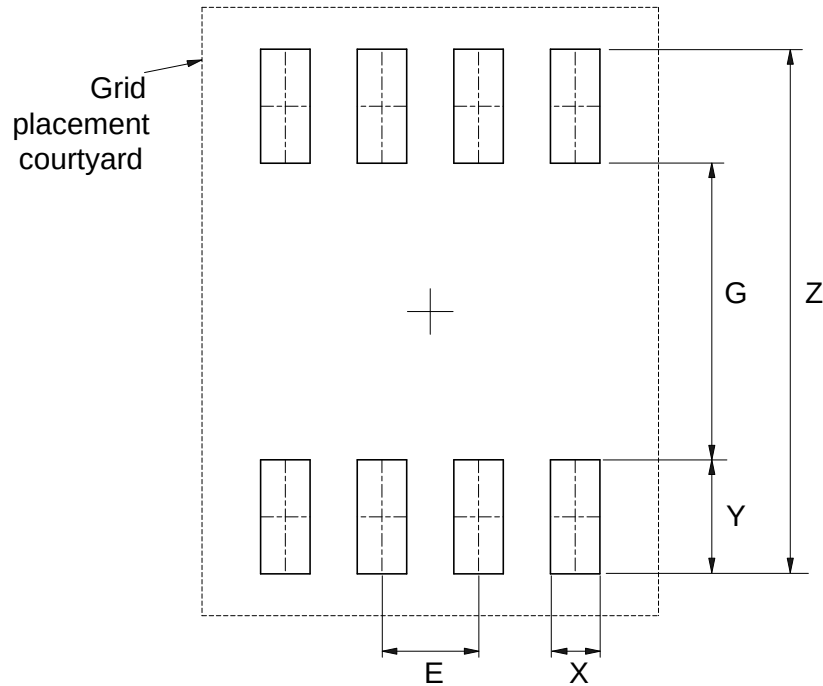

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	1.270/0.050

Suggested Pad Layout (Cont.)


(2) Package Type: TSSOP-8

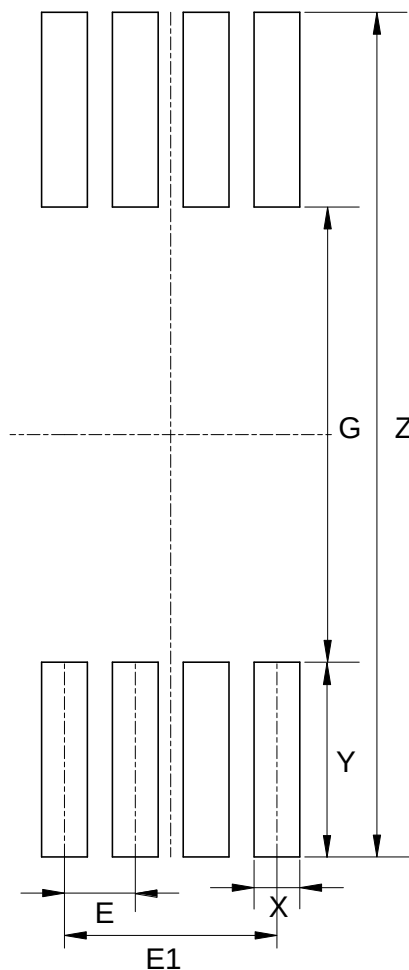

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)	E1 (mm)/(inch)
Value	7.720/0.304	4.160/0.164	0.420/0.017	1.780/0.070	0.650/0.026	1.950/0.077

Suggested Pad Layout (Cont.)

(3) Package Type: MSOP-8

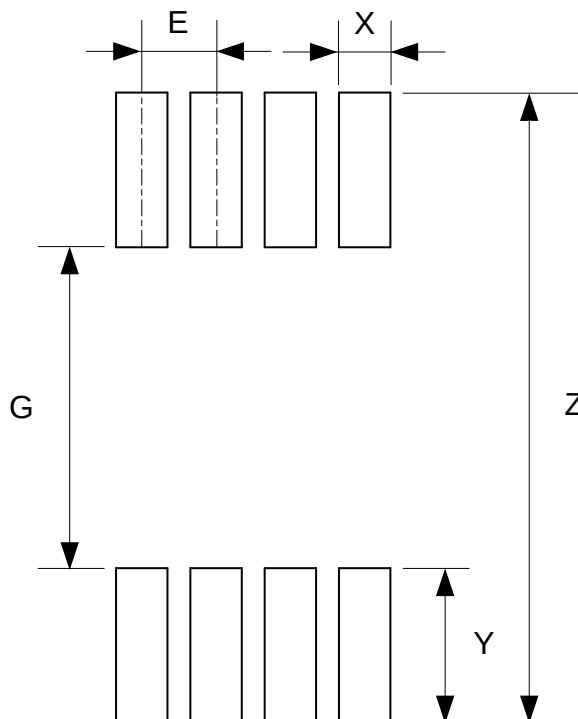

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)
Value	5.500/0.217	2.800/0.110	0.450/0.018	1.350/0.053	0.650/0.026

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru