

COMPACT POWER RELAY

1 POLE - 25A (For Automotive Applications)

FTR-G1 Series

■ FEATURES

- Compact for high density packaging
 - High contact capacity with proven contact material (min. 100,000 operations, 14V, 25A)
 - Coil power savings (640mW nominal achieved with state-of-the-art magnetic analysis/design)
 - Ease of PCB layout (all terminals on perimeter, coil and contact terminals separated)
 - Lower noise (57dB average at 5cm)
 - RoHS compliant
- Please see page 5 for more information



■ APPLICATIONS

- Power window
- Door lock
- Tilt steering
- Sunroof
- Power seat
- Wiper/IWW
- Retractable antenna

■ PARTNUMBER INFORMATION

[Example] FTR-G1 C N 010 W1
 (a) (b) (c) (d) (e)

(a)	Relay type	FTR-G1: FTR-G1 Series	
(b)	Contact configuration	C	: 1 form C
(c)	Contact gap	N	: 0.25mm
(d)	Coil rated voltage	010	: 9...12VDC Coil rating table at page 3
(e)	Contact material	W1	: Silver-tin oxide indium

Actual marking does not carry the type name: "FTR"

E.g.: Ordering code: FTR-G1CN010W1

Actual marking: G1CN010W1

FTR-G1 SERIES

■ SPECIFICATION

Item	FTR-G1		
Contact Data	Configuration	1 form C	
	Material	Silver-tin oxide indium (AgSnO ₂)	
	Contact voltage drop	Max. 100mV at 1A, 6VDC (after stabilization)	
	Contact rating	25A at 14VDC (locked motor load)	
	Max. carrying current * ¹	25A/1 hour (25 °C, 100% rated coil voltage)	
	Max. switching voltage	16VDC (reference)	
	Max. switching current	35A (reference)	
	Min. switching load * ²	1A, 6VDC	
Life	Mechanical	Min. 1 x 10 ⁶ operations	
	Electrical	* Min. 100 x 10 ³ operations, 14VDC, 25A inrush power window motor (1 operation: 1 forward and 1 reverse) * Min. 100 x 10 ³ operations 14VDC, 20A inrush door locked motor	
Coil Data	Rated power	640mW	
	Operate power	237mW	
	Operating temperature range	-40 °C to +85 °C (no frost)	
Timing Data	Operate (at nominal voltage)	Max. 10 ms (without bounce)	
	Release (at nominal voltage)	Max. 5 ms (without bounce, no diode)	
Insulation	Resistance (initial)	Min. 100MΩ at 500VDC	
	Dielectric withstanding voltage	Open contacts	500VAC , 1 min.
		Between coil and contacts	500VAC, 1 min.
Other	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.5mm
	Shock	Misoperation	100m/s ² minimum (10G)
		Endurance	1,000m/s ² minimum (100G)
	Weight	Approximately 3.5 g	
	Sealing	Plastic sealed cat III	

* 1 Need to consider the heat to PCB when max. current is more than 10A

* 2 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-G1 SERIES

COIL RATING


Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Coil Power at Nominal Voltage (W)
009	9	126	5.4	0.75	0.64
			6.8 (at 85 °C)		
010	10	160	6.5	0.8	
			8.2 (at 85 °C)		
012	12	225	7.3	1	
			9.2 (at 85 °C)		

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise indicated.


* Specified operate values are valid for pulse wave voltage.

REFERENCE DATA


Operate/release voltage distribution

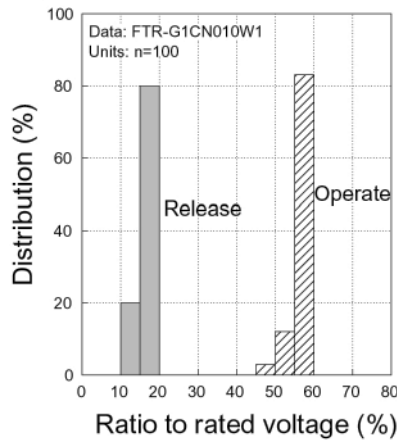


Contact resistance distribution

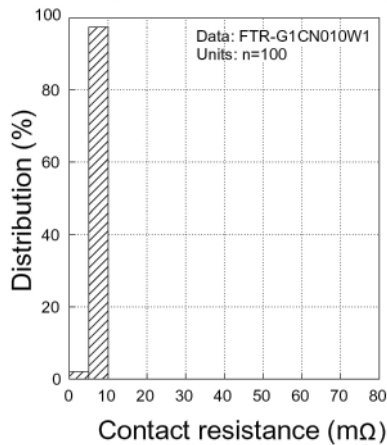


Contact current

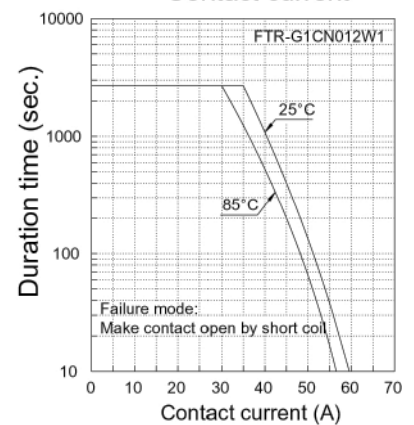


Ambient temperature vs voltage

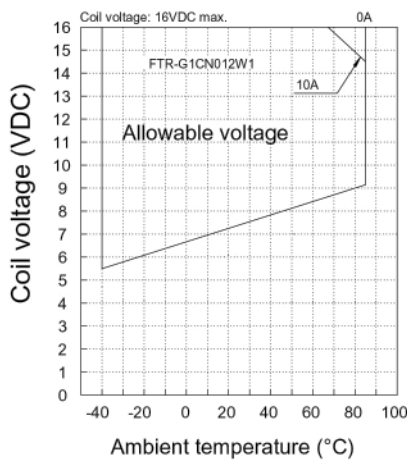



Coil temperature rise

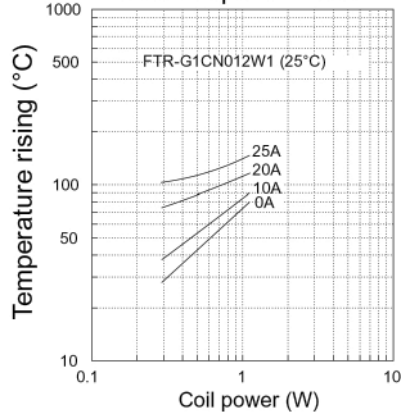



Coil temperature rise

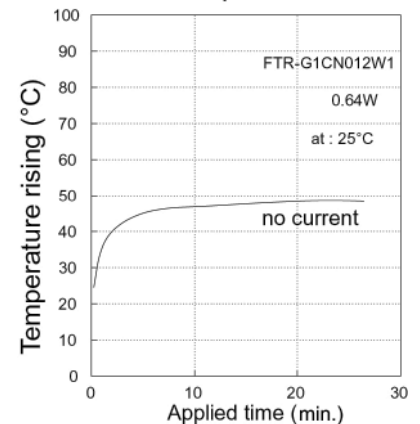


FTR-G1 SERIES

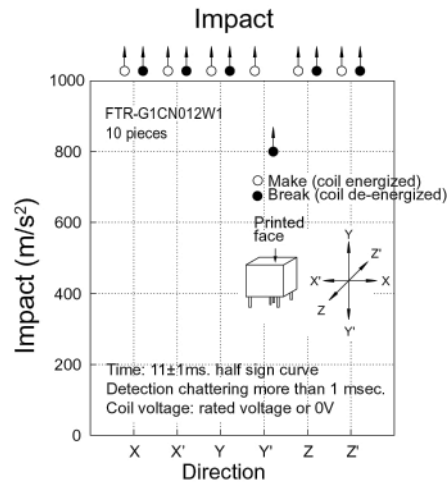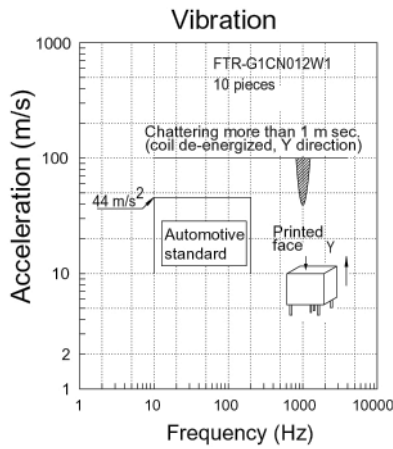


DIMENSIONS

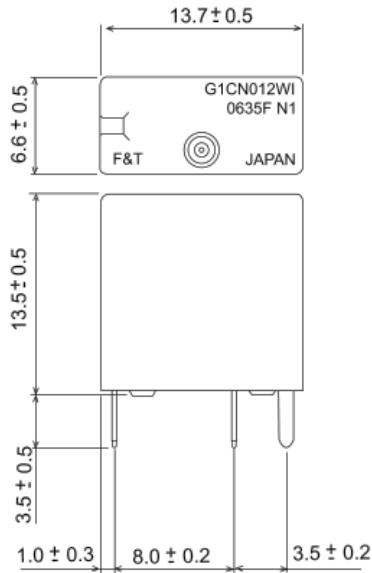


- Mounting hole layout (bottom view)

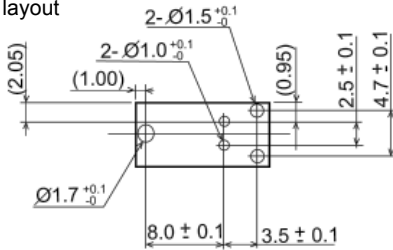


- Schematics



- Marking (example)

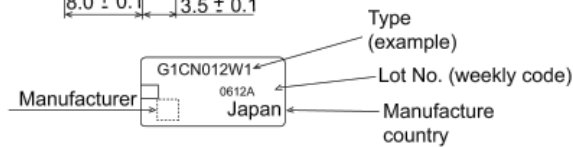

- Tube

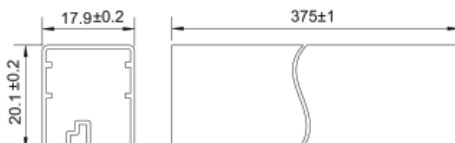

Unit: mm

RoHS Compliance and Lead Free Information

1. General Information

- All automotive relays produced by Fujitsu Components are compliant with RoHS directive 2002/95/EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All our automotive relays are lead-free.
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to through hole mounted electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January 11, 2011

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru