

Specification

Part No.	:	AA.166.A.301111
Product Name	:	Ulysses Ultra Low Profile Magnetic Mount GPS/GLONASS/Galileo/BeiDou Antenna
Features	:	Dimensions: 37.8*40.4*10mm Cable: 3m RG-174 Connector: SMA(M) IP67 Rated Cable Length and Connector Customizable RoHS & REACH Compliant



1. Introduction

The Ulysses miniature ultra low profile (only 10mm in height) GNSS antenna is designed for applications which require high positioning accuracy by combining signals from GPS, GLONASS, Galileo and BeiDou systems. The tiny size of this antenna allows it to be used in very space restricted environments.

A high gain wide-band patch antenna on an integral ground delivers reliable performance. A fully IP67 waterproof rated and UV resistant enclosure allows use in outdoor environments. Mid SAW filter configuration eliminates potential LNA burn-out from nearby out of band radiated power bursts from other antennas that may be co-located nearby.

The antenna is manufactured to strict first tier Automotive quality controlled manufacturing process in IATF16949 approved facility. Custom cables and connectors available on request. Contact your regional Taoglas customer support team for more information.

2. Specification


GPS-Galileo-GLONASS-BeiDou					
Center Frequency	Galileo E1	BeiDou	GPS	Galileo E2	GLONASS
	1559 MHz	1561 MHz	1575.42±1.02 3 MHz	1592 MHz	1602±5 MHz
Passive Antenna Efficiency (%)	46.13	51.33	34.56	49.74	44.55
Passive Antenna Average gain (dBi)	-3.36	-2.90	-4.61	-2.41	-3.51
Passive Antenna Peak gain	1.92	2.34	0.34	2.10	1.81
VSWR	<5				
Impedance	50Ω				
Axial Ratio	Galileo E1:28.94 Beidou:<27.29 GPS:<0.93 Galileo:< 7.76 GLONASS:< 16.15				
Polarization	RHCP				
	LNA and Filter Electrical Properties				
Center Frequency	BeiDou:1561±2.046 MHz GPS:1575.42±1.023 MHz GLONASS:1602±5 MHz Galileo:1575.5±MHz				
Pout 1dB gain Compression point	-6dBm Min. -2 dbm Typ. (1561MHz,1575.42MHz,1602MHz,1559MHz-1592MHz)				
Output Impedance	50 Ohm				
VSWR	< 5:1				
Return Loss	-3 dB Max.				
LNA Gain, Current Draw, and Noise Figure @GPS	Frequency (MHz)	Voltage	LNA Gain(Typ)		Noise Figure(Typ)
	1559	3-5V	31.37		3.24
	1561		31.31		3.16
	1575.42		29.75		2.66
	1591		31.21		3.00
	1602		30.43		2.97

MECHANICAL	
Antenna Dimensions	40.4 x 37.8 x 10mm
Housing Material	UV Resistant ABS
Cable	3m RG-174
Connector	SMA(M)
Magnet force	
ENVIRONMENTAL	
Operation Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Humidity	Non-condensing 40°C 95% RH

3. Antenna Characteristics

3.1 GPS-GLONASS-GALILEO-BEIDOU Antenna


3.1.1 Block Diagram (Active antenna)

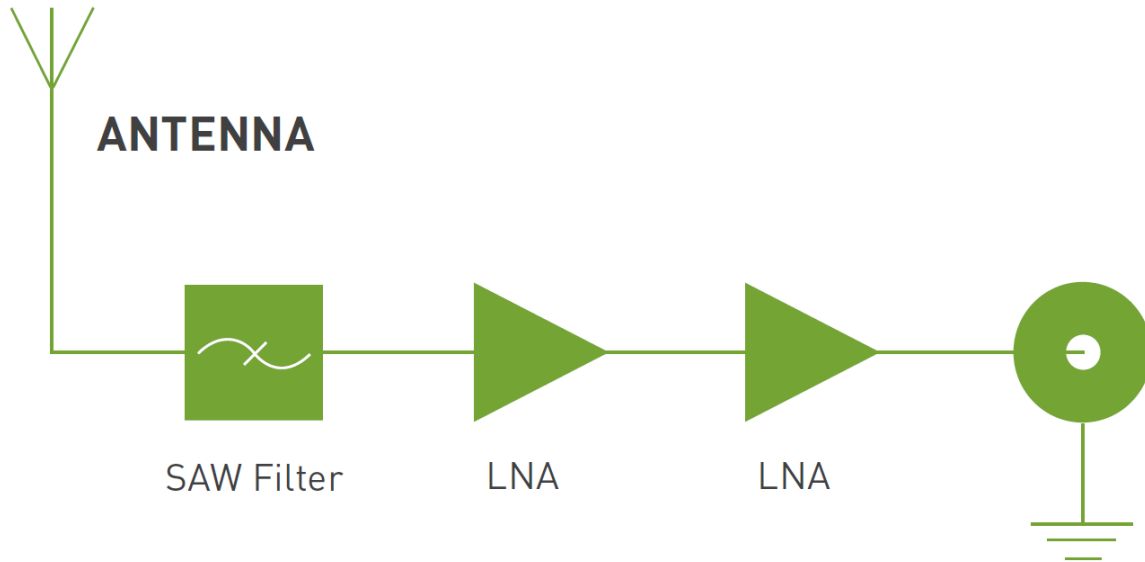


3.1.2 Test Setup




3.1.3 Return Loss (Passive antenna)

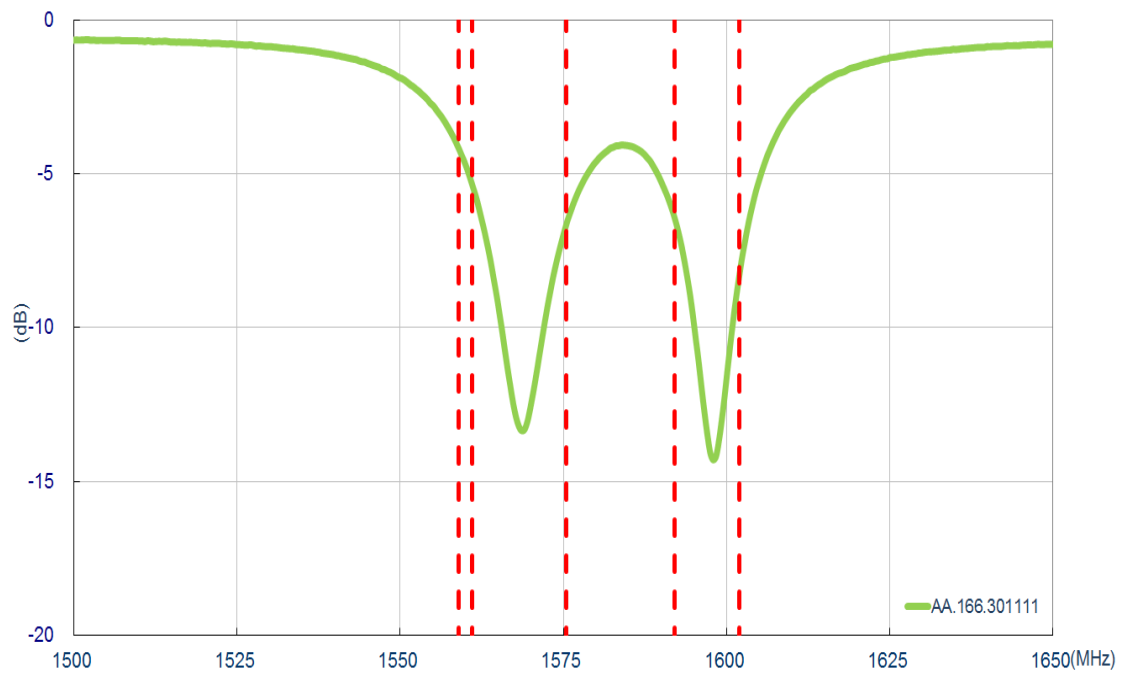


3.1.4 VSWR (Passive antenna)

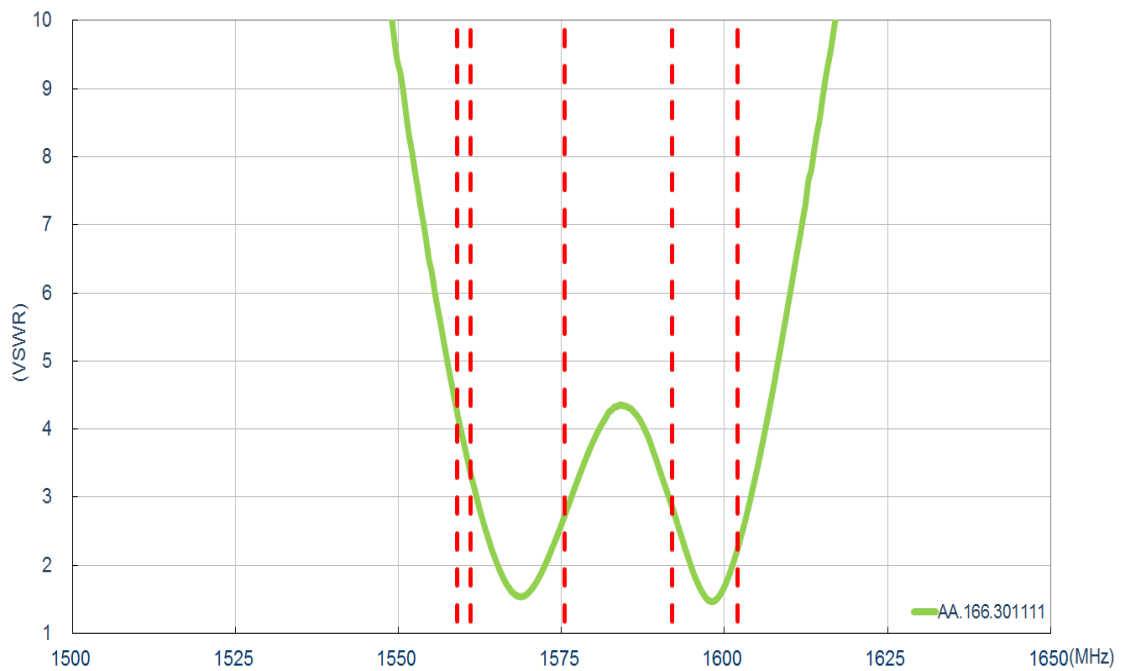


3.1.5 Smith Chart (Passive antenna)

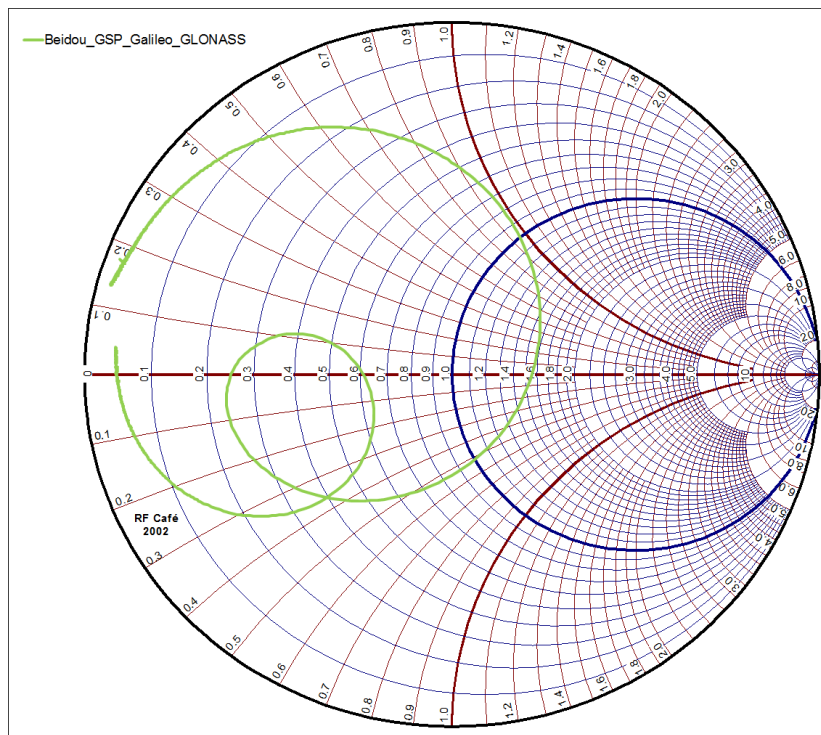


3.1.6 Efficiency (Passive antenna)

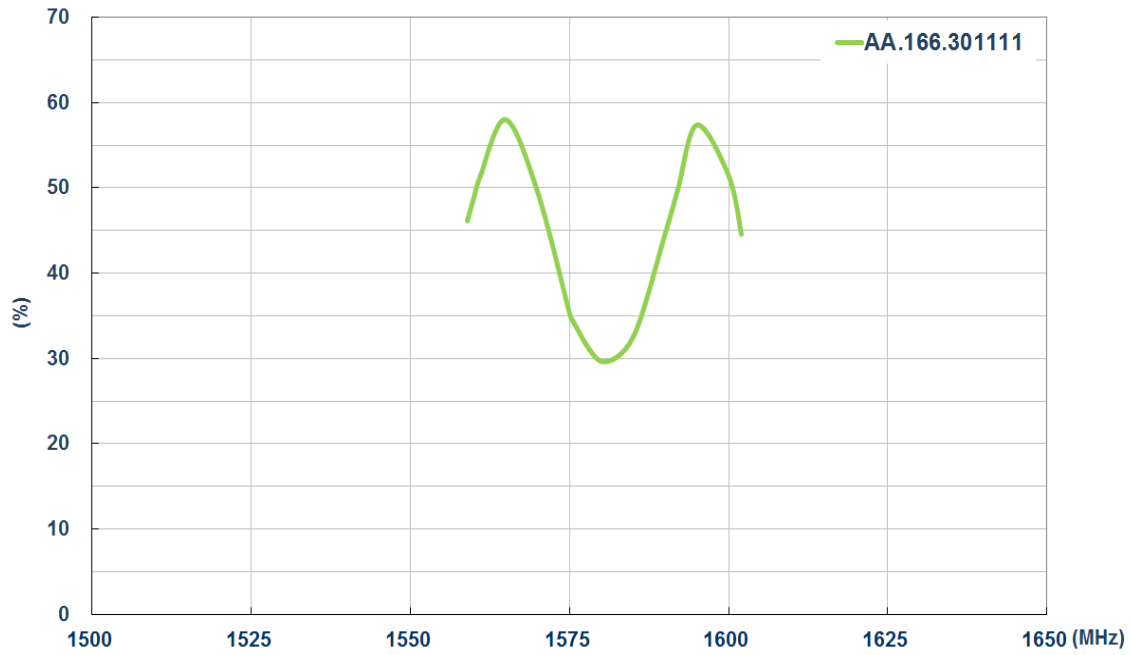

3.1.7 Average Gain (Passive antenna)



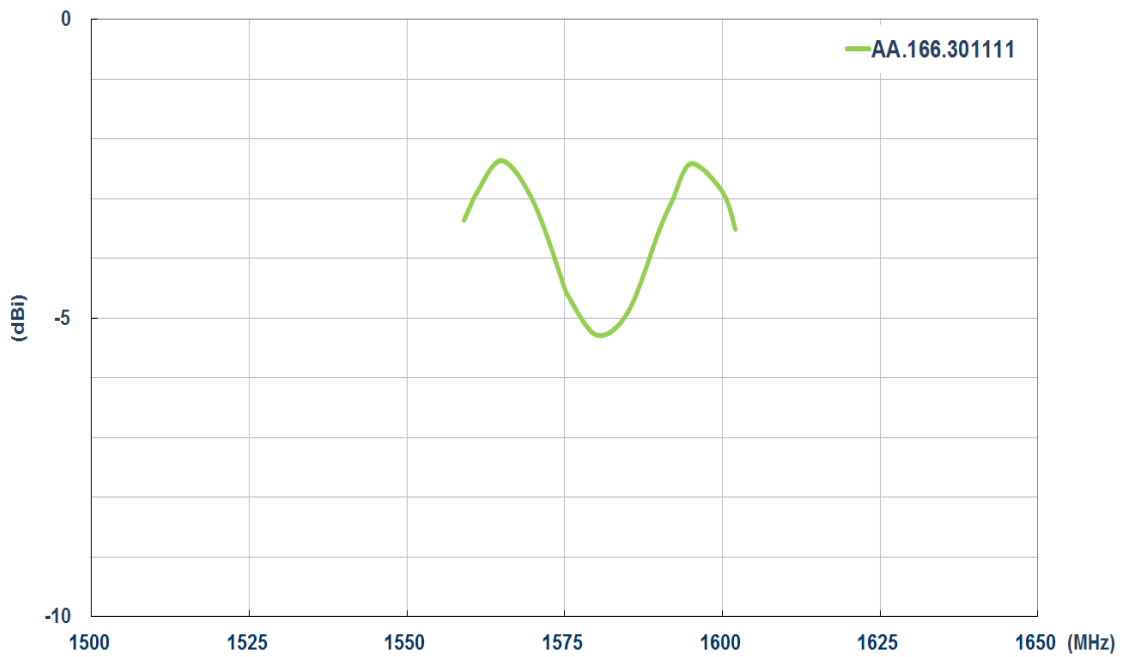


3.1.8 Peak Gain (Passive antenna)


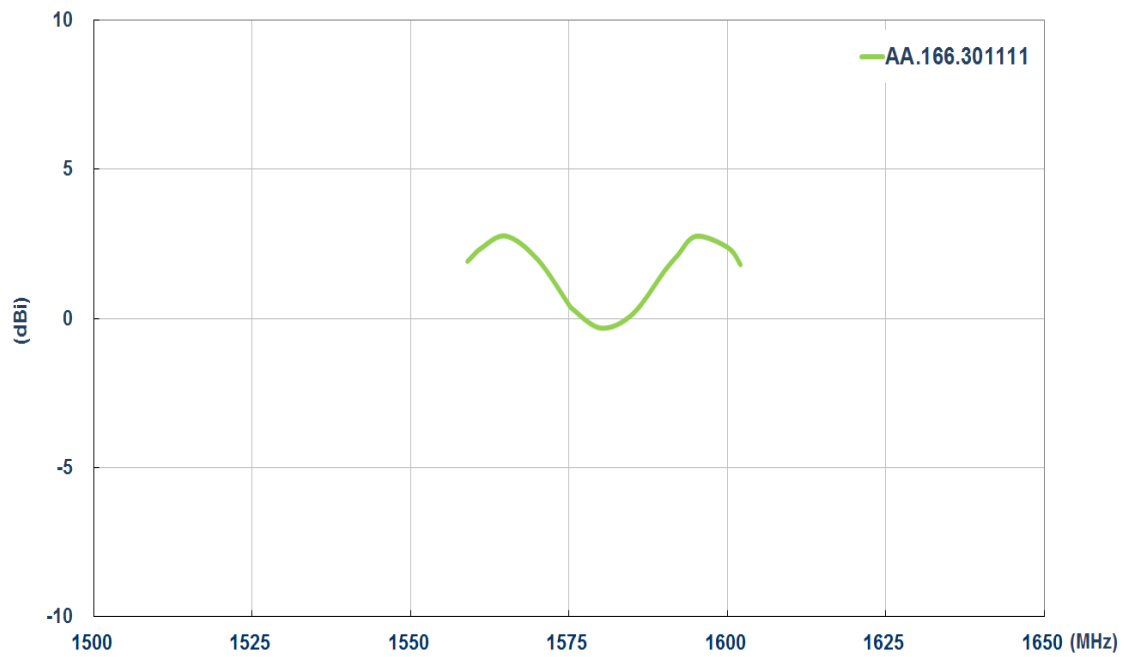




.1.9 Antenna Radiation Pattern (Passive antenna)


2D Radiation pattern

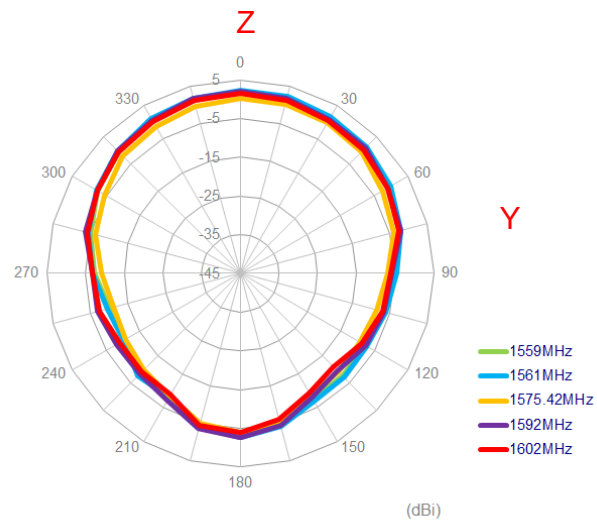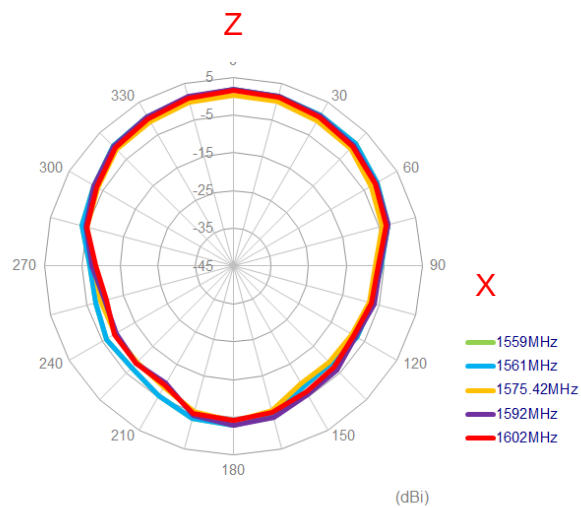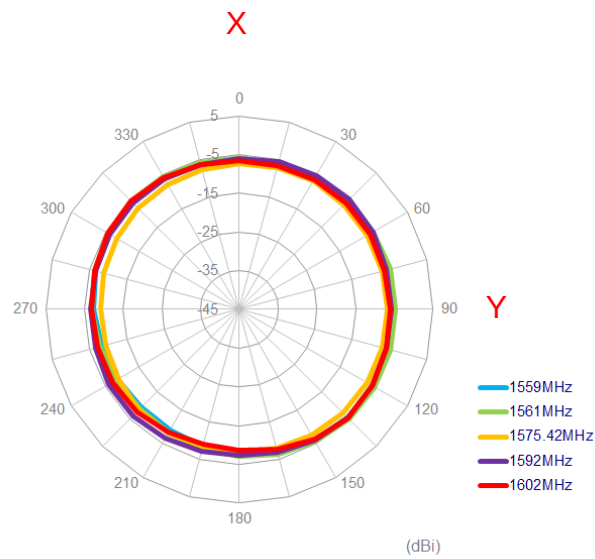


3.1.10 Axial Ratio Pattern (Passive antenna)

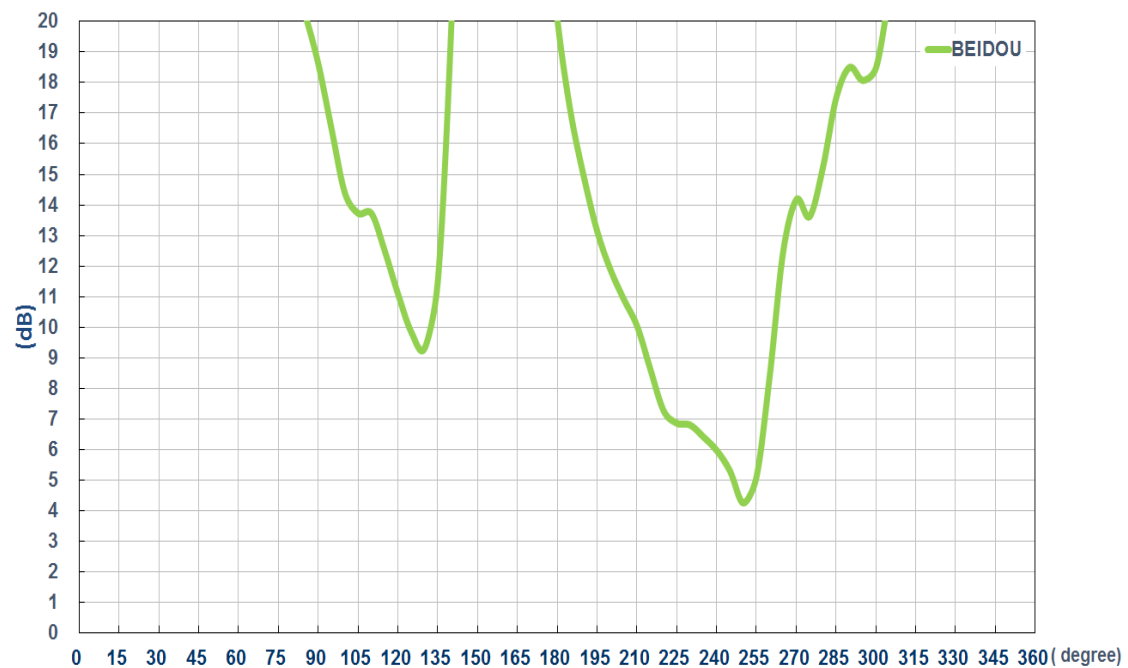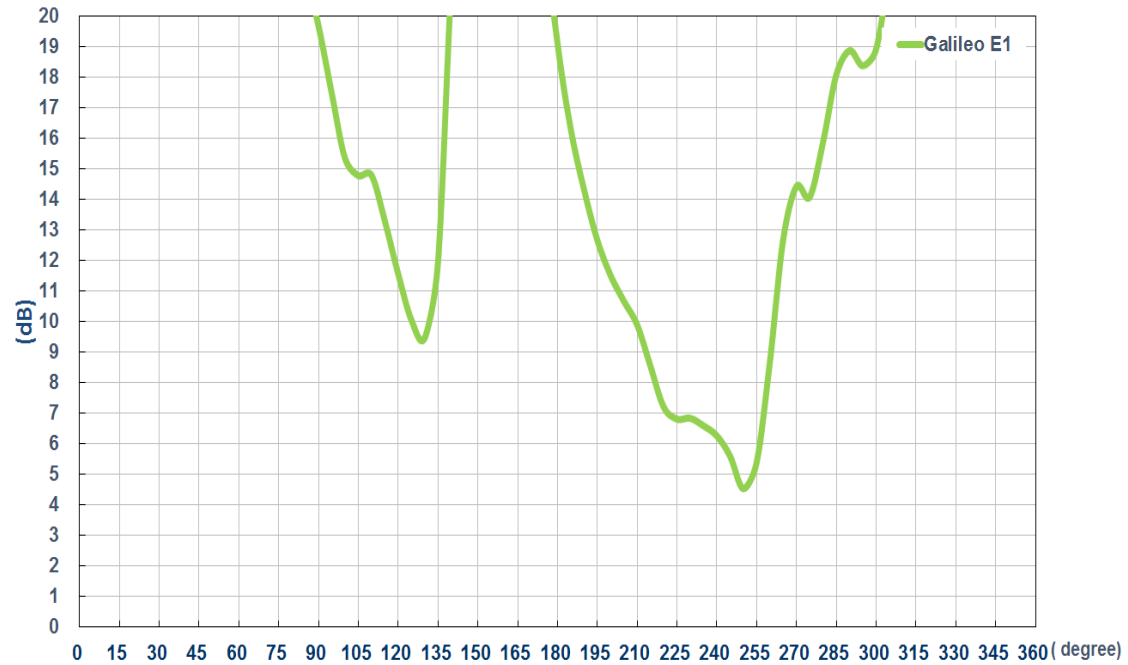

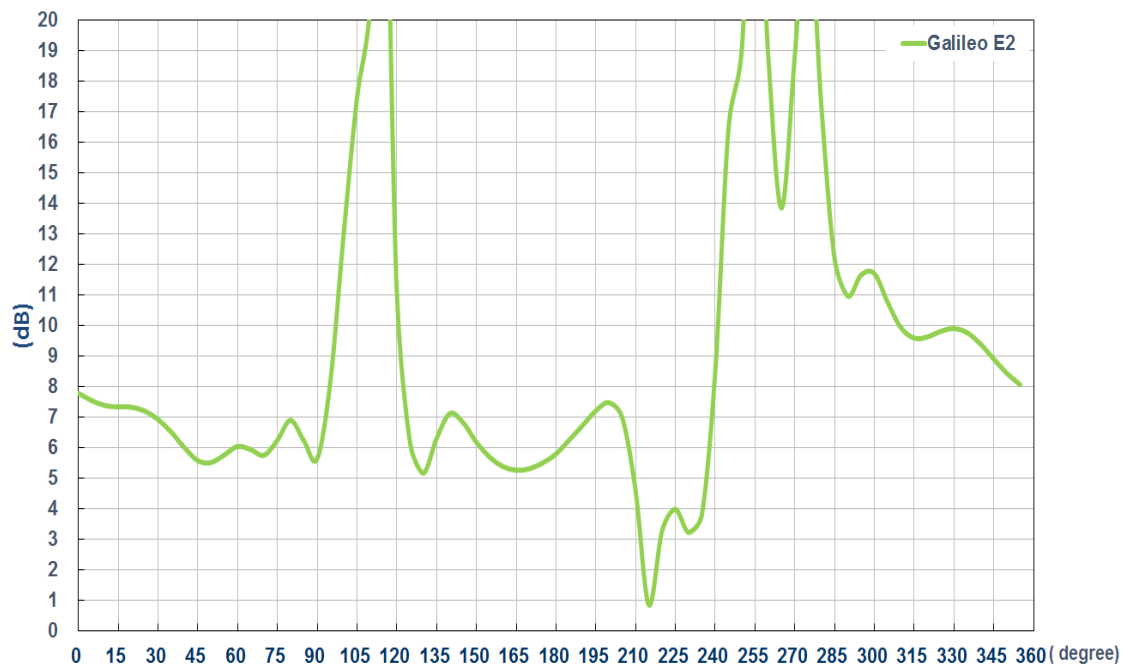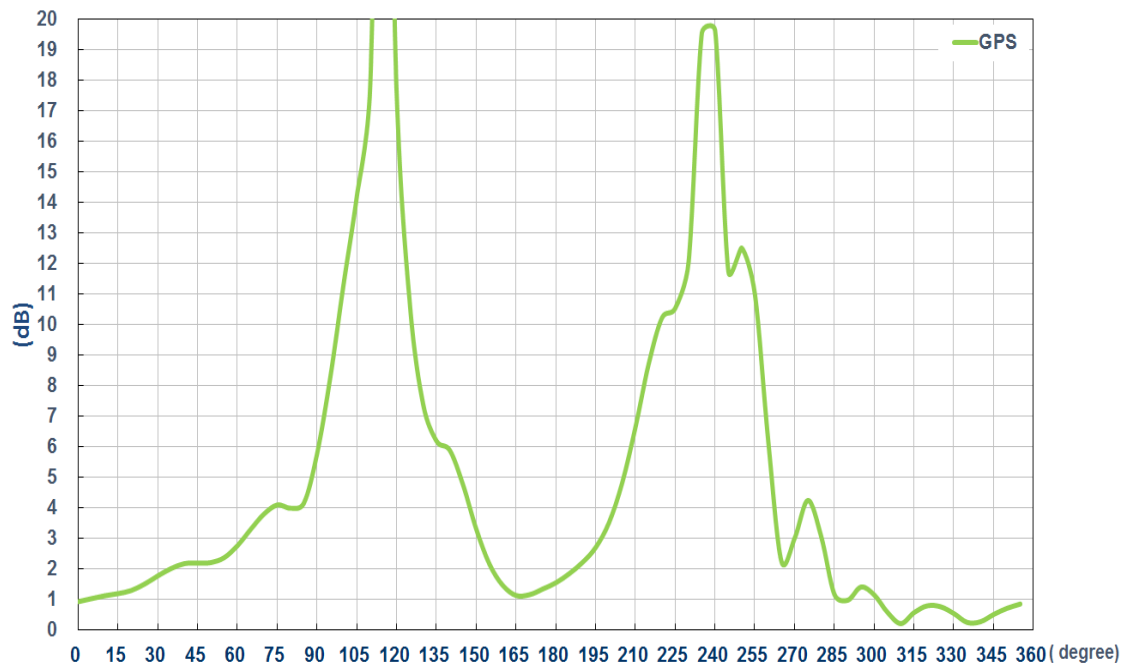


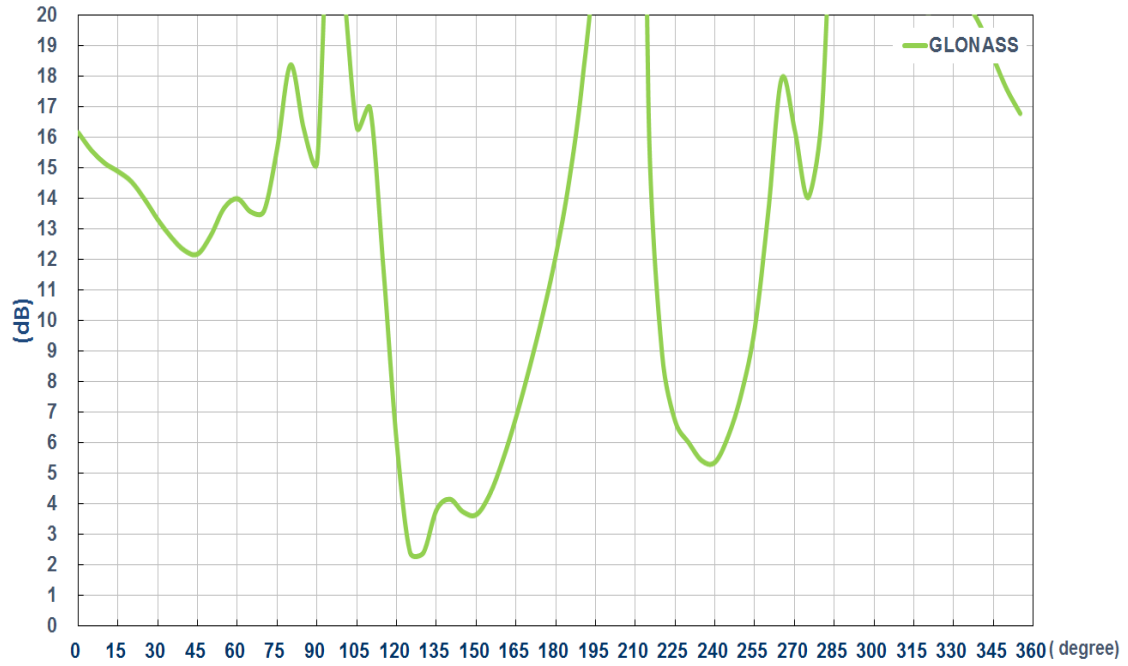

3.1.11 LNA Gain and Noise Figure (Active antenna)

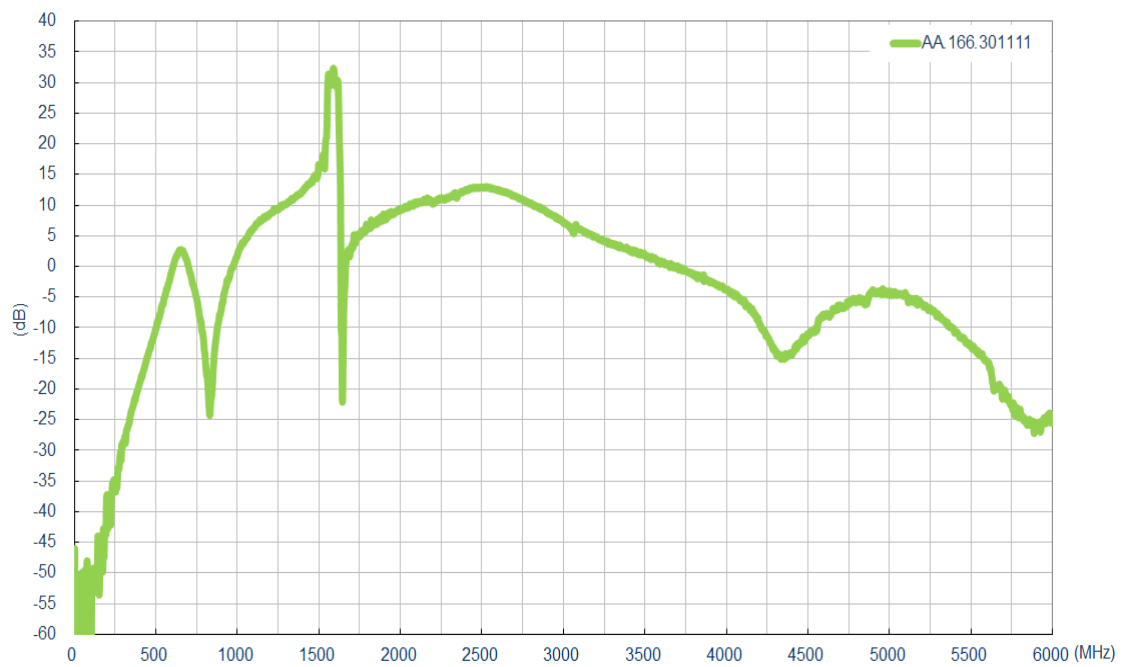


LNA Gain@3.0V

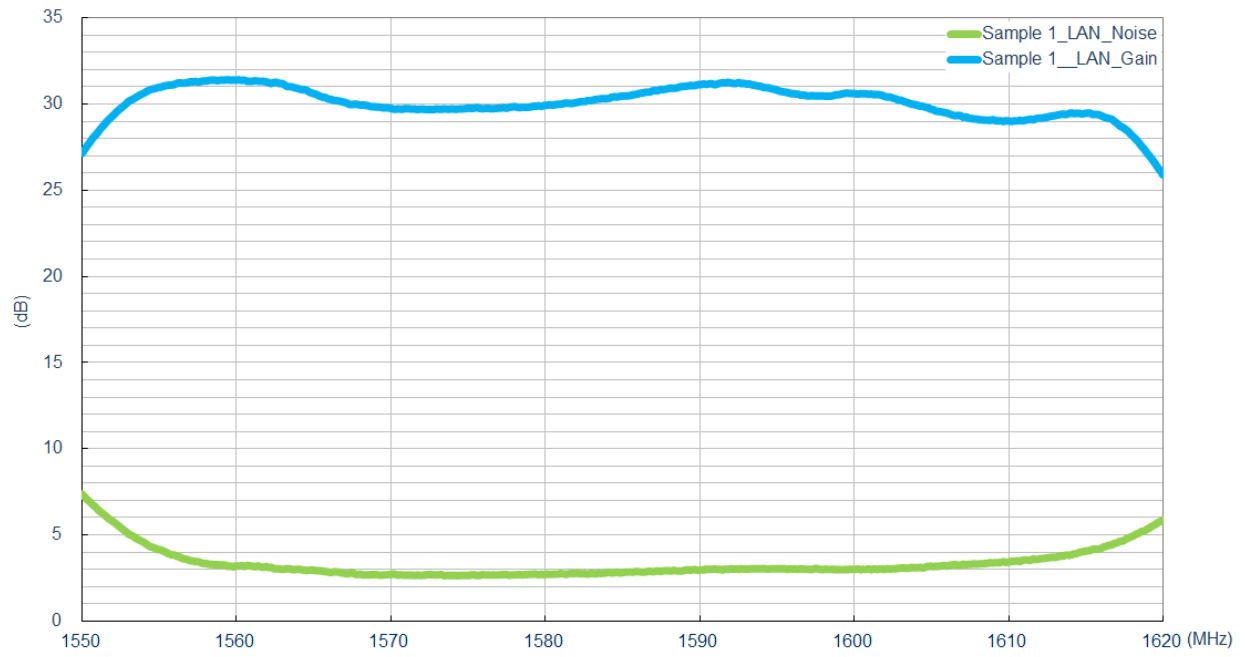


LNA Noise Figure @3.0V

4. Mechanical Drawing (Unit:mm)

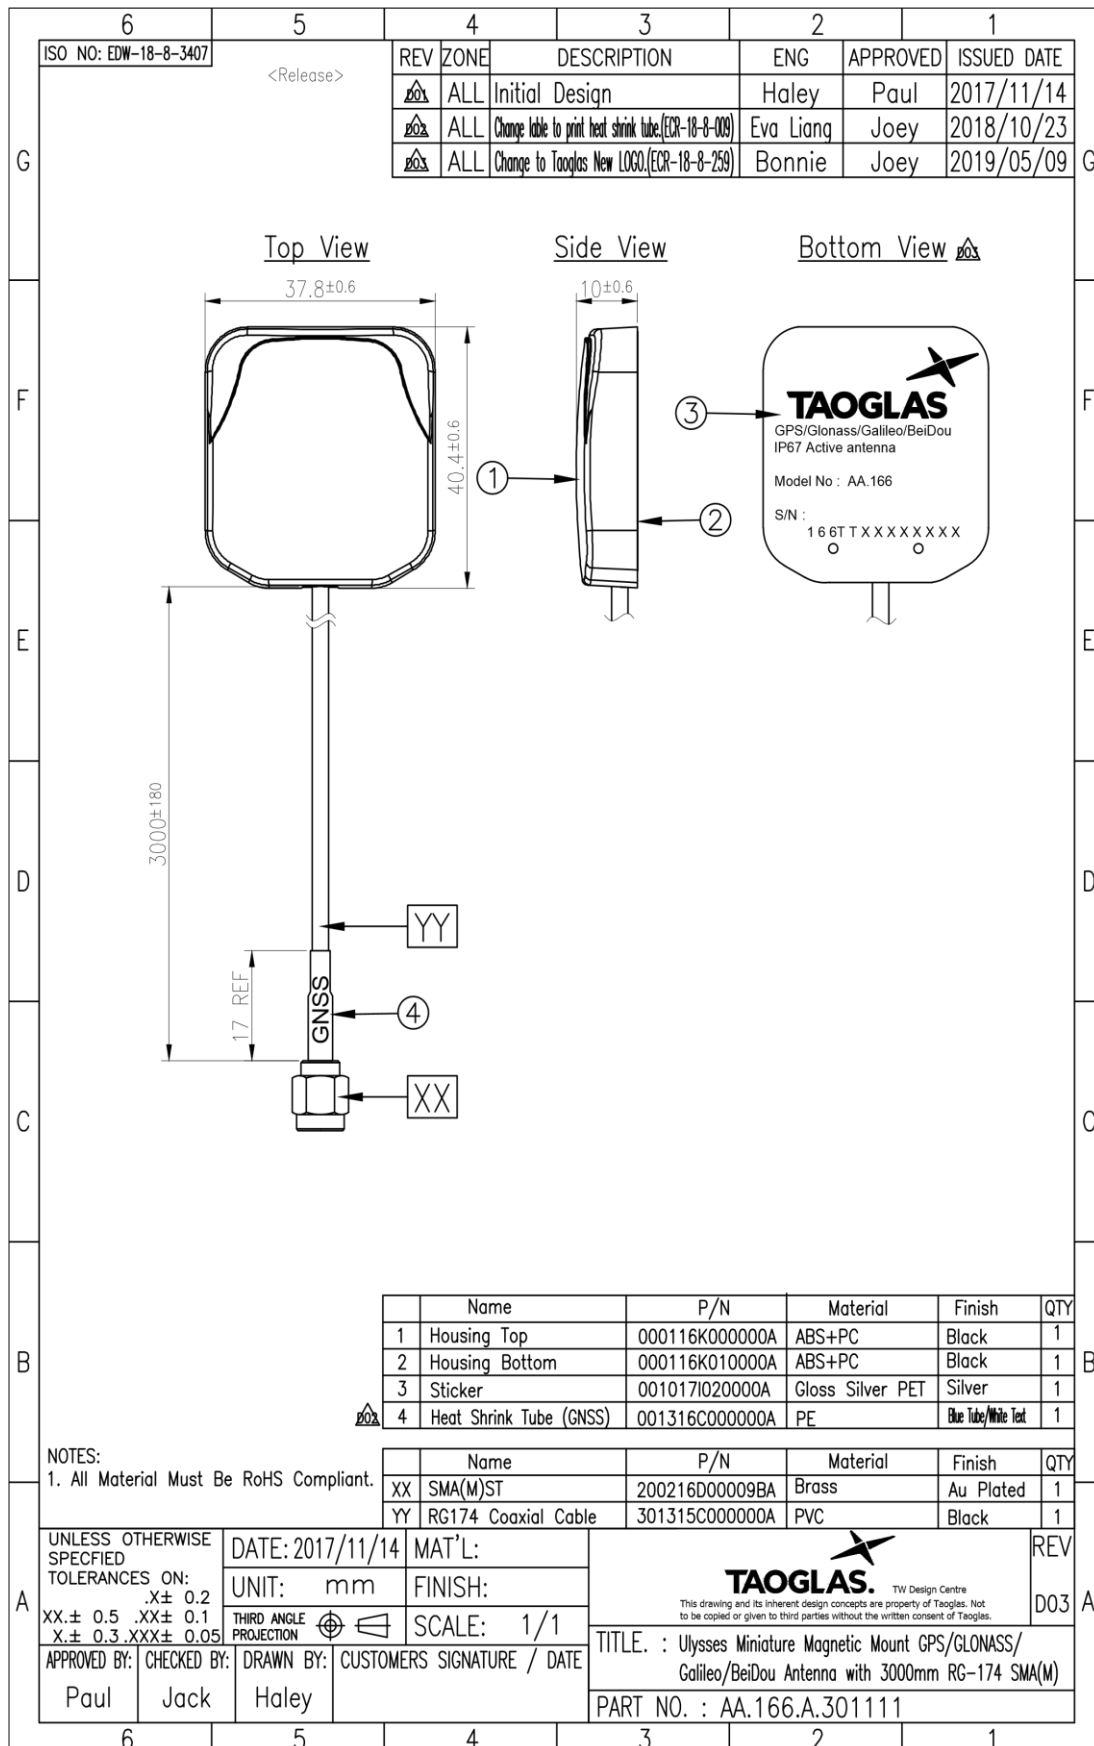


5. Packaging


1 pcs AA.166.A.301111 per PE bag
PE Bag Dimensions - 100 x 200mm
Weight - 65g

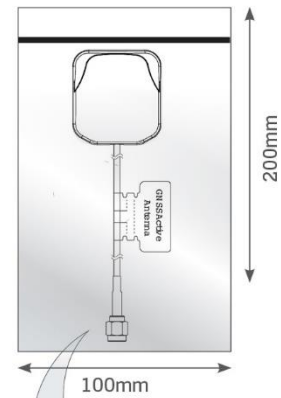

10 PE bags per large PE bags
10 pcs AA.166.A.301111 per large PE bags
Carton Dimensions - 420 x 220mm
Weight - 0.65kg



10 Large PE bags per carton
100 pcs AA.166.A.301111 per carton
Carton Dimensions - 380 x 380 x 310mm
Weight - 7.5kg

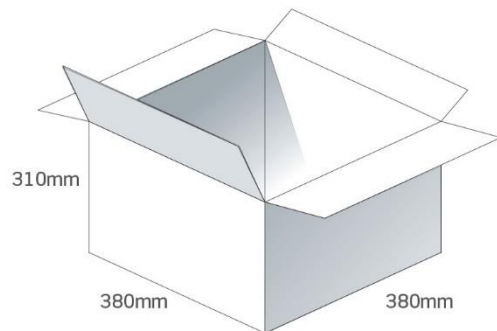

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru