




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

AC/DC SWITCHING POWER SUPPLY
AC INPUT 85~264
SINGLE CHANNEL OUTPUT
300 WATTS

FHF-SX-U1 SERIES

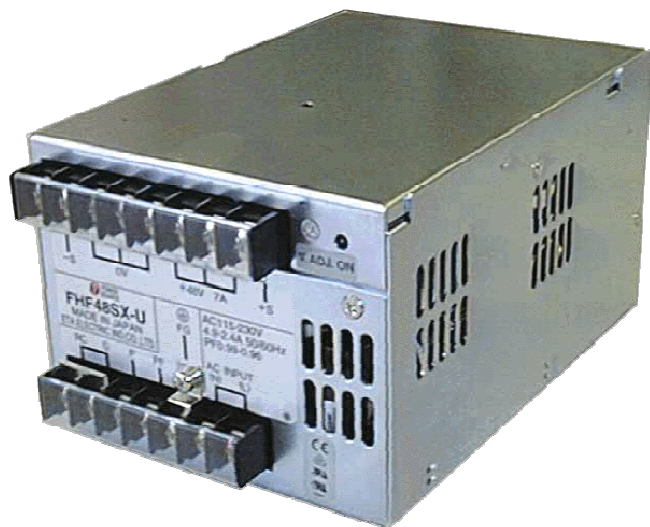

General Description

FH-Series is a new generation of power supplies. It's the latest design following international standards and market demands. This type of power supply has all in one: These supplies incorporate Power Factor Correction (PFC), low line distortion per IEC61000-3-2 and universal inputs. (EMI) complies with VDE 0871/B, EN50022/B, FCC level B. Safety complies with VDE/EN 60950-1, CSA 234. Size is compatible with WR-series. High efficiency and near unity power factor: an optimal combination of cost and performance for both power user and supplier.

Application

Industrial

Input

Input Voltage Nominal:	AC115-230V
Input Voltage Range:	AC85-264V
Input Current:	2.4-4.9A
Frequency:	50/60Hz
Input Frequency Range:	47-63Hz
Phase:	Single
Inrush Current: *1	12A(max.) at AC115V 24A(max.) at AC230V
Leakage Current:	1mA(maximum) at 25°C (rated input/output and rated input frequency)

Features

1. Power factor correction
2. Power factor > .98
3. Immunity against surge and burst

Options

N/A



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWER, (408) 778-2793 Fax: (408) 779-2753


Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

DIMENSION DIAGRAM (mm)

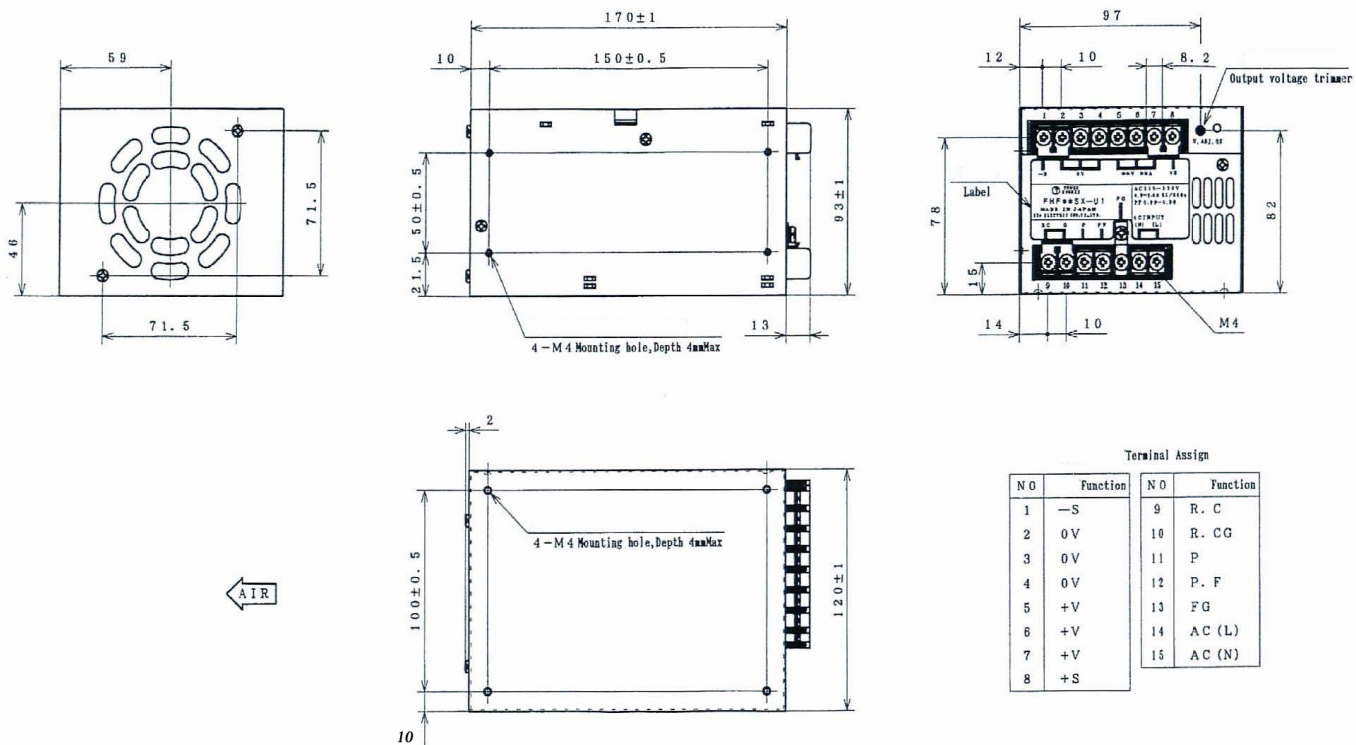

ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWER, (408) 778-2793 Fax: (408) 779-2753


Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

BLOCK DIAGRAM

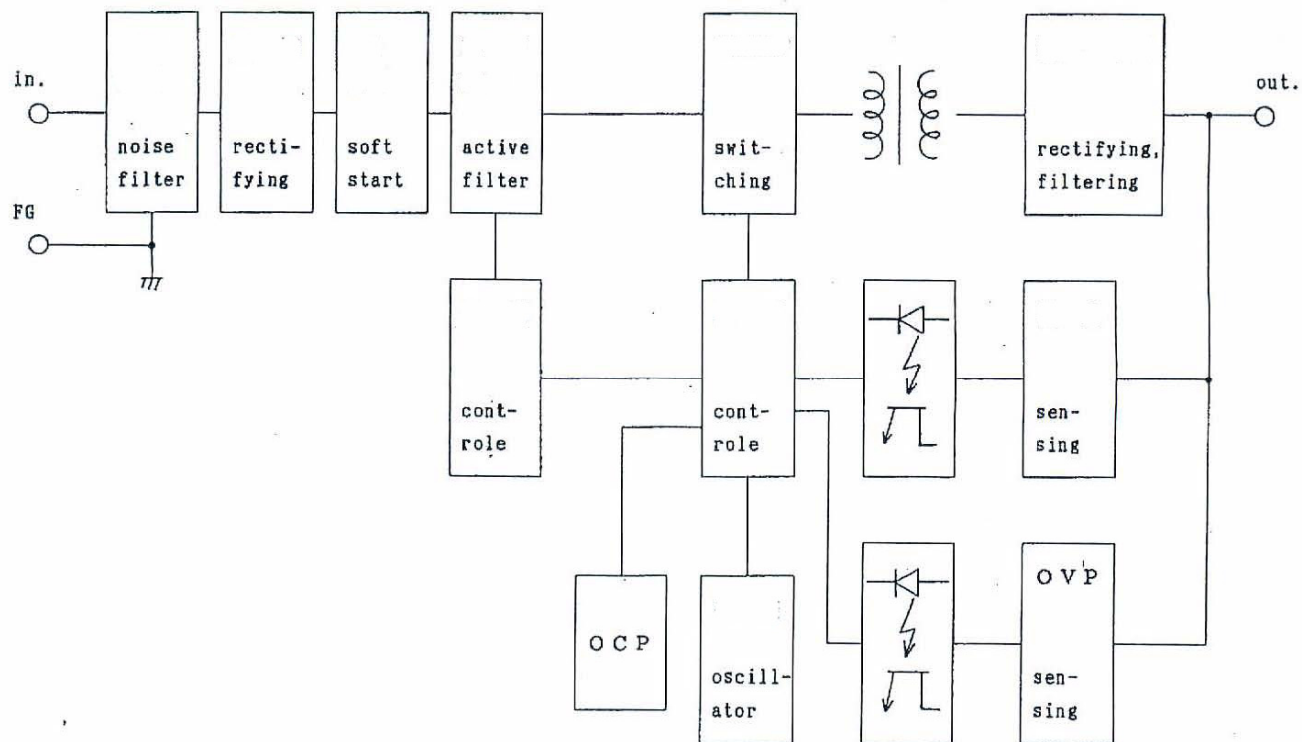

MODEL	OUTPUT		EFFICIENCY
	VOLTAGE	CURRENT	
FHF 3.3SX	3.3V	60A	67%
FHF 05SX	5V	60A	72%
FHF 06SX	6V	50A	73%
FHF 12SX	12V	27A	75%
FHF 15SX	15V	22A	76%
FHF 24SX	24V	14A	78%
FHF 30SX	30V	11A	78%
FHF 36SX	36V	9A	78%
FHF 48SX	48V	7A	80%



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWER, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Environmental Specification	
Operating Temperature	-5 to +50°C
Operating Humidity	30 to 85%/RH(non-condensing)
Storage Temperature	-20 to +85 °C
Storage Humidity	10 to 85%/RH(non-condensing)
Withstanding Voltage	Primary-Secondary AC3,000V for 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC500V for 1minute
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s ² ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)
Shock	294m/s ²
Cooling	Convection
Environmental Agencies	
Line Conducted Noise	Built to meet FCC Part15-B Class B Built to meet VCCI Class B Built to meet VDE0801 Class B
Line Harmonic Distortion	Built to meet IEC61000-3-2
Safety	UL:60950-1 2 nd edition C-UL: CSA C22.2 No.950 VDE EN60950-1 2006, IEC950, VDE0805
MTBF [H]	130,000
Switching Frequency[kHz]	100(typ.)
Function/Protection	
Over current Protection	Available
Over voltage Protection	Available
Remote Sense	Available
Remote On/Off	Available
Power Fail Detection	
Series Operation	Available
Parallel Operation	Available
Mechanical	
Dimension [mm]	~119.9 x 169.9 x 93.0
Weight [g](typical)	1900g

Conditions:

- *1 cold start
- *2 measured by a bayonet probe at the output connector at a 0 to 100MHz bandwidth
- *3 when output current changed from 50% to 150% of rated output current rapidly at rated input
- *4 at -10 to +50°C
- *5 for 7hour period after 1hour warm-up at 25°C and rated input/output
- *6 safety approved at 25°C



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWER, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

DERATING CURVE

OUTPUT DERATING


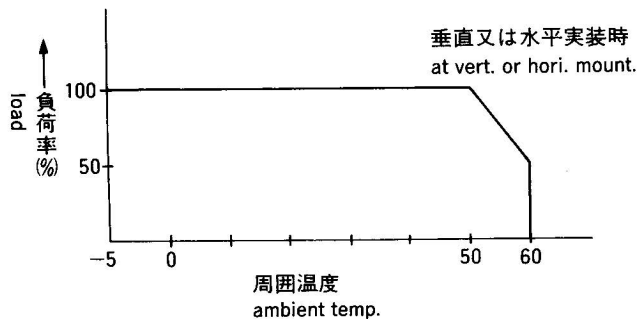


※安全規格取得条件については、都度ご確認ください。
for further information contact safety approvals.

EFFICIENCY CURVE

OCP CURVE

Load & Output V.

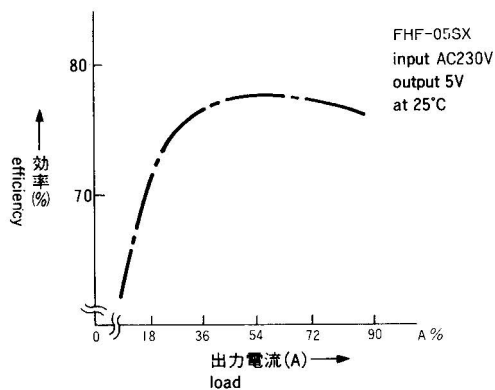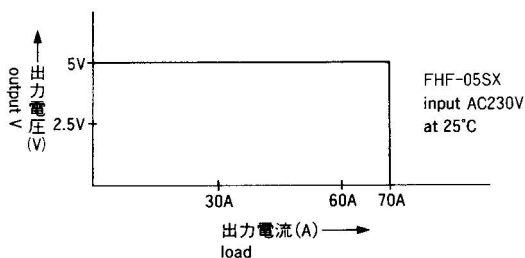

ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWER, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru