


Singlemode can support 40GBASE-PLR4 / 100GBASE-PSM4 in applicable parallel optics networks

## MTP/MPO (APC) to 8xLC (UPC) Singlemode Breakout Patch Cable, 40/100 GbE, QSFP+ 40GBASE-PLR4, Plenum, Yellow, 2 m (6.6 ft.)

MODEL NUMBER: N390-02M-8LC-AP

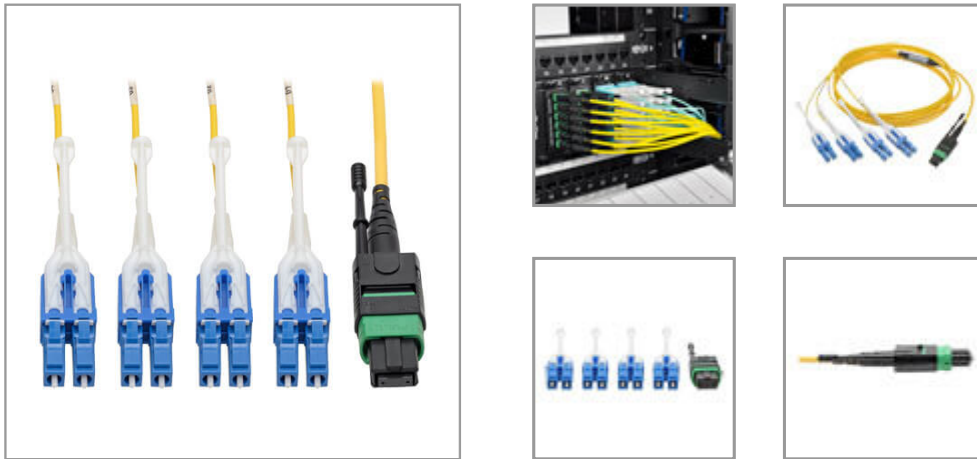

Premium 8.3/125 singlemode fiber optic cabling for transmitting 40/100 Gb data and voice signals. Designed for high-density fiber patching between data center MDFs and IDFs in enterprise installations.

### Description

The N390-02M-8LC-AP MTP/MPO to 8xLC Singlemode Breakout Patch Cable supports 40/100 Gb Ethernet speeds and is designed for high-density fiber patching between data center MDFs (main distribution frames) and IDFs (intermediate distribution frames) in enterprise installations. It's optimized for QSFP+ 40GBASE-PLR4 and QSFP28 100GBASE-PSM4 networks. Its plenum-rated jacket makes it ideal for connecting switches, hubs, routers and other high-speed network components in ceilings, walls and ducts.

The 12-fiber MTP/MPO connector is about the same size as an SC connector, but is 12 times denser, freeing up rack space for other cables. The APC connector is angled to prevent infrared light entering the fiber from bouncing back into the laser. The N390-02M-8LC-AP is tested for low insertion loss and back reflection on every connector and attenuation loss that meets or exceeds current standards.

The N390-02M-8LC-AP uses eight fibers to fully transmit 40GBASE-PLR4 with four fibers transmitting at 10 Gbps in each direction. Its slim, space-saving uniboot design allows easier cable management. The LC UPC connector's premium-grade ceramic ferrule is designed for fast applications of 10 GbE and higher.

The singlemode cable is colored yellow for instant identification in a crowded switch or patch panel. Push/pull tab connectors are easily accessible in high-density data center environments and make the plug-and-play cable easy to install and remove with one hand.

### Features

### Highlights

- Push/pull tab connectors install/remove with one hand
- 12-fiber MTP/MPO connectors with 12x density of SC connectors
- Slim space-saving uniboot design for easy cable management
- Angled APC connectors protect laser against destabilization
- Yellow color for quick singlemode identification

### Package Includes

- N390-02M-8LC-AP MTP/MPO to 8xLC Singlemode Breakout Patch Cable, Yellow, 2 m

#### 8.3/125 Rated Singlemode Cable for 40/100 Gb Ethernet Applications

- Designed for high-density fiber patching between data center MDFs and IDF's in enterprise installations
- Optimized for QSFP+ 40GBASE-PLR4 and QSFP28 100GBASE-PSM4 networks
- Plenum-rated jacket suited for ceilings, walls and ducts
- Yellow-colored for identification as a singlemode cable

#### MTP/MPO APC and LC Duplex UPC Connectors with Push/Pull Tabs

- MTP/MPO female connector and 8 LC duplex male connectors—no splicing required
- 12-fiber MTP/MPO connector 12 times denser than SC connector
- APC connector angled to prevent light from reflecting back into laser
- UPC connector with premium-grade ceramic ferrule for 10 GbE and faster applications
- Push/pull tabs easy to install and remove with one hand

#### Error-Free Signal Transfer

- Fully transmits 40GBASE-PLR4 with 4 fibers transmitting at 10 Gbps in each direction
- 100% tested for low insertion loss and back reflection
- Slim, space-saving uniboot design easier to manage in crowded applications

## Specifications

OVERVIEW	
UPC Code	037332205582
Clad Diameter	125 micron
Core Diameter	8.3 micron
Number of Fibers	12
INPUT	
Cable Length (ft.)	6.6
Cable Length (m)	2
Cable Length (in.)	78.7
PHYSICAL	
Color	Yellow
Shipping Dimensions (hwd / cm)	22.86 x 17.78 x 1.27
Shipping Dimensions (hwd / in.)	9.00 x 7.00 x 0.50
Shipping Weight (kg)	0.07
Shipping Weight (lbs.)	0.15



<b>ENVIRONMENTAL</b>	
Operating Temperature Range	-4 to 140 F (-20 to 60 C)
Storage Temperature Range	-4 to 140 F (-20 to 60 C)
<b>COMMUNICATIONS</b>	
Network Speed	10Gbps / 40Gbps / 100Gbps
<b>CONNECTIONS</b>	
Side A - Connector 1	12-STRAND MTP (FEMALE)
Side B - Connector 1	(8) LC DUPLEX (MALE) WITH PULL/PUSH TAB
<b>FEATURES &amp; SPECIFICATIONS</b>	
Technology	MTP/MPO; Singlemode
<b>SPECIAL FEATURES</b>	
Push/Pull Tabs	Yes
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)