

SIDE ROTARY

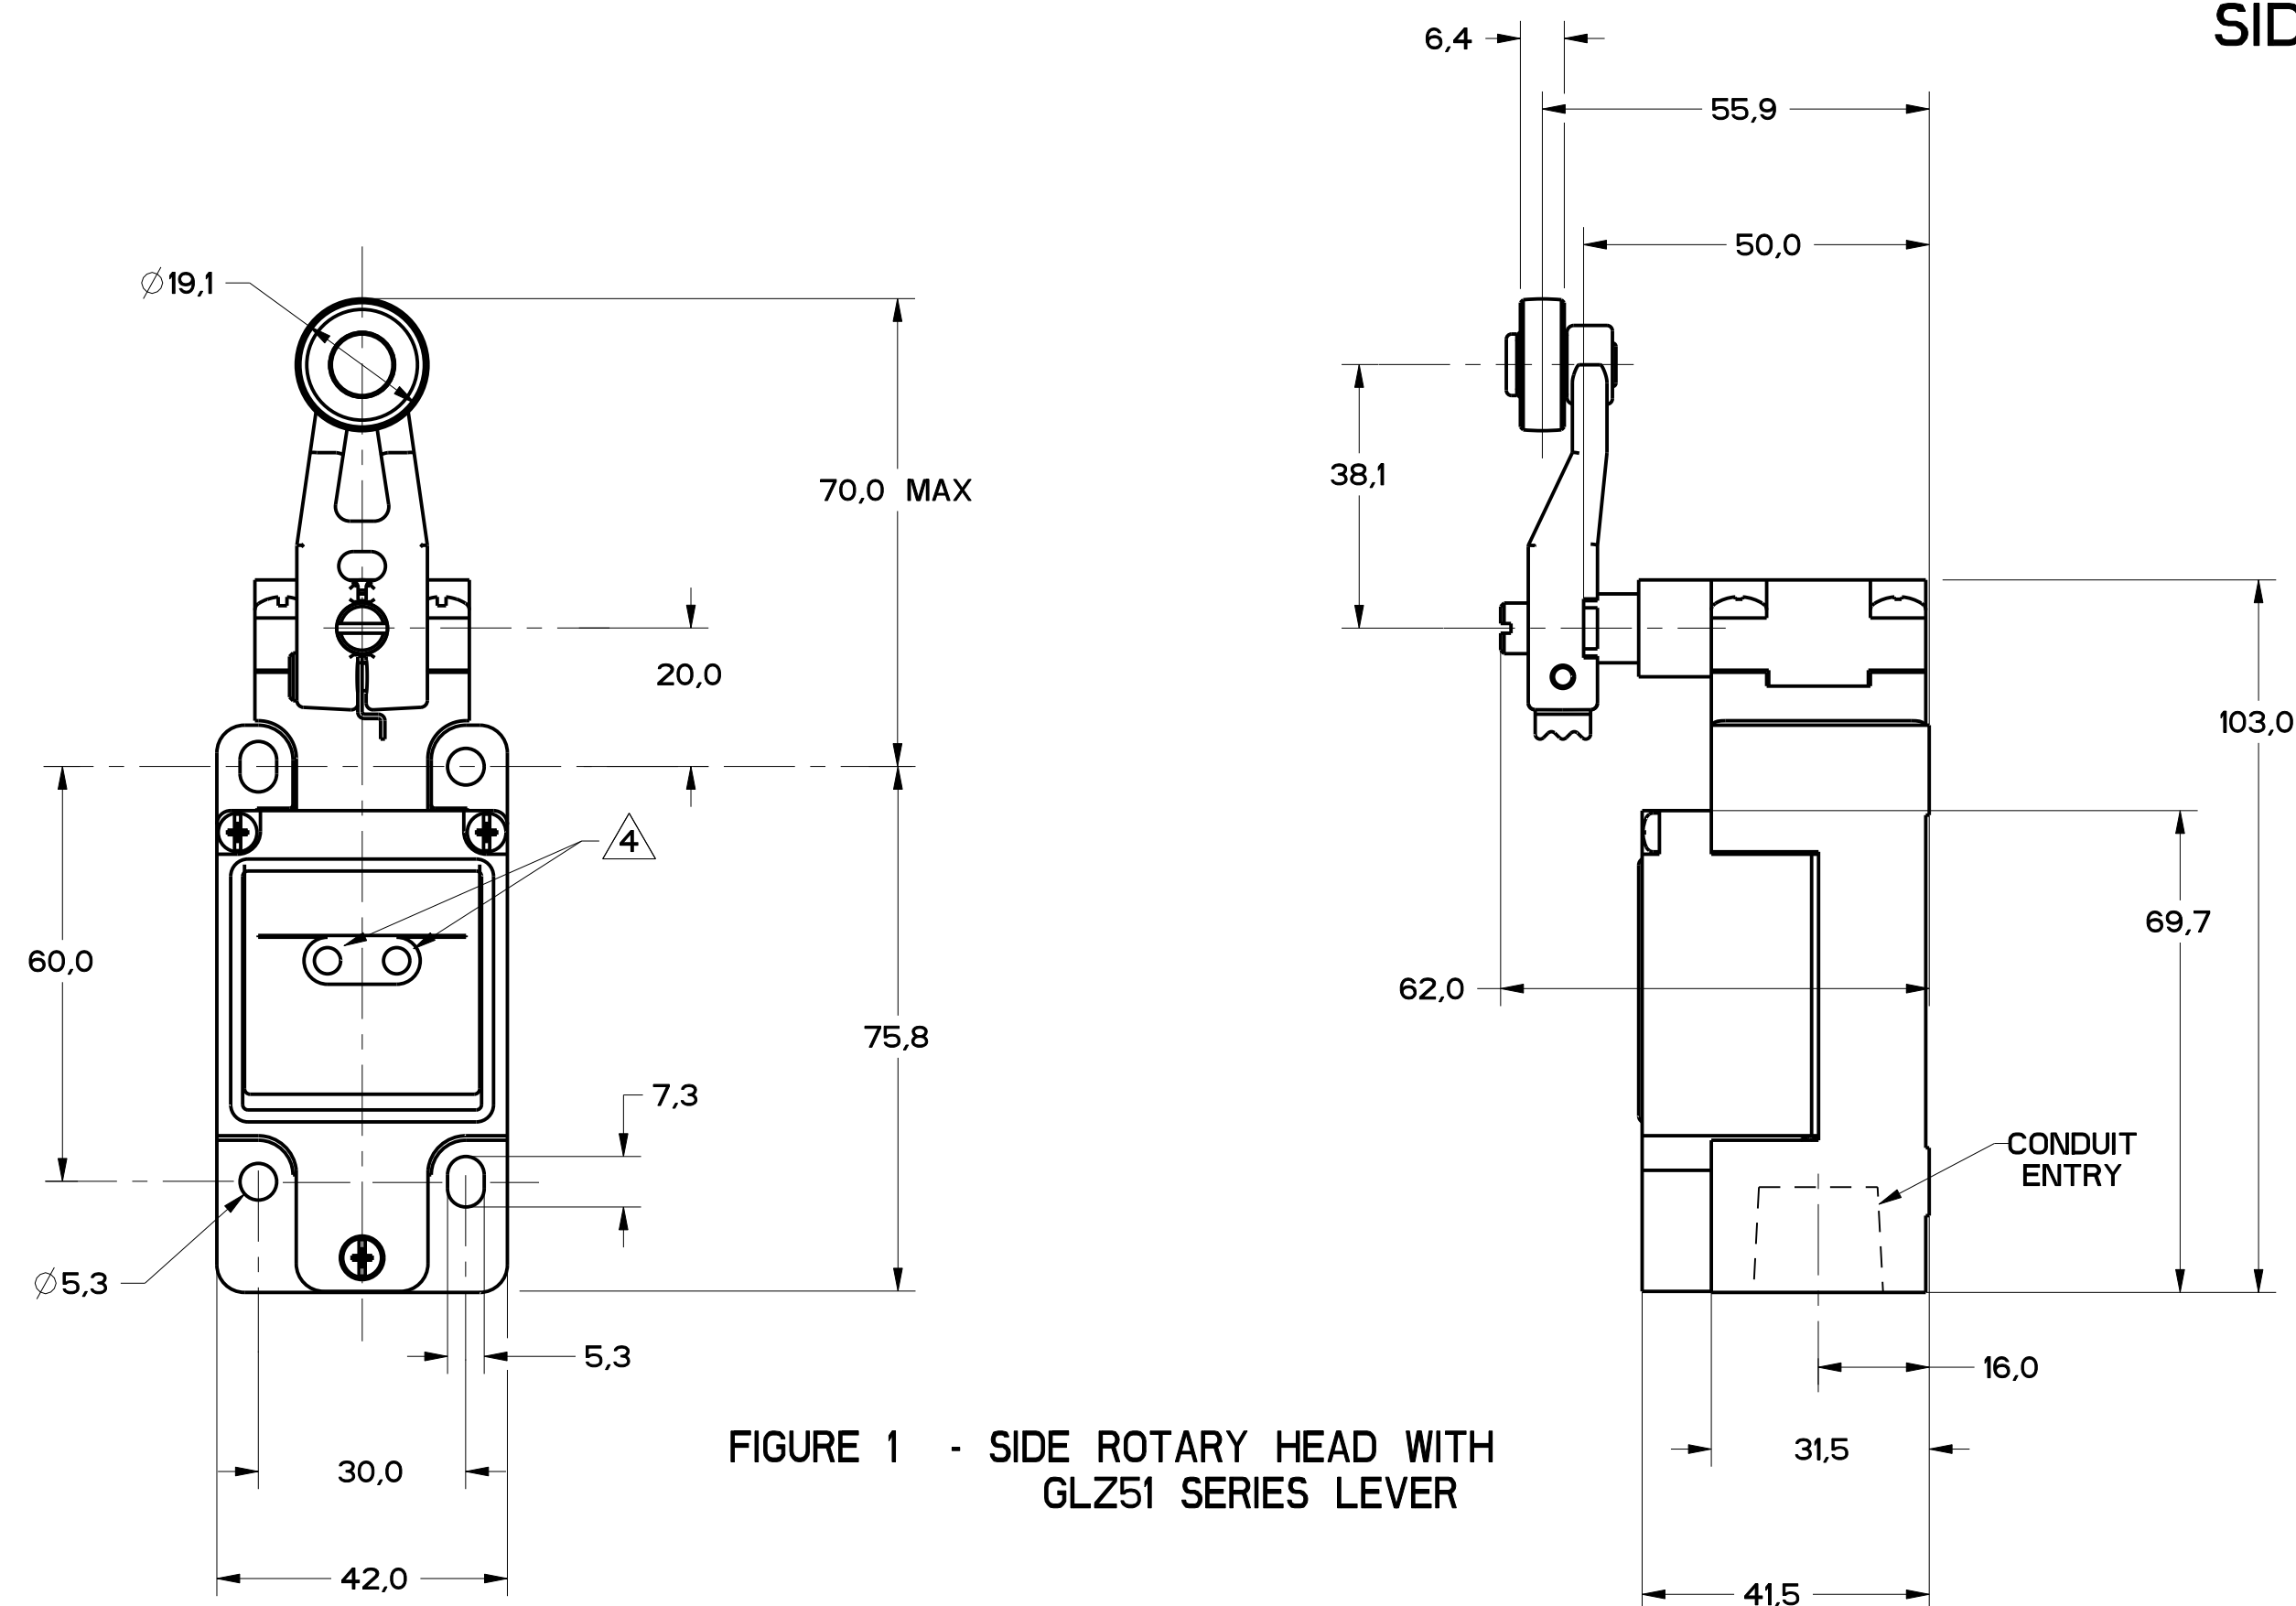


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

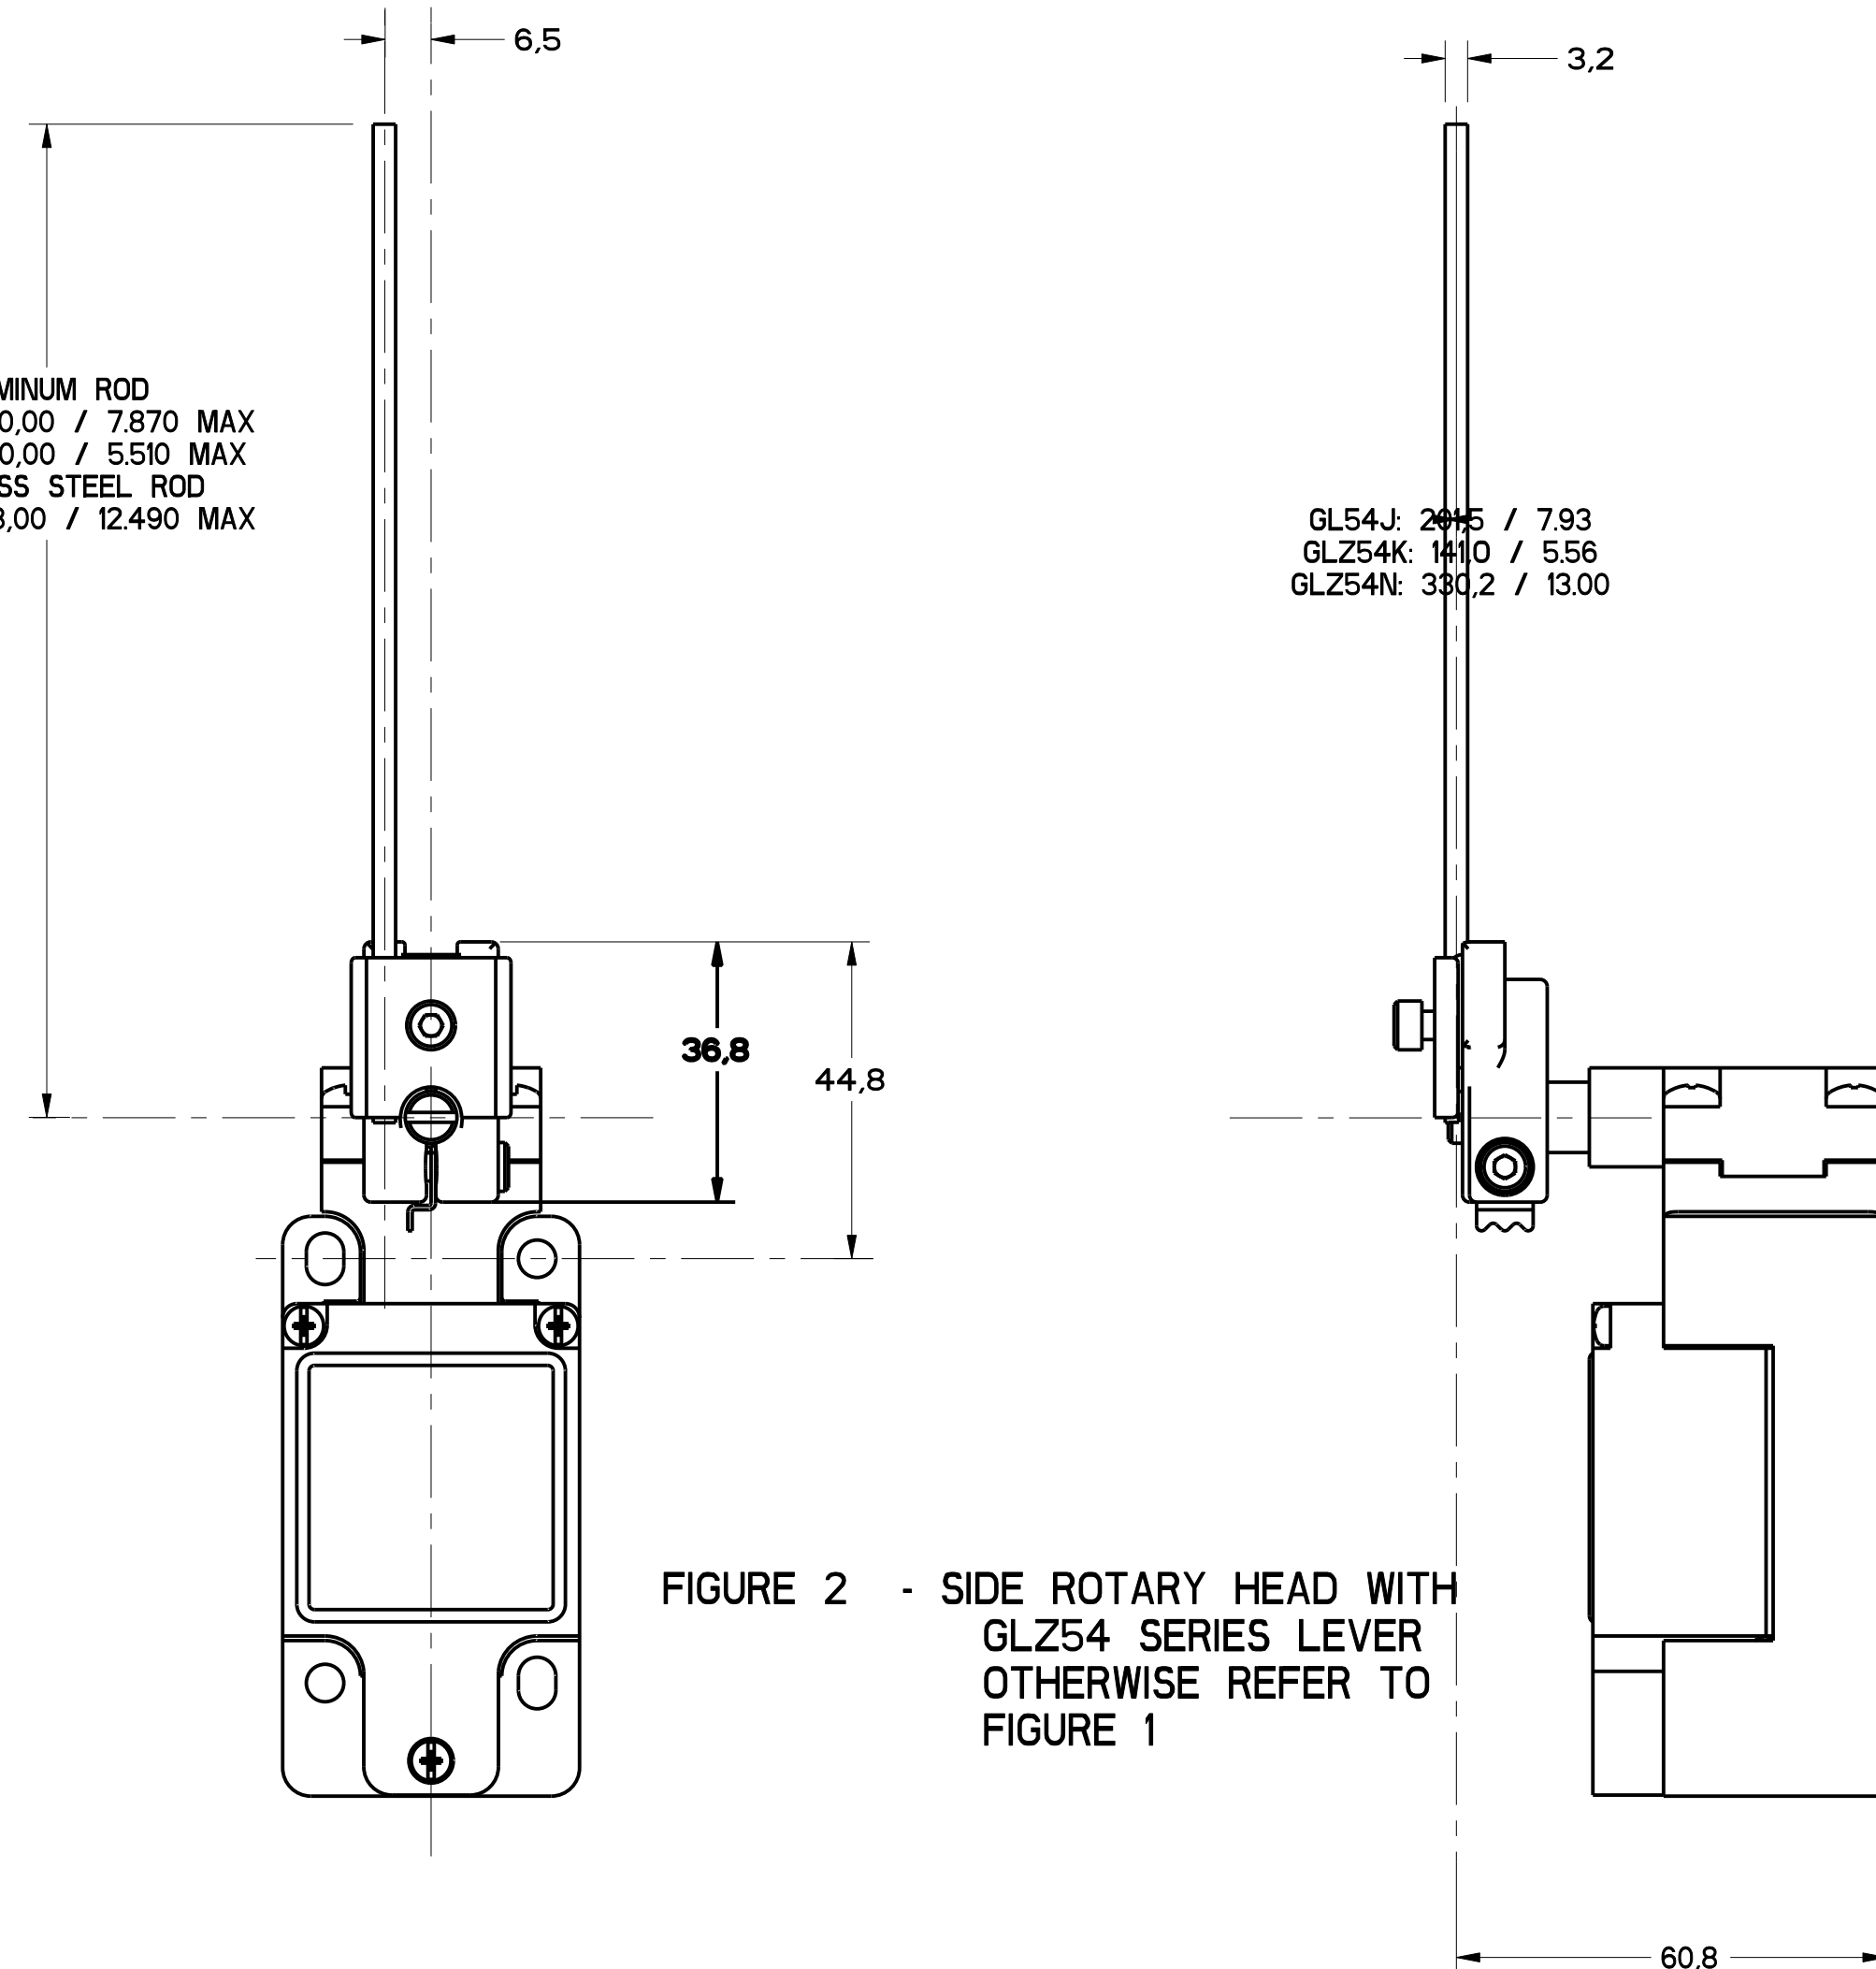


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	Q300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

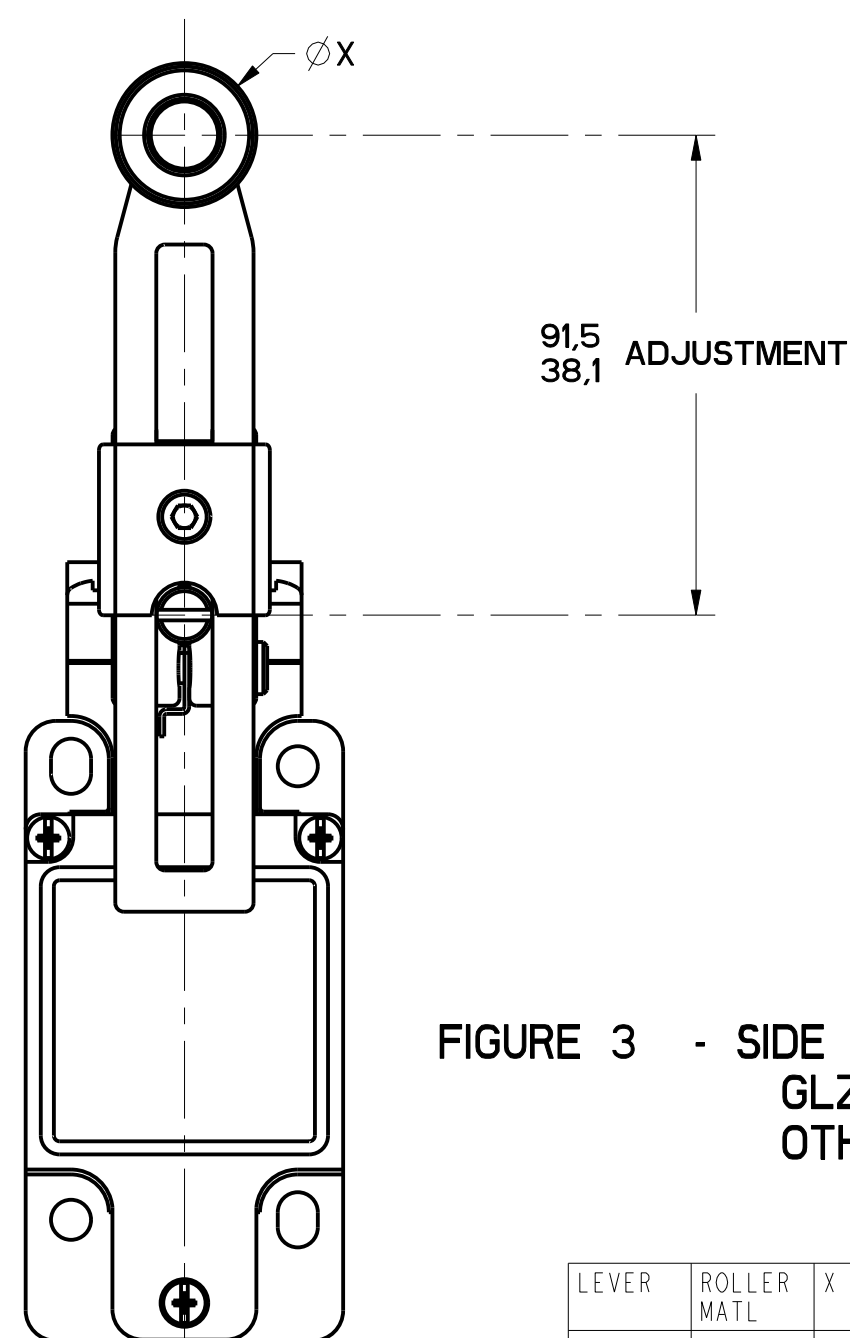



FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GL*A***	1A	N/A	N/A
GL*B***	1B	N/A	N/A
GL*C***	1C	N/A	N/A
GL*D***	1D	N/A	N/A
GL***A1*	I	1	8
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	INCH	1/16	0.0625
ONE PLACE	INCH	1/32	0.03125
TWO PLACES	INCH	1/64	0.015625
THREE PLACES	INCH	1/128	0.0078125
ANGLES	DEGREES	1/16	0.625
DESIGN UNITS		SI METRIC	US CUSTOMARY
		☒	☐
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

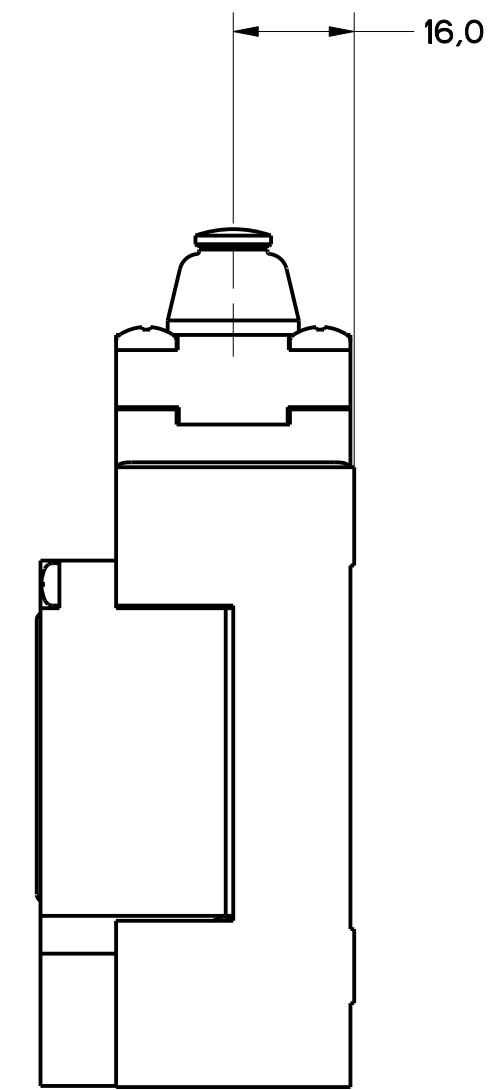


STEEL ROLLER

Ø 12,4

50,5

Technical drawing of a lamp head (Lampenkopf) showing a side view. The drawing includes two dimensions: 4,7 (width of the base) and 16,0 (width of the top section).

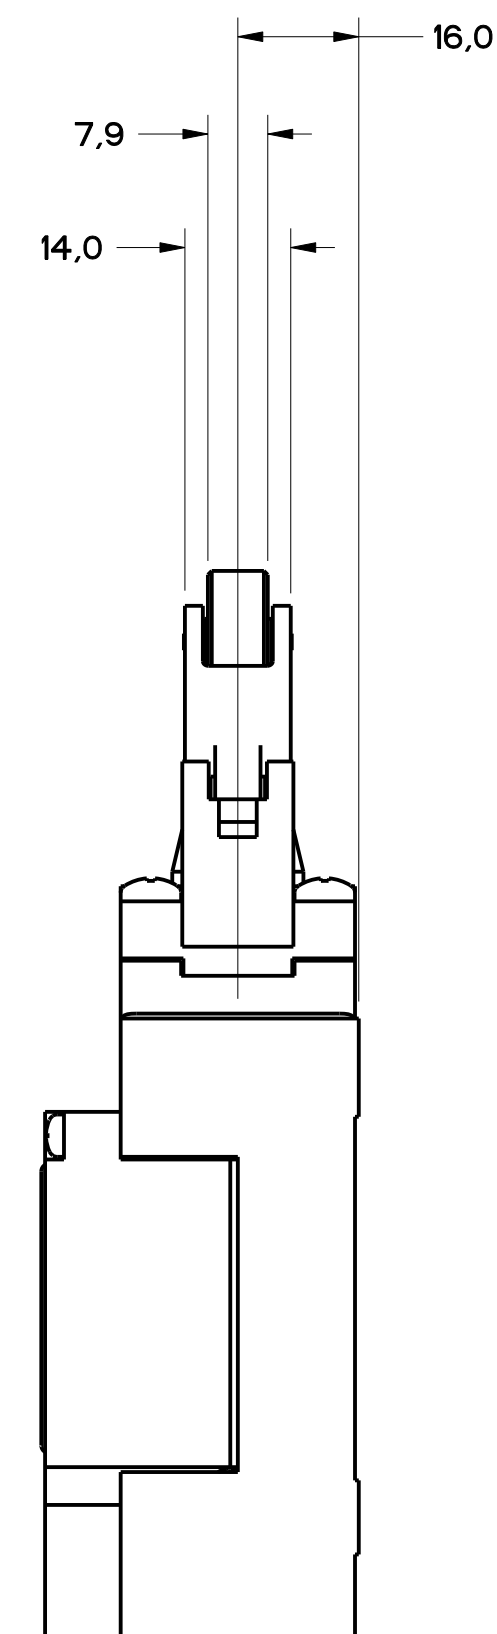

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>INCHES</td> <td>FRACTIONS</td> <td>INCHES</td> <td>FRACTIONS</td> </tr> <tr> <td>NO PLACES</td> <td>0</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ONE PLACE</td> <td>0.4</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>TWO PLACES</td> <td>0.004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>THREE PLACES</td> <td>0.0004</td> <td>0.01</td> <td>0.01</td> </tr> <tr> <td>ANGLES</td> <td>± 1</td> <td></td> <td></td> </tr> </table>		DIM	TOL	DIM	TOL	INCHES	FRACTIONS	INCHES	FRACTIONS	NO PLACES	0	0.01	0.01	ONE PLACE	0.4	0.01	0.01	TWO PLACES	0.004	0.01	0.01	THREE PLACES	0.0004	0.01	0.01	ANGLES	± 1		
DIM	TOL	DIM	TOL																												
INCHES	FRACTIONS	INCHES	FRACTIONS																												
NO PLACES	0	0.01	0.01																												
ONE PLACE	0.4	0.01	0.01																												
TWO PLACES	0.004	0.01	0.01																												
THREE PLACES	0.0004	0.01	0.01																												
ANGLES	± 1																														
FED. MFG. CODE 91929	CATALOG LISTING																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED		GL SERIES CHART 2																												
			DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY ☐																												
			WEIGHT																												

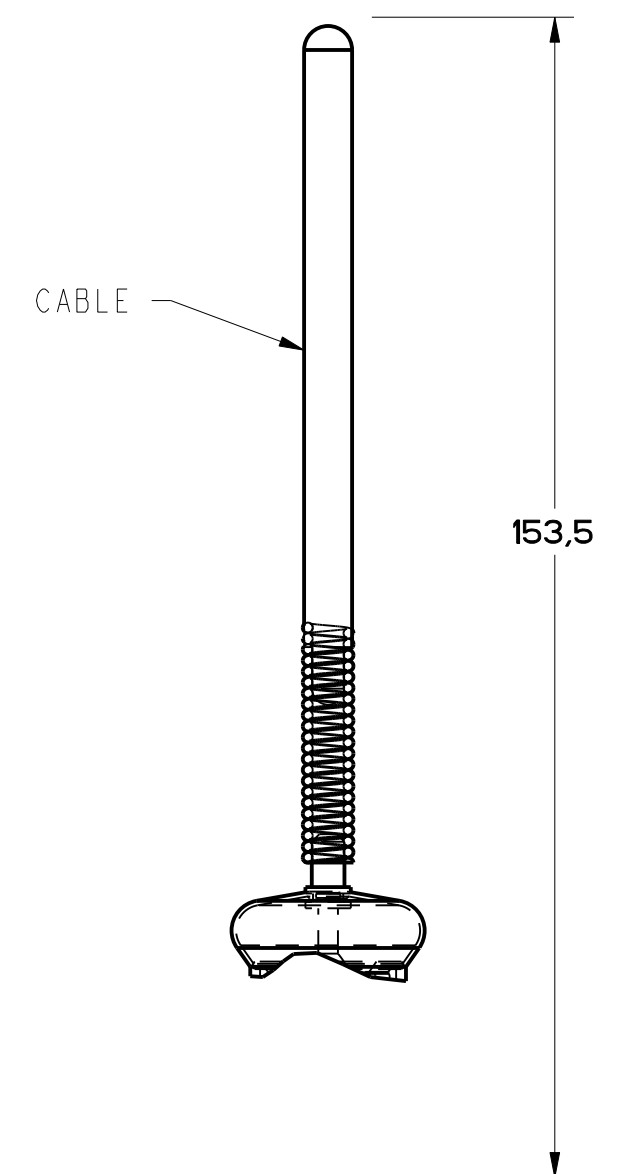
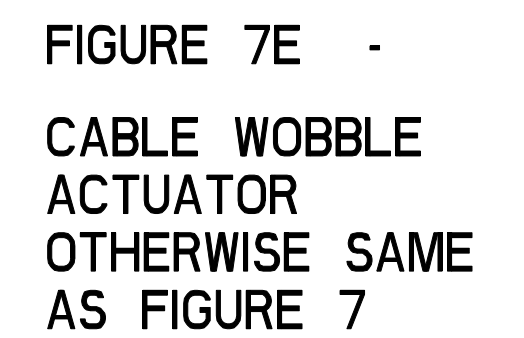
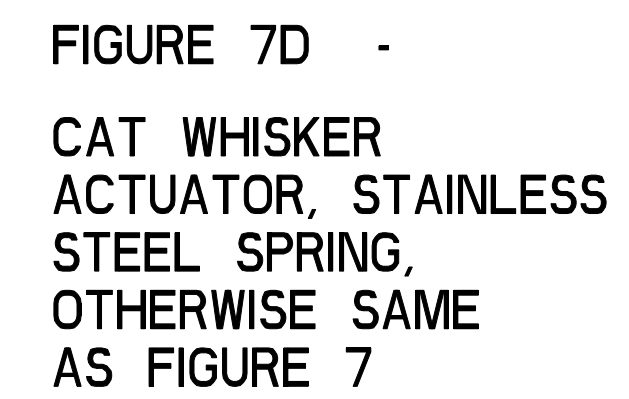
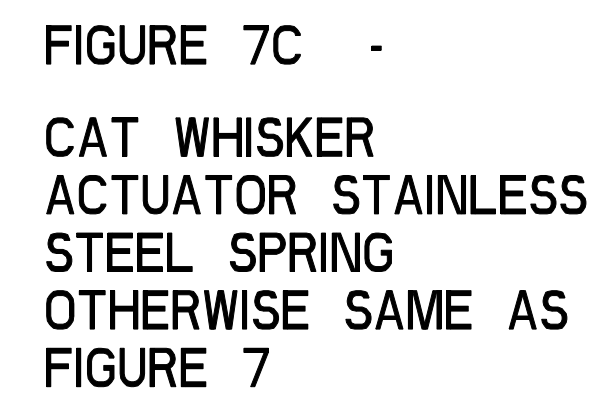
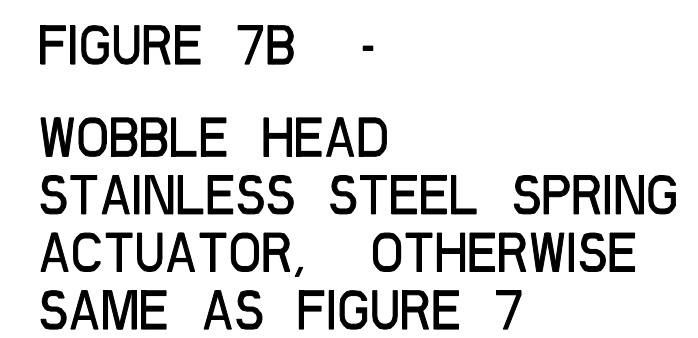
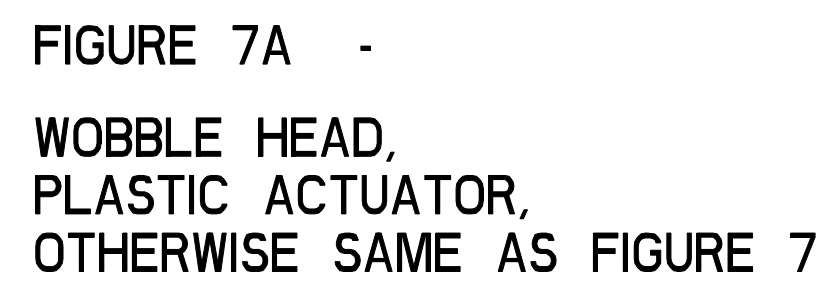


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

CATALOG LISTING

GL SERIES CHART 2

THIRD ANGLE PROJECTION			
			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS, CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED, TOLERANCES ARE:			
	DIM inch	TOL mm	DIM mm
NO PLACES	X	1/16, 1/8, 1/4	0.01, 0.03
ONE PLACE	X.1	0.4, 0.016	0.05, 0.015
TWO PLACES	X.01	0.008, 0.0008	0.001, 0.0001
THREE PLACES	X.001	0.0006, 0.00006	0.0001, 0.00001
FOUR PLACES	X.0001	0.00004, 0.000004	0.00001, 0.000001
± SYMETRIC US CUSTOMARY			
DESIGN UNITS			
WEIGHT			

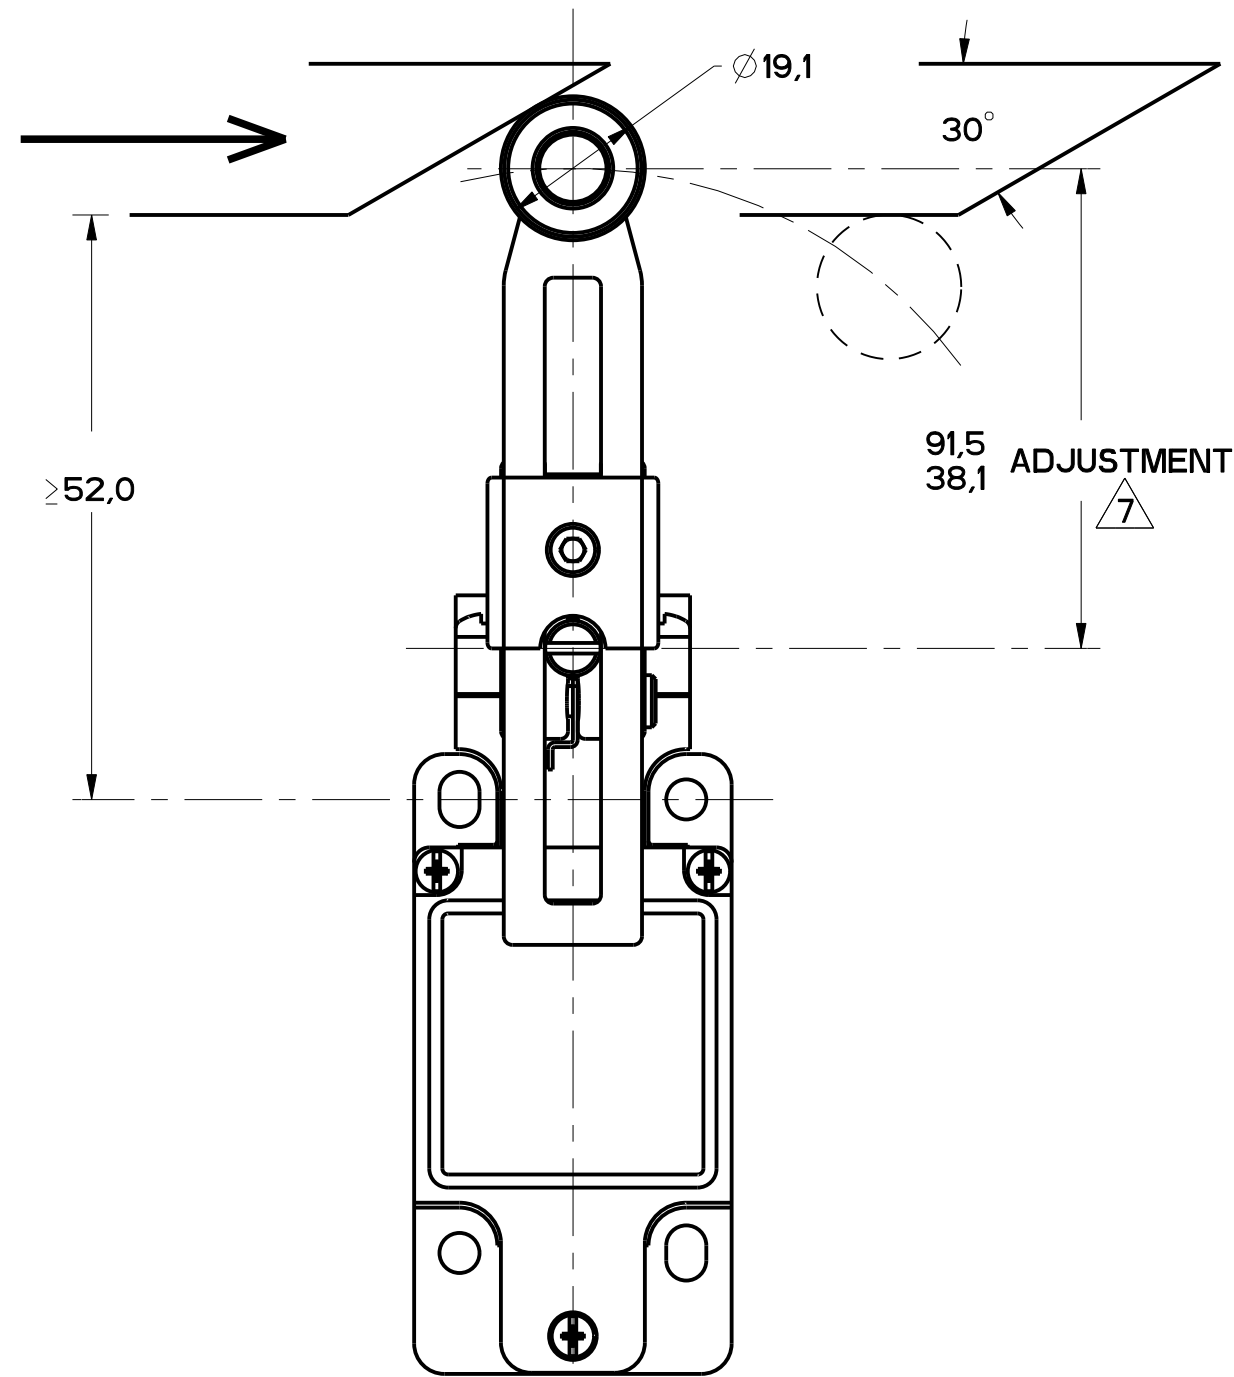


FIGURE 9

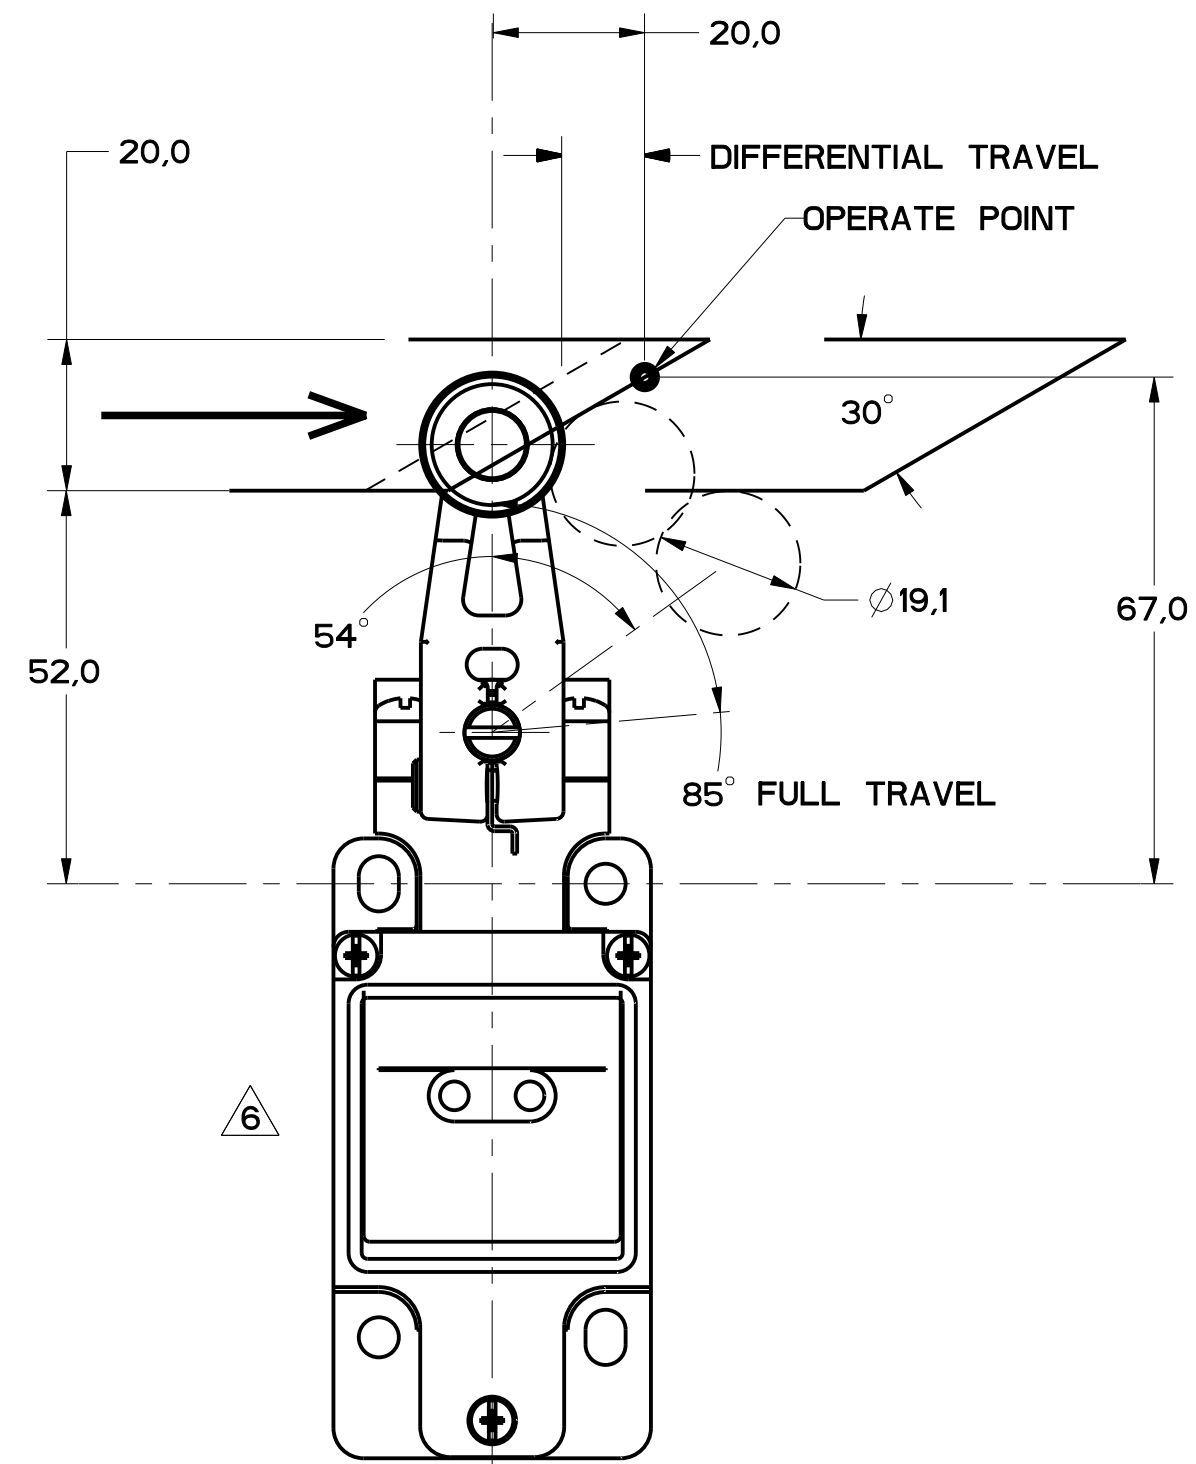


FIGURE 8

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

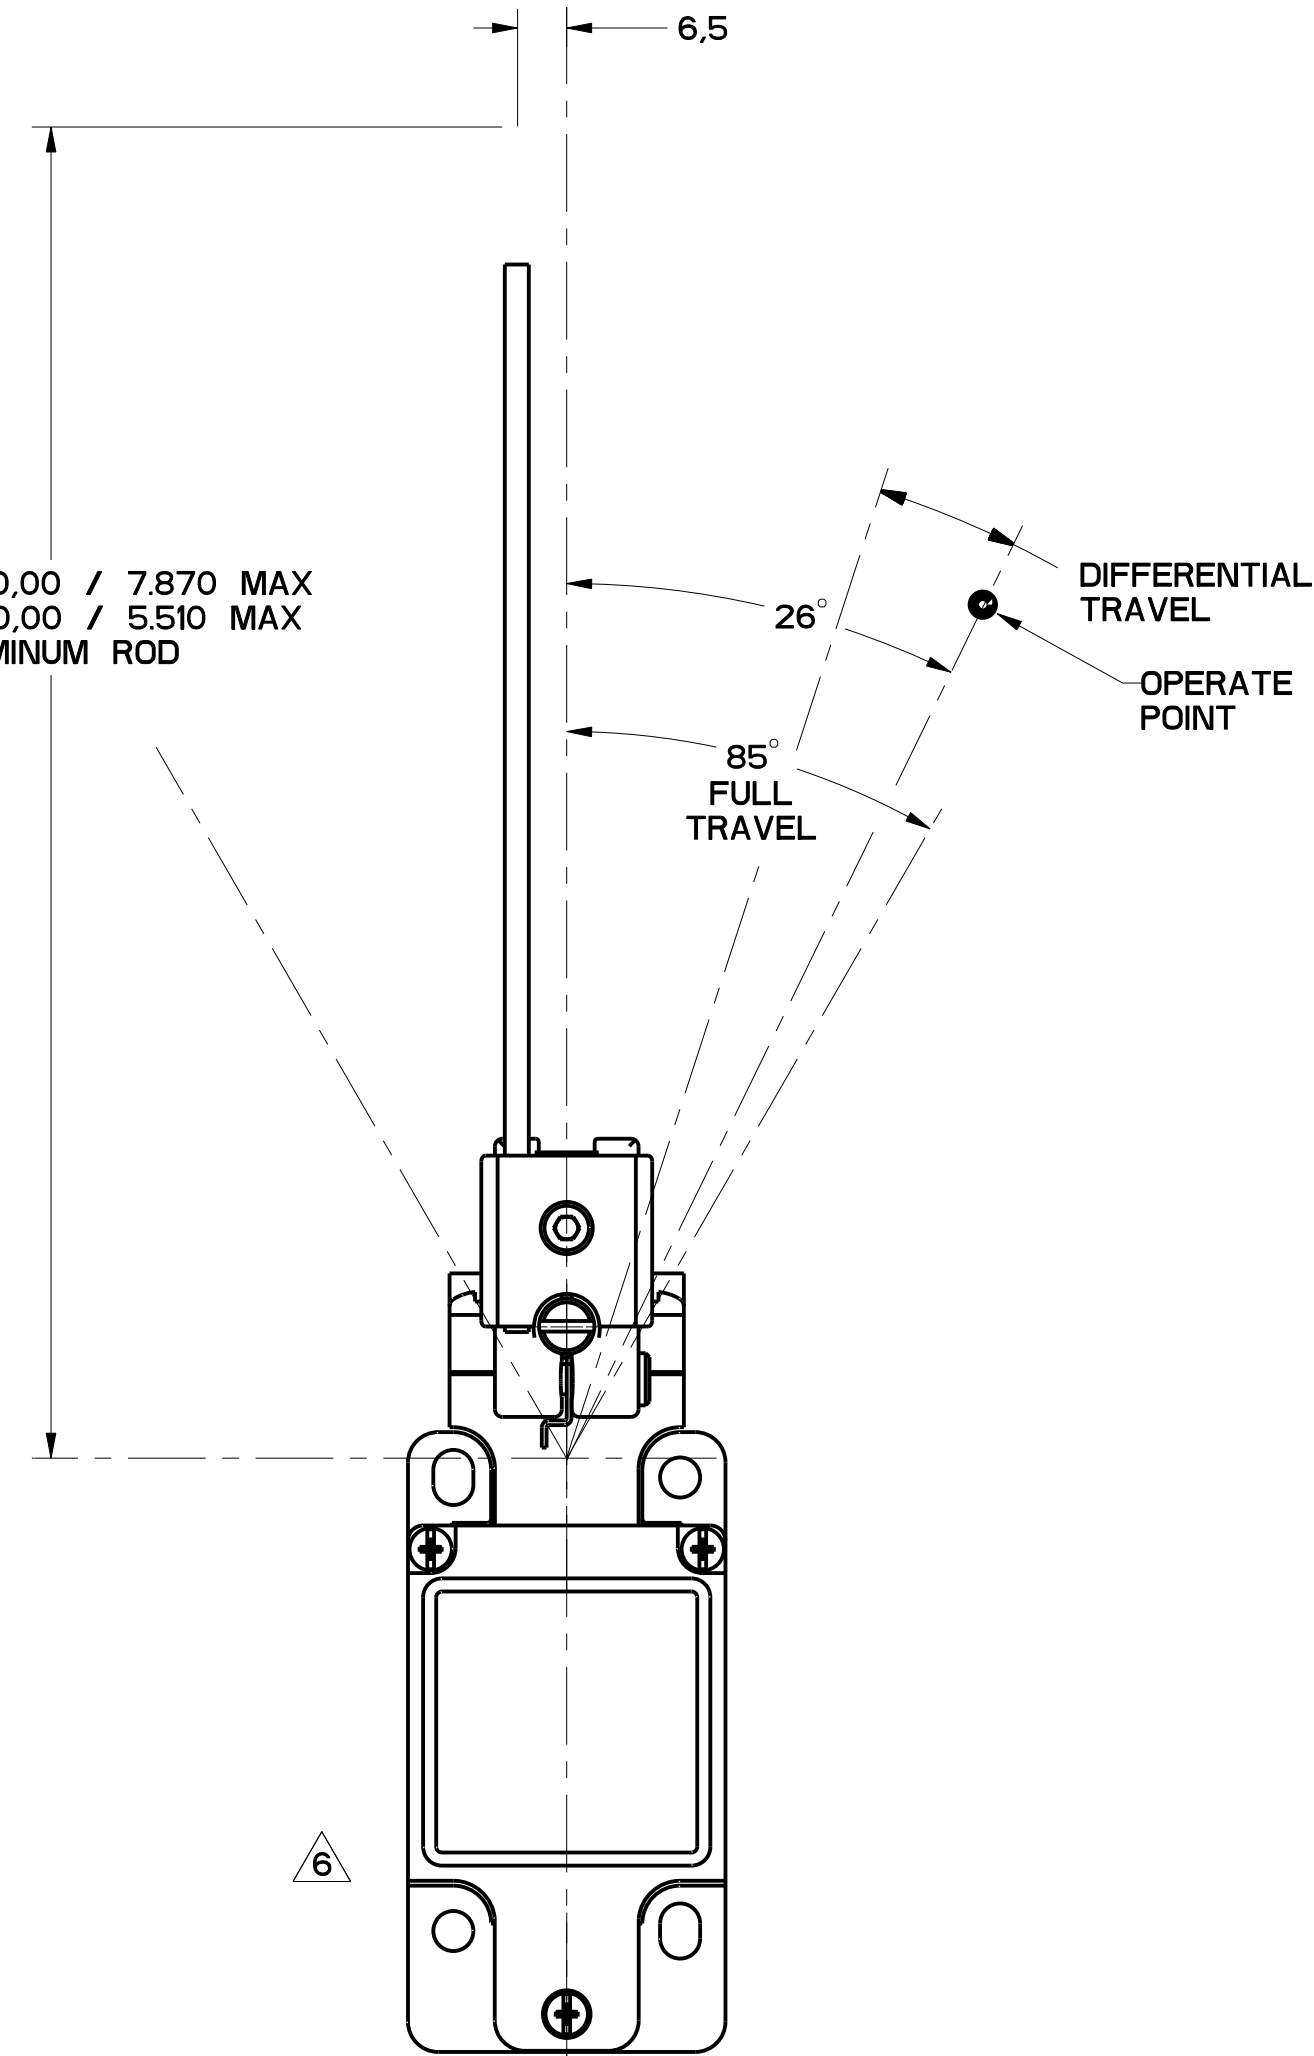


FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE $\frac{N}{LB-IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N}{LB-IN}$	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13

CAM ACTUATION PER EN50041, FIGURES 8 AND 9						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$



26,0

18°

DIFFERENTIAL TRAVEL

OPERATE POINT

140,8

100,0

70,0 FULL TRAVEL

FIGURE 12

FIGURES 11, PIN PLUNGER HEAD, LINEAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{mm/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02B	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE $\frac{\text{N}\cdot\text{m}}{\text{LB}\cdot\text{in}}$	MAXIMUM DISCONNECT TORQUE $\frac{\text{N}\cdot\text{m}}{\text{LB}\cdot\text{in}}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{0.2}{1.8}$	N/A	360	8	100

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{mm/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 26 12 DIFFERENTIAL TRAVEL	$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <th>DIM</th> <th>TOL</th> <th>DIM</th> <th>TOL</th> </tr> <tr> <td>mm</td> <td>(mil)</td> <td>mm</td> <td>(mil)</td> </tr> <tr> <td>NO PLACES</td> <td>± 1</td> <td>1.754</td> <td>± 0.0010</td> </tr> <tr> <td>TWO PLACES</td> <td>± 0.40</td> <td>0.0016</td> <td>± 0.0003</td> </tr> <tr> <td>THREE PLACES</td> <td>± 0.15</td> <td>0.006</td> <td>± 0.0005</td> </tr> <tr> <td>ANGLES</td> <td colspan="3">± 2</td> </tr> </table>		DIM	TOL	DIM	TOL	mm	(mil)	mm	(mil)	NO PLACES	± 1	1.754	± 0.0010	TWO PLACES	± 0.40	0.0016	± 0.0003	THREE PLACES	± 0.15	0.006	± 0.0005	ANGLES	± 2		
DIM	TOL	DIM	TOL																								
mm	(mil)	mm	(mil)																								
NO PLACES	± 1	1.754	± 0.0010																								
TWO PLACES	± 0.40	0.0016	± 0.0003																								
THREE PLACES	± 0.15	0.006	± 0.0005																								
ANGLES	± 2																										
FED. MFG. CODE 91929	CATALOG LISTING	<table border="1"> <tr> <td>SI METRIC</td> <td>US CUSTOMARY</td> </tr> <tr> <td>☒</td> <td>☐</td> </tr> </table>		SI METRIC	US CUSTOMARY	☒	☐																				
SI METRIC	US CUSTOMARY																										
☒	☐																										
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2																									
DESIGN UNITS		<table border="1"> <tr> <td>mm</td> <td>(mil)</td> </tr> <tr> <td>1.754</td> <td>0.0010</td> </tr> <tr> <td>0.0016</td> <td>0.0003</td> </tr> <tr> <td>0.006</td> <td>0.0005</td> </tr> </table>		mm	(mil)	1.754	0.0010	0.0016	0.0003	0.006	0.0005																
mm	(mil)																										
1.754	0.0010																										
0.0016	0.0003																										
0.006	0.0005																										

REVISIONS	
A	000000
B	000000
C	000000
D	000000
E	000000

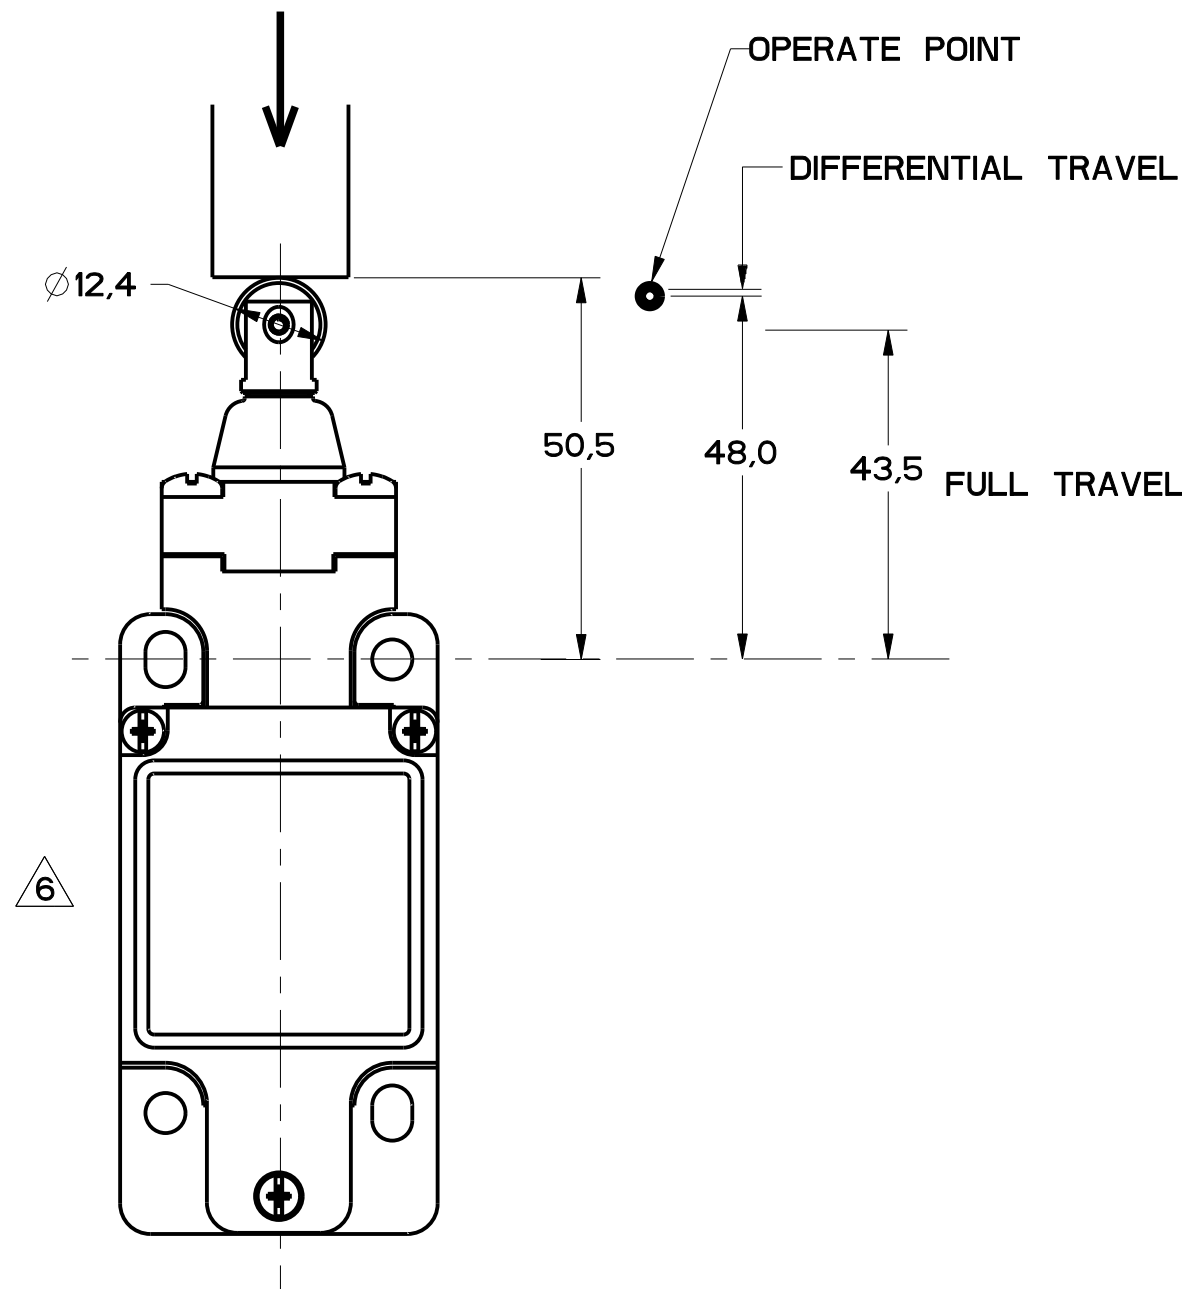


FIGURE 13A

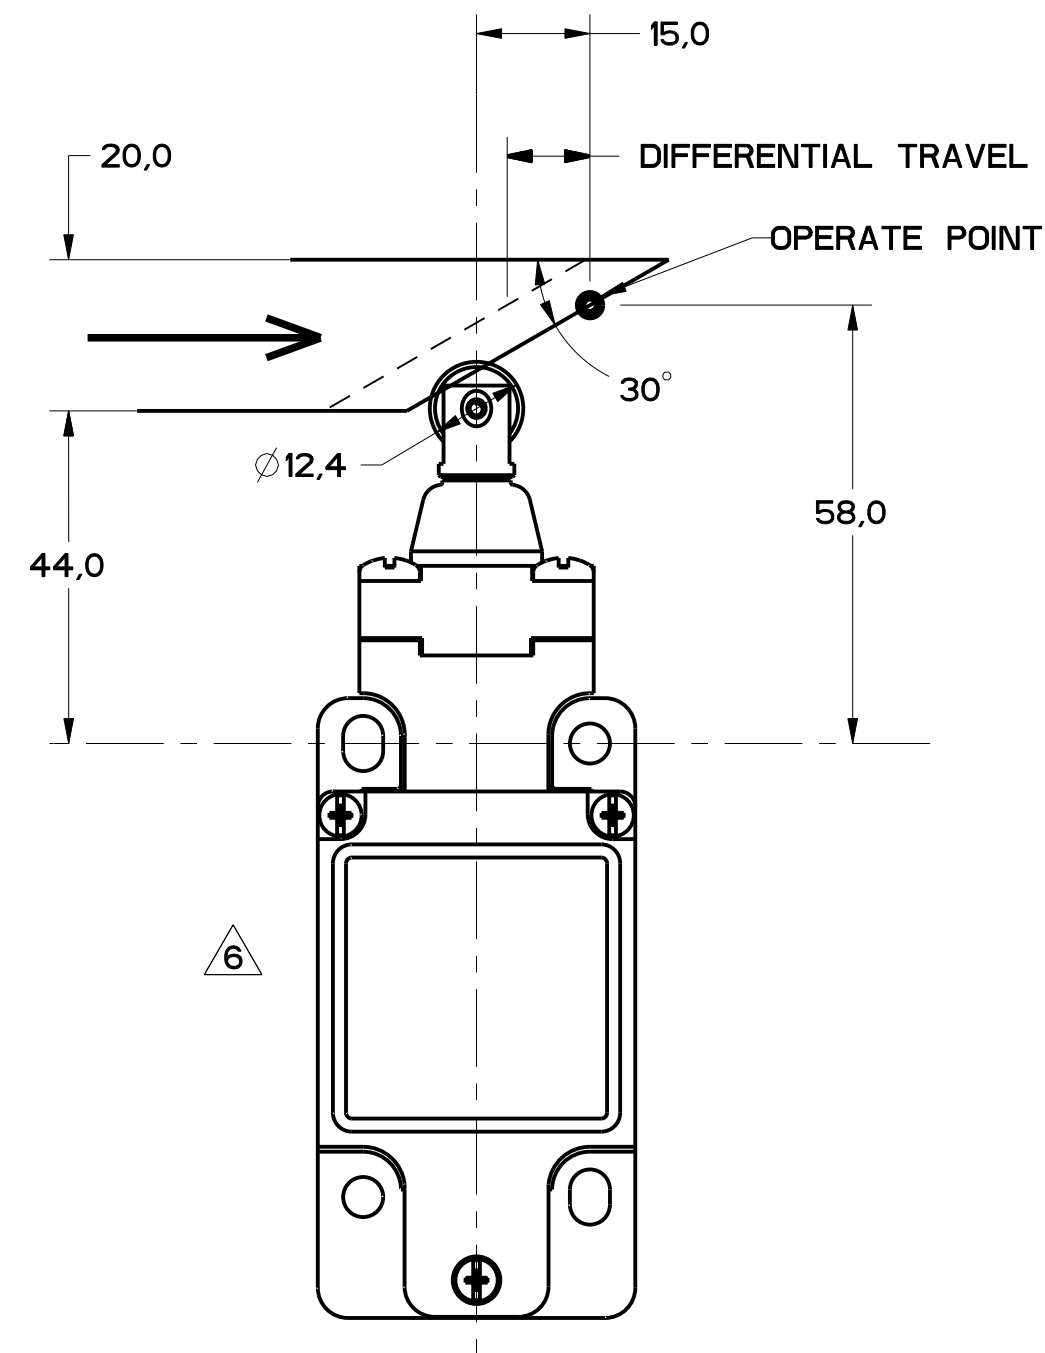


FIGURE 13B

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/S	MIN OPERATE VEL in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 50.5 48 46** 43.5 21-22 13-14 0.9 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/S	MIN OPERATE VEL in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0 15 18.3** 21-22 13-14 1.8 DIFFERENTIAL TRAVEL	$\frac{9.3}{2.1}$	$\frac{15.6}{3.5}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	1/16	0.0005	0.0005
ONE PLACE	1/32	0.0010	0.0010
TWO PLACES	1/64	0.0020	0.0020
THREE PLACES	1/128	0.0040	0.0040
ANGLES	± 1/2	± 1/2	± 1/2
DESIGN UNITS	SI METRIC	US CUSTOMARY	
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	

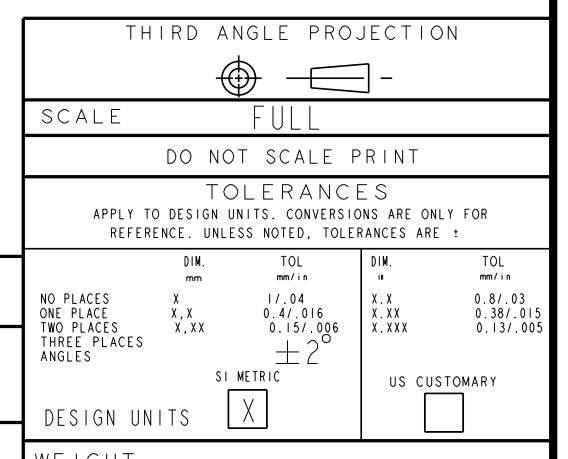


FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{M/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{in/S}$	MIN OPERATE VEL $\frac{mm/S}{in/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
FED. MFG. CODE 91929	SWITCH, ENCLOSED	CATALOG LISTING
MICRO SWITCH a Honeywell Division		GL SERIES CHART 2

ANSI Y14.5M-1982 APPLIES

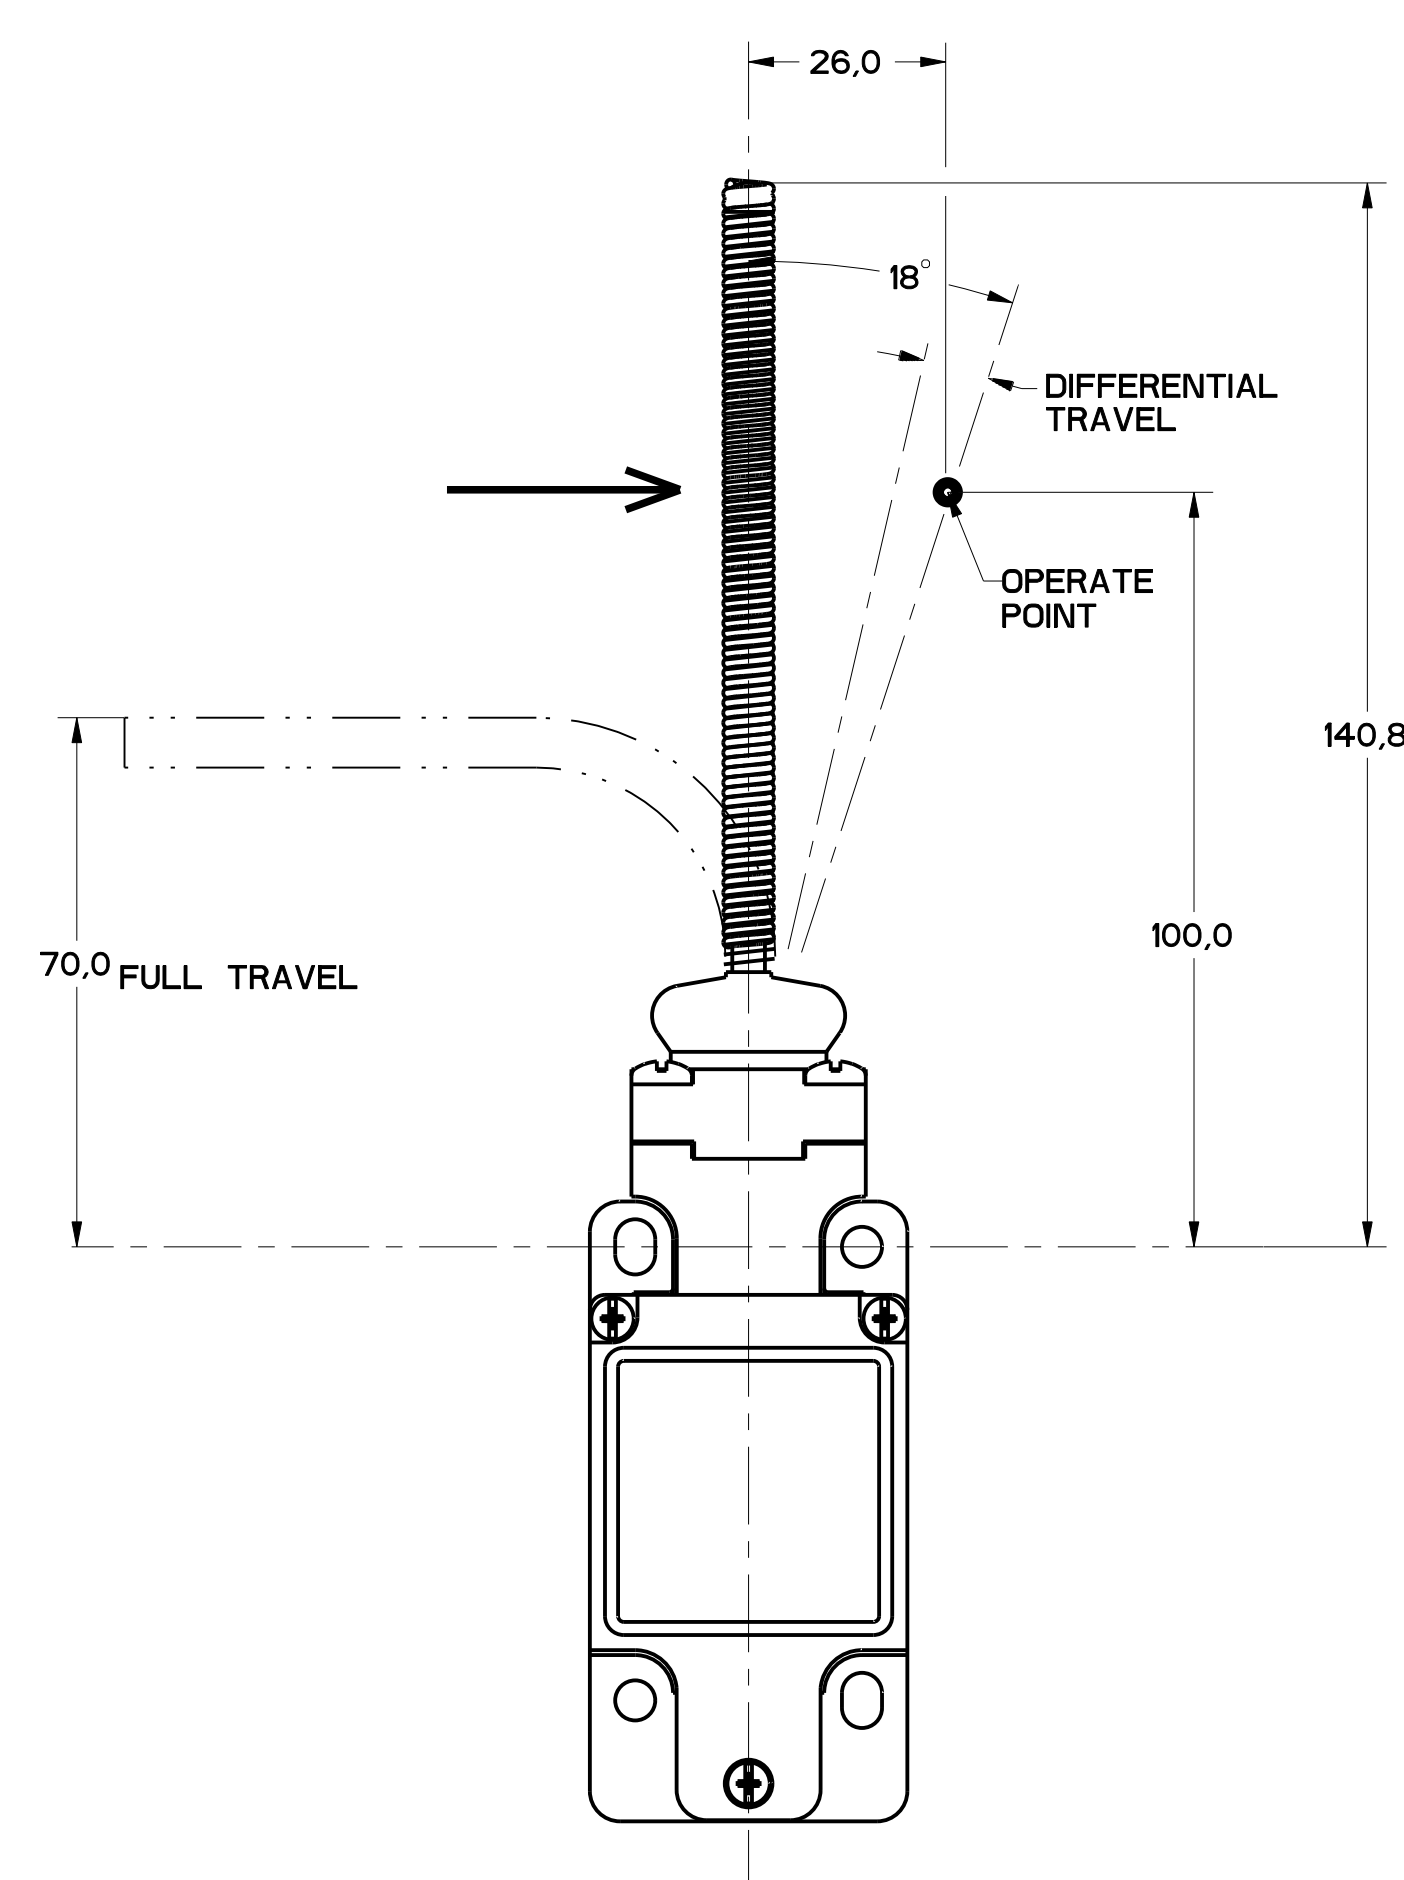


FIGURE 15

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE m LB-IN	MAXIMUM DISCONNECT TORQUE m LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14 18° 8° DIFFERENTIAL TRAVEL	0.1 .9	N/A	360	8

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm						
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL m/s in/s	MIN OPERATE VEL m/s in/s
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 13-14 26 12 DIFFERENTIAL TRAVEL	1.3 .3	N/A	.5 19.7	.11 .43

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru