



## NOTES

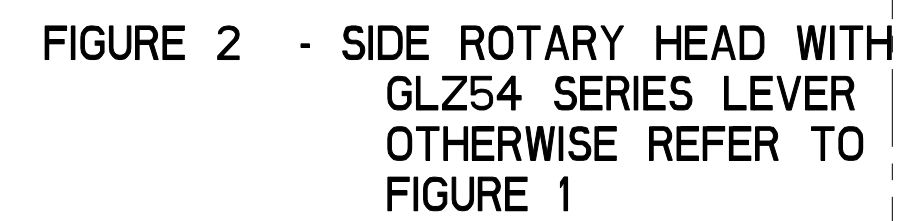

| LEVER  | ROLLER<br>MATERIAL | X DIM       | Y DIM         | Z DIM          |
|--------|--------------------|-------------|---------------|----------------|
| GLZ52A | NYLON              | 19.1<br>.75 | 65.9<br>2.59  | 6.4<br>.25     |
| GLZ52B | STEEL              | 19.1<br>.75 | 65.9<br>2.59  | 6.4<br>.25     |
| GLZ52D | NYLON              | 38.1<br>1.5 | 65.9<br>2.59  | 6.4<br>.25     |
| GLZ52E | NYLON              | 19.1<br>.75 | 71.5<br>3.125 | 33.07<br>1.300 |
| GLZ52W | RUBBER             | 40.0<br>1.5 | 71.5<br>2.81  | 12.7<br>.5     |
| GLZ52Y | RUBBER             | 50.9<br>2.0 | 71.5<br>2.81  | 12.7<br>.5     |



| ELECTRICAL RATING  |            |            |            |
|---------------------------------------------------------------------------------------------------------|------------|------------|------------|
| AC                                                                                                      |            | DC         |            |
| A600<br>Ue                                                                                              | AC15<br>Ie | Q300<br>Ue | DC13<br>Ie |
| (VOLTS)                                                                                                 | (AMPS)     | (VOLTS)    | (AMPS)     |
| 120                                                                                                     | 6          | 24         | 2.8        |
| 240                                                                                                     | 3          | 125        | .55        |
| 380                                                                                                     | 1.9        | 250        | .27        |
| 480                                                                                                     | 1.5        |            |            |
| 500                                                                                                     | 1.4        |            |            |
| 600                                                                                                     | 1.2        |            |            |

|                            |
|----------------------------|
| ENVIRONMENTAL RATING       |
| IP67                       |
| NEMA/UL TYPES 1, 4, 12, 13 |

- NOTES
- 1 - HEADS MAY BE INDEXED IN 90° INCREMENTS.
  - 2 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
  - 3 - FOR ADDITIONAL LEVERS SEE "IM" DRAWING CHART GLZ5
  - 4 - THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
  - 5 - THE MAXIMUM VOLTAGE,  $V_e$  OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
  - 6 - FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
  - 7 - CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38,1 / 1.50
  - 8 - TEMPERATURE RANGE  
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)  
OPERATING: -25°C TO +85°C / -13°F TO +185°F  
STORAGE: -40°C TO +85°C / -40°F TO +185°F  
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)  
OPERATING: -40°C TO +85°C / -40°F TO +185°F  
STORAGE: -40°C TO +85°C / -40°F TO +185°F

| CATALOG LISTING | BODY DIMENSIONS, FIGURE | HEAD DIMENSIONS, FIGURE | HEAD ACTUATION, FIGURE |
|-----------------|-------------------------|-------------------------|------------------------|
| GLB****         | I                       | N/A                     | N/A                    |
| GLG****         | I                       | N/A                     | N/A                    |
| GLJ****         | I                       | N/A                     | N/A                    |
| GL*A***         | IA                      | N/A                     | N/A                    |
| GL*B***         | IB                      | N/A                     | N/A                    |
| GL*C***         | IC                      | N/A                     | N/A                    |
| GL*D***         | ID                      | N/A                     | N/A                    |
| GL****A *       | I                       | I                       | 8                      |
| GL****A2*       | I                       | 3                       | 9                      |
| GL****A4*       | I                       | 2                       | 10                     |
| GL****A5*       | I                       |                         | 8                      |
| GL****B         | I                       | 4                       | I I                    |
| GL****C         | I                       | 5                       | I 3A, I 3B             |
| GL****D         | I                       | 6                       | I 4A, I 4B             |
| GL****E7A       | I                       | 7A                      | 12                     |
| GL****E7B       | I                       | 7                       | 12                     |
| GL****E7C       | I                       | 7E                      | 12                     |
| GL****E7D       | I                       | 7B                      | 12                     |
| GL****K8A       | I                       | 7C                      | 15                     |
| GL****K8B       | I                       | 7D                      | 15                     |
| GL****K8C       | I                       | 7                       | 15                     |

| THIRD ANGLE PROJECTION                                                                                                                                                  |                                                                                           |                                                                                                    |              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------|
|                                                                                    | <div style="border: 1px solid black; width: 100px; height: 100px; margin: 0 auto;"></div> |                                                                                                    |              |
| <div style="display: flex; justify-content: space-around; align-items: center;"> <div>SCALE</div> <div style="border: 1px solid black; padding: 5px;">FULL</div> </div> |                                                                                           |                                                                                                    |              |
| DO NOT SCALE PRINT                                                                                                                                                      |                                                                                           |                                                                                                    |              |
| <b>TOLERANCES</b><br>APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:                                                           |                                                                                           |                                                                                                    |              |
| DIM.                                                                                                                                                                    | TOL.                                                                                      | DIM.                                                                                               | TOL.         |
| inch                                                                                                                                                                    | mm                                                                                        | inch                                                                                               | mm           |
| NO PLACES                                                                                                                                                               | 0                                                                                         | NO PLACES                                                                                          | 0            |
| 1 PLACE                                                                                                                                                                 | 1/16, .001                                                                                | 1 PLACE                                                                                            | 0.001, .015  |
| 2 PLACES                                                                                                                                                                | .0005, .001                                                                               | 2 PLACES                                                                                           | 0.0005, .005 |
| THREE PLACES                                                                                                                                                            | .0001, .0005                                                                              | THREE PLACES                                                                                       | .0001, .0005 |
| ANGLES                                                                                                                                                                  | .001, .005                                                                                | ANGLES                                                                                             | .001, .005   |
| \$1 METRIC                                                                         |                                                                                           | US CUSTOMARY  |              |
| DESIGN UNITS                                                                                                                                                            |                                                                                           |                                                                                                    |              |
| WEIGHT                                                                                                                                                                  |                                                                                           |                                                                                                    |              |



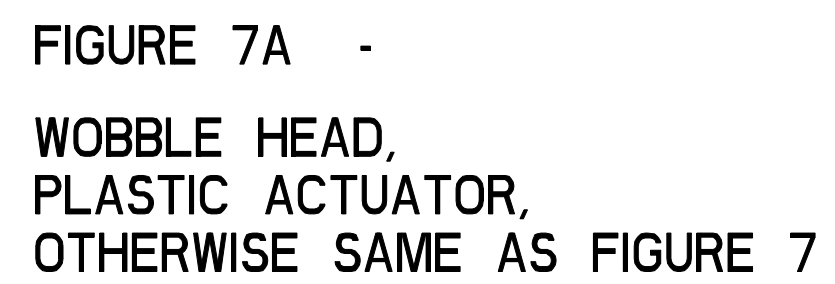


FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD  
COIL ACTUATOR,  
OTHERWISE REFER TO  
FIGURE 1

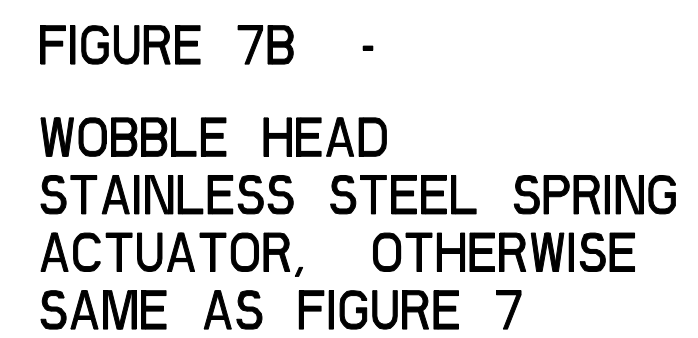


FIGURE 7B -  
WOBBLE HEAD  
STAINLESS STEEL SPRING  
ACTUATOR, OTHERWISE  
SAME AS FIGURE 7

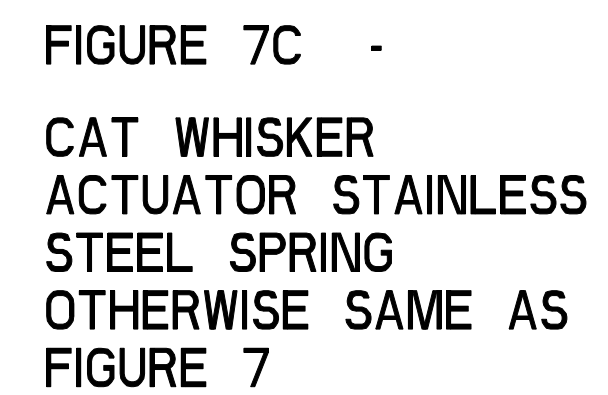


FIGURE 7C -  
CAT WHISKER  
ACTUATOR STAINLESS  
STEEL SPRING  
OTHERWISE SAME AS  
FIGURE 7

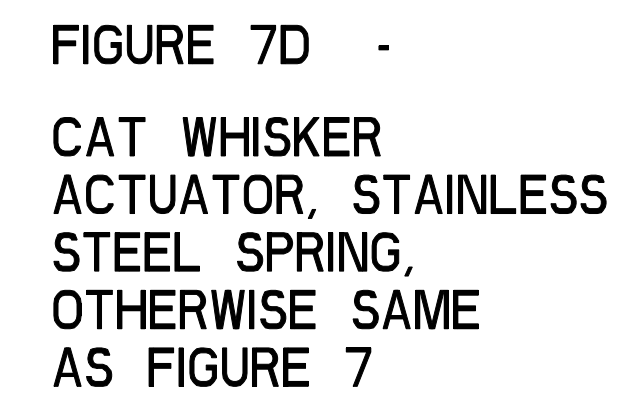


FIGURE 7D -  
CAT WHISKER  
ACTUATOR, STAINLESS  
STEEL SPRING,  
OTHERWISE SAME  
AS FIGURE 7

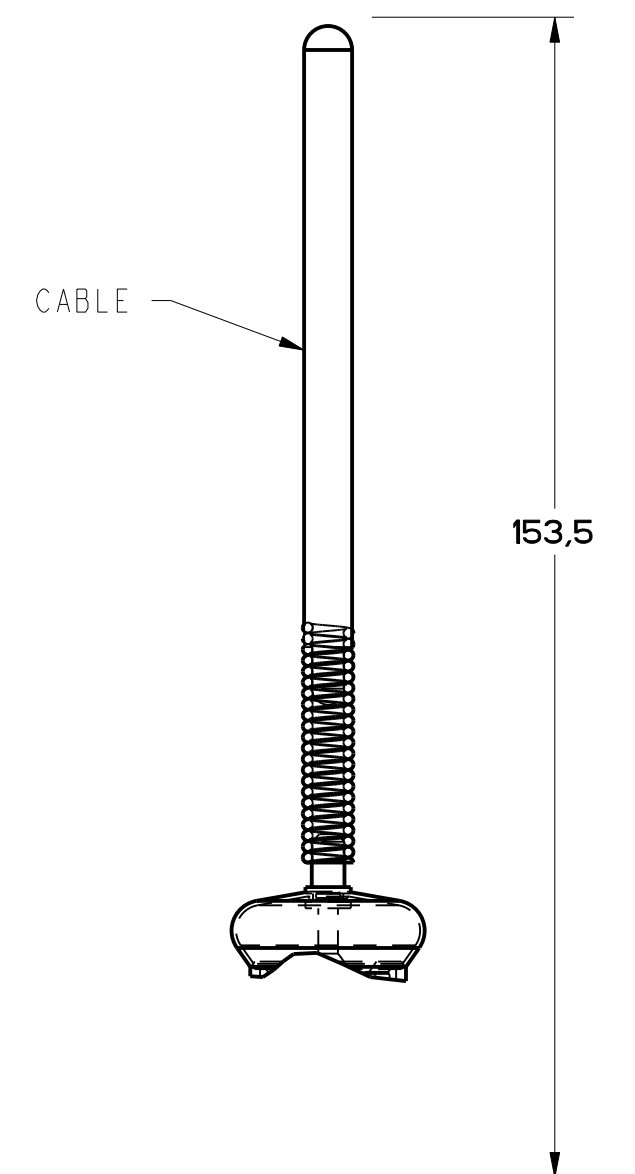


FIGURE 7E -  
CABLE WOBBLE  
ACTUATOR  
OTHERWISE SAME  
AS FIGURE 7

| THIRD ANGLE PROJECTION                                                                                |                                                                                   |                                                                                             |                      |
|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------|
|                  | <div style="font-size: 2em; font-weight: bold; letter-spacing: 0.5em;">FULL</div> |                                                                                             |                      |
| DO NOT SCALE PRINT                                                                                    |                                                                                   |                                                                                             |                      |
| <div style="font-size: 1.5em; font-weight: bold; letter-spacing: 0.2em;">TOLERANCES</div>             |                                                                                   |                                                                                             |                      |
| APPLY TO DEFINITIVE UNITS. CONVERSIONS ARE ONLY FOR<br>REFERENCE. UNLESS NOTED, TOLERANCES ARE: $\pm$ |                                                                                   |                                                                                             |                      |
| DIM                                                                                                   | TOL                                                                               | DIM                                                                                         | TOL                  |
| $\times$                                                                                              | $\pm 0.004$                                                                       | $\frac{1}{8}$                                                                               | $\pm 0.01 \pm 0.015$ |
| ONE PLACE<br>X .1                                                                                     | $\pm 0.015$                                                                       | 1.0                                                                                         | $\pm 0.08 \pm 0.15$  |
| TWO PLACES<br>X .01                                                                                   | $\pm 0.006$                                                                       | 1.0XX                                                                                       | $\pm 0.13 \pm 0.05$  |
| <div style="font-size: 1.5em; font-weight: bold; letter-spacing: 0.2em;">ANGLES</div>                 |                                                                                   |                                                                                             |                      |
| $\pm 30^\circ$<br>SYMMETRIC                                                                           |                                                                                   | US CUSTOMARY                                                                                |                      |
| <div style="font-size: 1.5em; font-weight: bold; letter-spacing: 0.2em;">DESIGN UNITS</div>           |                                                                                   | <div style="font-size: 1.5em; font-weight: bold; letter-spacing: 0.2em;">US CUSTOMARY</div> |                      |
|                  |                                                                                   |        |                      |
| WEIGHT                                                                                                |                                                                                   |                                                                                             |                      |

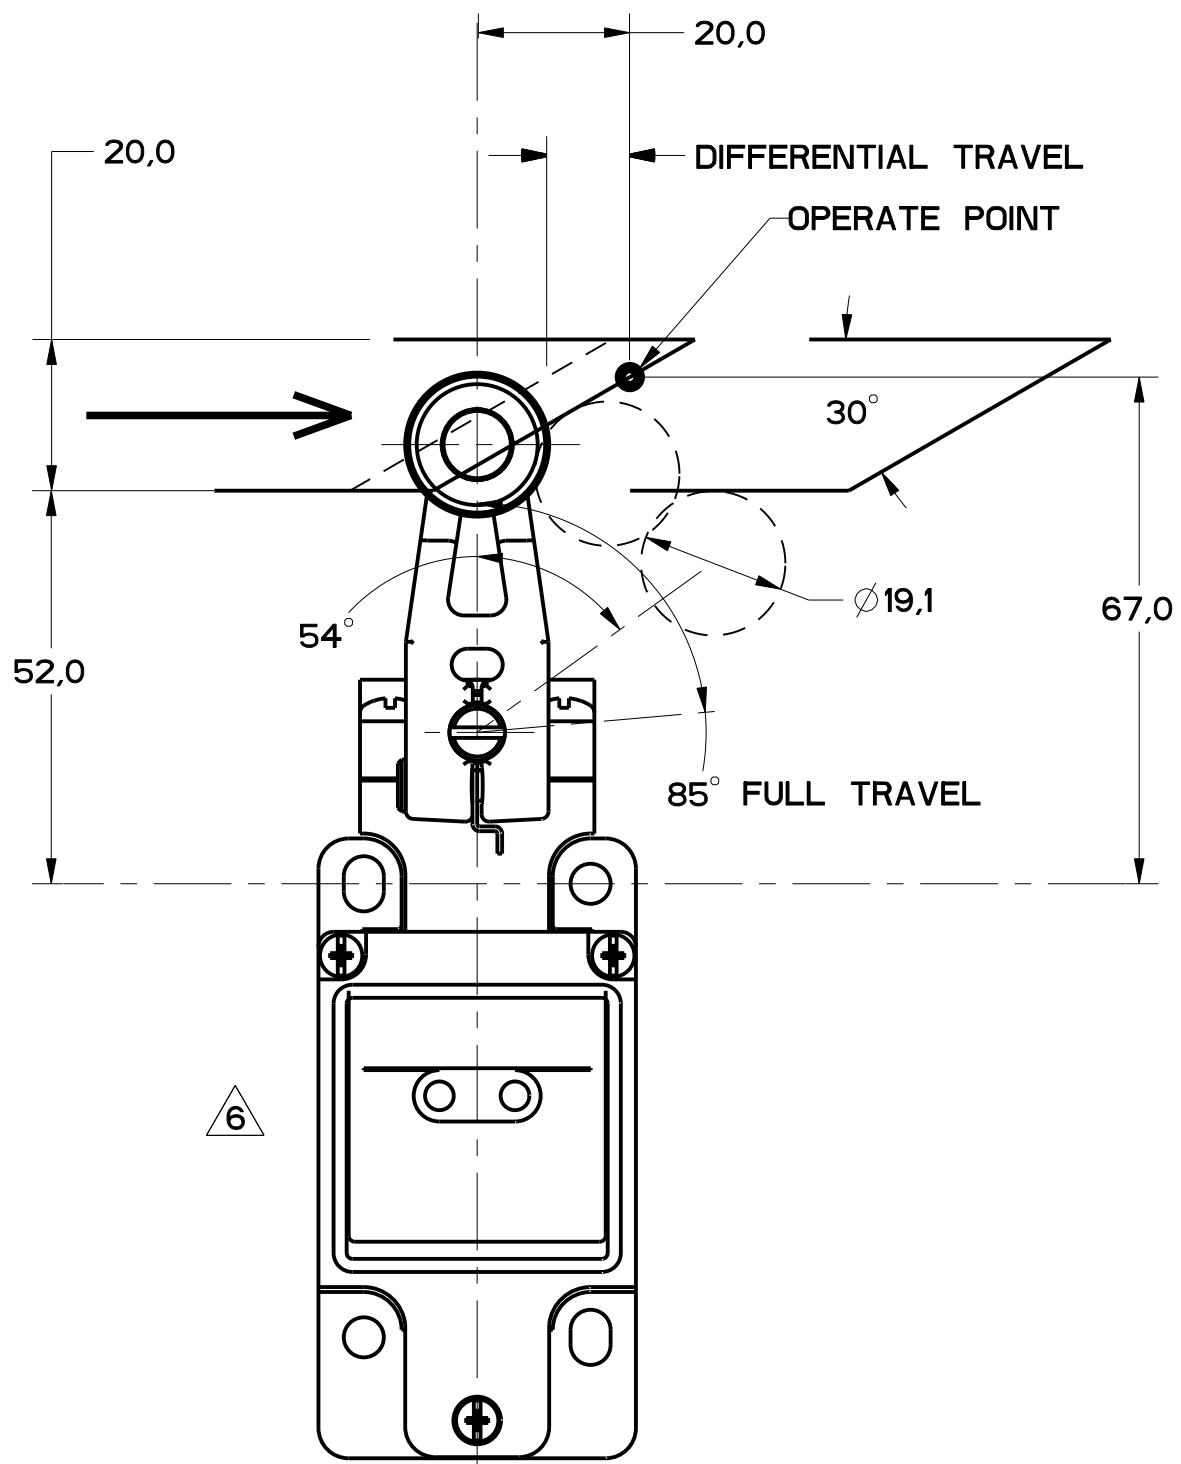


FIGURE 8

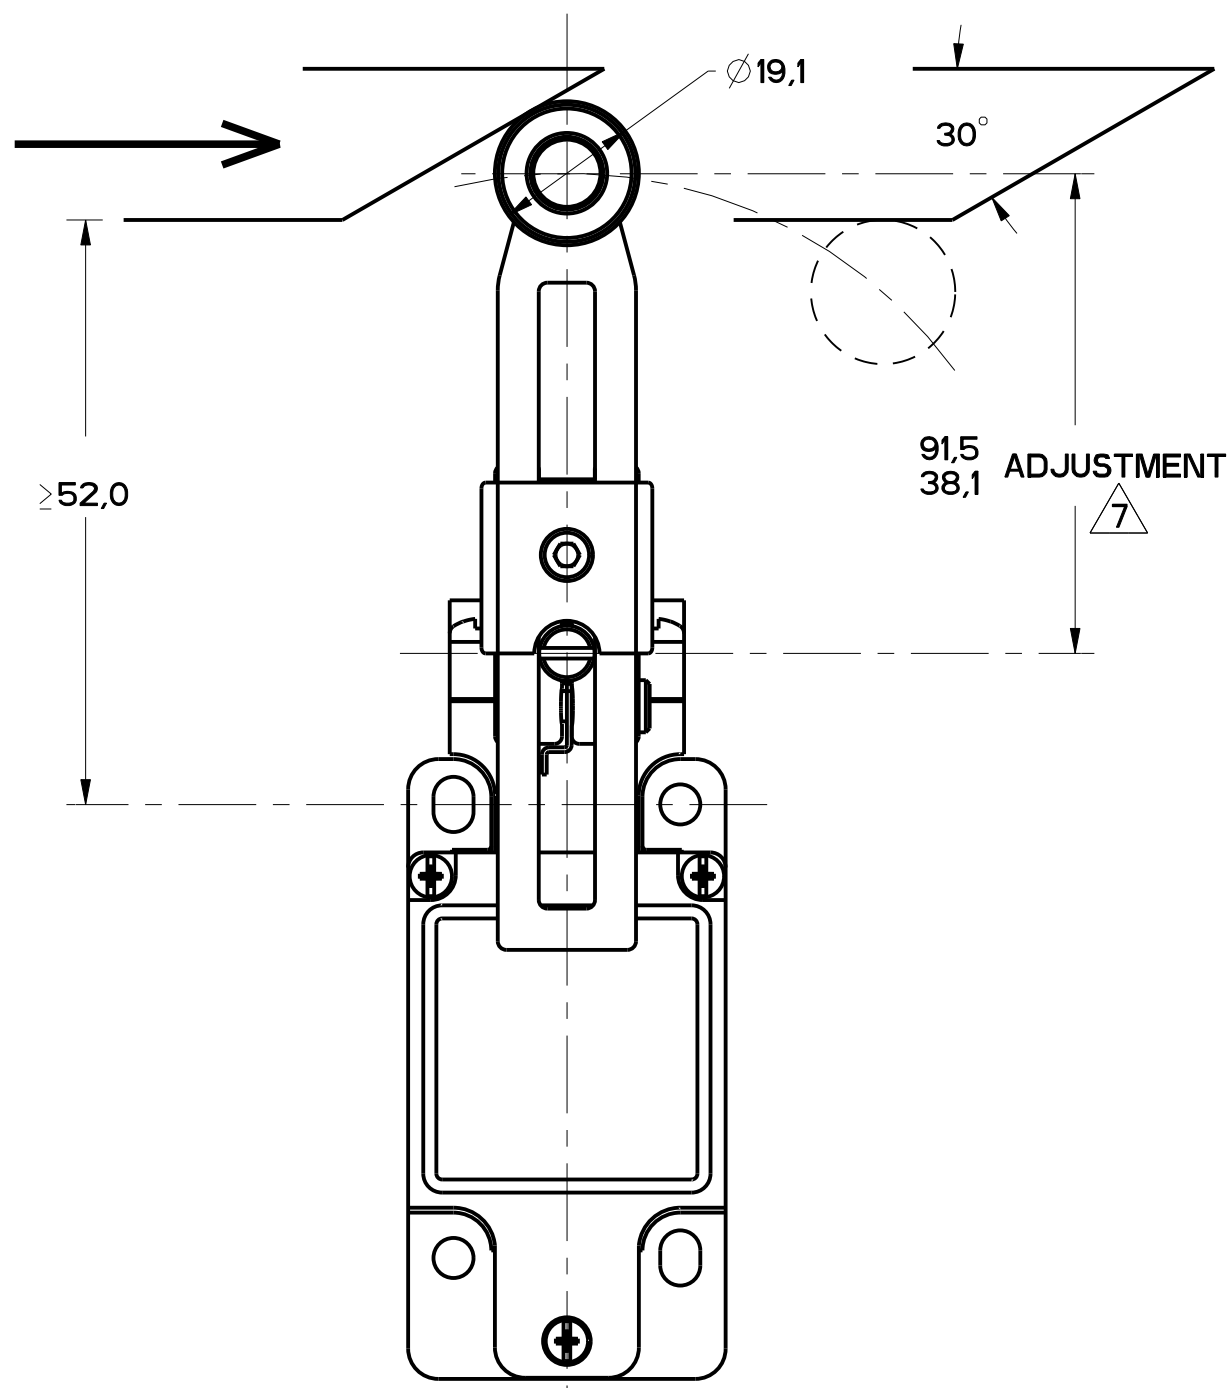


FIGURE 9

GLZ54J: 200.00 / 7.870 MAX  
GLZ54K: 140.00 / 5.510 MAX  
ALUMINUM ROD

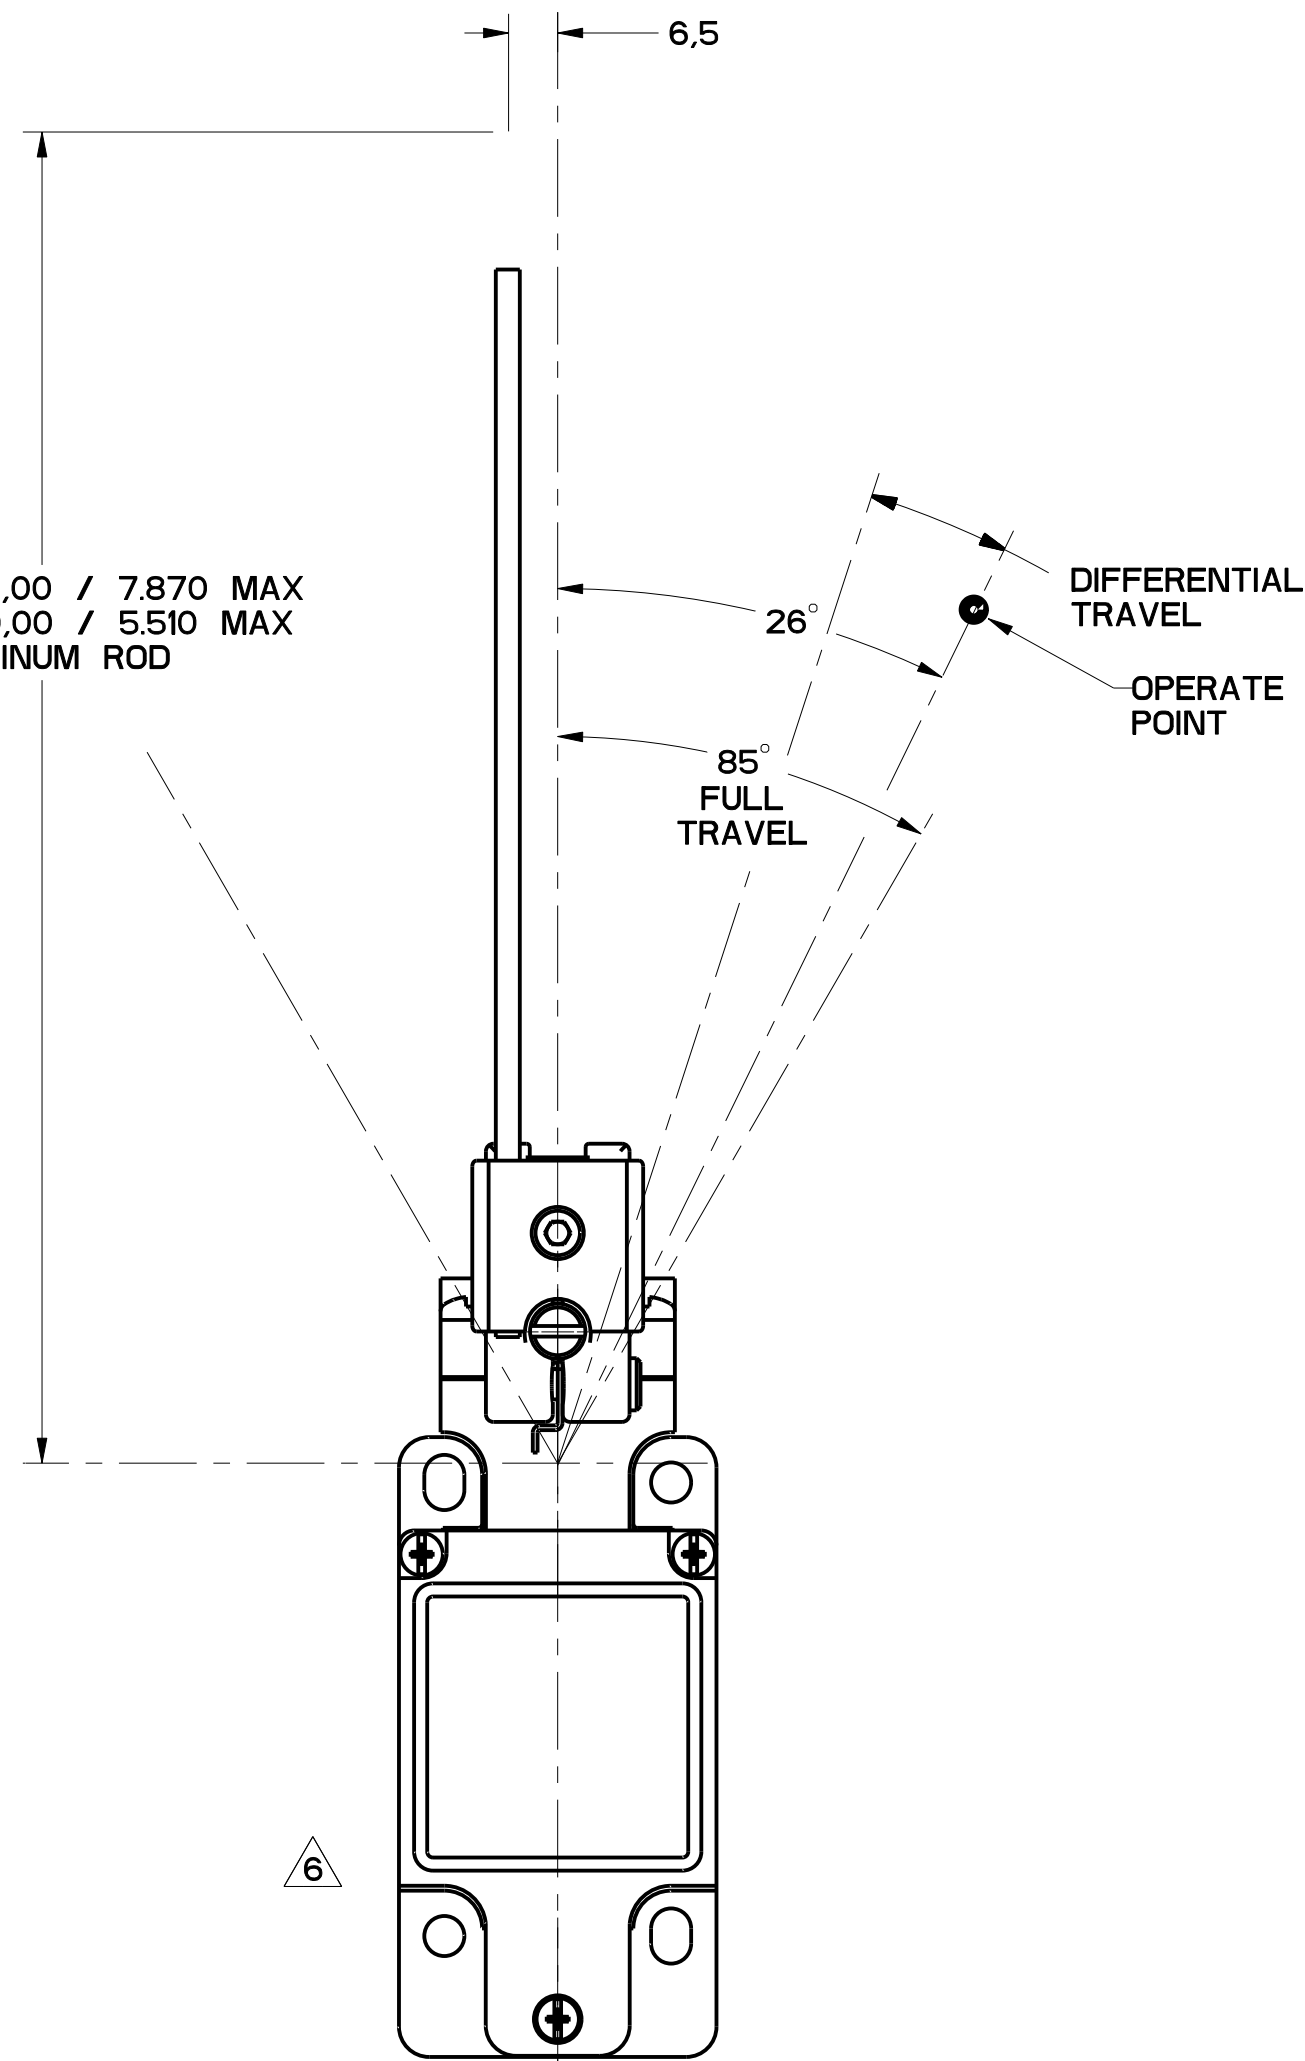


FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION

| CATALOG LISTING | CONTACT BLOCK DIAGRAM                     | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED,  CONTACT OPEN,  - CONTACT CLOSED<br>DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 | MAXIMUM OPERATING TORQUE<br>N-<br>LB-IN | MAXIMUM DISCONNECT TORQUE<br>N-<br>LB-IN | MAX OPERATE DEGREE/S | MIN OPERATE DEGREE/S | MAX OPERATE FREQUENCY OPS/MIN |
|-----------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------------------------------------------|----------------------|----------------------|-------------------------------|
| GL**02A*        | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> | 21-22 26° 55**° 85°<br>13-14  12° DIFFERENTIAL TRAVEL                                                                                              | $\frac{.330}{2.9}$                      | $\frac{.385}{3.4}$                       | 1290                 | 13                   | 250                           |


CAM ACTUATION PER EN50041, FIGURES 8 AND 9

| CATALOG LISTING | CONTACT BLOCK DIAGRAM                     | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED,  CONTACT OPEN,  - CONTACT CLOSED<br>DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5<br>DIMENSIONS IN mm | MAXIMUM OPERATING FORCE<br>N<br>LB | MAXIMUM DISCONNECT FORCE<br>N<br>LB | MAX OPERATE VEL<br>M/S<br>IN/S | MIN OPERATE VEL<br>M/S<br>IN/S | MAX OPERATE FREQUENCY OPS/MIN |
|-----------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------|--------------------------------|-------------------------------|
| GL**02A*        | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> | 21-22 0 20 56**<br>13-14  12 DIFFERENTIAL TRAVEL                                                                                                                       | $\frac{9.7}{2.2}$                  | $\frac{11.4}{2.6}$                  | $\frac{.85}{33.5}$             | $\frac{8.5}{.33}$              | 250                           |



FIGURE 12



| FIGURE 12. WOBBLE HEAD, SIDE ACTUATION AT 100mm |                                                                                                                                |                                                                                                                                                           |                                           |                                            |                                       |                                        |                                  |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------------------------------------------|---------------------------------------|----------------------------------------|----------------------------------|
| CATALOG LISTING                                 | CONTACT BLOCK DIAGRAM                                                                                                          | NOMINAL TRAVELS AND RELATED TERMINALS<br>■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 | MAXIMUM OPERATING FORCE<br>$\frac{N}{LB}$ | MAXIMUM DISCONNECT FORCE<br>$\frac{N}{LB}$ | MAX OPERATE VEL<br>$\frac{M/S}{in/S}$ | MIN OPERATE VEL<br>$\frac{mm/S}{in/S}$ | MAX OPERATE FREQUENCY<br>OPS/MIN |
| GL**02E                                         | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> |  <p>12 DIFFERENTIAL TRAVEL</p>                                       | $\frac{2.5}{0.6}$                         | N/A                                        | $\frac{.5}{19.7}$                     | $\frac{11}{.43}$                       | 100                              |

THIRD ANGLE PROJECTION



SCALEFULL

DO NOT SCALE PRINT

TOLERANCES  
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR  
REFERENCE, UNLESS NOTED. TOLERANCES ARE: 1

| DIM          |      | TOL     |         | DIM     |         | TOL     |         |
|--------------|------|---------|---------|---------|---------|---------|---------|
| mm           | in   | mm/16   | in      | mm/16   | in      | mm/16   | in      |
| NO PLACES    | 2    | 1/16    | 1.6     | 2.81/32 | 2.8     | 9/32    | 2.81/32 |
| ONE PLACE    | 1.2  | 0.005   | 0.125   | 0.005   | 0.125   | 0.005   | 0.125   |
| TWO PLACES   | 0.1  | 0.0005  | 0.0125  | 0.0005  | 0.0125  | 0.0005  | 0.0125  |
| THREE PLACES | 0.01 | 0.00005 | 0.00125 | 0.00005 | 0.00125 | 0.00005 | 0.00125 |
| ANGLES       |      | ± 2     |         |         |         |         |         |

FED. MFG. CODE 91929

MICRO SWITCH

a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING

GL SERIES CHART 2

DESIGN UNITS

☒

SI METRIC

☐

US CUSTOMARY

☐

| REVISIONS |          |
|-----------|----------|
| A         | CO 78529 |
| B         | CO 93181 |
| C         | CO 93181 |
| D         | CO 93181 |
| E         | CO 93181 |

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

| CATALOG LISTING | CONTACT BLOCK DIAGRAM                     | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED<br>DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 | MAXIMUM OPERATING FORCE<br>N<br>LB | MAXIMUM DISCONNECT FORCE<br>N<br>LB | MAX OPERATE VEL<br>M/S<br>in/s | MIN OPERATE VEL<br>M/S<br>in/s | MAX OPERATE FREQUENCY<br>OPS/MIN |
|-----------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------|--------------------------------|----------------------------------|
| GL**02C         | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> | <br>0.9 DIFFERENTIAL TRAVEL                                                                                                                      | 16<br>3.6                          | 27<br>6.0                           | 0.1<br>3.9                     | 1.0<br>.04                     | 250                              |

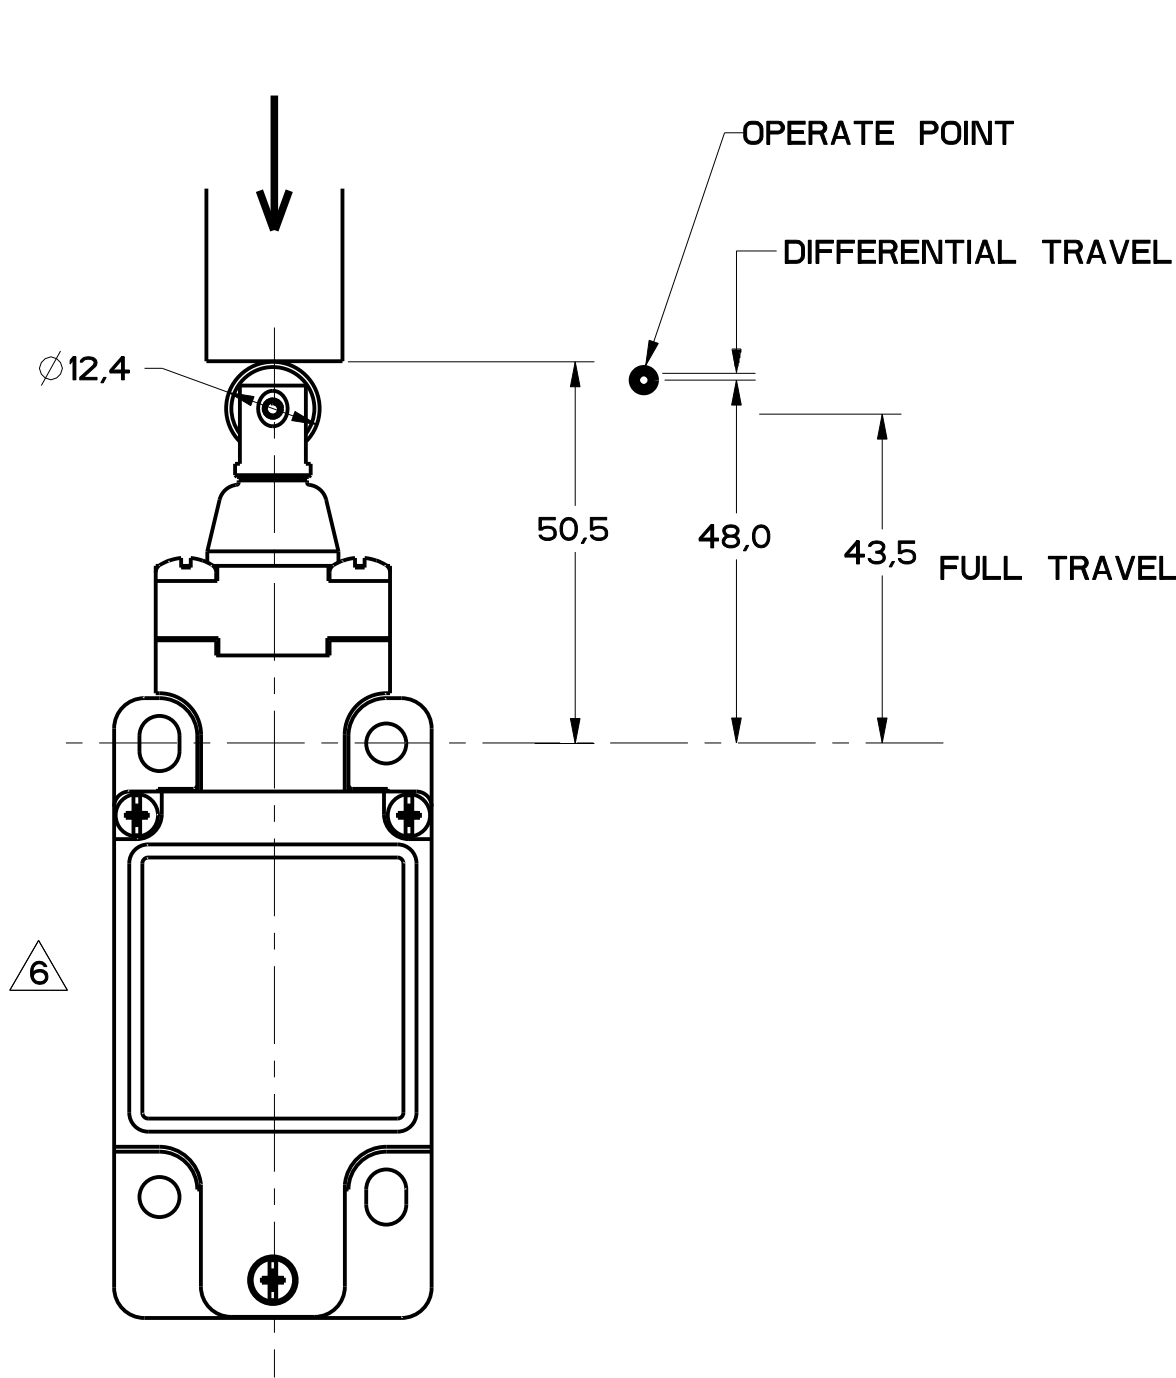


FIGURE 13A

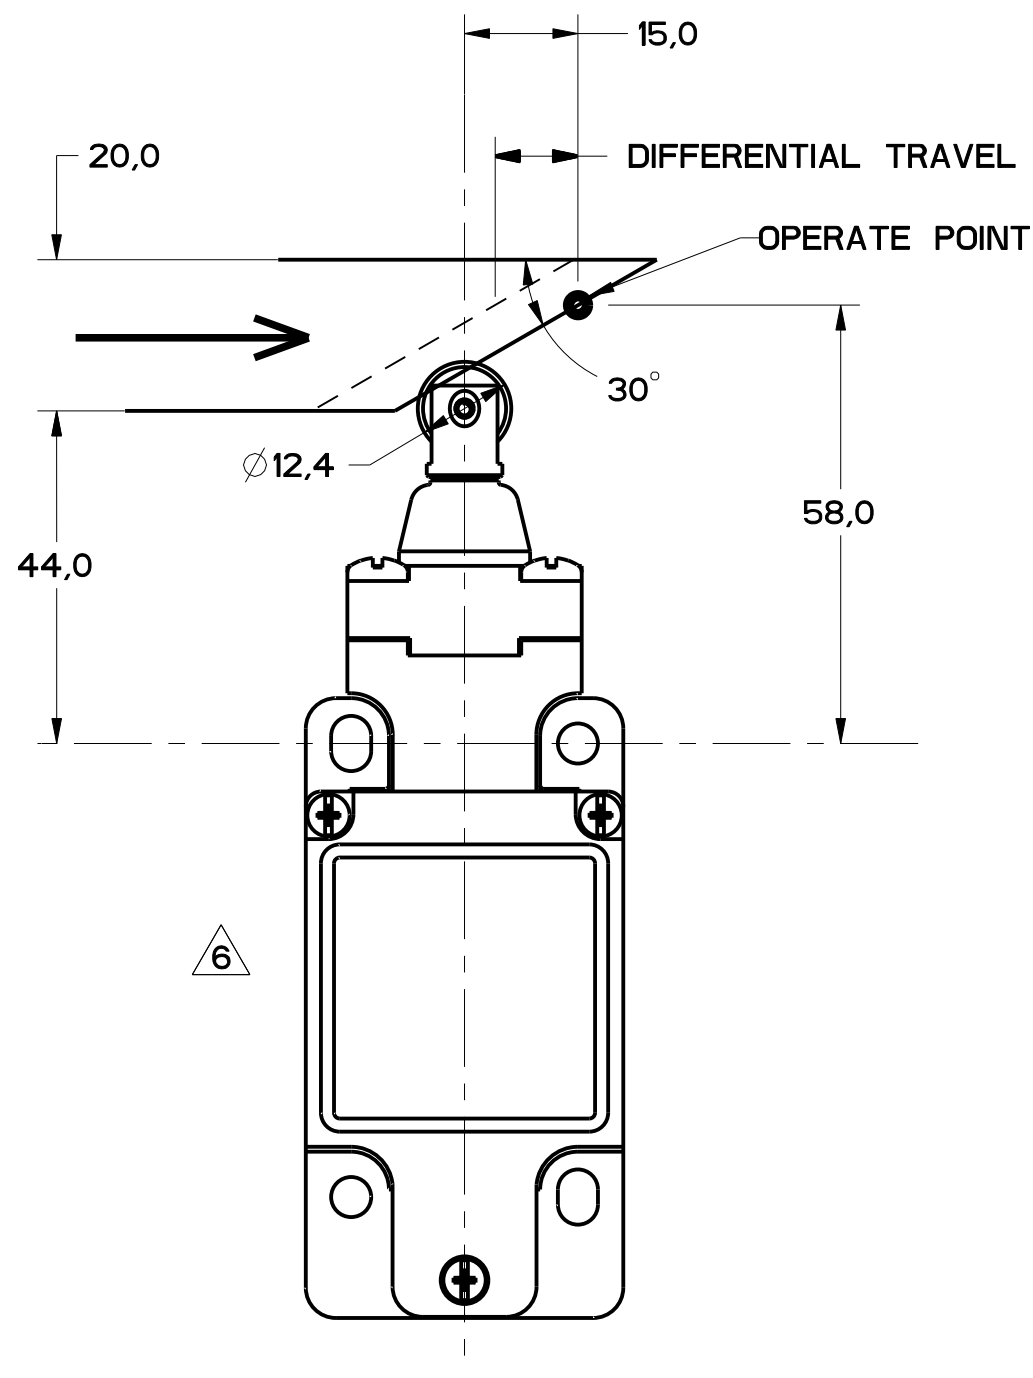


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

| CATALOG LISTING | CONTACT BLOCK DIAGRAM                     | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED<br>DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 | MAXIMUM OPERATING FORCE<br>N<br>LB | MAXIMUM DISCONNECT FORCE<br>N<br>LB | MAX OPERATE VEL<br>M/S<br>in/s | MIN OPERATE VEL<br>M/S<br>in/s | MAX OPERATE FREQUENCY<br>OPS/MIN |
|-----------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------|--------------------------------|----------------------------------|
| GL**02C         | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> | <br>1.8 DIFFERENTIAL TRAVEL                                                                                                                      | 9.3<br>2.1                         | 15.6<br>3.5                         | 0.17<br>6.7                    | 1.7<br>.067                    | 250                              |

| THIRD ANGLE PROJECTION                                                                                 |                                                           |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|
| SCALE                                                                                                  | FULL                                                      |
| DO NOT SCALE PRINT                                                                                     |                                                           |
| TOLERANCES<br>APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE: |                                                           |
| NO PLACES<br>ONE PLACE<br>TWO PLACES<br>THREE PLACES<br>ANGLES                                         | TOL<br>FRACTIONAL<br>DECIMAL<br>SI METRIC<br>US CUSTOMARY |
| DESIGN UNITS                                                                                           | SI METRIC<br>US CUSTOMARY                                 |
| WEIGHT                                                                                                 |                                                           |

| REVISIONS |   |           |  |
|-----------|---|-----------|--|
| A         | 1 | 180992    |  |
| B         | 1 | 01 SEP 94 |  |
| C         | 1 | CO 93789  |  |
| D         | 1 | 0002986   |  |
| E         | 1 | 0017532   |  |
| F         | 1 | 0002986   |  |

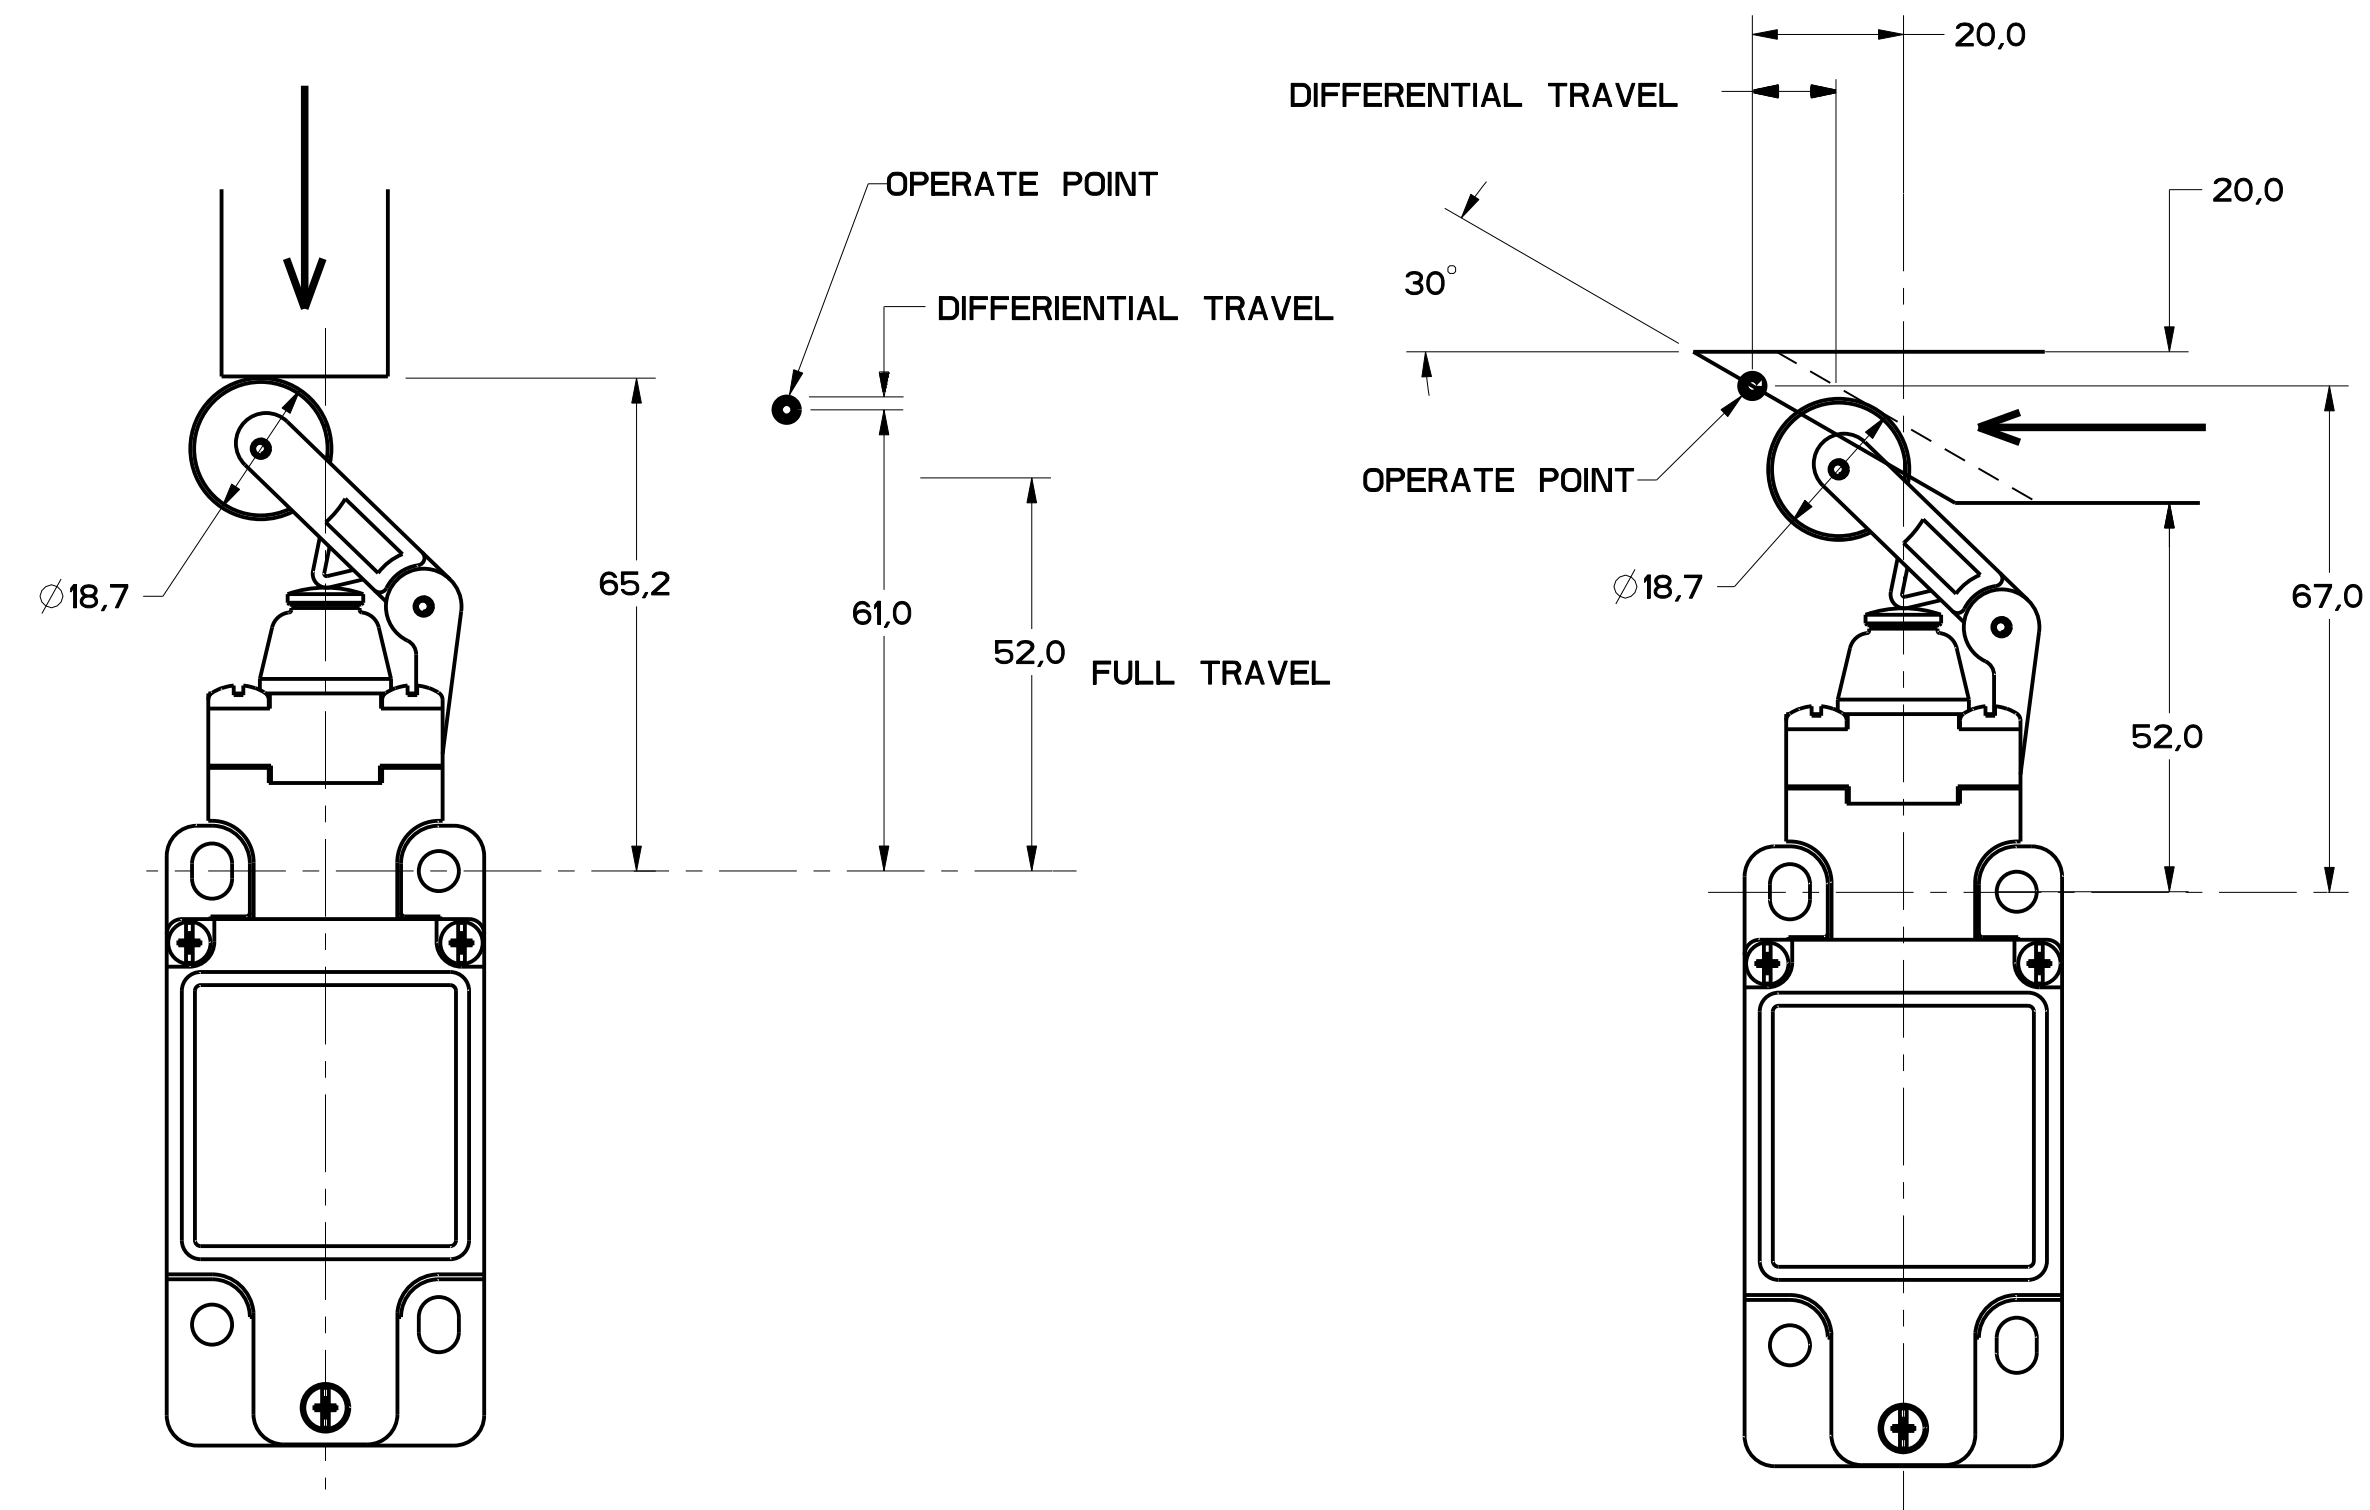


FIGURE 14A

FIGURE 14B

| FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION |                                           |                                                                                                                                                  |                                    |                                     |                                |                                |
|------------------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------|--------------------------------|
| CATALOG LISTING                                      | CONTACT BLOCK DIAGRAM                     | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED<br>DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 | MAXIMUM OPERATING FORCE<br>N<br>LB | MAXIMUM DISCONNECT FORCE<br>N<br>LB | MAX OPERATE VEL<br>M/S<br>in/S | MIN OPERATE VEL<br>M/S<br>in/S |
| GL**02D                                              | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> | <br>1.7 DIFFERENTIAL TRAVEL                                                                                                                      | 9.5<br>2.1                         | 12<br>2.7                           | 0.17<br>6.7                    | 0.067<br>1.7                   |

| FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION |                                           |                                                                                                                                                  |                                    |                                     |                                |                                |
|------------------------------------------------------|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------|--------------------------------|
| CATALOG LISTING                                      | CONTACT BLOCK DIAGRAM                     | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED<br>DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 | MAXIMUM OPERATING FORCE<br>N<br>LB | MAXIMUM DISCONNECT FORCE<br>N<br>LB | MAX OPERATE VEL<br>M/S<br>in/S | MIN OPERATE VEL<br>M/S<br>in/S |
| GL**02D                                              | SNAP - ACTION CONTACTS<br>SINGLE POLE<br> | <br>4.1 DIFFERENTIAL TRAVEL                                                                                                                      | 5.5<br>1.2                         | 7.0<br>1.6                          | 0.29<br>11.4                   | 0.11<br>2.9                    |

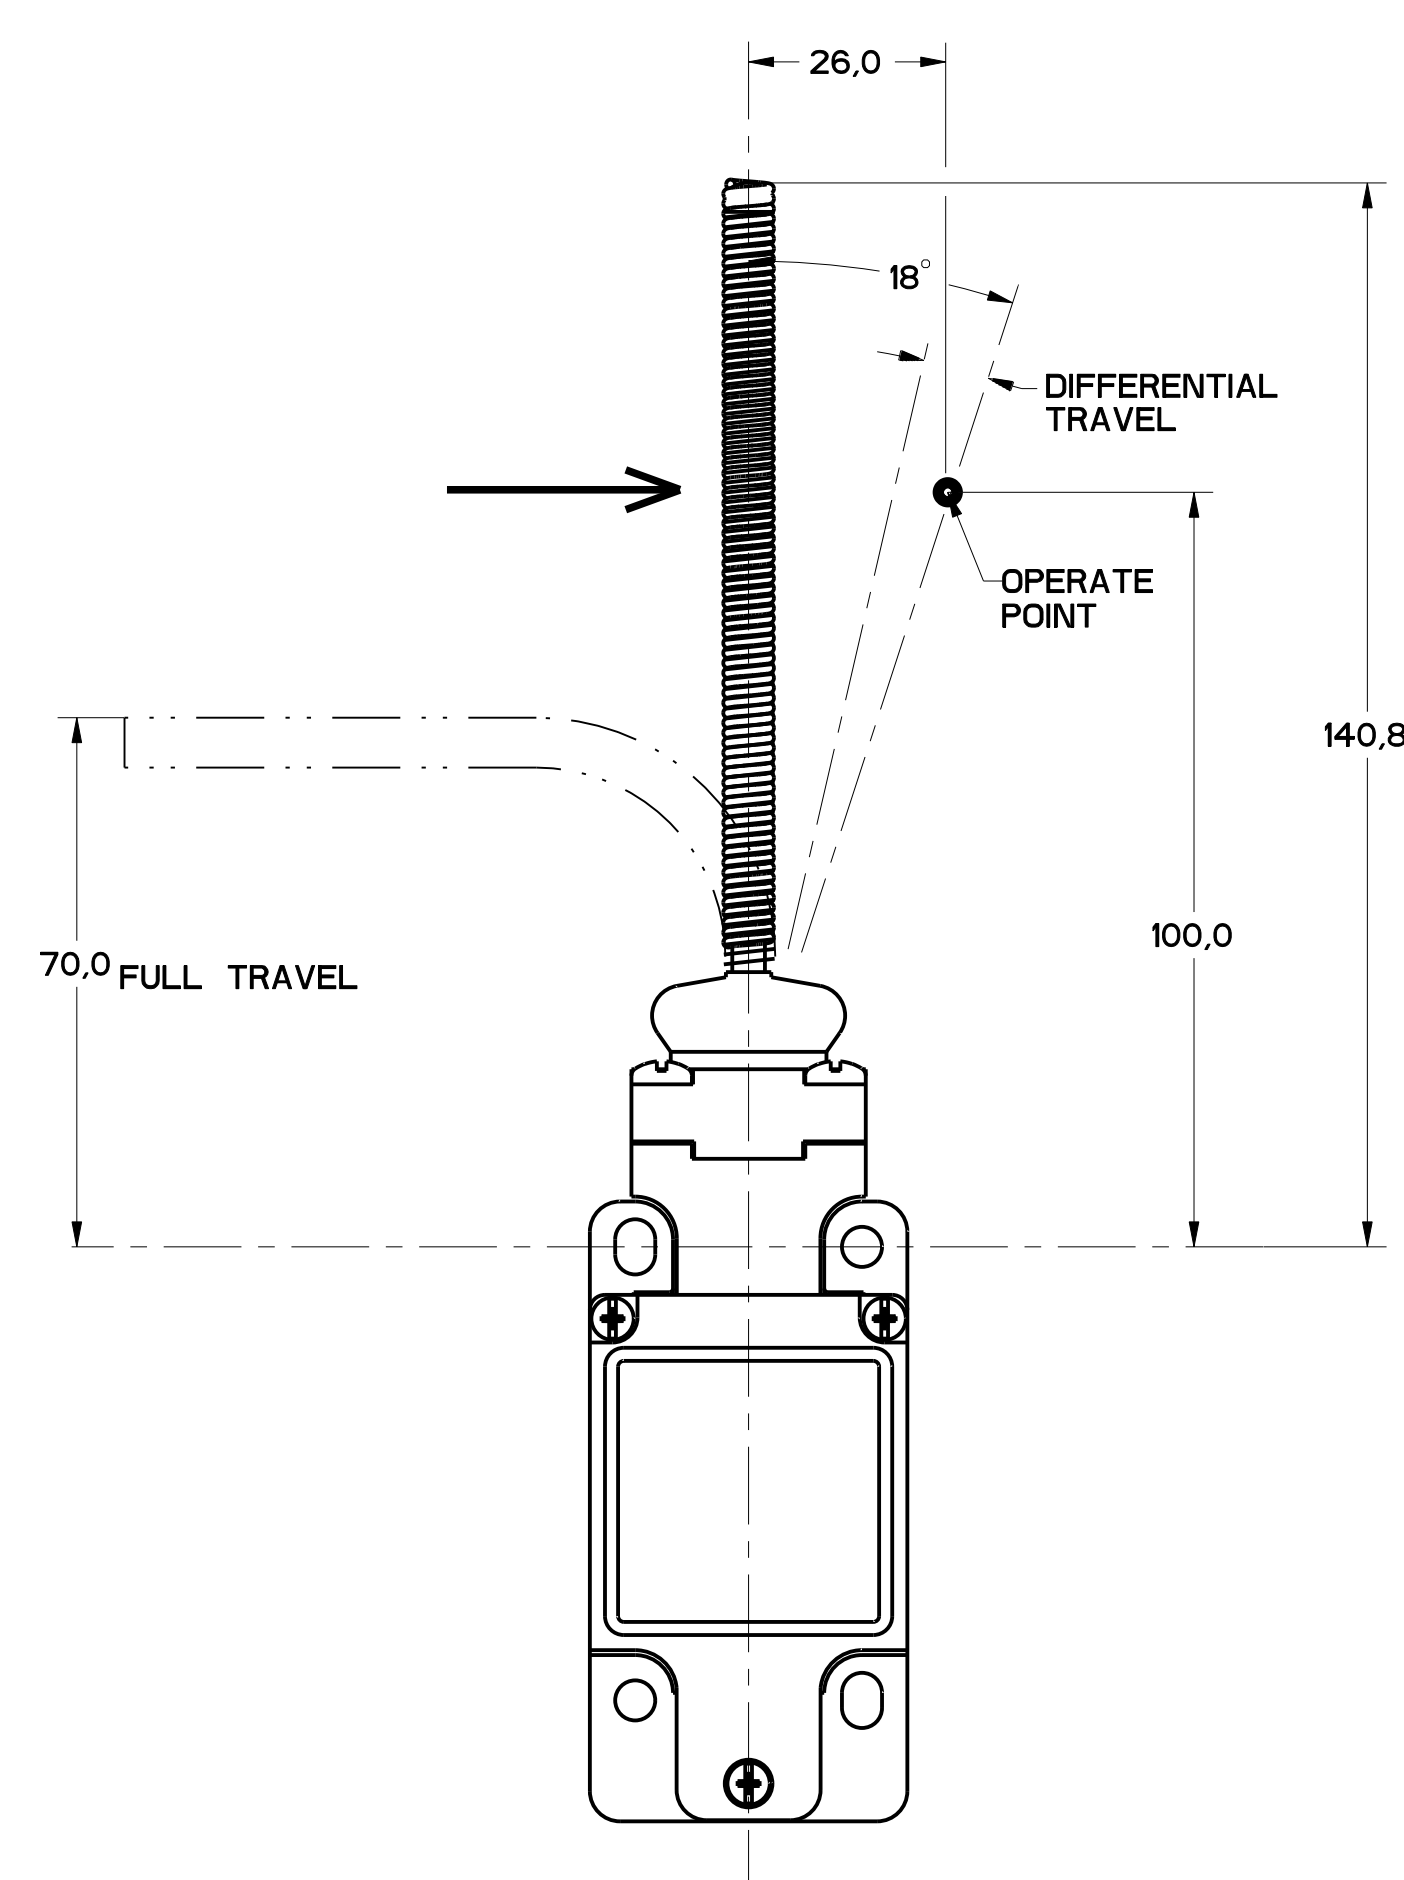


FIGURE 15

| FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION |                                        |                                                                                            |                                        |                                         |                      |                               |
|-----------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------|-----------------------------------------|----------------------|-------------------------------|
| CATALOG LISTING                               | CONTACT BLOCK DIAGRAM                  | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL | MAXIMUM OPERATING TORQUE<br>m<br>LB-IN | MAXIMUM DISCONNECT TORQUE<br>m<br>LB-IN | MAX OPERATE DEGREE/S | MIN OPERATE VELOCITY DEGREE/S |
| GL**02K                                       | SNAP - ACTION CONTACTS SINGLE POLE<br> | <br>21-22<br>13-14<br>18°<br>8° DIFFERENTIAL TRAVEL                                        | 0.1<br>.9                              | N/A                                     | 360                  | 8                             |

| FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm |                                        |                                                                                            |                                    |                                     |                                |                                |
|-----------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------|------------------------------------|-------------------------------------|--------------------------------|--------------------------------|
| CATALOG LISTING                                     | CONTACT BLOCK DIAGRAM                  | NOMINAL TRAVELS AND RELATED TERMINALS<br>CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL | MAXIMUM OPERATING FORCE<br>m<br>LB | MAXIMUM DISCONNECT FORCE<br>m<br>LB | MAX OPERATE VEL<br>m/s<br>IN/S | MIN OPERATE VEL<br>m/s<br>IN/S |
| GL**02K                                             | SNAP - ACTION CONTACTS SINGLE POLE<br> | <br>21-22<br>13-14<br>26<br>12 DIFFERENTIAL TRAVEL                                         | 1.3<br>.3                          | N/A                                 | .5<br>19.7                     | .11<br>.43                     |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)