

SIDE ROTARY



FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

ALUMINUM ROD
GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
STAINLESS STEEL ROD
GLZ54N: 318.00 / 12.490 MAX

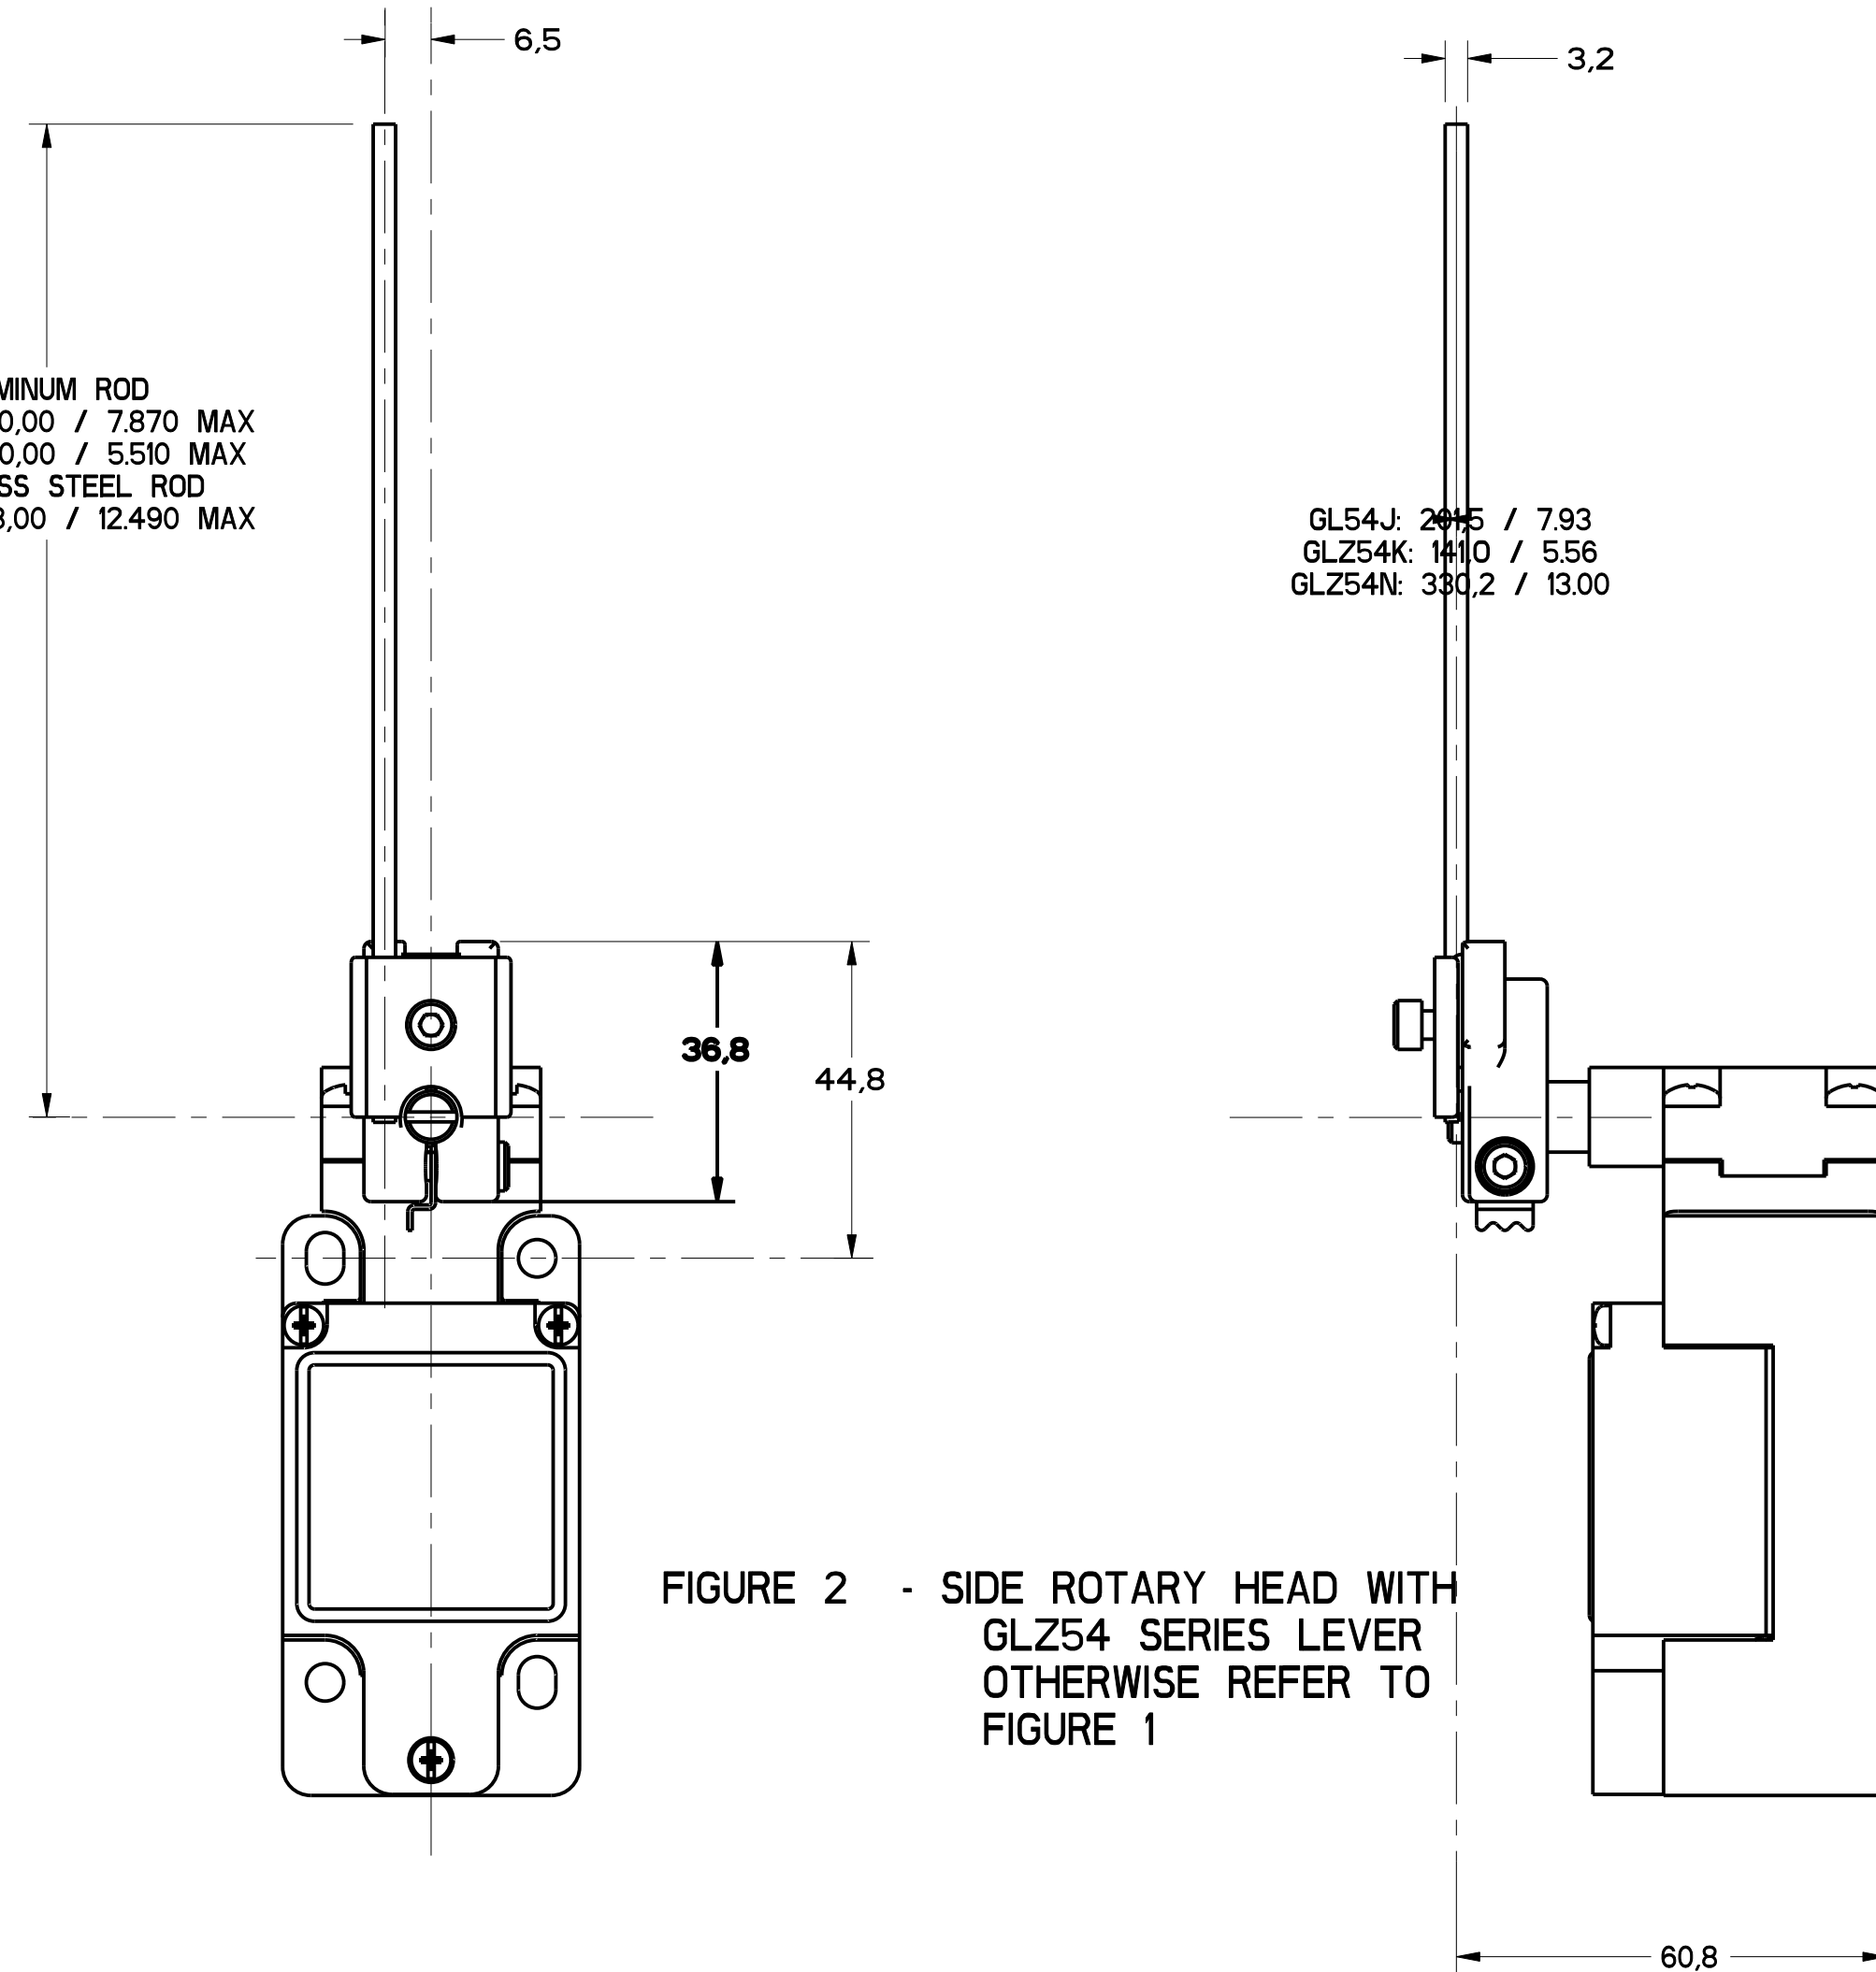


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
Ue	Ie	Ue	Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13


NOTES

- HEADS MAY BE INDEXED IN 90° INCREMENTS.
- LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
- THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
- TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	8	
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

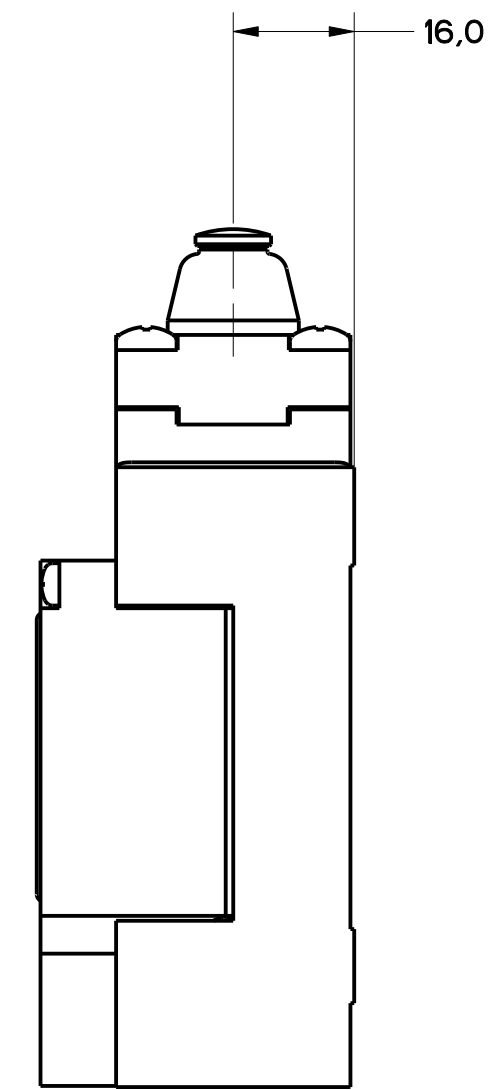


STEEL ROLLER


Ø12,4

50,5

Technical drawing of a lamp head (Fig. 1). The drawing shows a side profile of the lamp head assembly. Two dimensions are indicated: a horizontal distance of 4,7 from the left edge to the center of the lamp head, and a horizontal distance of 16,0 from the center of the lamp head to the right edge of the mounting bracket.

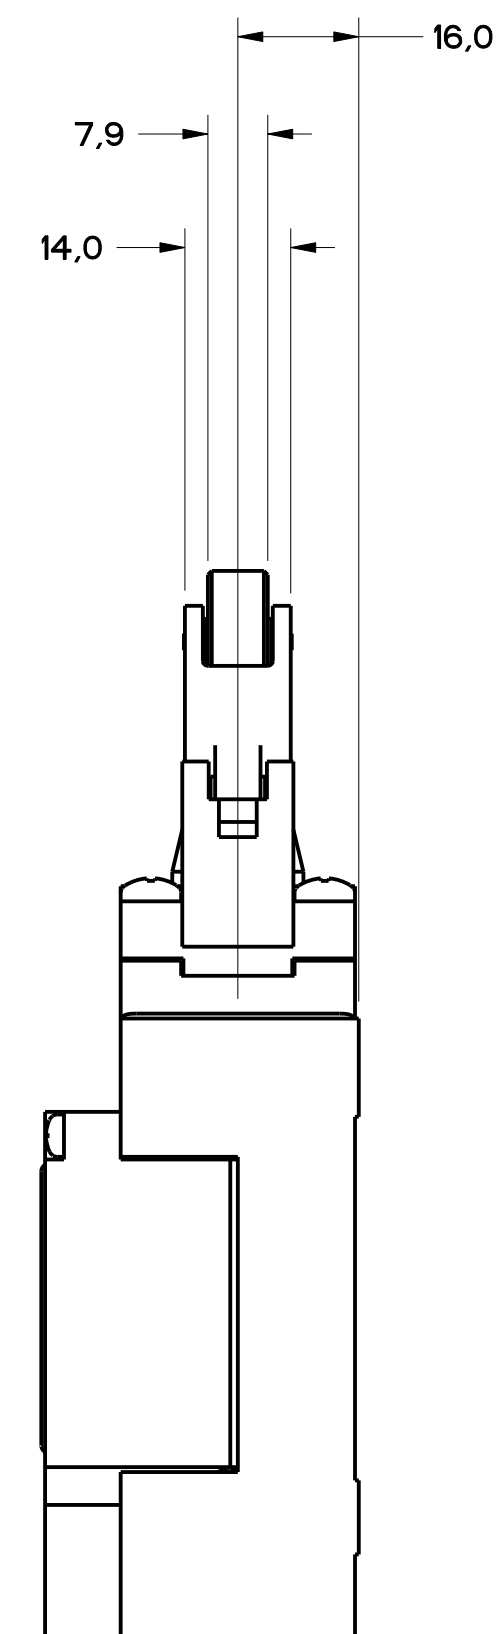

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td colspan="2">mm</td> <td colspan="2">mm</td> </tr> <tr> <td colspan="2">1</td> <td colspan="2">2</td> </tr> </table>		DIM	TOL	DIM	TOL	mm		mm		1		2									
DIM	TOL	DIM	TOL																				
mm		mm																					
1		2																					
FED. MFG. CODE 91929	CATALOG LISTING	<table border="1"> <tr> <td>NO PLACES</td> <td>0.75</td> <td>0.85</td> <td>0.9</td> </tr> <tr> <td>ONE PLACE</td> <td>0.47</td> <td>0.5</td> <td>0.58</td> </tr> <tr> <td>TWO PLACES</td> <td>0.15</td> <td>0.18</td> <td>0.21</td> </tr> <tr> <td>THREE PLACES</td> <td></td> <td></td> <td></td> </tr> <tr> <td>ANGLES</td> <td></td> <td></td> <td></td> </tr> </table>		NO PLACES	0.75	0.85	0.9	ONE PLACE	0.47	0.5	0.58	TWO PLACES	0.15	0.18	0.21	THREE PLACES				ANGLES			
NO PLACES	0.75	0.85	0.9																				
ONE PLACE	0.47	0.5	0.58																				
TWO PLACES	0.15	0.18	0.21																				
THREE PLACES																							
ANGLES																							
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2	<table border="1"> <tr> <td>SI METRIC</td> <td>US CUSTOMARY</td> </tr> <tr> <td>☒</td> <td>☐</td> </tr> </table>	SI METRIC	US CUSTOMARY	☒	☐																
			SI METRIC	US CUSTOMARY																			
☒	☐																						
WEIGHT	DESIGN UNITS																						

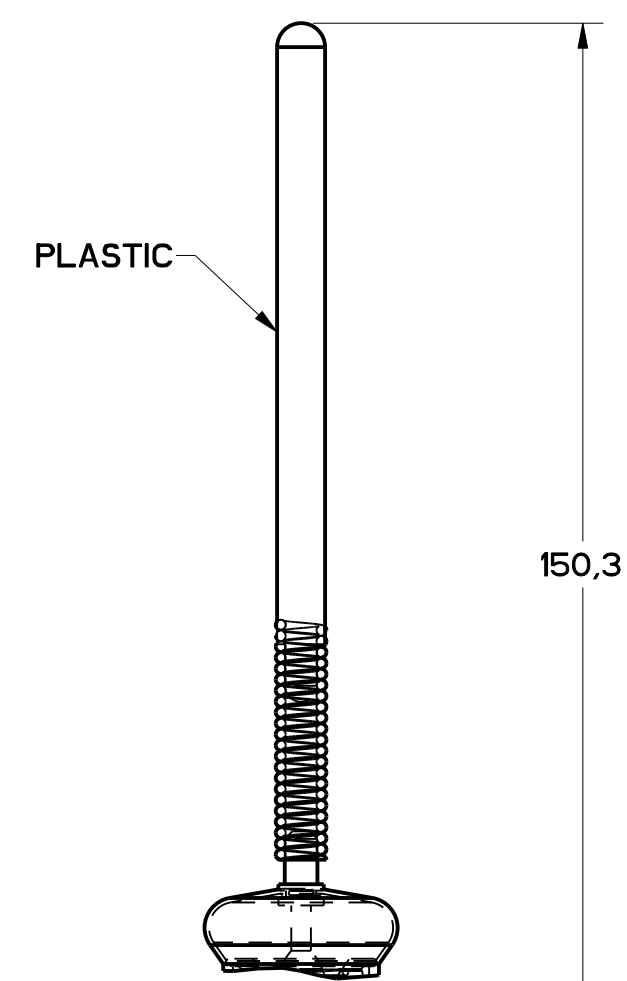

Technical drawing of a vertical rod. The rod has a base with a flared bottom. A dimension line on the right indicates a height of 165,1. A horizontal dimension line at the top indicates a diameter of $\varnothing 1,3$.

Technical drawing of a screwdriver. A dimension line on the right indicates a length of 139.7 units, measured from the base of the handle to the tip of the shaft.

Technical drawing of a screwdriver. The drawing shows a side view of the tool. The handle is at the bottom, followed by a threaded section (the neck), and then a long, thin shaft. The shaft has a diameter of $\varnothing 1,2$ mm. The total length of the shaft is indicated as 190,5 mm.

Technical drawing of a cable assembly. The drawing shows a vertical cable with a coiled spring section near the bottom. A label 'CABLE' points to the main body of the cable. A dimension line on the right indicates a length of 153,5.

FIGURE 7 - WOBBLE HEAD, AND CAT WHISKER HEAD
COIL ACTUATOR,
OTHERWISE REFER TO
FIGURE 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>SW mm</td><td>TOL mm / .01</td><td>SW in</td><td>TOL in</td></tr><tr><td>NO PLACES</td><td>0.075</td><td>0.003</td><td>0.001</td></tr><tr><td>ONE PLACE</td><td>0.47 / .016</td><td>0.003</td><td>0.001</td></tr><tr><td>TWO PLACES</td><td>0.157 / .006</td><td>0.003</td><td>0.001</td></tr><tr><td>THREE PLACES</td><td></td><td>0.003</td><td>0.001</td></tr><tr><td>ANGLES</td><td>±.02</td><td></td><td></td></tr></table>		SW mm	TOL mm / .01	SW in	TOL in	NO PLACES	0.075	0.003	0.001	ONE PLACE	0.47 / .016	0.003	0.001	TWO PLACES	0.157 / .006	0.003	0.001	THREE PLACES		0.003	0.001	ANGLES	±.02		
SW mm	TOL mm / .01	SW in	TOL in																								
NO PLACES	0.075	0.003	0.001																								
ONE PLACE	0.47 / .016	0.003	0.001																								
TWO PLACES	0.157 / .006	0.003	0.001																								
THREE PLACES		0.003	0.001																								
ANGLES	±.02																										
FED. MFG. CODE 91929	CATALOG LISTING	<table><tr><td>DESIGN UNITS</td><td>☒ SI METRIC</td><td>US CUSTOMARY</td></tr></table>		DESIGN UNITS	☒ SI METRIC	US CUSTOMARY																					
DESIGN UNITS	☒ SI METRIC	US CUSTOMARY																									
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 2																									
		WEIGHT																									

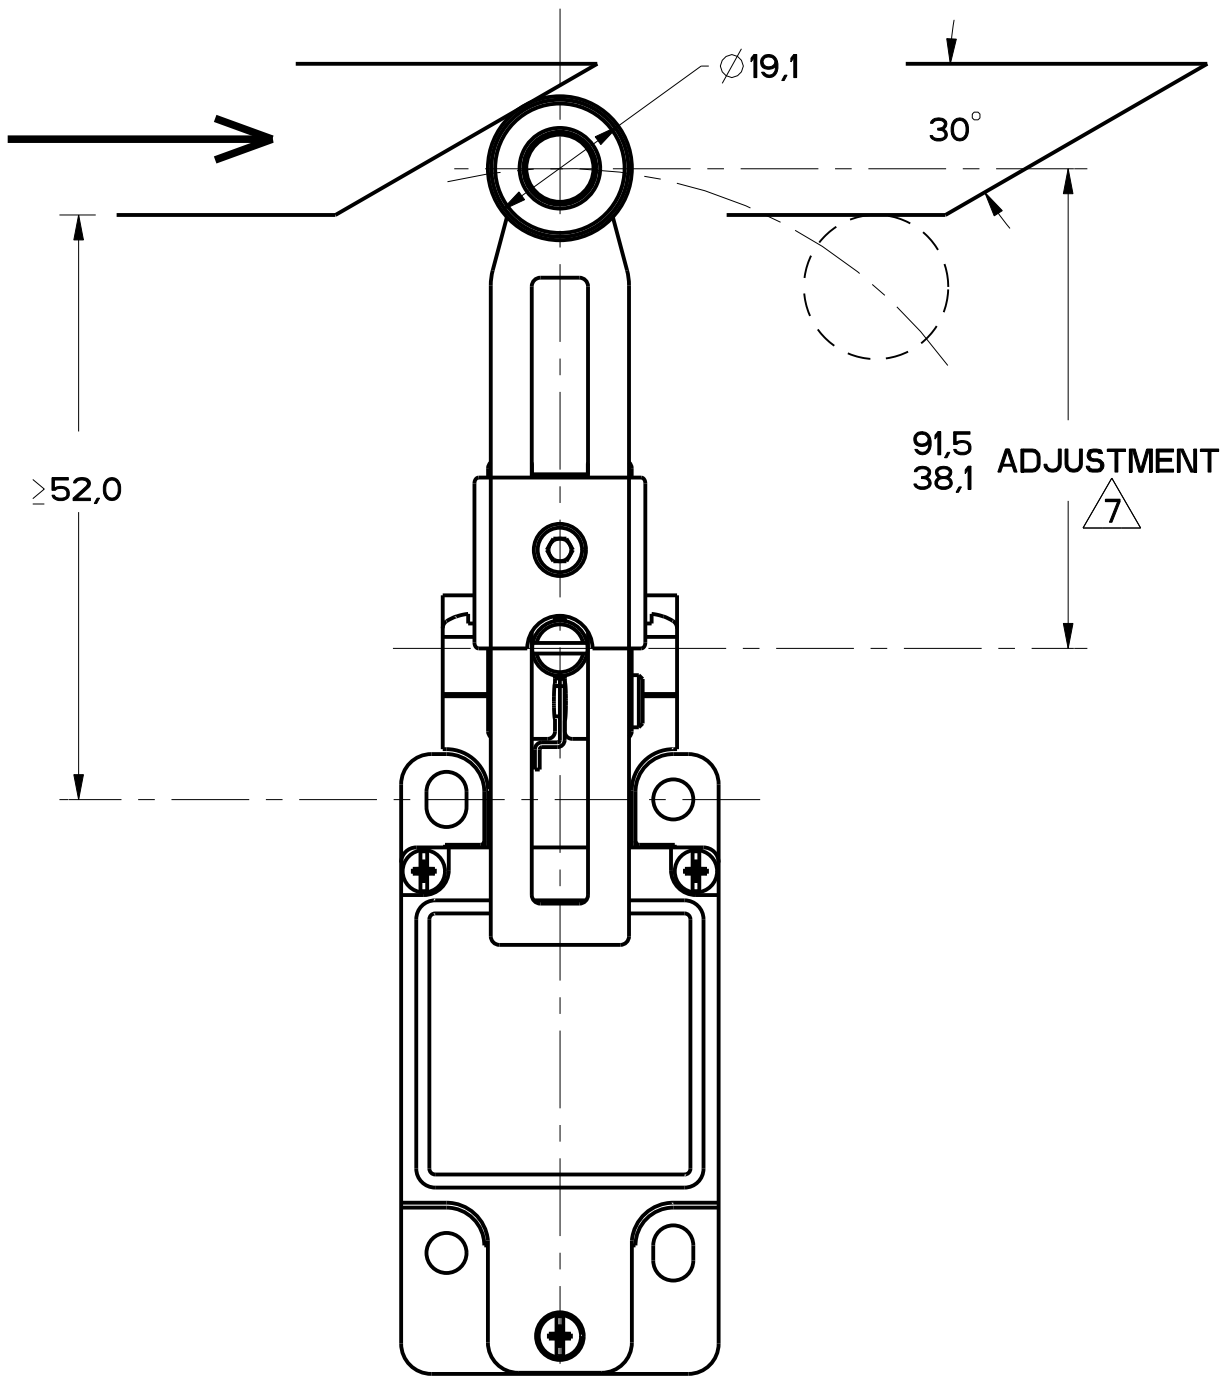


FIGURE 9

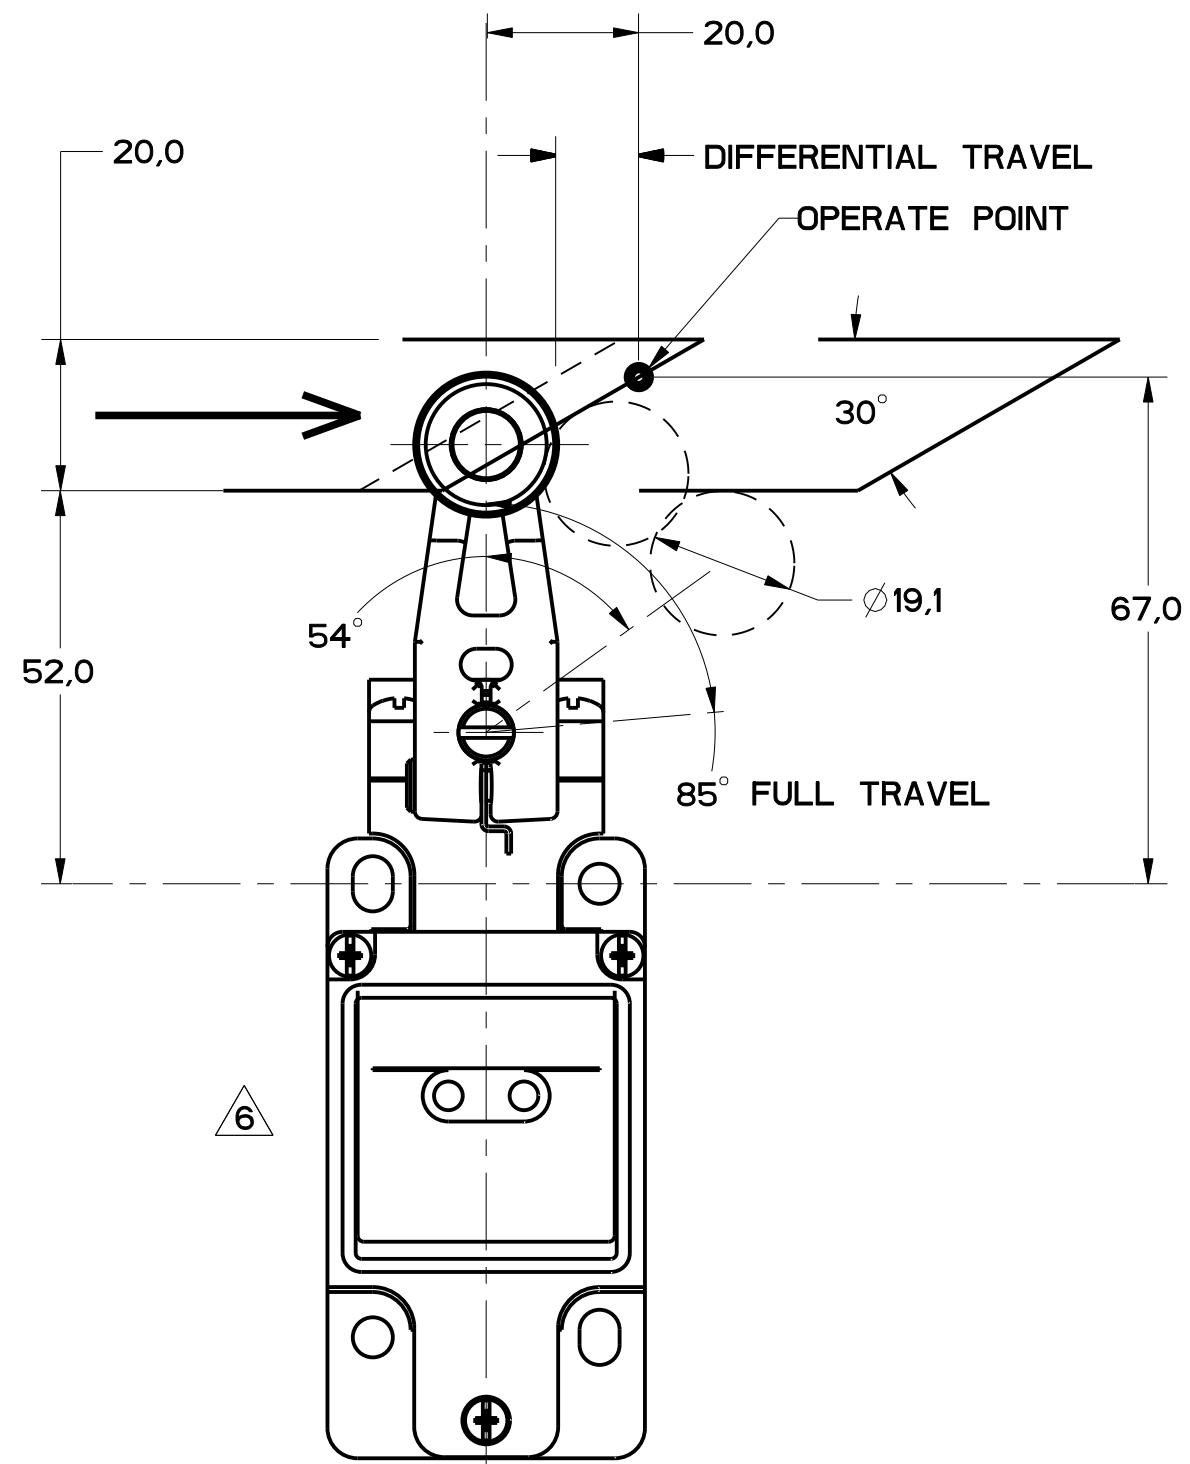


FIGURE 8

GLZ54J: 200.00 / 7.870 MAX
GLZ54K: 140.00 / 5.510 MAX
ALUMINUM ROD

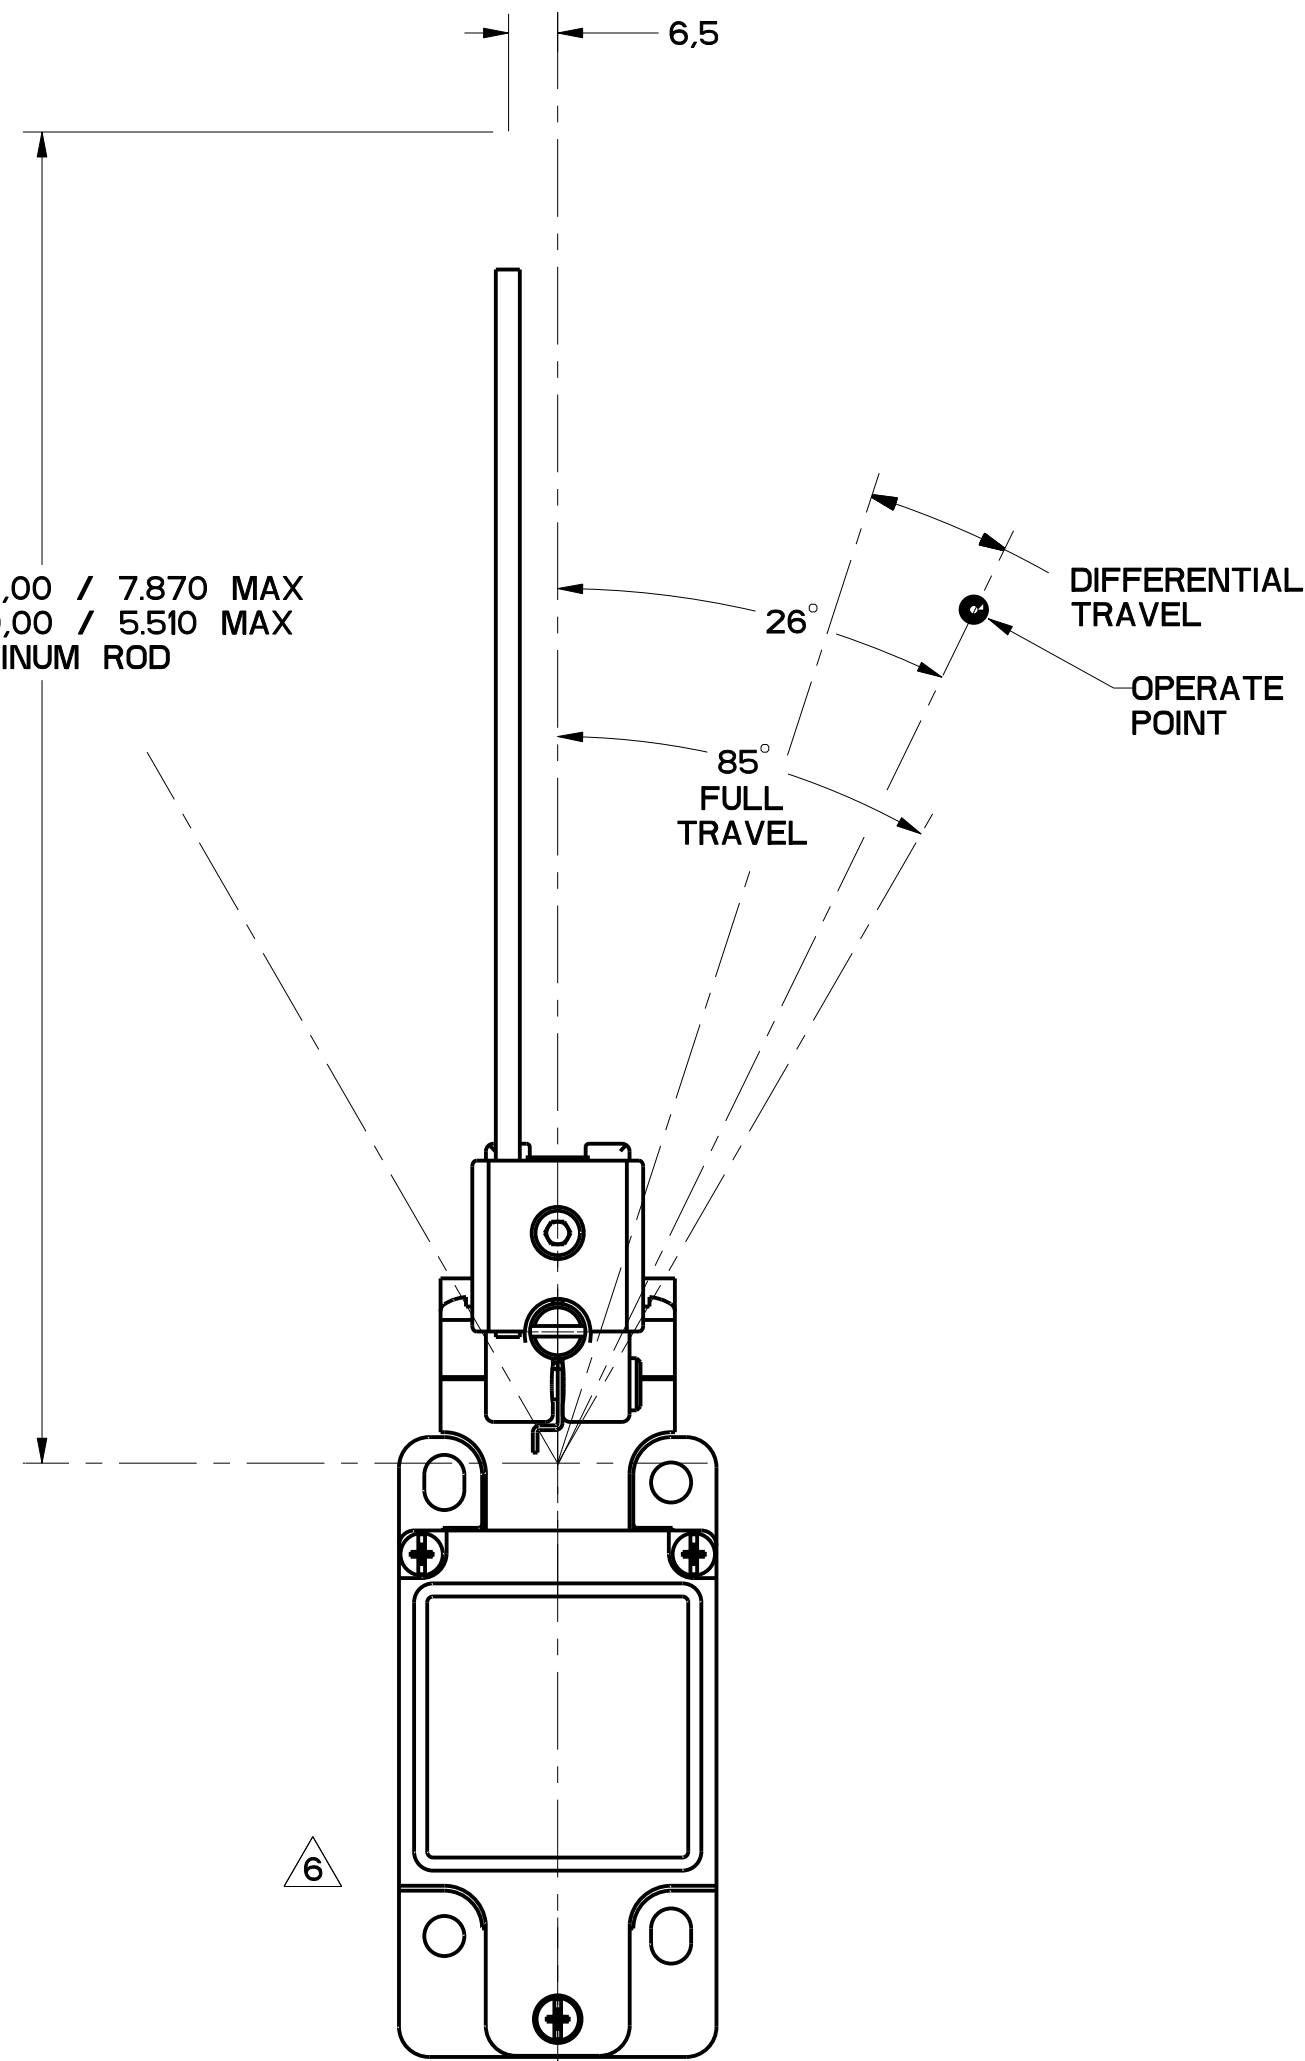


FIGURE 10

FIGURES 8, 9, 10 ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE $\frac{N}{LB-IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N}{LB-IN}$	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250

CAM ACTUATION PER EN50041, FIGURES 8 AND 9

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250



FIGURE 12


FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION								
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE N-m LB/in	MAXIMUM DISCONNECT TORQUE N-m LB/in	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN	
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 18° 8° DIFFERENTIAL TRAVEL > <	0.2 1.8	N/A	360	8	100	

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02E	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 26 12 DIFFERENTIAL TRAVEL	$\frac{2.5}{0.6}$	N/A	$\frac{5}{19.7}$	$\frac{11}{.43}$	100

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table border="1"> <tr> <th>DIM</th> <th>TOL</th> <th>DIM</th> <th>TOL</th> </tr> <tr> <td>mm</td> <td>mm / in.</td> <td>mm</td> <td>mm / in.</td> </tr> <tr> <td>1</td> <td>1.64</td> <td>1</td> <td>0.81 / 0.</td> </tr> <tr> <td>2</td> <td>0.41 / 0.</td> <td>2</td> <td>0.71 / 0.</td> </tr> <tr> <td>3</td> <td>0.15 / 0.</td> <td>3</td> <td>0.13 / 0.</td> </tr> <tr> <td colspan="2" style="text-align: center;">± 2</td> <td colspan="2"></td> </tr> </table>		DIM	TOL	DIM	TOL	mm	mm / in.	mm	mm / in.	1	1.64	1	0.81 / 0.	2	0.41 / 0.	2	0.71 / 0.	3	0.15 / 0.	3	0.13 / 0.	± 2			
DIM	TOL	DIM	TOL																								
mm	mm / in.	mm	mm / in.																								
1	1.64	1	0.81 / 0.																								
2	0.41 / 0.	2	0.71 / 0.																								
3	0.15 / 0.	3	0.13 / 0.																								
± 2																											
FED. MFG. CODE 91929	CATALOG LISTING																										
MICRO SWITCH a Honeywell Division	GL SERIES CHART 2																										
	SWITCH, ENCLOSED																										
		SI METRIC ☒	US CUSTOMARY ☐																								
		DESIGN UNITS ☒																									

REVISIONS		
A	CO	78529
B	CS	81101
B	CO	93188
C	CO	93188
C	CO	93188
D	CO	93188
E	CO	93188

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL mm/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

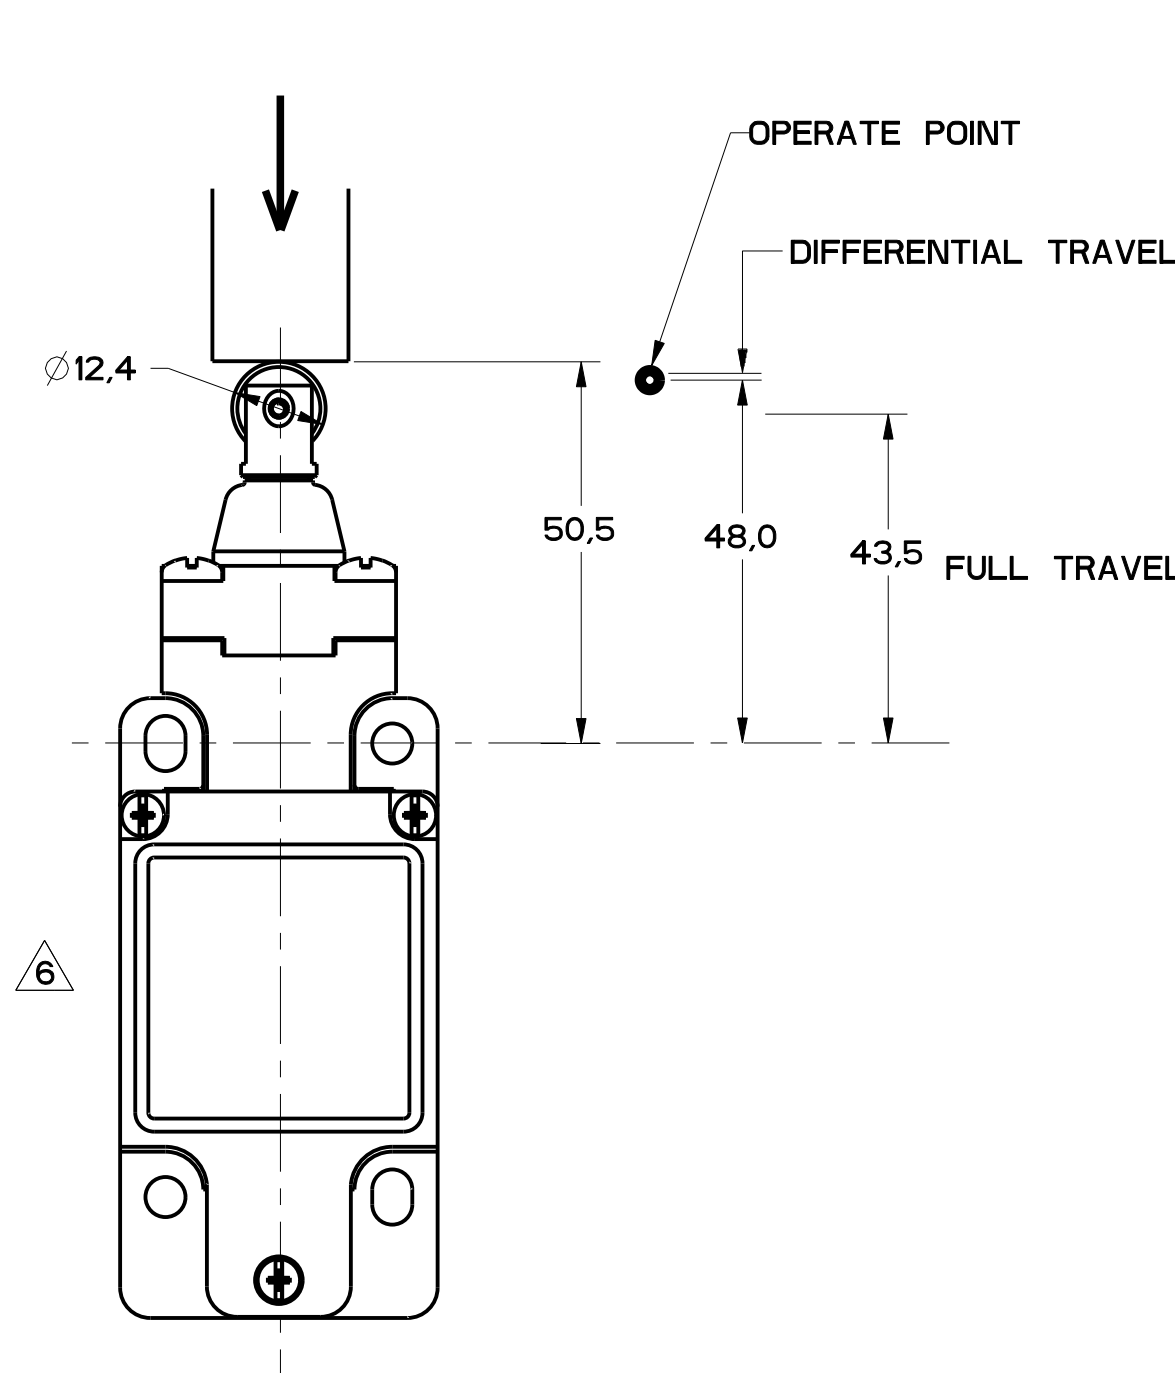


FIGURE 13A

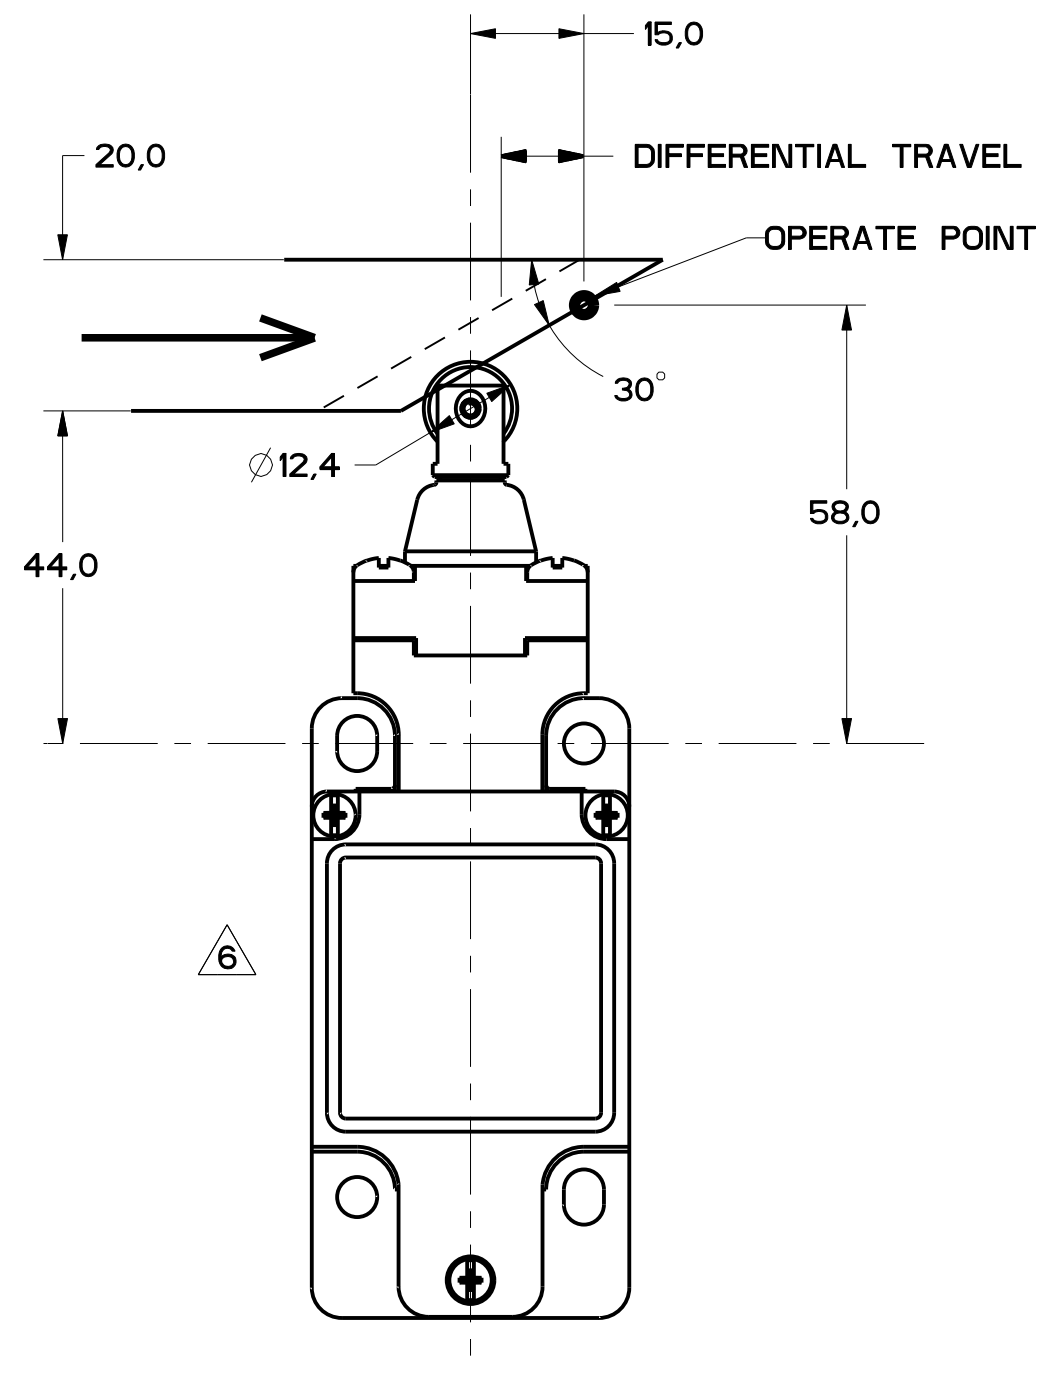


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL mm/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	$\frac{9.3}{2.1}$	$\frac{15.6}{3.5}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

	IN	TOL	MM	TOL
NO PLACES	X	1/16	1.0	0.01
ONE PLACE	X.X	0.0156	0.4	0.025
TWO PLACES	X.XX	0.0031	0.1	0.005
THREE PLACES	X.XXX	0.0008	0.025	0.001

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

REVISIONS		
A	1	180292
B	1	01
C	20	SEP 94
D	CO	93789
E	REV	200788
F	0000401	
G	011	2 JUN 93
H	0002986	
I	20	JAN 94
J	0017532	
K	0000005	

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	9.5 2.1	12 2.7	0.17 6.7	1.7 .067	250

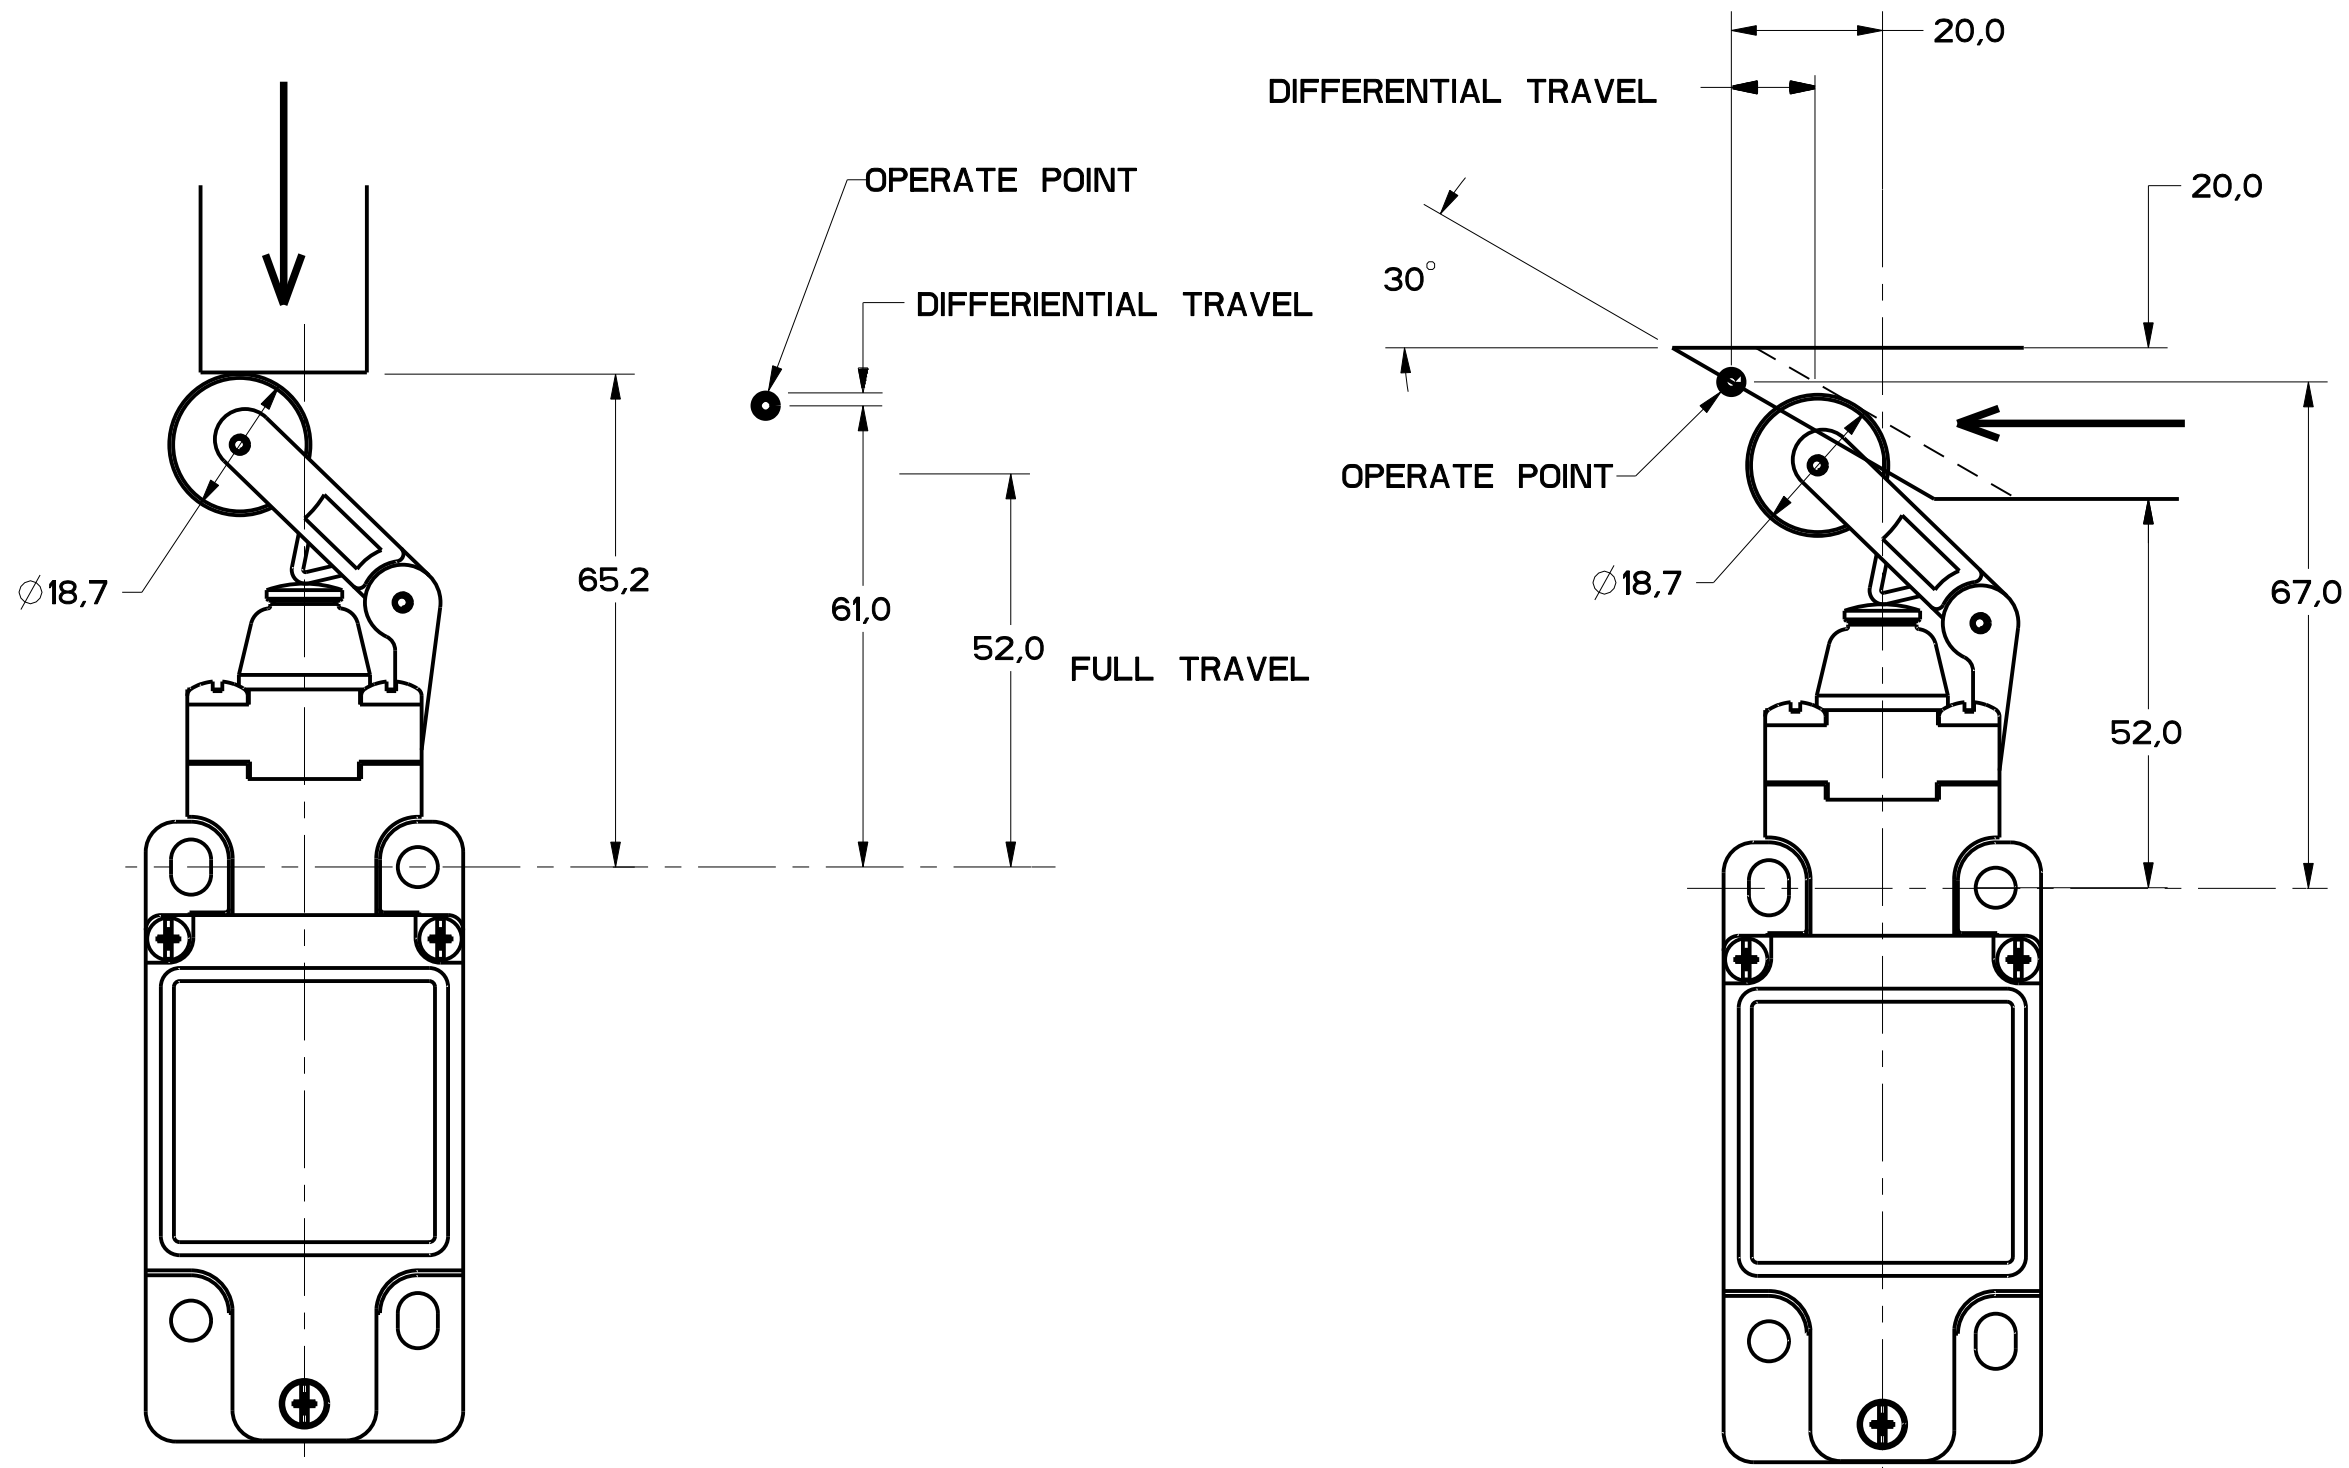


FIGURE 14A

FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION


CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S in/S	MIN OPERATE VEL M/S in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
	MM	TOL	IN
NO PLACES	X	1/104	1/16
ONE PLACE	X.X	0.01/0.05	0.001/0.005
TWO PLACES	X.XX	0.001/0.005	0.0001/0.0005
THREE PLACES	X.XXX	0.0001/0.0005	0.00001/0.00005
ANGLES	± 2		
DESIGN UNITS	SI METRIC	US CUSTOMARY	
	☒	☐	
WEIGHT			

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		CATALOG LISTING	
FED. MFG. CODE 91929		GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	



FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	 NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE N-m LB-IN	MAXIMUM DISCONNECT TORQUE N-m LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 	 21-22 18° 13-14 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100

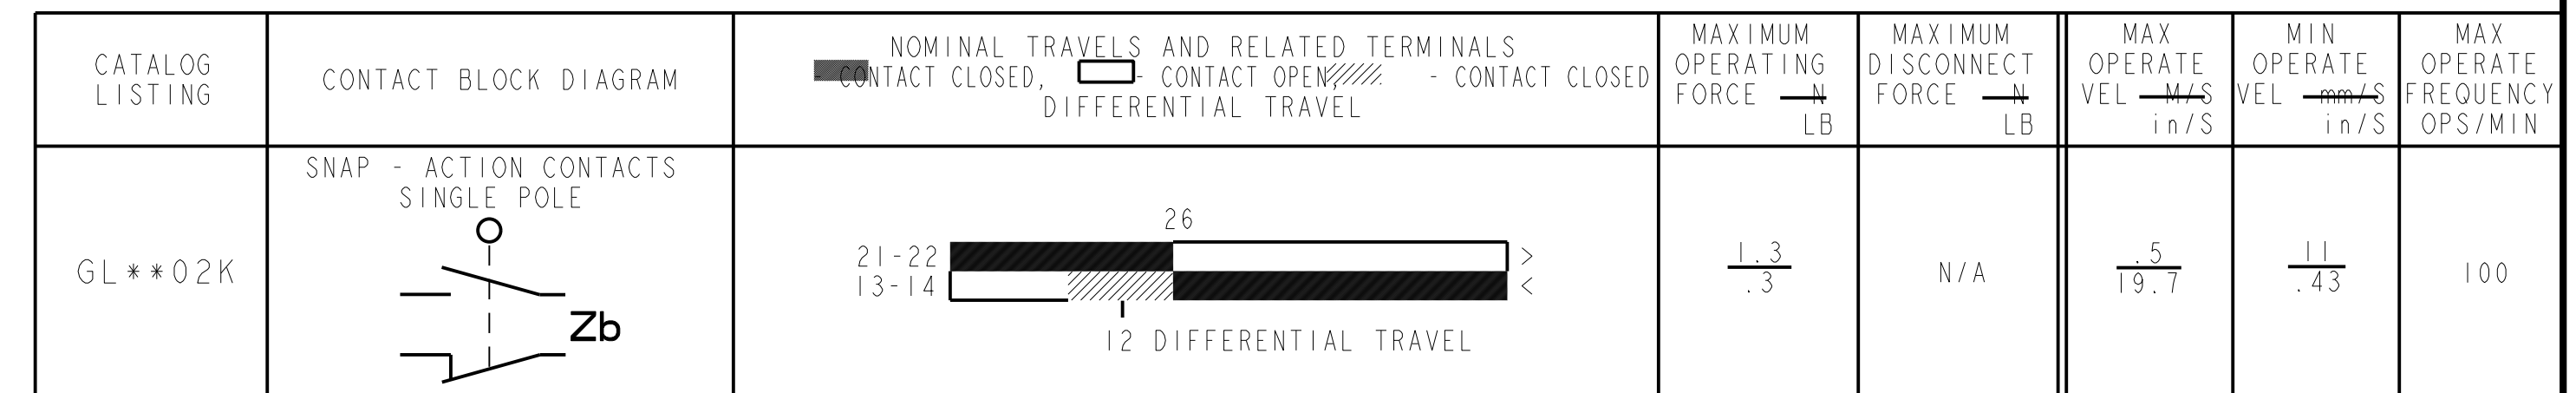

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru