Features

- Universal AC Input (85-264VAC)
- Long 7 Year Warranty
- Protections: SCP, OVP, OCP, OTP
- 100% Full Load burn-in test
- DC OK Indicator LED with Relay Contacts
- cooling by free air convection, 5000m operation
- UL, CSA & CE certified with CB Report

RECOM

AC/DC Converter

REDIN45

45 Watt DIN-Rail Power Supply

Description

This DIN-rail mounted power supply uses high reliability components to give a long, trouble-free life.The power supply can be end mounted to save space or side mounted for use in low-profile cabinets. Relay contacts simplify DC OK monitoring and the units can be deliver 60W start-up power. The REDIN series is fully certified for industrial use and carries a 7-year warranty.

Selection Guide

Part Number	Input Voltage Range (VAC)	Output Voltage (VDC)	Output Trimming Voltage (VDC)	Rated Current (A)	Efficiency typ. (%)	Max. Capacitive Load (µF)
REDIN45-12	85-264	12	12-15	3.75	85	18800
REDIN45-24	85-264	24	24-28	1.875	86	4700

* add suffix /NR for versions without relay

Specifications (measured at T_A= 25°C, 230VAC, full load and after warm up)

BASIC CHARACTERISTICS				
Parameter	**Condition**	**Min.**	**Typ.**	**Max.**
Input Voltage Range	all operating conditions	85VAC		264VAC
max. Input Voltage	max. 1 second			300VAC 375VDC
Output Voltage Adjustment (Factory Setting) (1)	12Vout 24Vout	12-15VDC (12V±5%) 24-28VDC (24V±5%)		
Input Current	full load, 115VAC full load, 230VAC			1.35A 0.75A
Inrush Current	cold start at 25°C, 115VAC cold start at 25°C, 230VAC			40A 60A
No Load Power Consumption	standard (with Relay) /NR option (no Relay)			<1000mW <500mW
Leakage Current	240VAC		<1.0mA	
Start Up time	cold start, 230VAC		500ms	1000ms
Rise time	cold start, 230VAC		20ms	
Hold-up time	full load, 115VAC full load, 230VAC		20ms 50ms	
Input Frequency		47kHz		63kHz
Efficiency		see Selection Guide		
Output Ripple and Noise (2)	12Vout 24Vout		60mVp-p 75mVp-p	
Over Load	all operating conditions	140% for 5 seconds max.		

Notes:

Note1: For more details refer to Vadj. Derating Graph

Note2: Ripple and Noise are measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with 0.1µF & 47µF parallel capacitor.

continued on next page

E224736

CB-Report
UL-60950-1 Certified
UL-508 Certified
IEC-60950-1 Certified
EN-60715 Compliant
EN-50022 Compliant
CSA C22.2 No. 60950-1-07 Certified

Refer to Applications Notes

Specifications (measured at T_A= 25°C, 230VAC, full load and after warm up)

Efficiency vs. Load

REDIN45-12

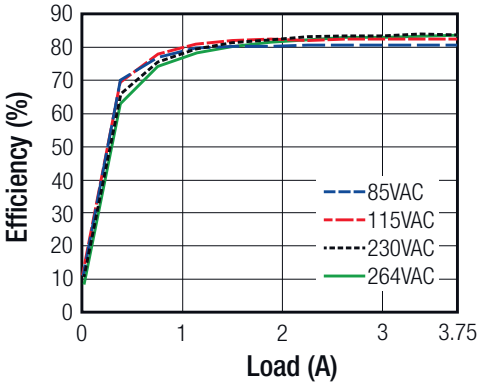

REDIN45-24

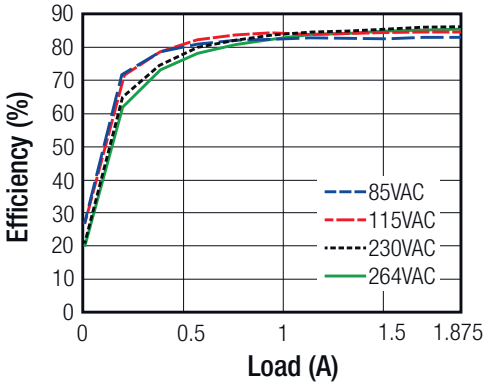

Vadj. Derating

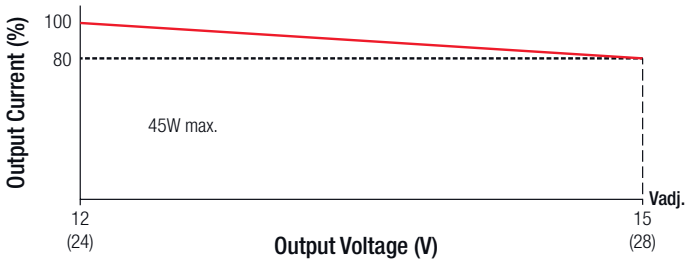

REGULATION		
Parameter	**Condition**	**Value**
Line Regulation		±0.1 typ. / ±1% max.
Load Regulation		±0.1 typ. / ±1% max.
Transient Response [3]	12Vout (step load change: 1.875A - 3.75A)	±5% typ.
	24Vout (step load change: 0.937A - 1.875A)	±5% typ.
Dwell Time		100Hz & 1kHz 50% duty
Slew Rate		0.5A / µs

Notes:

Note3: Transient Response + E-CAP loading 3300µF. Other specs with resistive load only.

PROTECTION		
Parameter	**Condition**	**Value**
Input Fuse		T2.5A, slow blow type
Short Circuit Protection (SCP)	Hiccup	auto-recovery after fault condition
Over Voltage Protection (OVP)	12Vout	18VDC max., shut-down latch-off o/p voltage, re-power on to recover
	24Vout	35VDC max., shut-down latch-off o/p voltage, re-power on to recover
Over Current Protection (OCP)		150% typ., auto-recovery after fault condition
Over Temperature Protection (OTP)	detect on inside ambient	105°C±5%, shut-down latch-off o/p voltage, re-power on to recover
Isolation Voltage	I/P to O/P	3.75kVAC / 1 minute
	I/P to FG	1.88kVAC / 1 minute
	O/P to FG	0.5kVAC / 1 minute
Isolation Resistance	500VDC, 70% RH, I/P to O/P; I/P to FG; O/P to FG	100MΩ min.
Power OK LED	Relay Contacts	1A, 30VDC / 120VAC
	LED/Relay	ON if Vout = 11-16V (12V) / 22-30V (24V)

Specifications (measured at T_A= 25°C, 230VAC, full load and after warm up)

ENVIRONMENTAL		
Parameter	**Condition**	**Value**
Operating Temperature Range	with derating	-20°C to +70°C (see graph)
Storage Temperature Range		-30°C to +85°C
Operating Humidity	non-condensing	20% - 90%RH
Storage Humidity		10% - 90% RH
Vibration		10-500Hz 2G, 60min.
Shock	3 times each axis	10G / 11ms, along X, Y and Z axis
Altitude	see derating graph	5000m
MTBF (+25°C)	MIL-HDBK-217F, 115VAC, 60Hz, 75% load	200 x 10^3 hours
Design Lifetime (+40°C)		87.6 x 10^3 hours

Derating Graph

Vin ≤ 100VAC

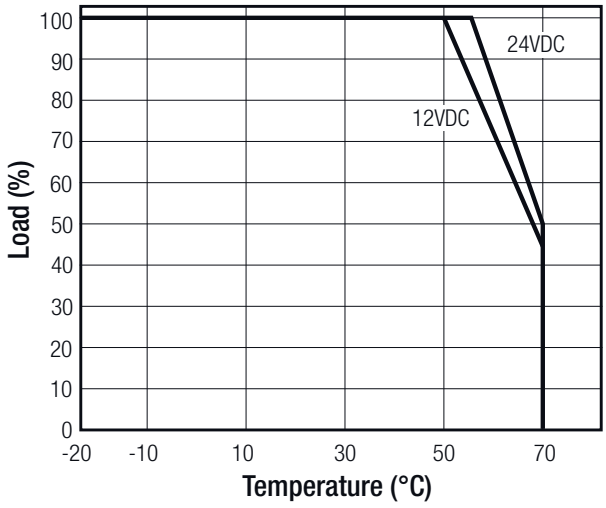

Vin > 100VAC

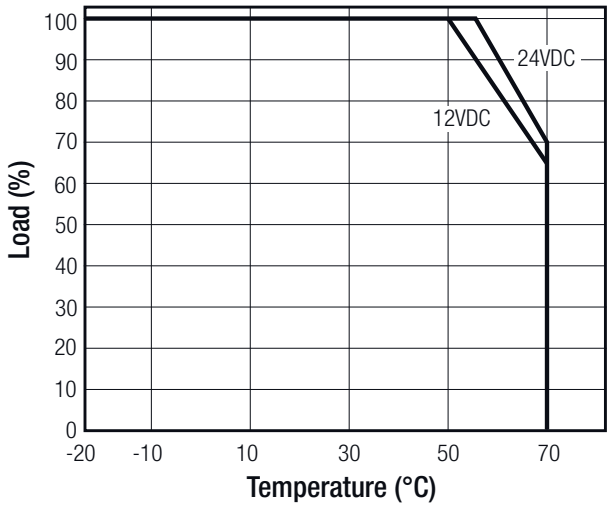

Typical Characteristics

REDIN45-12

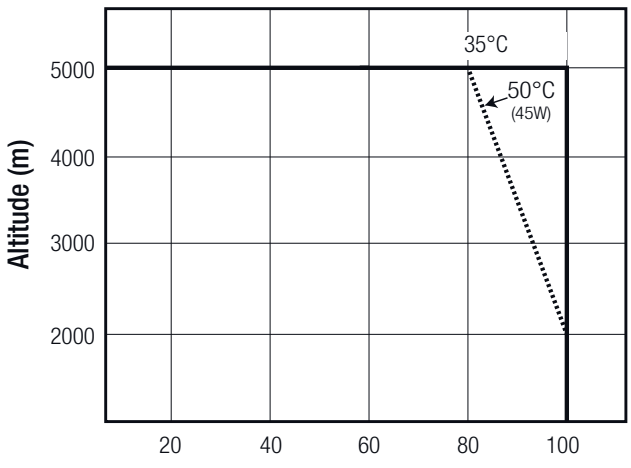

REDIN45-24

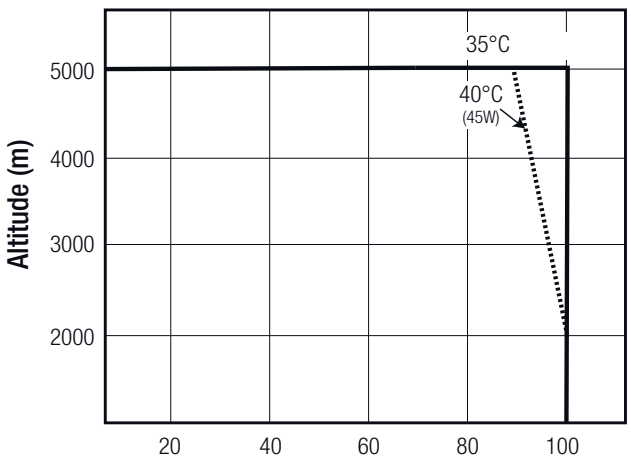

Specifications (measured at T_A= 25°C, 230VAC, full load and after warm up)

SAFETY AND CERTIFICATIONS		
Certificate Type	**Report / File Number**	**Standard**
UL General Safety	E224736	UL-60950-1, 2nd Edition UL-508 UL-1310
CSA		C22.2 No. 60950-1-07, 2nd Edition
IEC/EN General Safety	E224736	IEC/EN-60950-1, 2nd Edition
Chinese Safety Standard	E224736	GB 4943.1-2011

Certificate Type (Environmental)	**Report / Condition**	**Standard / Criterion**
EMI Standard	Report: HA150146	EN-55022, Class B
		EN-55024, Class B
		FCC15, Class B
ESD	R±8kV Contact & Air Discharge	EN-61000-4-2, Criteria A
Radiated Immunity	10V/m, 80-3000MHz, 80% AM at 1kHz	EN-61000-4-3, Criteria A
Fast Transient	Level 2	EN-61000-4-4, Criteria A
Surge	±2kV / L-N, ±4kV / L, N-FG	EN-61000-4-5, Criteria A
Conducted Immunity	10Vrms, 0.15-80MHz, 80% AM at 1kHz	EN-61000-4-6, Criteria A
Power frequency magnetic field immunity test		EN-61000-4-8, Criteria A
Noise Immunity	40% reduction, 200ms	EN-61000-4-11, Criteria A
	70% reduction, 500ms	EN-61000-4-11, Criteria B
	90% reduction, 5s	EN-61000-4-11, Criteria B
Harmonic Immunity	not applicable input below 75W	EN-61000-3-2
Voltage Flicker		EN-61000-3-3

DIMENSIONS and PHYSICAL CHARACTERISTICS		
Parameter	**Type**	**Value**
Case Material		UL94V-0 plastic
Dimensions (WxHxD)		45.1 x 92.0 x 101.2mm
Weight		332g
Packaging Dimensions (LxWxH)	Cardboard Box	310 x 252 x 285mm
Packaging Quantity	Carton	30pcs

Mechanical Dimensions

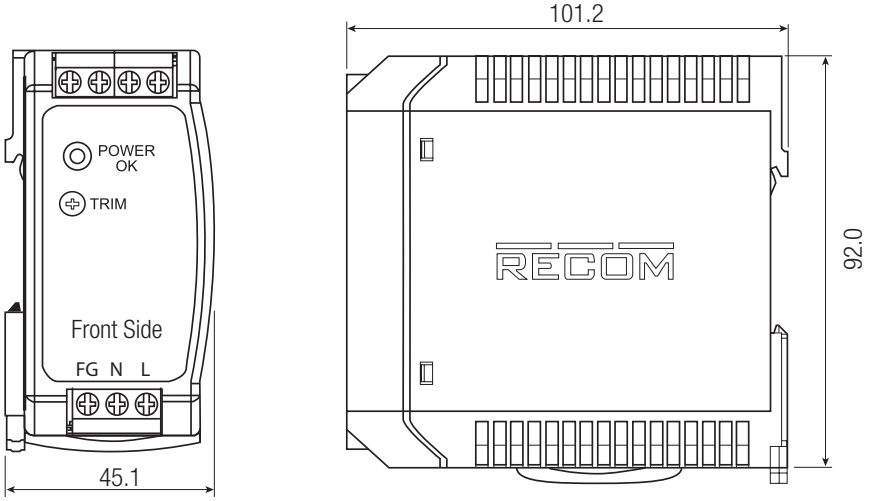

continued on next page

Specifications (measured at T_A= 25°C, 230VAC, full load and after warm up)

Mechanical Dimensions

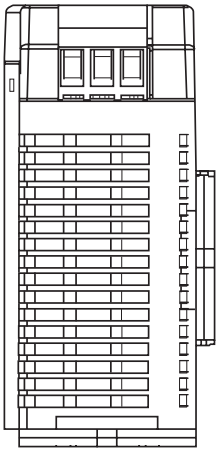

DIN-RAIL mounting bracket
(75mm) included

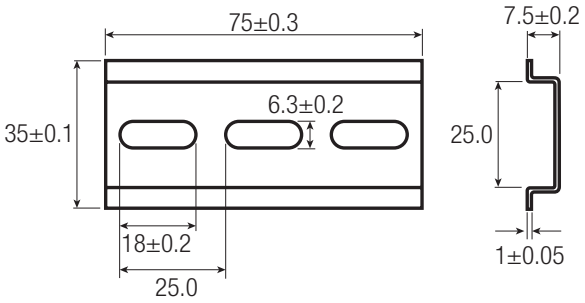

END MOUNTING

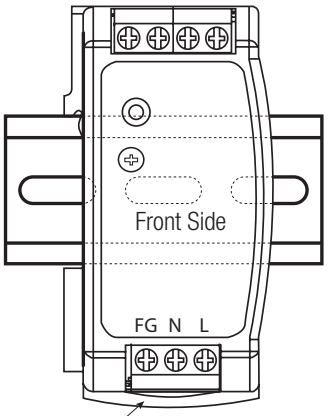

SIDE MOUNTING

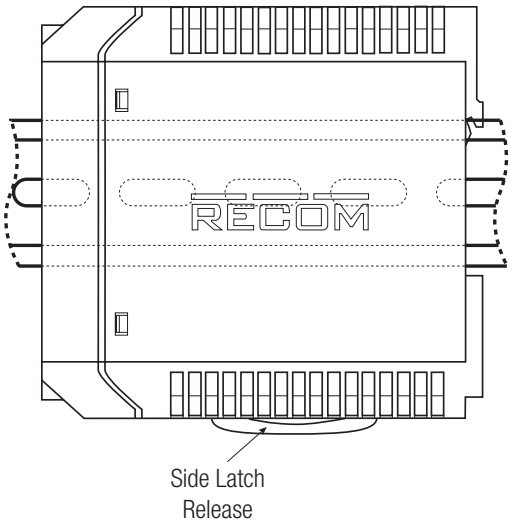

Tolerance: ±0.5mm

Mounting Instruction

Mounting

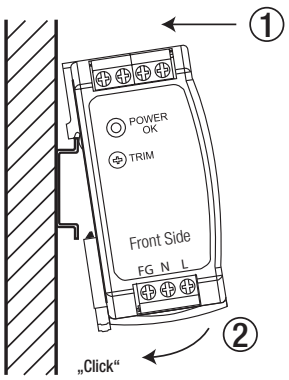

Releasing

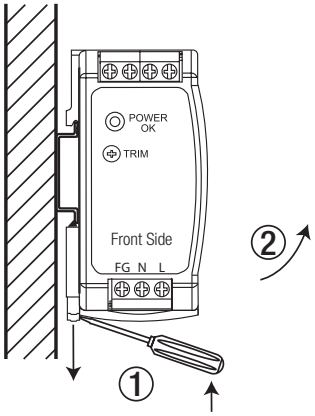

continued on next page

Specifications (measured at T_A= 25°C, 230VAC, full load and after warm up)

Mounting Multiple Power Supplies

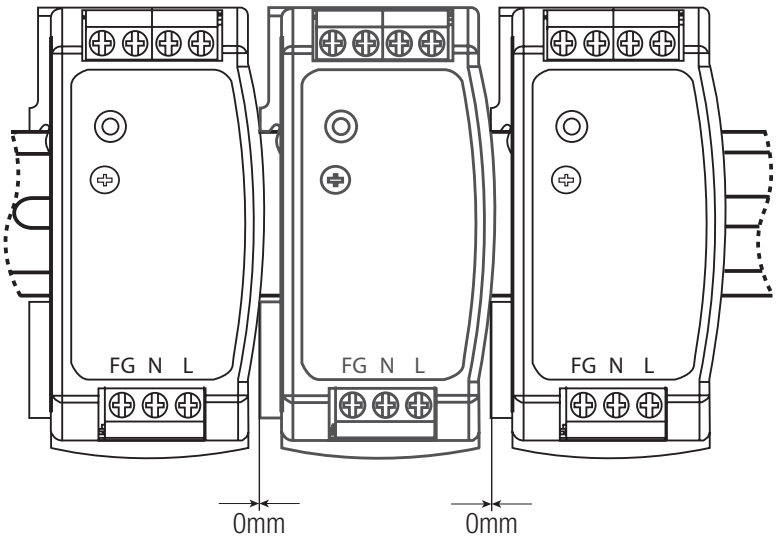

no spacers between supplies required

Functional Diagram

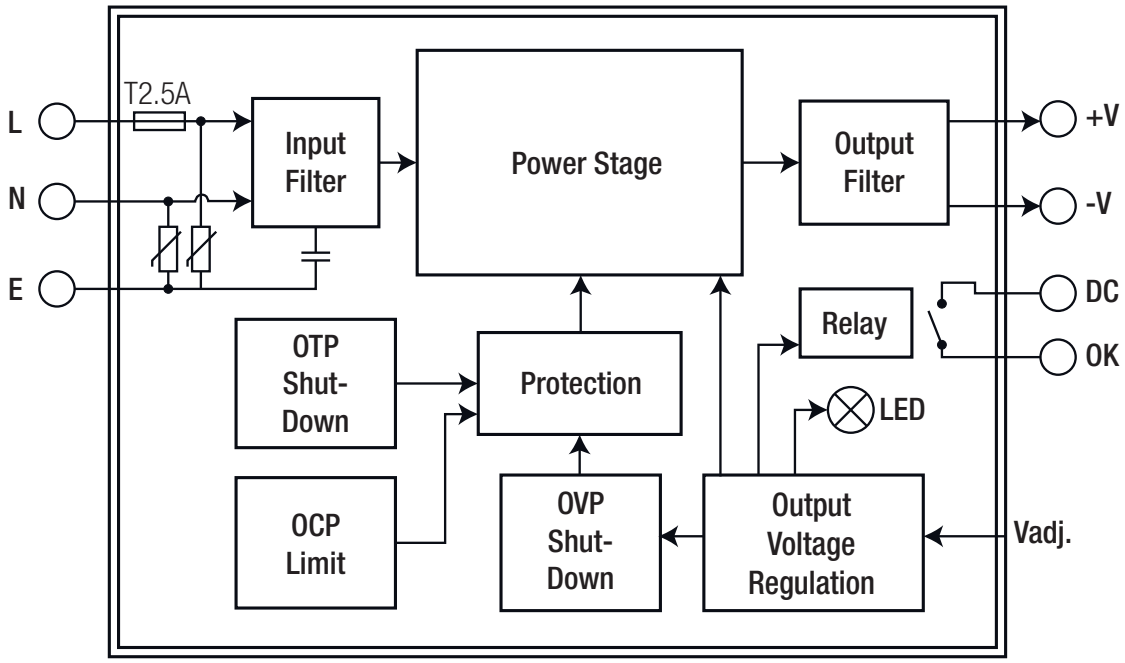

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru