


### Description

The 74LVC1G57 is a single 3-input positive configurable multiple function gate with a standard push-pull output. The output state is determined by eight patterns of 3-bit input. The user can choose the logic functions AND, OR, NAND, NOR, XNOR, inverter or non-inverting buffer. All inputs can be connected to ground or V<sub>CC</sub> as required. The device is designed for operation with a power supply range of 1.65V to 5.5V. The inputs are tolerant to 5.5V allowing this device to be used in a mixed voltage environment. The device is fully specified for partial power down applications using IOFF. The IOFF circuitry disables the output preventing damaging current backflow when the device is powered down. The user is reminded that the device can simulate several types of logic gates but may respond differently due to the Schmitt action at the inputs.

### Features

- Wide Supply Voltage Range from 1.65V to 5.5V
- $\pm 24\text{mA}$  Output Drive at 3.3V
- CMOS low power consumption
- IOFF Supports Partial-Power-Down Mode Operation
- Inputs accept up to 5.5V
- ESD Protection Exceeds JESD 22
  - 200-V Machine Model (A115-A)
  - 2000-V Human Body Model (A114-A)
- Latch-Up Exceeds 100mA per JESD 78, Class II
- Range of Package Options
- SOT26, SOT363, X2-DFN1410-6, and X2-DFN1010-6: Available in "Green" Molding Compound (no Br, Sb)
  - **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
  - **Halogen and Antimony Free. "Green" Device (Note 3)**

### Pin Assignments

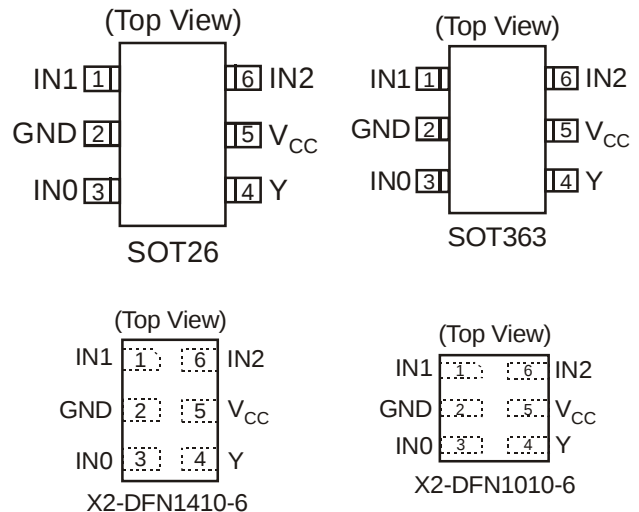

### Applications

- Voltage Level Shifting
- General Purpose Logic
- Power Down Signal Isolation
- Wide array of products such as:
  - PCs, networking, notebooks, netbooks, PDAs
  - Computer peripherals, hard drives, CD/DVD ROM
  - TV, DVD, DVR, set top box
  - Cell Phones, Personal Navigation / GPS
  - MP3 players, Cameras, Video Recorders


Notes:

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
2. See <http://www.diodes.com> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Pin Descriptions

| Pin Name        | Function       |
|-----------------|----------------|
| IN1             | Data Input     |
| GND             | Ground         |
| IN0             | Data Input     |
| Y               | Data Output    |
| V <sub>CC</sub> | Supply Voltage |
| IN2             | Data Input     |


## Logic Diagram

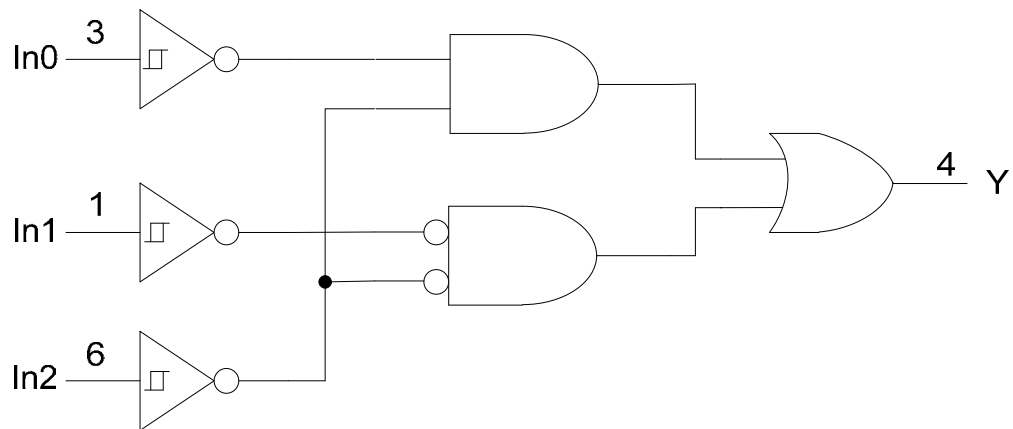


## Function Table

| Inputs |     |     | Output |
|--------|-----|-----|--------|
| IN2    | IN1 | IN0 | Y      |
| L      | L   | L   | H      |
| L      | L   | H   | L      |
| L      | H   | L   | H      |
| L      | H   | H   | L      |
| H      | L   | L   | L      |
| H      | L   | H   | L      |
| H      | H   | L   | H      |
| H      | H   | H   | H      |


### Logic Configurations

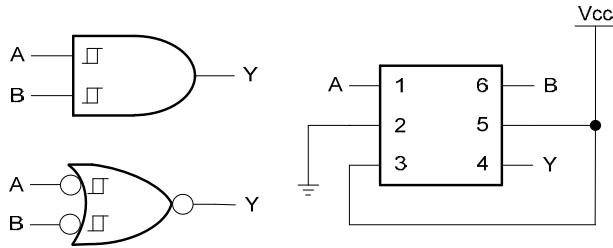


Configuration 1  
2-Input AND Gate  
2-Input NOR Gate with Both Inputs Inverted

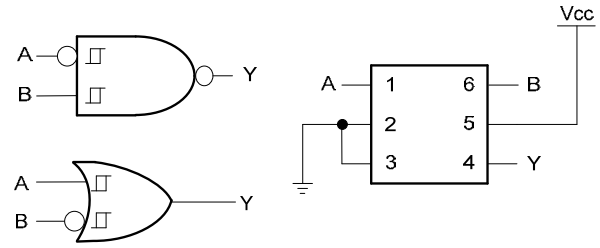


Configuration 2  
2-Input NAND Gate with A Input Inverted  
2-Input OR Gate with B input Inverted

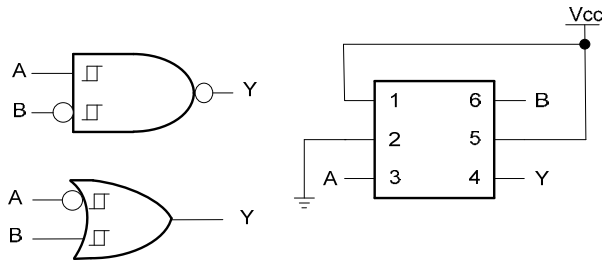


Configuration 3  
2-Input NAND Gate with B Input Inverted  
2-Input OR Gate with A Input Inverted

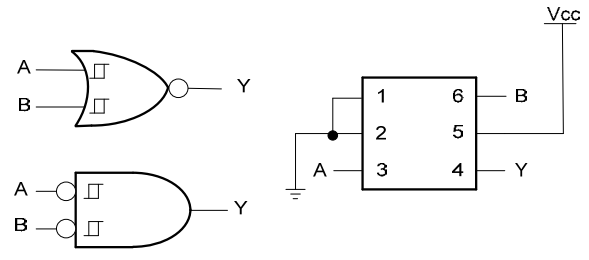

Configuration 4  
2-Input NOR Gate  
2-Input AND Gate with Both Inputs Inverted

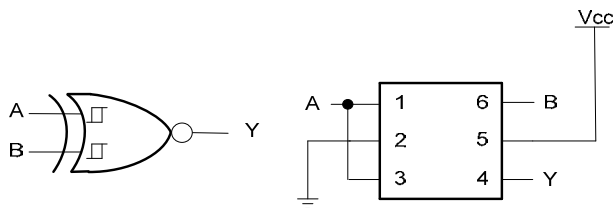

Configuration 5  
2-Input XNOR Gate

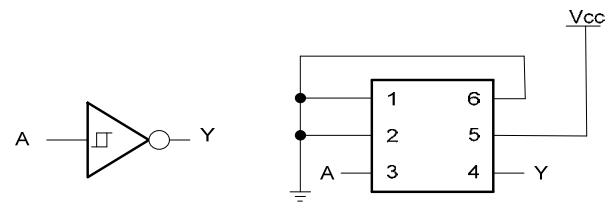

Configuration 6  
Inverter

| Function Selection Table              |               |
|---------------------------------------|---------------|
| Logic Function                        | Configuration |
| 2-input AND                           | 1             |
| 2-input AND with both inputs inverted | 4             |
| 2-input NAND with inverted input      | 2, 3          |
| 2-input OR with inverted input        | 2, 3          |
| 2-input NOR                           | 4             |
| 2-input NOR with both inputs inverted | 1             |
| 2-input XNOR                          | 5             |
| 1-input INVERTER                      | 6             |

### Absolute Maximum Ratings (Note 4)

| Symbol           | Description                                                           | Rating                       | Unit |
|------------------|-----------------------------------------------------------------------|------------------------------|------|
| ESD HBM          | Human Body Model ESD Protection                                       | 2                            | KV   |
| ESD MM           | Machine Model ESD Protection                                          | 200                          | V    |
| V <sub>CC</sub>  | Supply Voltage Range                                                  | -0.5 to +6.5                 | V    |
| V <sub>I</sub>   | Input Voltage Range                                                   | -0.5 to +6.5                 | V    |
| V <sub>O</sub>   | Voltage applied to output in high impedance or I <sub>OFF</sub> state | -0.5 to +6.5                 | V    |
| V <sub>O</sub>   | Voltage applied to output in high or low state                        | -0.3 to V <sub>CC</sub> +0.5 | V    |
| I <sub>IK</sub>  | Input Clamp Current V <sub>I</sub> < 0                                | -50                          | mA   |
| I <sub>OK</sub>  | Output Clamp Current                                                  | -50                          | mA   |
| I <sub>O</sub>   | Continuous output current                                             | ±50                          | mA   |
|                  | Continuous current through V <sub>DD</sub> or GND                     | ±100                         | mA   |
| T <sub>J</sub>   | Operating Junction Temperature                                        | -40 to +150                  | °C   |
| T <sub>STG</sub> | Storage Temperature                                                   | -65 to +150                  | °C   |

Notes: 4. Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.

### Recommended Operating Conditions (Note 5)

| Symbol          | Parameter                          |                                             | Min  | Max             | Unit |
|-----------------|------------------------------------|---------------------------------------------|------|-----------------|------|
| V <sub>CC</sub> | Operating Voltage                  | Operating                                   | 1.65 | 5.5             | V    |
|                 |                                    | Data retention only                         | 1.5  |                 | V    |
| V <sub>I</sub>  | Input Voltage                      |                                             | 0    | 5.5             | V    |
| V <sub>O</sub>  | Output Voltage                     |                                             | 0    | V <sub>CC</sub> | V    |
| I <sub>OH</sub> | High-level output current          | V <sub>CC</sub> = 1.65V                     |      | -4              | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      |      | -8              |      |
|                 |                                    | V <sub>CC</sub> = 3V                        |      | -16             |      |
|                 |                                    |                                             |      | -24             |      |
|                 | V <sub>CC</sub> = 4.5V             |                                             | -32  |                 |      |
| I <sub>OL</sub> | Low-level output current           | V <sub>CC</sub> = 1.65V                     |      | 4               | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      |      | 8               |      |
|                 |                                    | V <sub>CC</sub> = 3V                        |      | 16              |      |
|                 |                                    |                                             |      | 24              |      |
|                 | V <sub>CC</sub> = 4.5V             |                                             | 32   |                 |      |
| Δt/ΔV           | Input transition rise or fall rate | V <sub>CC</sub> = 1.8V ± 0.15V, 2.5V ± 0.2V |      | 20              | ns/V |
|                 |                                    | V <sub>CC</sub> = 3.3V ± 0.3V               |      | 10              |      |
|                 |                                    | V <sub>CC</sub> = 5V ± 0.5V                 |      | 5               |      |
| T <sub>A</sub>  | Operating free-air temperature     |                                             | -40  | +125            | °C   |

Notes: 5. Unused inputs should be held at V<sub>CC</sub> or Ground.

### Electrical Characteristics $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ (All typical values are at $V_{CC} = 3.3\text{V}$ , $T_A = +25^\circ\text{C}$ )

| Symbol          | Parameter                              | Test Conditions                                                        | $V_{CC}$      | Min            | Typ. | Max      | Unit          |
|-----------------|----------------------------------------|------------------------------------------------------------------------|---------------|----------------|------|----------|---------------|
| $V_{T+}$        | Positive-going input threshold voltage |                                                                        | 1.65V         | 0.70           |      | 1.20     |               |
|                 |                                        |                                                                        | 2.3V          | 1.11           |      | 1.60     |               |
|                 |                                        |                                                                        | 3V            | 1.50           |      | 2.00     |               |
|                 |                                        |                                                                        | 4.5V          | 2.16           |      | 2.74     |               |
|                 |                                        |                                                                        | 5.5V          | 2.61           |      | 3.33     |               |
| $V_{T-}$        | Negative-going input threshold voltage |                                                                        | 1.65V         | 0.30           |      | 0.72     |               |
|                 |                                        |                                                                        | 2.3V          | 0.58           |      | 1.00     |               |
|                 |                                        |                                                                        | 3V            | 0.80           |      | 1.30     |               |
|                 |                                        |                                                                        | 4.5V          | 1.21           |      | 1.95     |               |
|                 |                                        |                                                                        | 5.5V          | 1.45           |      | 2.35     |               |
| $\Delta V_T$    | Hysteresis ( $V_{T+} - V_{T-}$ )       |                                                                        | 1.65V         | 0.30           |      | 0.62     |               |
|                 |                                        |                                                                        | 2.3V          | 0.40           |      | 0.80     |               |
|                 |                                        |                                                                        | 3V            | 0.35           |      | 1.00     |               |
|                 |                                        |                                                                        | 4.5V          | 0.55           |      | 1.10     |               |
|                 |                                        |                                                                        | 5.5V          | 0.60           |      | 1.20     |               |
| $V_{OH}$        | High Level Output Voltage              | $I_{OH} = -100\mu\text{A}$                                             | 1.65V to 5.5V | $V_{CC} - 0.1$ |      |          | V             |
|                 |                                        | $I_{OH} = -4\text{mA}$                                                 | 1.65V         | 1.2            |      |          |               |
|                 |                                        | $I_{OH} = -8\text{mA}$                                                 | 2.3V          | 1.9            |      |          |               |
|                 |                                        | $I_{OH} = -16\text{mA}$                                                | 3V            | 2.4            |      |          |               |
|                 |                                        | $I_{OH} = -24\text{mA}$                                                |               | 2.3            |      |          |               |
|                 |                                        | $I_{OH} = -32\text{mA}$                                                | 4.5V          | 3.8            |      |          |               |
| $V_{OL}$        | High-level Input Voltage               | $I_{OL} = 100\mu\text{A}$                                              | 1.65V to 5.5V |                |      | 0.1      | V             |
|                 |                                        | $I_{OL} = 4\text{mA}$                                                  | 1.65V         |                |      | 0.45     |               |
|                 |                                        | $I_{OL} = 8\text{mA}$                                                  | 2.3V          |                |      | 0.3      |               |
|                 |                                        | $I_{OL} = 16\text{mA}$                                                 | 3V            |                |      | 0.4      |               |
|                 |                                        | $I_{OL} = 24\text{mA}$                                                 |               |                |      | 0.55     |               |
|                 |                                        | $I_{OL} = 32\text{mA}$                                                 | 4.5V          |                |      | 0.55     |               |
| $I_I$           | Input Current                          | $V_I = 5.5\text{V}$ or GND                                             | 0 to 5.5V     |                |      | $\pm 5$  | $\mu\text{A}$ |
| $I_{OFF}$       | Power Down Leakage Current             | $V_I$ or $V_O = 5.5\text{V}$                                           | 0             |                |      | $\pm 10$ | $\mu\text{A}$ |
| $I_{CC}$        | Supply Current                         | $V_I = 5.5\text{V}$ of GND<br>$I_O = 0$                                | 1.65V to 5.5V |                |      | 10       | $\mu\text{A}$ |
| $\Delta I_{CC}$ | Additional Supply Current              | One input at $V_{CC} - 0.6\text{V}$<br>Other inputs at $V_{CC}$ or GND | 3V to 5.5V    |                |      | 500      | $\mu\text{A}$ |

### Electrical Characteristics $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ (All typical values are at $V_{CC} = 3.3\text{V}$ , $T_A = +25^\circ\text{C}$ )

| Symbol          | Parameter                              | Test Conditions                                                        | $V_{CC}$      | Min            | Typ. | Max       | Unit          |
|-----------------|----------------------------------------|------------------------------------------------------------------------|---------------|----------------|------|-----------|---------------|
| $V_{T+}$        | Positive-going input threshold voltage |                                                                        | 1.65V         | 0.70           |      | 1.20      |               |
|                 |                                        |                                                                        | 2.3V          | 1.11           |      | 1.60      |               |
|                 |                                        |                                                                        | 3V            | 1.50           |      | 2.00      |               |
|                 |                                        |                                                                        | 4.5V          | 2.16           |      | 2.74      |               |
|                 |                                        |                                                                        | 5.5V          | 2.61           |      | 3.33      |               |
| $V_{T-}$        | Negative-going input threshold voltage |                                                                        | 1.65V         | 0.30           |      | 0.75      |               |
|                 |                                        |                                                                        | 2.3V          | 0.58           |      | 1.03      |               |
|                 |                                        |                                                                        | 3V            | 0.80           |      | 1.33      |               |
|                 |                                        |                                                                        | 4.5V          | 1.21           |      | 1.95      |               |
|                 |                                        |                                                                        | 5.5V          | 1.45           |      | 2.35      |               |
| $\Delta V_T$    | Hysteresis ( $V_{T+} - V_{T-}$ )       |                                                                        | 1.65V         | 0.30           |      | 0.62      |               |
|                 |                                        |                                                                        | 2.3V          | 0.37           |      | 0.80      |               |
|                 |                                        |                                                                        | 3V            | 0.32           |      | 1.00      |               |
|                 |                                        |                                                                        | 4.5V          | 0.50           |      | 1.20      |               |
|                 |                                        |                                                                        | 5.5V          | 0.55           |      | 1.40      |               |
| $V_{OH}$        | High Level Output Voltage              | $I_{OH} = -100\mu\text{A}$                                             | 1.65V to 5.5V | $V_{CC} - 0.1$ |      |           | V             |
|                 |                                        | $I_{OH} = -4\text{mA}$                                                 | 1.65V         | 0.95           |      |           |               |
|                 |                                        | $I_{OH} = -8\text{mA}$                                                 | 2.3V          | 1.7            |      |           |               |
|                 |                                        | $I_{OH} = -16\text{mA}$                                                | 3V            | 1.9            |      |           |               |
|                 |                                        | $I_{OH} = -24\text{mA}$                                                |               | 2.0            |      |           |               |
|                 |                                        | $I_{OH} = -32\text{mA}$                                                | 4.5V          | 3.4            |      |           |               |
| $V_{OL}$        | High-level Input Voltage               | $I_{OL} = 100\mu\text{A}$                                              | 1.65V to 5.5V |                |      | 0.1       | V             |
|                 |                                        | $I_{OL} = 4\text{mA}$                                                  | 1.65 V        |                |      | 0.7       |               |
|                 |                                        | $I_{OL} = 8\text{mA}$                                                  | 2.3V          |                |      | 0.45      |               |
|                 |                                        | $I_{OL} = 16\text{mA}$                                                 | 3V            |                |      | 0.6       |               |
|                 |                                        | $I_{OL} = 24\text{mA}$                                                 |               |                |      | 0.8       |               |
|                 |                                        | $I_{OL} = 32\text{mA}$                                                 | 4.5V          |                |      | 0.8       |               |
| $I_I$           | Input Current                          | $V_I = 5.5\text{V}$ or GND                                             | 0 to 5.5V     |                |      | $\pm 100$ | $\mu\text{A}$ |
| $I_{OFF}$       | Power Down Leakage Current             | $V_I$ or $V_O = 5.5\text{V}$                                           | 0             |                |      | $\pm 200$ | $\mu\text{A}$ |
| $I_{CC}$        | Supply Current                         | $V_I = 5.5\text{V}$ of GND<br>$I_O = 0$                                | 1.65V to 5.5V |                |      | 200       | $\mu\text{A}$ |
| $\Delta I_{CC}$ | Additional Supply Current              | One input at $V_{CC} - 0.6\text{V}$<br>Other inputs at $V_{CC}$ or GND | 3V to 5.5V    |                |      | 5000      | $\mu\text{A}$ |

### Package Characteristics (All typical values are at $V_{CC} = 3.3V$ , $T_A = +25^\circ C$ )

| Symbol        | Parameter                              | Test Conditions                | $V_{CC}$ | Min | Typ. | Max | Unit         |
|---------------|----------------------------------------|--------------------------------|----------|-----|------|-----|--------------|
| $C_i$         | Input Capacitance                      | $V_i = V_{CC} - \text{or GND}$ | 3.3      |     | 3.5  |     | pF           |
| $\theta_{JA}$ | Thermal Resistance Junction-to-Ambient | SOT26                          | (Note 6) |     | 204  |     | $^\circ C/W$ |
|               |                                        | SOT363                         |          |     | 371  |     |              |
|               |                                        | X2-DFN1410-6                   |          |     | 430  |     |              |
|               |                                        | X2-DFN1010-6                   |          |     | 510  |     |              |
| $\theta_{JC}$ | Thermal Resistance Junction-to-Case    | SOT26                          | (Note 6) |     | 52   |     | $^\circ C/W$ |
|               |                                        | SOT363                         |          |     | 143  |     |              |
|               |                                        | X2-DFN1410-6                   |          |     | 190  |     |              |
|               |                                        | X2-DFN1010-6                   |          |     | 250  |     |              |

Notes: 6. Test condition for SOT26, SOT363, X2-DFN1410-6 and X2-DFN1010-6: Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

### Switching Characteristics

$T_A = -40^\circ C$  to  $+85^\circ C$ ,  $C_L = 30$  or  $50pF$  as noted (see Figure 1)

| Parameter | From (Input) | TO (OUTPUT) | $V_{CC} = 1.8V \pm 0.15V$ |      | $V_{CC} = 2.5V \pm 0.2V$ |     | $V_{CC} = 3.3V \pm 0.3V$ |     | $V_{CC} = 5V \pm 0.5V$ |     | Unit |
|-----------|--------------|-------------|---------------------------|------|--------------------------|-----|--------------------------|-----|------------------------|-----|------|
|           |              |             | Min                       | Max  | Min                      | Max | Min                      | Max | Min                    | Max |      |
| $t_{pd}$  | Any          | Y           | 1.0                       | 14.4 | 0.7                      | 8.3 | 0.7                      | 6.3 | 0.7                    | 5.1 | ns   |

$T_A = -40^\circ C$  to  $+125^\circ C$ ,  $C_L = 30$  or  $50pF$  as noted (see Figure 1)


| Parameter | From (Input) | TO (OUTPUT) | $V_{CC} = 1.8V \pm 0.15V$ |      | $V_{CC} = 2.5V \pm 0.2V$ |      | $V_{CC} = 3.3V \pm 0.3V$ |     | $V_{CC} = 5V \pm 0.5V$ |     | Unit |
|-----------|--------------|-------------|---------------------------|------|--------------------------|------|--------------------------|-----|------------------------|-----|------|
|           |              |             | Min                       | Max  | Min                      | Max  | Min                      | Max | Min                    | Max |      |
| $t_{pd}$  | Any          | Y           | 1.0                       | 18.0 | 0.7                      | 10.4 | 0.7                      | 7.9 | 0.7                    | 6.4 | ns   |

### Operating Characteristics

$T_A = +25^\circ C$

| Parameter |                               | Test Conditions      | $V_{CC} = 1.8V$ | $V_{CC} = 2.5V$ | $V_{CC} = 3.3V$ | $V_{CC} = 5V$ | Unit |
|-----------|-------------------------------|----------------------|-----------------|-----------------|-----------------|---------------|------|
|           |                               |                      | Typ.            | Typ.            | Typ.            | Typ.          |      |
| $C_{pd}$  | Power dissipation capacitance | $f = 10 \text{ MHz}$ | 22              | 22              | 23              | 24            | pF   |

## Parameter Measurement Information

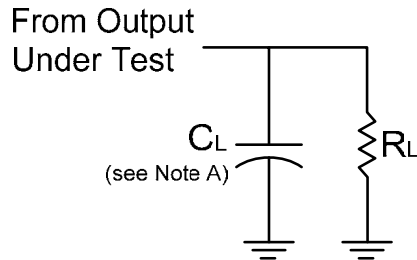

| $V_{CC}$         | Inputs   |              | $V_M$      | $C_L$ | $R_L$        |
|------------------|----------|--------------|------------|-------|--------------|
|                  | $V_I$    | $t_r/t_f$    |            |       |              |
| $1.8V \pm 0.15V$ | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | 30pF  | 1K $\Omega$  |
| $2.5V \pm 0.2V$  | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | 30pF  | 500 $\Omega$ |
| $3.3V \pm 0.3V$  | 3V       | $\leq 2.5ns$ | 1.5V       | 50pF  | 500 $\Omega$ |
| $5V \pm 0.5V$    | $V_{CC}$ | $\leq 2.5ns$ | $V_{CC}/2$ | 50pF  | 500 $\Omega$ |



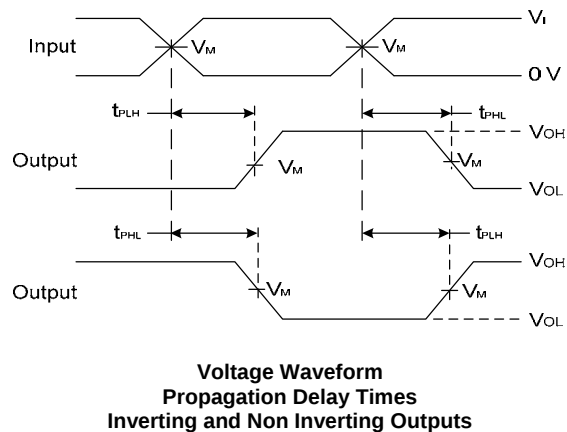


Figure 1. Load Circuit and Voltage Waveforms

Notes:

- A. Includes test lead and test apparatus capacitance.
- B. All pulses are supplied at pulse repetition rate  $\leq 10$  MHz
- C. Inputs are measured separately one transition per measurement
- D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$

## Ordering Information

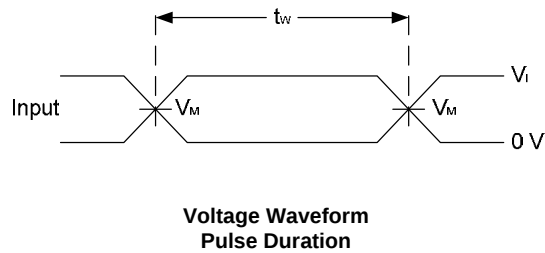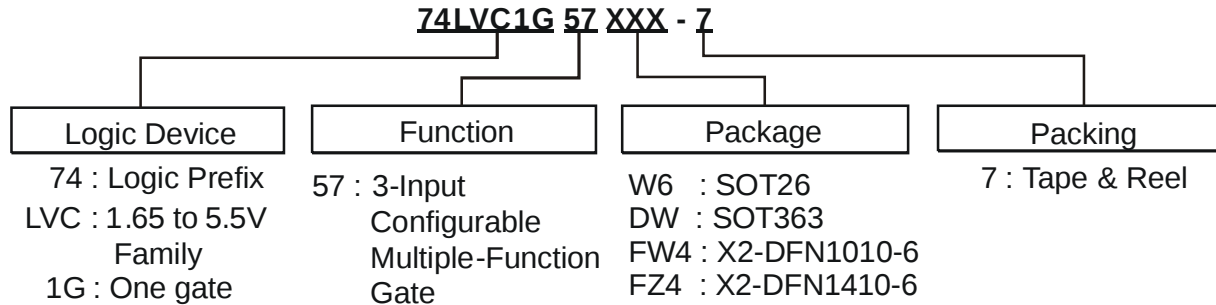


| Device         | Package Code | Packaging<br>(Note 7) | 7" Tape and Reel |                    |
|----------------|--------------|-----------------------|------------------|--------------------|
|                |              |                       | Quantity         | Part Number Suffix |
| 74LVC1G57W6-7  | W6           | SOT26                 | 3000/Tape & Reel | -7                 |
| 74LVC1G57DW-7  | DW           | SOT363                | 3000/Tape & Reel | -7                 |
| 74LVC1G57FW4-7 | FW4          | X2-DFN1010-6          | 5000/Tape & Reel | -7                 |
| 74LVC1G57FZ4-7 | FZ4          | X2-DFN1410-6          | 5000/Tape & Reel | -7                 |

Notes: 7. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.

## Marking Information

### (1) SOT26, SOT363




XX : Identification code  
Y : Year 0~9  
W : Week : A~Z : 1~26 week;  
a~z : 27~52 week; z represents  
52 and 53 week  
X : A~Z : Internal Code

| Part Number | Package | Identification Code |
|-------------|---------|---------------------|
| 74LVC1G57W6 | SOT26   | TW                  |
| 74LVC1G57DW | SOT363  | TW                  |

### (2) X2-DFN1010-6, X2-DFN1410-6

#### (Top View)




XX : Identification Code  
Y : Year : 0~9  
W : Week : A~Z : 1~26 week;  
a~z : 27~52 week; z represents  
52 and 53 week  
X : A~Z : Internal code

| Part Number  | Package      | Identification Code |
|--------------|--------------|---------------------|
| 74LVC1G57FW4 | X2-DFN1010-6 | TW                  |
| 74LVC1G57FZ4 | X2-DFN1410-6 | TW                  |


**Package Outline Dimensions (All Dimensions in mm)**

**(1) SOT26**

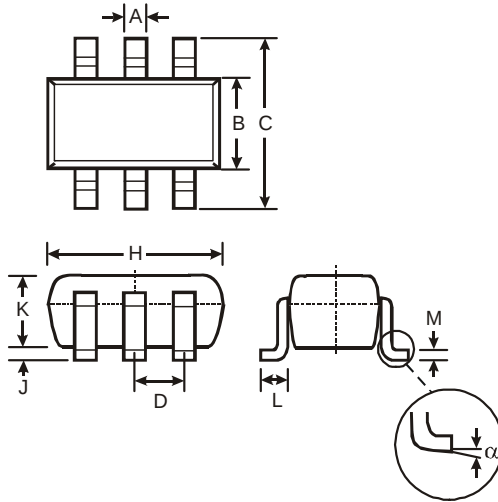

| SOT26                |       |      |      |
|----------------------|-------|------|------|
| Dim                  | Min   | Max  | Typ  |
| A                    | 0.35  | 0.50 | 0.38 |
| B                    | 1.50  | 1.70 | 1.60 |
| C                    | 2.70  | 3.00 | 2.80 |
| D                    | —     | —    | 0.95 |
| H                    | 2.90  | 3.10 | 3.00 |
| J                    | 0.013 | 0.10 | 0.05 |
| K                    | 1.00  | 1.30 | 1.10 |
| L                    | 0.35  | 0.55 | 0.40 |
| M                    | 0.10  | 0.20 | 0.15 |
| $\alpha$             | 0°    | 8°   | —    |
| All Dimensions in mm |       |      |      |


**(2) SOT363**

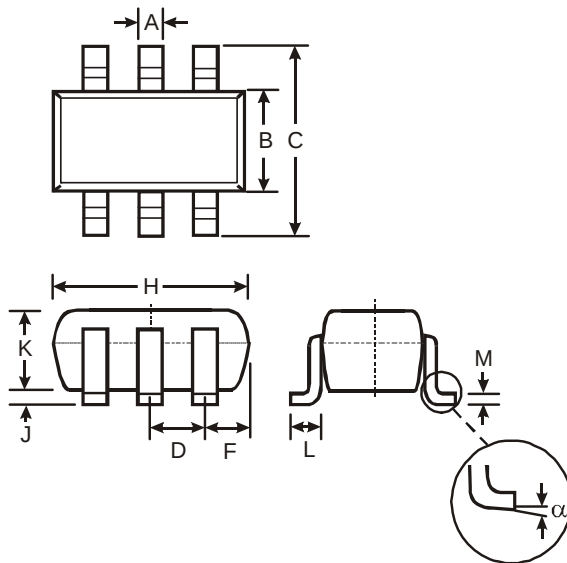

| SOT363               |          |      |
|----------------------|----------|------|
| Dim                  | Min      | Max  |
| A                    | 0.10     | 0.30 |
| B                    | 1.15     | 1.35 |
| C                    | 2.00     | 2.20 |
| D                    | 0.65 Typ |      |
| F                    | 0.40     | 0.45 |
| H                    | 1.80     | 2.20 |
| J                    | 0        | 0.10 |
| K                    | 0.90     | 1.00 |
| L                    | 0.25     | 0.40 |
| M                    | 0.10     | 0.22 |
| $\alpha$             | 0°       | 8°   |
| All Dimensions in mm |          |      |


**Package Outline Dimensions (All Dimensions in mm)**

**(3) X2-DFN1010-6**

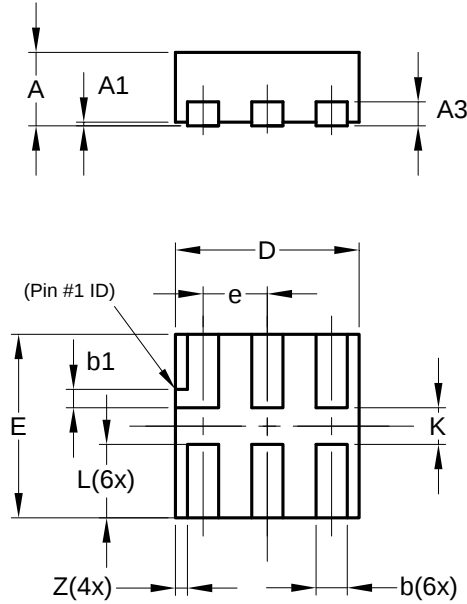

| X2-DFN1010-6         |      |      |       |
|----------------------|------|------|-------|
| Dim                  | Min  | Max  | Typ   |
| A                    | —    | 0.40 | 0.39  |
| A1                   | 0.00 | 0.05 | 0.02  |
| A3                   | —    | —    | 0.13  |
| b                    | 0.14 | 0.20 | 0.17  |
| b1                   | 0.05 | 0.15 | 0.10  |
| D                    | 0.95 | 1.05 | 1.00  |
| E                    | 0.95 | 1.05 | 1.00  |
| e                    | —    | —    | 0.35  |
| L                    | 0.35 | 0.45 | 0.40  |
| K                    | 0.15 | —    | —     |
| Z                    | —    | —    | 0.065 |
| All Dimensions in mm |      |      |       |


**(4) X2-DFN1410-6**

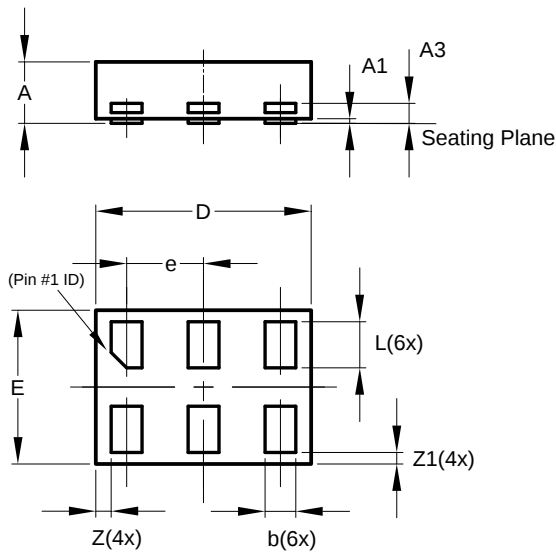

| X2-DFN1410-6         |       |       |       |
|----------------------|-------|-------|-------|
| Dim                  | Min   | Max   | Typ   |
| A                    | —     | 0.40  | 0.39  |
| A1                   | 0.00  | 0.05  | 0.02  |
| A3                   | —     | —     | 0.13  |
| b                    | 0.15  | 0.25  | 0.20  |
| D                    | 1.35  | 1.45  | 1.40  |
| E                    | 0.95  | 1.05  | 1.00  |
| e                    | —     | —     | 0.50  |
| L                    | 0.25  | 0.35  | 0.30  |
| Z                    | —     | —     | 0.10  |
| Z1                   | 0.045 | 0.105 | 0.075 |
| All Dimensions in mm |       |       |       |


## Suggest Pad Layout

### (1) SOT26

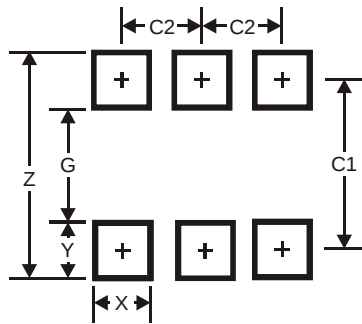


| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 3.20          |
| G          | 1.60          |
| X          | 0.55          |
| Y          | 0.80          |
| C1         | 2.40          |
| C2         | 0.95          |

### (2) SOT363

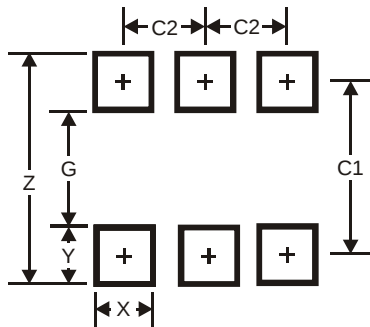

| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 2.5           |
| G          | 1.3           |
| X          | 0.42          |
| Y          | 0.6           |
| C1         | 1.9           |
| C2         | 0.65          |


### (3) X2-DFN1010-6

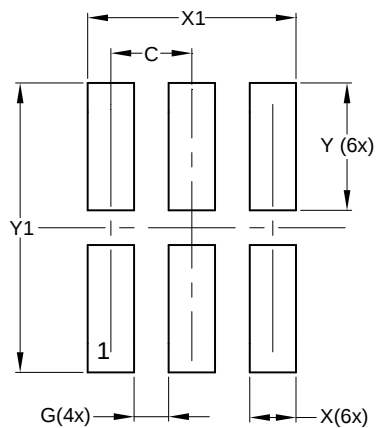

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.350         |
| G          | 0.150         |
| X          | 0.200         |
| X1         | 0.900         |
| Y          | 0.550         |
| Y1         | 1.250         |

## Suggest Pad Layout

(4) X2-DFN1410-6

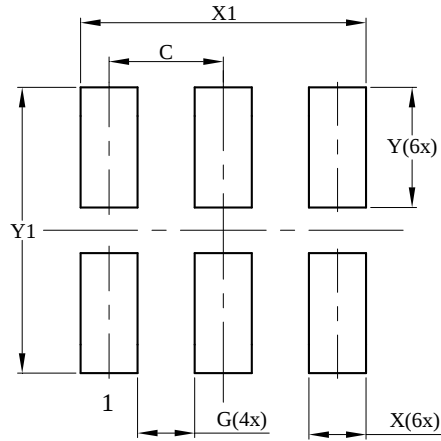

| Dimensions | Value<br>(in mm) |
|------------|------------------|
| C          | 0.500            |
| G          | 0.250            |
| X          | 0.250            |
| X1         | 1.250            |
| Y          | 0.525            |
| Y1         | 1.250            |

## IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

## LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2012, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)