


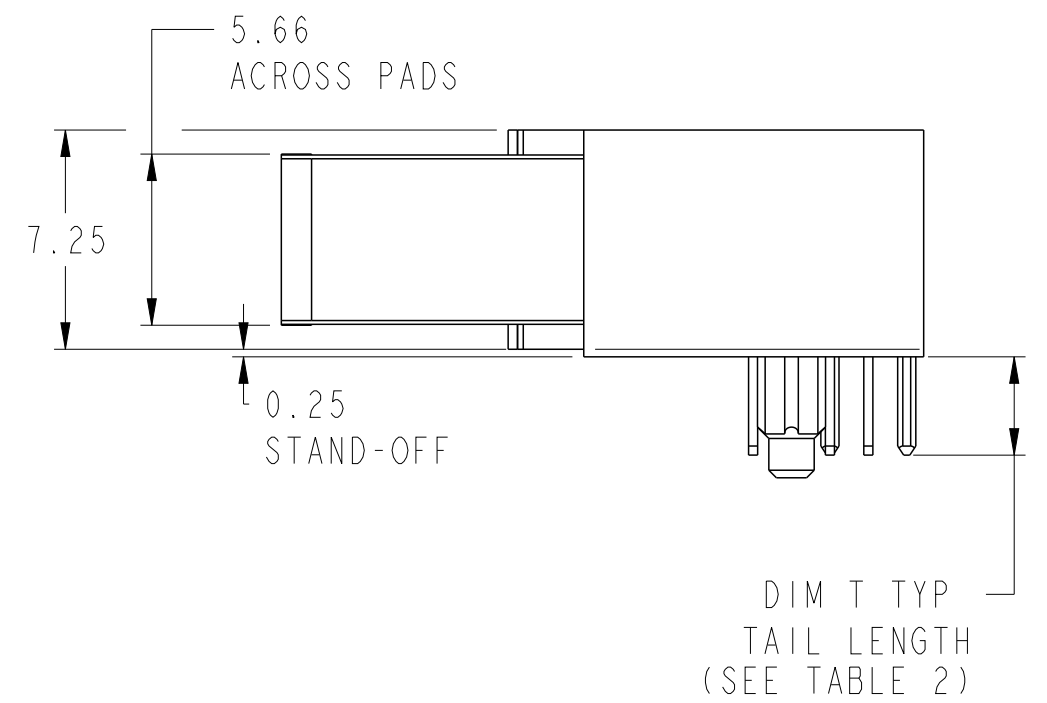
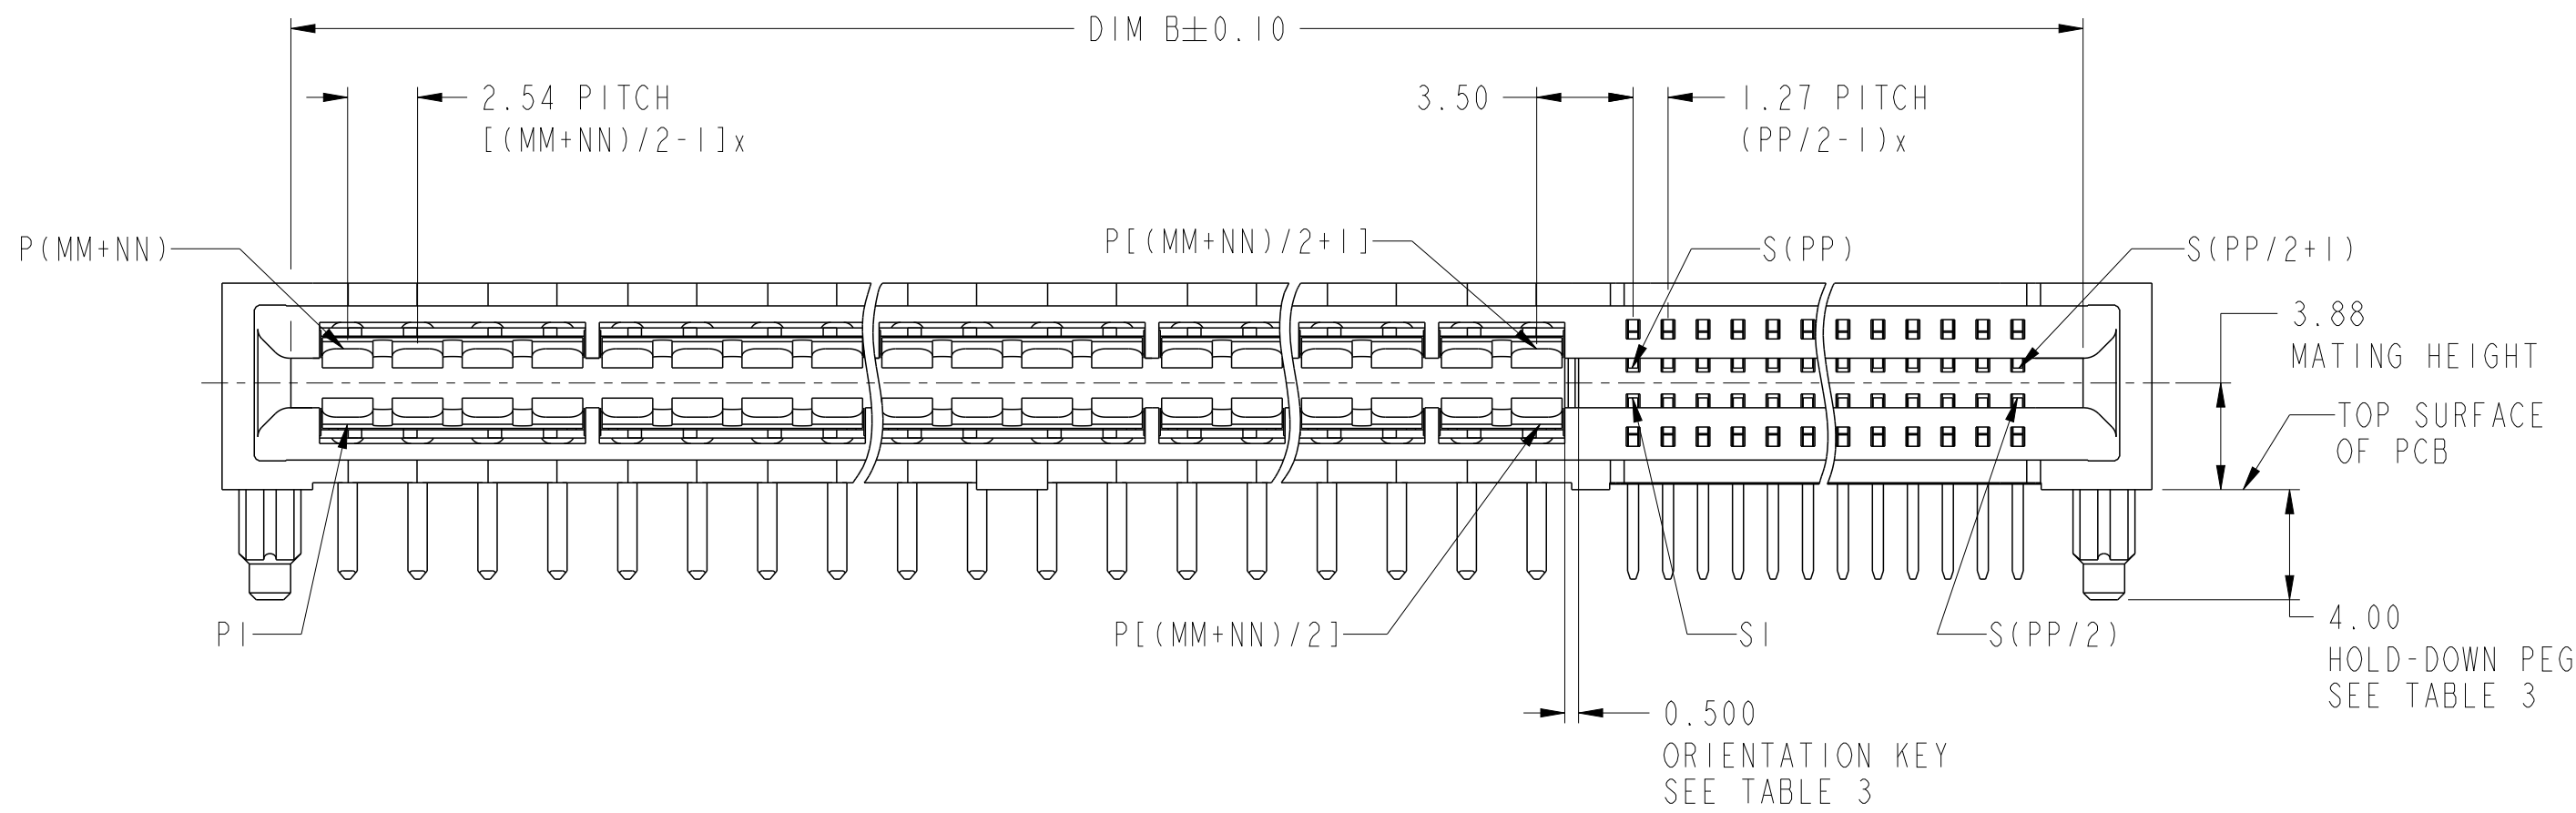


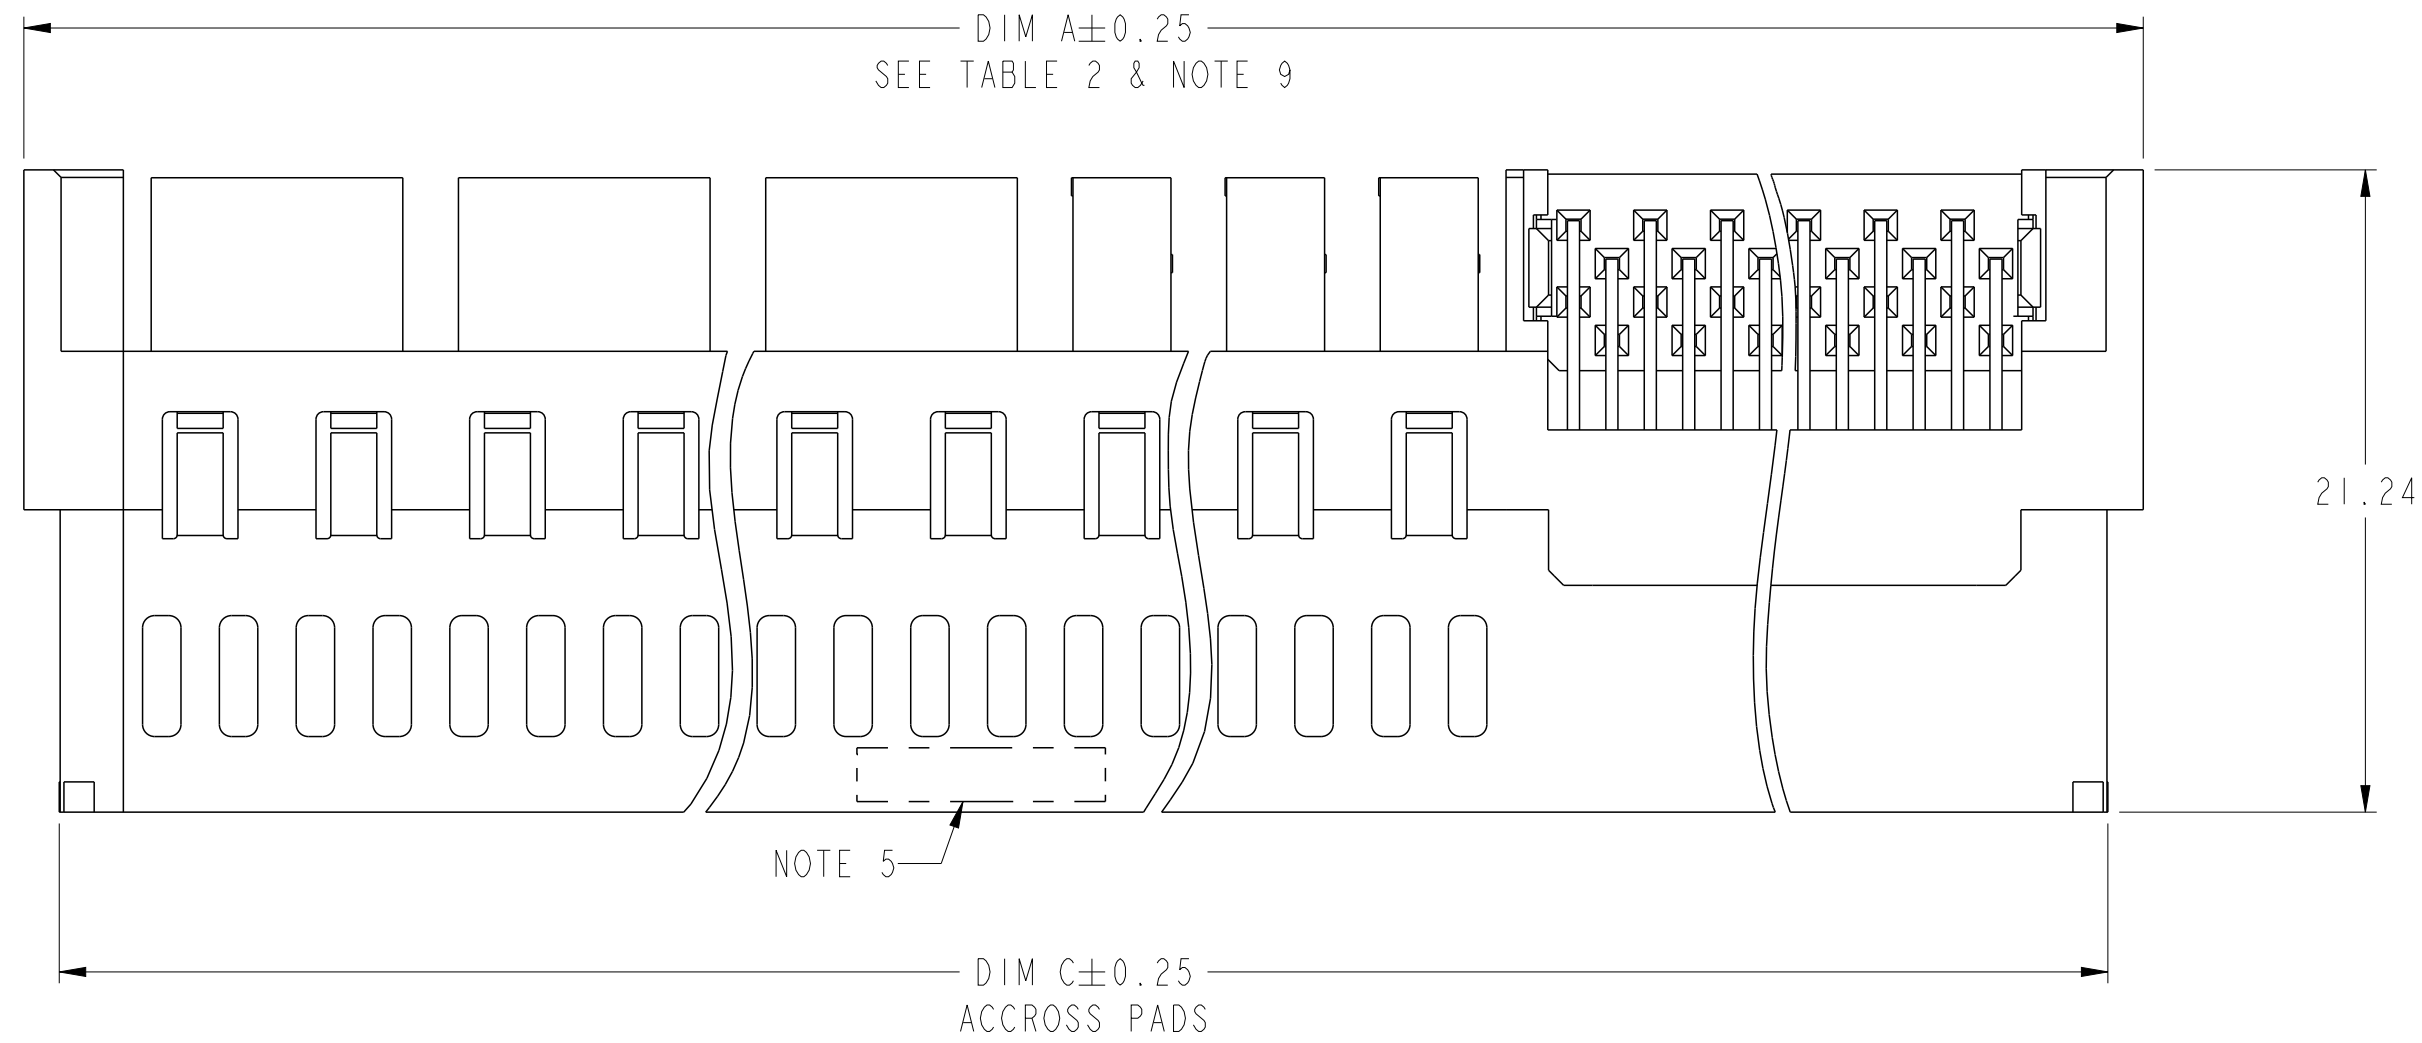

spec ref		-	dr		Hai-Ling Liu	2014/06/30	projection				MM	size	A2	scale	4:1
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED	eng		Ada Ye	2018/08/30					ecn no	ELX-DG-31039-1			
ISO 406			chr		Feng Zheng	2018/08/31									
ISO 1101		appr		Zheng, Pei-Min	2018/08/31			product family					rel level	Released	
surface		linear	0.X	±0.50		R/A RECEPTACLE HIGH POWER CARD EDGE - UNIVERSAL					dwg no	10130788	rev	C	
			0.XX	±0.25											
			0.XXX	±0.10											
	angular	0°	±2°												
ISO 1302						cat. no.	Product - Customer Drw					sheet 1 of 4			




spec ref		-		dr		Hai-Ling Liu		2014/06/30		projection				MM				size		A2		scale		4:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Ada Ye		2018/08/30		chr		Feng Zheng		2018/08/31		appr		Zheng, Pei-Min		2018/08/31		product family		ecn no		ELX-DG-31039-1	
ISO 406																						rel level		Released			
ISO 1101																											
surface		linear		0.X		±0.50		Amphenol		title		R/A RECEPTACLE		dwg no		10130788		rev		C							
				0.XX		±0.25		FCI				HIGH POWER CARD EDGE - UNIVERSAL															
				0.XXX		±0.10																					
ISO 1302		angular				+2°				cat. no.		Product - Customer Drw		sheet 3 of 4													




	A	B	C	D	E	F	G	H
Tail Length(DIM T)	2.6	2.6	2.6	2.6	3.25	3.25	3.25	3.25
Orientation Key	Y	N	N	Y	Y	N	N	Y
Hold Down Option	Y	Y	N	N	Y	Y	N	N

	J	K	L	M
△ C	4.05	4.05	4.05	4.05
	Y	N	N	Y
	Y	Y	N	N

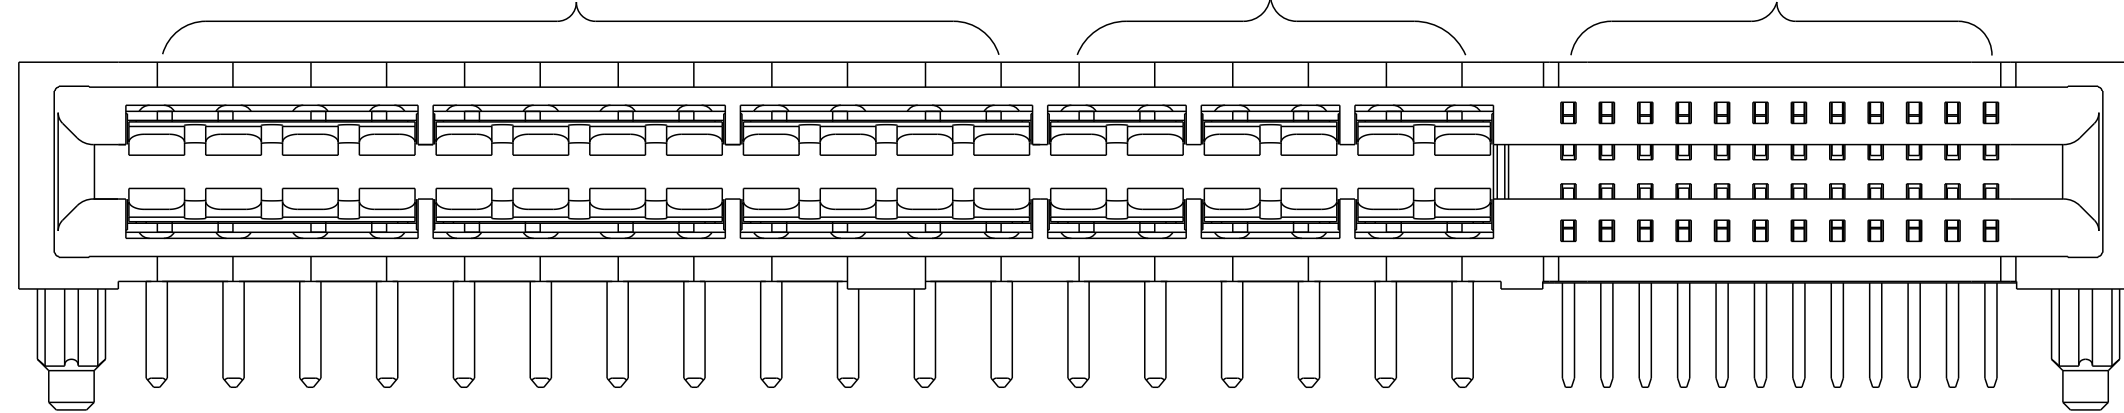

Example: The Configuration above is 10130788-241224ELF
R/A RECEPTACLE 36P24S with Orientation Key and Hold Down.
24P is 4 beam contacts, 12P is 2 beam contacts.

TABLE 3: PART NUMBER CODE FOR HPCE R/A RECEPTACLE P+S CONFIG

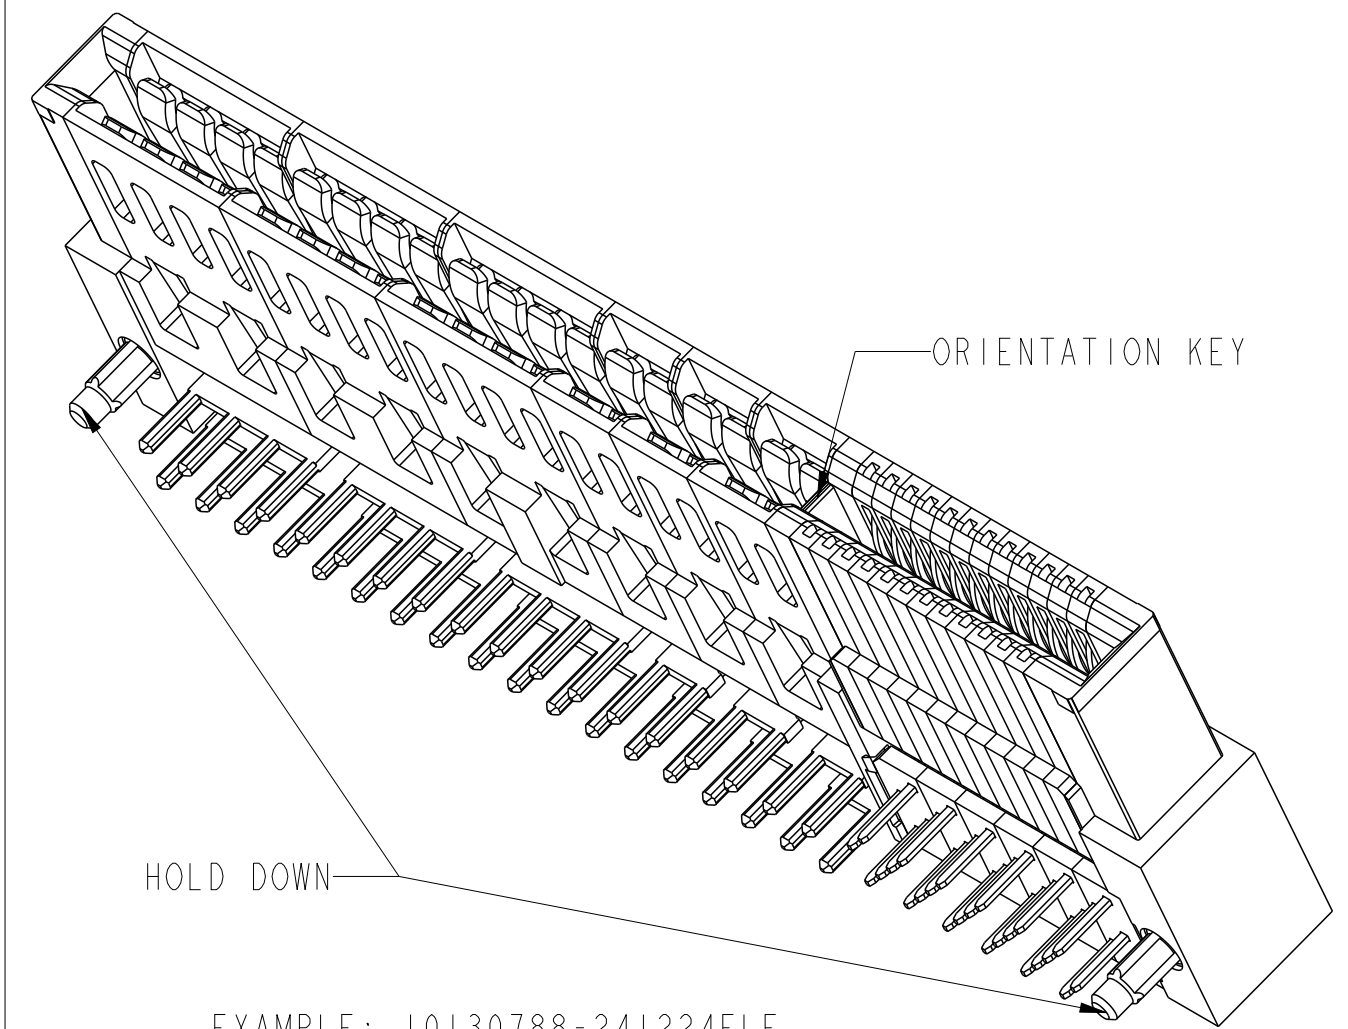

EXAMPLE: 10130788-241224ELF

NOTES:

1. CONNECTOR MATERIALS:
HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
CONTACTS: HIGH PERFORMANCE COPPER ALLOY.
2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.
3. PRODUCT SPECIFICATION: GS-12-604.
4. APPLICATION SPECIFICATION: GS-20-128.
5. PRODUCT MARKING ON HOUSING IN AREA SHOWN MEETS AFCI SPECIFICATION: GS-24-007.
6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.
7. ALL HOLE SIZES ARE FINISHED HOLE SIZES.
8. MOUNTING HOLES ARE UNPLATED
 $\varnothing$ 2.18 +/- 0.03 FOR SOLDER TAILS
9. MAXIMUM OVERALL LENGTH IS 100mm.
10. DIM IS NOT APPLICABLE IF NO 4 BEAM CONTACT OR 2 BEAM CONTACT.
11. A SYMBOL  WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

TABLE 2: LENGTH FORMULAS

DIM	TABLE 2: LENGTH FORMULAS
DIM A	$(MM + NN) / 2 \times 2.54 + (PP / 2) \times 1.27 + 9.12$
DIM B	DIM A - 5.00
DIM C	DIM A - 2.34
DIM D	DIM A - 3.48
DIM E	DIM A - 5.30
DIM F	$(MM / 8 - 1) \times 10.16 + (NN / 4 - 1) \times 5.08 + 13.34$ (WITH 4 BEAM CONTACT)
	$(NN / 4 - 1) \times 5.08 + 3.18$ (WITHOUT 4 BEAM CONTACT)
DIM T	2.6 or 3.25 or 4.05

spec ref		-		dr		Hai-Ling Liu		2014/06/30		projection		size		scale	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Ada Ye		2018/08/30						A2 4:1	
ISO 406 ISO 1101				chr		Feng Zheng		2018/08/31							
				appr		Zheng, Pei-Min		2018/08/31		product family		ecn no		ELX-DG-31039-1	
												rel level		Released	
surface		linear		0.X		±0.50		Amphenol FCI		title R/A RECEPTACLE HIGH POWER CARD EDGE - UNIVERSAL		dwg no 10130788		rev C	
				0.XX		±0.25									
				0.XXX		±0.10									
ISO 1302		angular		0°		±2°									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru