


New Product Introduction

PAN1760 Series Bluetooth® Smart, Place and Play Module



Introducing a new member to Panasonic's growing family of *Bluetooth* Smart modules; the **PAN1760 Series**, place and play, single-mode, *Bluetooth* Low Energy module. This module is based on Toshiba's TC35667 SOC, with an integrated *Bluetooth* Smart controller, ARM7 CPU core, *Bluetooth* SIG certified stack v4.1, API, and GATT profile. The **PAN1760 Series** delivers high-speed operation at ultra-low power consumption. Design in time and application BOM are minimized with embedded 26MHz oscillator and 2.4 GHz antenna.

The **PAN1760 Series** is a fully autonomous device, perfectly suited for stand-alone operation, with integrated 512Kb EEPROM and 32KB of RAM for application code storage and execution.

Bluetooth dual-mode networks - *Bluetooth* Classic plus *Bluetooth* Smart (Low Energy) - are easily implemented by pairing together Panasonic's **PAN1760 Series Bluetooth** Smart and **PAN1026 Series, Bluetooth** SmartReady modules, as they share an identical form factor and module footprint. Most *Bluetooth* Low Energy applications and profiles developed for **PAN1026 Series** can be transferred to **PAN1760 Series**¹.

Program development is easily accomplished using the **EVAL_PAN1760EMK Experimenter Kit** and extracted API enabling text based high level commands. The **EVAL_PAN1760EMK Experimenter Kit** simplifies both firmware and hardware development by integrating a Cortex M3 processor, **PAN1760 Series**, and UART on a single board.

Created with the design engineer in mind, product design cycles are greatly reduced using Panasonic's free of charge reference design and design review services². PCB layouts are simplified using available Gerber files and minimized with Panasonic's tiny footprint technology. The module is just 15.6mm x 8.7mm x 1.9mm and fully shielded to improve immunity. All Panasonic *Bluetooth* RF modules carry FCC, IC, CE and *Bluetooth* certifications.

Features

- Software and Hardware Compatible with the **PAN1026 Series**
- *Bluetooth* 4.1 (LE) Embedded GATT Profile with High-Level API Commands
- Power Consumption Max 8.7mA Tx/ Max 8.4 Rx/<5µA Sleep
- Tx Power 0 dBm, Rx Sensitivity -91 dBm
- Small 15.6 x 8.7 x 1.9 mm³ SMD Package
- 32KB on-chip RAM for Applications
- 512Kb EEPROM
- Autonomous Operation, No Host Required
- Standard SIG BLE and "SPP over BLE" Profiles Available
- -40°C to +85°C Operating Temperature

Interfaces

- UART, I2C , GPIO (10 in/out), Wake-Up Control Pins, Four Channel ADC Bluetooth 4.1
- GAP Central and Peripheral Support
- GATT, SMP and SDB Support


¹Accessing the advanced feature set of PAN1760 Series which includes support for both Central and Peripheral modes will require code modifications.

²Qualified projects only

Applications

- Wearable Devices
- Health Care, Medical Diagnostic Systems - Sports and Leisure Equipment
- Mobile Phone Accessories
- Industrial Measurement and Diagnosis
- Devices Where Power Consumption is Critical
- Consumer Electronics
- Remote Controls
- Health Care and Medical
- Heart Rate Monitor
- Blood Glucose Meter

Block Diagram

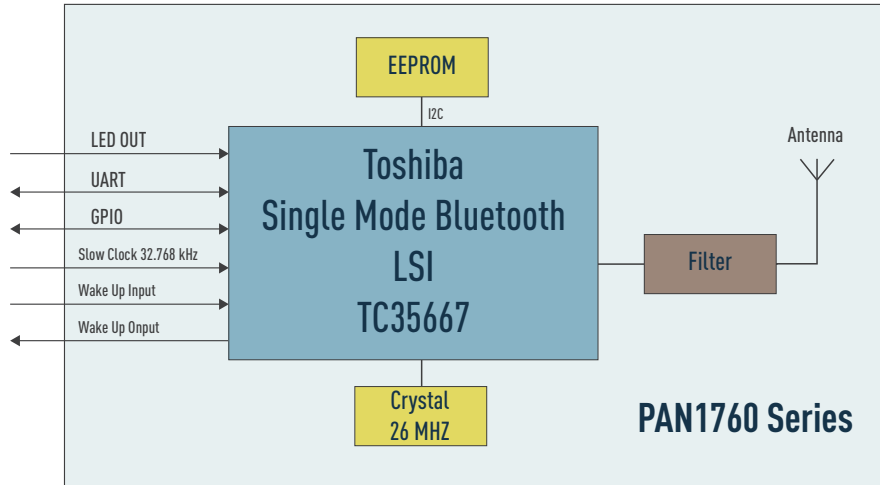

Technical Characteristics

| Parameter | Value | Condition / Note |
|-------------------------------|--------------|-----------------------------------|
| Receiver Sensitivity (1% PER) | - 91 dBm | @ 500 kbps / MSK (high-gain mode) |
| Output Power | 0 dBm | Maximum |
| Power Supply | 1.8V - 3.6V | Single operation voltage |
| Transmit and Receive Mode | 8.7 / 8.4 mA | |
| Low Power Mode | <1 μ A | |
| Operating Temperature Range | -40C / +85C | Industrial Range |

Ordering Information

| Part Number | Description |
|-----------------|--|
| ENW-89847A1KF | PAN1760 Series, <i>Bluetooth</i> Low Energy Module, Integrated Antenna |
| EVAL_PAN1760EMK | PAN1760 Series Experimenter Kit |

For detailed specification information on the PAN1760 Series, visit our website at: na.industrial.panasonic.com/products/wireless-connectivity/bluetooth



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru