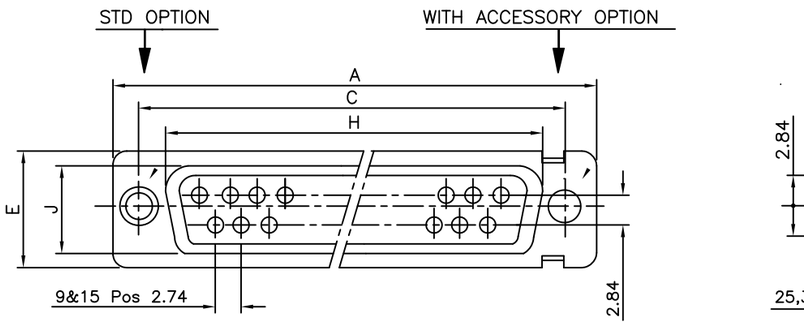



LAY OUT OF 50P CONNECTOR

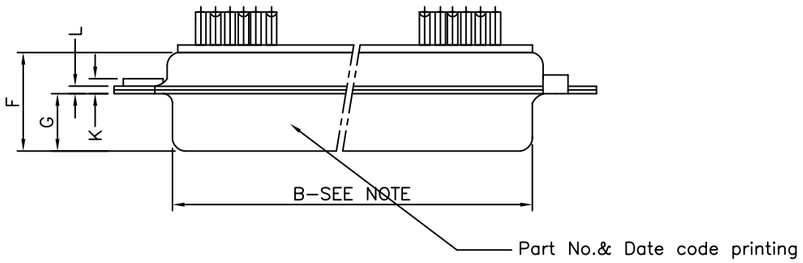



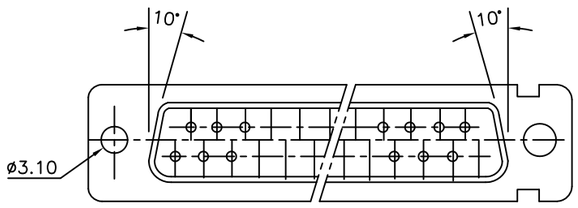

VIEW OF MATING FACE

"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

Packaging as per GS-14-920

Housing will withstand exposure to 260°c peak temp for 3.5sec

TECHNICAL SPECIFICATIONS

SHELLS	:	MATT TIN / ZINC PLATED STEEL
INSULATOR MATERIAL	:	SELF EXTINGUISHING THERMOPLASTIC - UL CLASS 94 V0 THE HOUSING WILL WITHSTAND EXPOSURE TO 260-265°C IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon) OR PROTECTIVE METALLIC DEVICE
CONTACTS DIA ON ACTIVE AREA	:	Ø1 MM.
CONTACTS MATERIAL	:	COPPER ALLOY
CONTACT PLATING	:	GXT / GOLD OVER NICKEL (ACTIVE ZONE)
	:	TIN OVER NICKEL (TERMINATION ZONE)
FOR LEAD FREE PLATING	:	2 μMIN. TIN TOP OVER 1.27 μ MIN.NICKEL UNDER PLATE(ON TERMINATION ZONE)
OPERATING TEMPERATURE	:	-55°C +125°C
OPERATING CURRENT	:	5 A PER CONTACT
CONTACT RESISTANCE	:	≤10m Ω
INSULATION RESISTANCE	:	≥5000M Ω
MAXIMUM VOLTAGE	:	1000 V.r.m.s
MECHANICAL ENDURANCE	:	200 MATINGS (For 64 code) 500 MATINGS (For 65 code).
DAMP HEAT	:	21 DAYS.
WIRE SIZE	:	0.6 MM^2 (AWG 20) MAX.

ORDERING INFORMATION

D B V 25 P 0 64 H T X B XXX LF

- SERIES
- SHELL SIZE: E,A,B,C,D
- OPTIONS: BLANK-STANDARD; F - FLOAT MOUNTING; L - CLINCH NUT (M3); O - CLINCH NUT (UNC); V - FEM. SCREW LOCK HEX. (UNC)
- NO.OF CONTACTS: 09,15,25,37,50
- CONTACTS: P - PIN; S - SOCKET
- TERMINATION TYPE: 0 - SOLDER BUCKET
- CONTACT PLATING: 64 - 200 Mating cycles; 65 - 500 Mating cycles
- OPTIONS: BLANK - STD; H - WITH SHIELDING TERMINATION FINGERS
- SHELL PLATING: BLANK-ZINC; T-STD. TIN over Cu
- INSULATOR COLOUR: BLANK- NATURAL; B - BLACK
- SPECIAL CODES
- DIMPLES: X-ON MALE CONNECTORS ONLY
- LEAD FREE

SHELL SIZE		A +0,76 0	B +0,25 0	C ±0,12	D +0,25 0	E +0,76 0	F MAX	G +0,15 0	H +0,51 0	J +0,51 0	K ±0,2	L +0,22 0
		DIMENSIONS										
50	P	66.65	52.68	61.11	11.08	14.99	11.09	5.85	55.07	13.31	1.50	1.0
	S	66.65	52.30	61.11	10.62	14.99	11.21	6.05	55.07	13.31	1.10	0.8
37	P	68.94	55.30	63.50	8.23	12.17	11.09	5.85	57.45	10.46	1.50	1.0
	S	68.94	54.71	63.50	7.77	12.17	11.21	6.05	57.45	10.46	1.10	0.8
25	P	52.65	38.84	47.04	8.23	12.17	11.07	5.85	41.02	10.46	1.10	0.8
	S	52.65	38.25	47.04	7.77	12.17	11.21	6.05	41.02	10.46	1.10	0.8
15	P	38.76	25.12	33.32	8.23	12.17	10.99	5.85	27.25	10.46	1.10	0.8
	S	38.76	24.54	33.32	7.77	12.17	11.21	6.05	27.25	10.46	1.10	0.8
09	P	30.43	16.79	24.99	8.23	12.17	10.99	5.85	19.02	10.46	1.10	0.8
	S	30.43	16.21	24.99	7.77	12.17	11.21	6.05	19.02	10.46	1.10	0.8

NOTE:– 1) INSIDE DIMENSIONS OF THE MALE AND OUTSIDE DIMENSIONS OF THE FEMALE CONNECTOR

2) ALL ACCESSORIES SHOWN IN ASSEMBLY OPTIONS SHOULD BE ORDERED SEPARETELY

ASSEMBLY OPTIONS

FEMALE SCREW LOCK EXTENDED TYPE



ORD CODE 8630–01–061

FEMALE SCREW LOCK

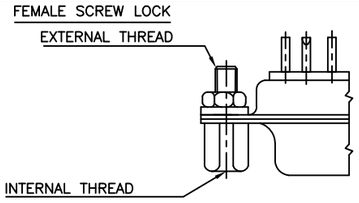

ORD–CODE	EXTERNAL THREAD	INTERNAL THREAD
8630–01LF	M3	M3
8630–01ALF	M3	4–40 UNC 2B
8630–01BLF	4–40 UNC 2A	4–40 UNC 2B
8630–01CLF	4–40 UNC 2A	M3

MALE LEVER LOCK



ORD CODE 8630–3427(EABC)

ORD CODE 8630–3428(D)

CONNECTOR WITH SPECIAL RIVETTED FEMALE SCREW LOCK



CLINCH NUT



PREFIX:

O – UNC4–40

L – M3

WITH SHIELDING TERMINATION FINGERS



OPTION: H

FEMALE LEVER LOCK



ORD CODE 8630–3425(EABC)

ORD CODE 8630–3426(D)

mat'l. code				surface		tolerance		projection	product family	
SEE NOTE 4				ISO 1302		ISO 406 ISO 1101			D-SUB	
ltr	ecn no	dr	date	tolerances unless otherwise specified					title	
N	I11-0003	AMR	2011-01-06	angles	linear			MM	D- SUB SOLDER BUCKET CONNECTOR	
-	-	-	-			.00±0.1			(WITH ASSEMBLY OPTIONS)	
H	I07-0175	MRA	2007-12-17	0°±1°		.000±.00X		scale –		
J	I08-0131	MRA	2008-10-06	dr	GEORGE.V.JOSEPH		1999-03-20		dwg no	sheet 1 of 1 size
K	I09-0121	MRA	2009-07-01	engr	GEORGE.V.JOSEPH		1999-03-20		C-DSUB-0064	A3
L	I09-0140	MRA	2009-07-14	chr	ABHILASH.M.R		2009-07-01		type Product Customer Drawing	
M	I09-0195	MRA	2009-09-18	appd	SUDHIR.VARMA		2009-07-01			
sheet index	revision	N								
	sheet	1								

Copyright FCI
FCIconnect.com

form: A3

PDM: Rev:N STATUS:Released Printed: Mar 01, 2011

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru