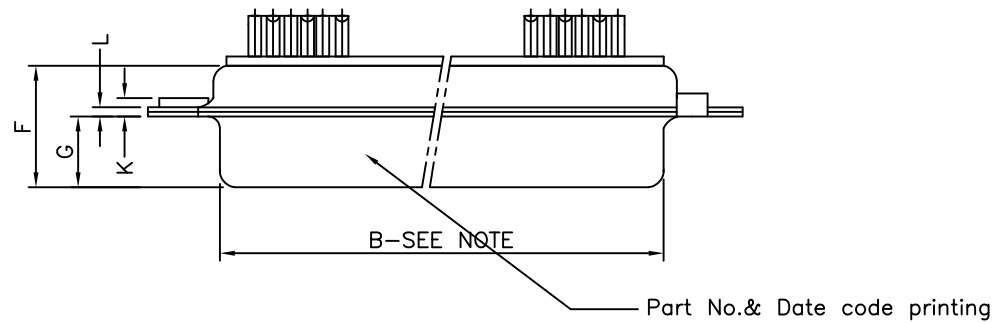
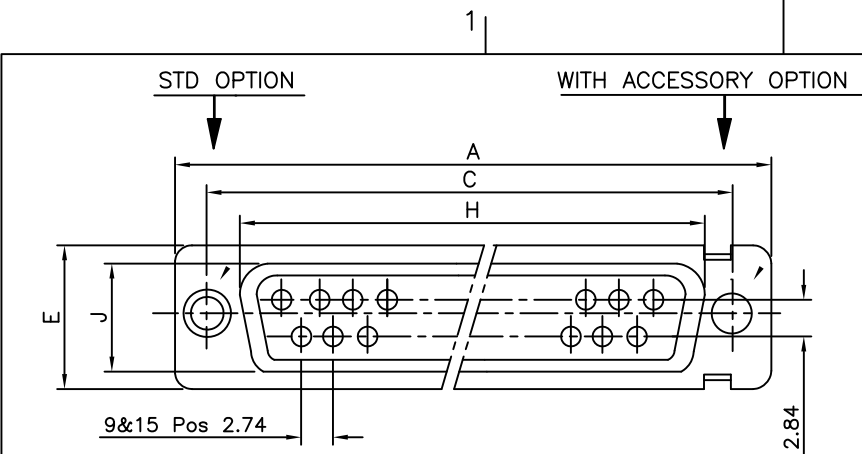


VIEW OF MATING FACE


"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

Packaging as per GS-14-920


Housing will withstand exposure to 260°C peak temp for 3.5sec

## ORDERING INFORMATION
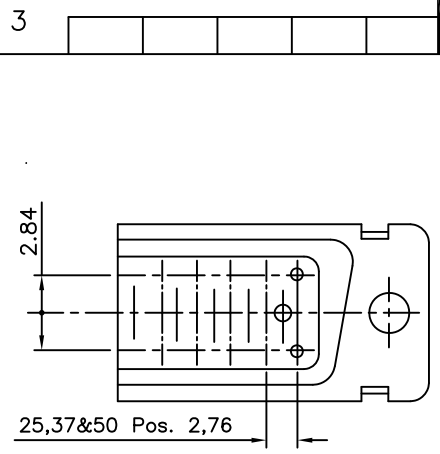
|                  |                                                                                                                       |                                                                     |
|------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| SERIES           | D B V 25 P 0 64 H T X B XXX LF                                                                                        | LEAD FREE                                                           |
| SHELL SIZE       | E,A,B,C,D                                                                                                             | SPECIAL CODES                                                       |
| OPTIONS          | BLANK-STANDARD<br>F - FLOAT MOUNTING<br>L - CLINCH NUT (M3)<br>O - CLINCH NUT (UNC)<br>V - FEM. SCREW LOCK HEX. (UNC) | INSULATOR COLOUR<br>BLANK- NATURAL<br>B - BLACK                     |
| NO.OF CONTACTS   | 09,15,25,37,50                                                                                                        | DIMPLES<br>X-ON MALE CONNECTORS ONLY                                |
| CONTACTS         | P - PIN<br>S - SOCKET                                                                                                 | SHELL PLATING<br>BLANK-ZINC<br>T-STD. TIN over Cu                   |
| TERMINATION TYPE | 0 - SOLDER BUCKET                                                                                                     | OPTIONS<br>BLANK - STD<br>H - WITH SHIELDING TERMINATION FINGERS    |
|                  |                                                                                                                       | CONTACT PLATING<br>64 - 200 Mating cycles<br>65 - 500 Mating cycles |



LAY OUT OF 50P CONNECTOR









## TECHNICAL SPECIFICATIONS

|                             |   |                                                                                                                                                                                                 |
|-----------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SHELLS                      | : | MATT TIN / ZINC PLATED STEEL                                                                                                                                                                    |
| INSULATOR MATERIAL          | : | SELF EXTINGUISHING THERMOPLASTIC - UL CLASS 94 V0<br>THE HOUSING WILL WITHSTAND EXPOSURE TO 260-265°C<br>IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon)<br>OR PROTECTIVE METALLIC DEVICE |
| CONTACTS DIA ON ACTIVE AREA | : | Ø1 MM.                                                                                                                                                                                          |
| CONTACTS MATERIAL           | : | COPPER ALLOY                                                                                                                                                                                    |
| CONTACT PLATING             | : | GXT / GOLD OVER NICKEL (ACTIVE ZONE)<br>TIN OVER NICKEL (TERMINATION ZONE)                                                                                                                      |
| FOR LEAD FREE PLATING       | : | 2 µMIN. TIN TOP OVER<br>1.27 µ MIN.NICKEL UNDER PLATE(ON TERMINATION ZONE)                                                                                                                      |
| OPERATING TEMPERATURE       | : | -55°C +125°C                                                                                                                                                                                    |
| OPERATING CURRENT           | : | 5 A PER CONTACT                                                                                                                                                                                 |
| CONTACT RESISTANCE          | : | ≤10m Ω                                                                                                                                                                                          |
| INSULATION RESISTANCE       | : | ≥5000M Ω                                                                                                                                                                                        |
| MAXIMUM VOLTAGE             | : | 1000 V.r.m.s                                                                                                                                                                                    |
| MECHANICAL ENDURANCE        | : | 200 MATINGS (For 64 code) 500 MATINGS (For 65 code).                                                                                                                                            |
| DAMP HEAT                   | : | 21 DAYS.                                                                                                                                                                                        |
| WIRE SIZE                   | : | 0.6 MM <sup>2</sup> (AWG 20) MAX.                                                                                                                                                               |

|            |            |            |            |            |              |              |       |              |              |              |           |              |
|------------|------------|------------|------------|------------|--------------|--------------|-------|--------------|--------------|--------------|-----------|--------------|
| 50         | P          | 66.65      | 52.68      | 61.11      | 11.08        | 14.99        | 11.09 | 5.85         | 55.07        | 13.31        | 1.50      | 1.0          |
|            | S          | 66.65      | 52.30      | 61.11      | 10.62        | 14.99        | 11.21 | 6.05         | 55.07        | 13.31        | 1.10      | 0.8          |
| 37         | P          | 68.94      | 55.30      | 63.50      | 8.23         | 12.17        | 11.09 | 5.85         | 57.45        | 10.46        | 1.50      | 1.0          |
|            | S          | 68.94      | 54.71      | 63.50      | 7.77         | 12.17        | 11.21 | 6.05         | 57.45        | 10.46        | 1.10      | 0.8          |
| 25         | P          | 52.65      | 38.84      | 47.04      | 8.23         | 12.17        | 11.07 | 5.85         | 41.02        | 10.46        | 1.10      | 0.8          |
|            | S          | 52.65      | 38.25      | 47.04      | 7.77         | 12.17        | 11.21 | 6.05         | 41.02        | 10.46        | 1.10      | 0.8          |
| 15         | P          | 38.76      | 25.12      | 33.32      | 8.23         | 12.17        | 10.99 | 5.85         | 27.25        | 10.46        | 1.10      | 0.8          |
|            | S          | 38.76      | 24.54      | 33.32      | 7.77         | 12.17        | 11.21 | 6.05         | 27.25        | 10.46        | 1.10      | 0.8          |
| 09         | P          | 30.43      | 16.79      | 24.99      | 8.23         | 12.17        | 10.99 | 5.85         | 19.02        | 10.46        | 1.10      | 0.8          |
|            | S          | 30.43      | 16.21      | 24.99      | 7.77         | 12.17        | 11.21 | 6.05         | 19.02        | 10.46        | 1.10      | 0.8          |
| SHELL SIZE | A          | +0,76<br>0 | +0,25<br>0 | ±0,12<br>C | +0,25<br>D 0 | +0,76<br>E 0 | F MAX | +0,15<br>G 0 | +0,51<br>H 0 | +0,51<br>J 0 | ±0,2<br>K | +0,22<br>L 0 |
|            | DIMENSIONS |            |            |            |              |              |       |              |              |              |           |              |

NOTE:- 1) INSIDE DIMENSIONS OF THE MALE AND OUTSIDE DIMENSIONS OF THE FEMALE CONNECTOR  
2) ALL ACCESSORIES SHOWN IN ASSEMBLY OPTIONS SHOULD BE ORDERED SEPARATELY
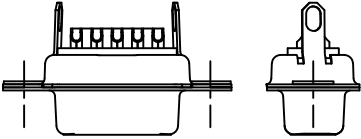
## ASSEMBLY OPTIONS

|                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |    |    |            |    |             |            |             |             |            |             |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|----|----|------------|----|-------------|------------|-------------|-------------|------------|-------------|----|
| <div><p><u>FEMALE SCREW LOCK EXTENDED TYPE</u></p><p>UNC 4-40,2B<br/>THREAD</p><p>ORD CODE 8630-01-061</p></div> | <div><p><u>FEMALE SCREW LOCK</u></p><p>EXTERNAL THREAD</p><p>INTERNAL THREAD</p><table border="1"><tr><td>8630-01LF</td><td>M3</td><td>M3</td></tr><tr><td>8630-01ALF</td><td>M3</td><td>4-40 UNC 2B</td></tr><tr><td>8630-01BLF</td><td>4-40 UNC 2A</td><td>4-40 UNC 2B</td></tr><tr><td>8630-01CLF</td><td>4-40 UNC 2A</td><td>M3</td></tr></table><p>ORD-CODE      EXTERNAL THREAD      INTERNAL THREAD</p></div> | 8630-01LF   | M3 | M3 | 8630-01ALF | M3 | 4-40 UNC 2B | 8630-01BLF | 4-40 UNC 2A | 4-40 UNC 2B | 8630-01CLF | 4-40 UNC 2A | M3 |
| 8630-01LF                                                                                                                                                                                           | M3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | M3          |    |    |            |    |             |            |             |             |            |             |    |
| 8630-01ALF                                                                                                                                                                                          | M3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4-40 UNC 2B |    |    |            |    |             |            |             |             |            |             |    |
| 8630-01BLF                                                                                                                                                                                          | 4-40 UNC 2A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 4-40 UNC 2B |    |    |            |    |             |            |             |             |            |             |    |
| 8630-01CLF                                                                                                                                                                                          | 4-40 UNC 2A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | M3          |    |    |            |    |             |            |             |             |            |             |    |
| <div><p><u>MALE LEVER LOCK</u></p><p>ORD CODE 8630-3427(EABC)<br/>ORD CODE 8630-3428(D)</p></div>              | <div><p><u>CONNECTOR WITH SPECIAL RIVETTED FEMALE SCREW LOCK</u></p><p>6.4 MAX</p><p><u>FEMALE SCREW LOCK</u></p><p>UNC 4-40,2B<br/>PREFIX: V      THREAD</p></div>                                                                                                                                                                                                                                                |             |    |    |            |    |             |            |             |             |            |             |    |
| <div><p><u>WITH SHIELDING TERMINATION FINGERS</u></p><p>OPTION: H</p></div>                                    | <div><p><u>FEMALE LEVER LOCK</u></p><p>ORD CODE 8630-3425(EABC)<br/>ORD CODE 8630-3426(D)</p></div>                                                                                                                                                                                                                                                                                                                |             |    |    |            |    |             |            |             |             |            |             |    |

|                           |                |     |            |                       |                               |                |                                                                    |  |  |  |
|---------------------------|----------------|-----|------------|-----------------------|-------------------------------|----------------|--------------------------------------------------------------------|--|--|--|
| mat'l. code<br>SEE NOTE 4 |                |     |            | surface<br>ISO 1302 ✓ | tolerance<br>ISO 406 ISO 1101 | projection<br> | product family<br>D-SUB                                            |  |  |  |
| ltr                       | ecn no         | dr  | date       | tolerances unless     | otherwise specified           | MM<br>         | title<br>D- SUB SOLDER BUCKET CONNECTOR<br>(WITH ASSEMBLY OPTIONS) |  |  |  |
| N                         | I11-0003       | AMR | 2011-01-06 | angles                | linear                        | .00±0.1        |                                                                    |  |  |  |
| -                         | -              | -   | -          | 0°±1°                 |                               | .000±.00X      |                                                                    |  |  |  |
| H                         | I07-0175       | MRA | 2007-12-17 | dr                    | GEORGE.V.JOSEPH               | 1999-03-20     |                                                                    |  |  |  |
| J                         | I08-0131       | MRA | 2008-10-06 | enr                   | GEORGE.V.JOSEPH               | 1999-03-20     |                                                                    |  |  |  |
| K                         | I09-0121       | MRA | 2009-07-01 | chr                   | ABHILASH.M.R                  | 2009-07-01     |                                                                    |  |  |  |
| L                         | I09-0140       | MRA | 2009-07-14 | appd                  | SUDHIR.VARMA                  | 2009-07-01     | dwg no<br>C-DSUB-0064                                              |  |  |  |
| M                         | I09-0195       | MRA | 2009-09-18 |                       |                               |                | sheet 1 of 1                                                       |  |  |  |
| sheet index               | revision sheet | N   | 1          |                       |                               |                | type Product Customer Drawing                                      |  |  |  |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)