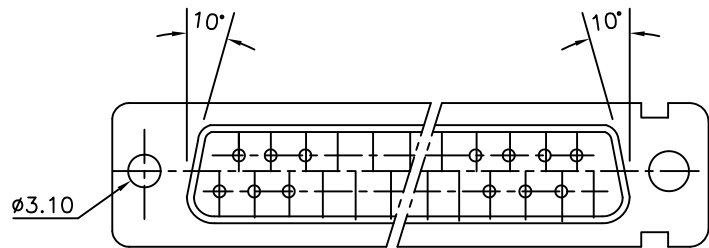
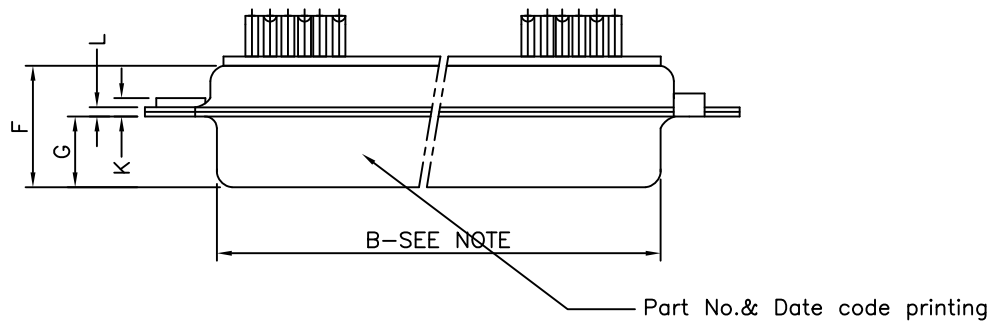
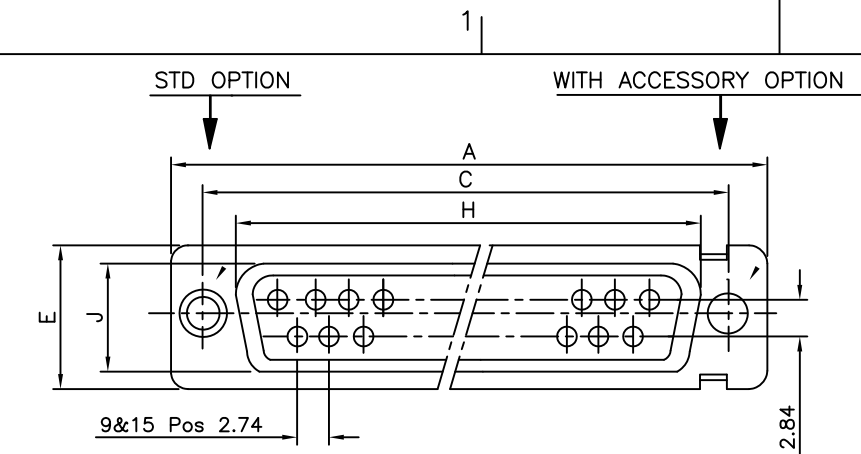




FCIconnect.com

Copyright FCI

D



VIEW OF MATING FACE


"This LF product meets European Union Directives and other country regulations as described in GS-22-008"

Packaging as per GS-14-920


Housing will withstand exposure to 260°C peak temp for 3.5sec

ORDERING INFORMATION

SERIES	D B V 25 P 0 64 H T X B XXX LF	LEAD FREE
SHELL SIZE		SPECIAL CODES
E,A,B,C,D		
OPTIONS		INSULATOR COLOUR
BLANK-STANDARD		BLANK- NATURAL
F - FLOAT MOUNTING		B - BLACK
L - CLINCH NUT (M3)		DIMPLES
O - CLINCH NUT (UNC)		X-ON MALE CONNECTORS ONLY
V - FEM. SCREW LOCK HEX. (UNC)		
NO.OF CONTACTS		SHELL PLATING
09,15,25,37,50		BLANK-ZINC
		T-STD. TIN over Cu
CONTACTS		OPTIONS
P - PIN		BLANK - STD
S - SOCKET		H - WITH SHIELDING TERMINATION FINGERS
TERMINATION TYPE		CONTACT PLATING
0 - SOLDER BUCKET		64 - 200 Mating cycles
		65 - 500 Mating cycles

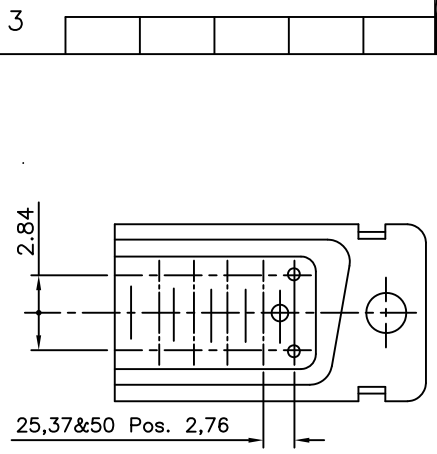

LAY OUT OF 50P CONNECTOR









TECHNICAL SPECIFICATIONS

SHELLS	:	MATT TIN / ZINC PLATED STEEL
INSULATOR MATERIAL	:	SELF EXTINGUISHING THERMOPLASTIC - UL CLASS 94 V0
	:	THE HOUSING WILL WITHSTAND EXPOSURE TO 260-265°C
	:	IF WE USE PROTECTIVE ADHESIVE (type Kapton or Teflon)
	:	OR PROTECTIVE METALLIC DEVICE
CONTACTS DIA ON ACTIVE AREA	:	Ø1 MM.
CONTACTS MATERIAL	:	COPPER ALLOY
CONTACT PLATING	:	GXT / GOLD OVER NICKEL (ACTIVE ZONE)
	:	TIN OVER NICKEL (TERMINATION ZONE)
FOR LEAD FREE PLATING	:	2 µMIN. TIN TOP OVER
	:	1.27 µ MIN.NICKEL UNDER PLATE(ON TERMINATION ZONE)
OPERATING TEMPERATURE	:	-55°C +125°C
OPERATING CURRENT	:	5 A PER CONTACT
CONTACT RESISTANCE	:	≤10m Ω
INSULATION RESISTANCE	:	≥5000M Ω
MAXIMUM VOLTAGE	:	1000 V.r.m.s
MECHANICAL ENDURANCE	:	200 MATINGS (For 64 code) 500 MATINGS (For 65 code).
DAMP HEAT	:	21 DAYS.
WIRE SIZE	:	0.6 MM ² (AWG 20) MAX.

50	P	66.65	52.68	61.11	11.08	14.99	11.09	5.85	55.07	13.31	1.50	1.0
	S	66.65	52.30	61.11	10.62	14.99	11.21	6.05	55.07	13.31	1.10	0.8
37	P	68.94	55.30	63.50	8.23	12.17	11.09	5.85	57.45	10.46	1.50	1.0
	S	68.94	54.71	63.50	7.77	12.17	11.21	6.05	57.45	10.46	1.10	0.8
25	P	52.65	38.84	47.04	8.23	12.17	11.07	5.85	41.02	10.46	1.10	0.8
	S	52.65	38.25	47.04	7.77	12.17	11.21	6.05	41.02	10.46	1.10	0.8
15	P	38.76	25.12	33.32	8.23	12.17	10.99	5.85	27.25	10.46	1.10	0.8
	S	38.76	24.54	33.32	7.77	12.17	11.21	6.05	27.25	10.46	1.10	0.8
09	P	30.43	16.79	24.99	8.23	12.17	10.99	5.85	19.02	10.46	1.10	0.8
	S	30.43	16.21	24.99	7.77	12.17	11.21	6.05	19.02	10.46	1.10	0.8
SHELL SIZE	A	+0,76 0	+0,25 0	±0,12 C	+0,25 D 0	+0,76 E 0	F MAX	+0,15 G 0	+0,51 H 0	+0,51 J 0	±0,2 K	+0,22 L 0
	DIMENSIONS											

NOTE:- 1) INSIDE DIMENSIONS OF THE MALE AND OUTSIDE DIMENSIONS OF THE FEMALE CONNECTOR
2) ALL ACCESSORIES SHOWN IN ASSEMBLY OPTIONS SHOULD BE ORDERED SEPARATELY

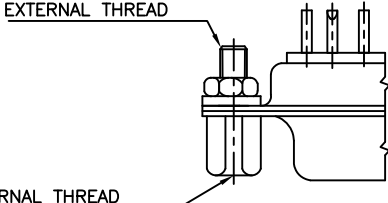ASSEMBLY OPTIONS

FEMALE SCREW LOCK EXTENDED TYPE  UNC 4-40,2B THREAD ORD CODE 8630-01-061	FEMALE SCREW LOCK  EXTERNAL THREAD INTERNAL THREAD <table border="1"><tr><td>8630-01LF</td><td>M3</td><td>M3</td></tr><tr><td>8630-01ALF</td><td>M3</td><td>4-40 UNC 2B</td></tr><tr><td>8630-01BLF</td><td>4-40 UNC 2A</td><td>4-40 UNC 2B</td></tr><tr><td>8630-01CLF</td><td>4-40 UNC 2A</td><td>M3</td></tr><tr><td>ORD-CODE</td><td>EXTERNAL THREAD</td><td>INTERNAL THREAD</td></tr></table>	8630-01LF	M3	M3	8630-01ALF	M3	4-40 UNC 2B	8630-01BLF	4-40 UNC 2A	4-40 UNC 2B	8630-01CLF	4-40 UNC 2A	M3	ORD-CODE	EXTERNAL THREAD	INTERNAL THREAD
8630-01LF	M3	M3														
8630-01ALF	M3	4-40 UNC 2B														
8630-01BLF	4-40 UNC 2A	4-40 UNC 2B														
8630-01CLF	4-40 UNC 2A	M3														
ORD-CODE	EXTERNAL THREAD	INTERNAL THREAD														
MALE LEVER LOCK  ORD CODE 8630-3427(EABC) ORD CODE 8630-3428(D)	CONNECTOR WITH SPECIAL RIVETTED FEMALE SCREW LOCK  6.4 MAX UNC 4-40,2B THREAD PREFIX: V															
WITH SHIELDING TERMINATION FINGERS  OPTION: H	FEMALE LEVER LOCK  ORD CODE 8630-3425(EABC) ORD CODE 8630-3426(D)															

mat'l. code SEE NOTE 4				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family D-SUB			
ltr	ecn no	dr	date	tolerances unless	otherwise specified	MM 	title D- SUB SOLDER BUCKET CONNECTOR (WITH ASSEMBLY OPTIONS)			
N	I11-0003	AMR	2011-01-06	angles	linear					
-	-	-	-				dwg no C-DSUB-0064			
H	I07-0175	MRA	2007-12-17	0°±1°						
J	I08-0131	MRA	2008-10-06	dr	GEORGE.V.JOSEPH	1999-03-20	sheet 1 of 1			
K	I09-0121	MRA	2009-07-01	enr	GEORGE.V.JOSEPH	1999-03-20				
L	I09-0140	MRA	2009-07-14	chr	ABHILASH.M.R	2009-07-01	size A3			
M	I09-0195	MRA	2009-09-18	appd	SUDHIR.VARMA	2009-07-01				
sheet index	revision	N					type Product Customer Drawing			
	sheet	1								

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru