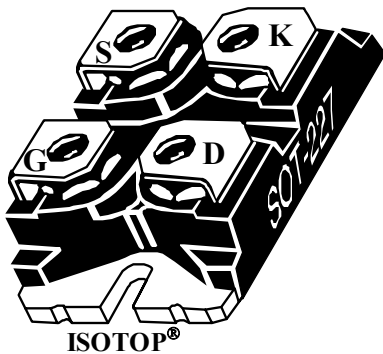
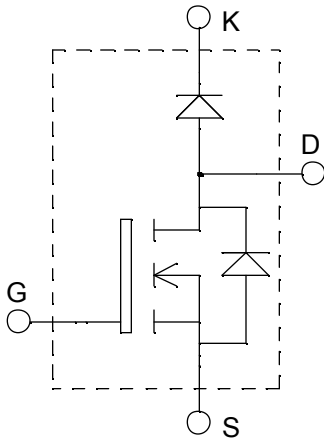


**ISOTOP[®] Boost chopper
MOSFET Power Module**

$V_{DSS} = 500V$
 $R_{DSon} = 100m\Omega \text{ max @ } T_j = 25^\circ C$
 $I_D = 44A \text{ @ } T_c = 25^\circ C$


Application

- AC and DC motor control
- Switched Mode Power Supplies
- Power Factor Correction
- Brake switch

Features

- Power MOS V[®] MOSFETs
 - Low R_{DSon}
 - Low input and Miller capacitance
 - Low gate charge
 - Fast intrinsic diode
 - Avalanche energy rated
 - Very rugged
- ISOTOP[®] Package (SOT-227)
- Very low stray inductance
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Very rugged
- Low profile
- RoHS Compliant

Absolute maximum ratings

| Symbol | Parameter | Max ratings | Unit |
|------------|---|--------------------|-----------|
| V_{DSS} | Drain - Source Breakdown Voltage | 500 | V |
| I_D | Continuous Drain Current | $T_c = 25^\circ C$ | 44 |
| | | $T_c = 80^\circ C$ | 33 |
| I_{DM} | Pulsed Drain current | 176 | A |
| V_{GS} | Gate - Source Voltage | ± 30 | V |
| R_{DSon} | Drain - Source ON Resistance | 100 | $m\Omega$ |
| P_D | Maximum Power Dissipation | $T_c = 25^\circ C$ | 450 |
| I_{AR} | Avalanche current (repetitive and non repetitive) | 44 | A |
| E_{AR} | Repetitive Avalanche Energy | 50 | mJ |
| E_{AS} | Single Pulse Avalanche Energy | 2500 | |
| I_{FAV} | Maximum Average Forward Current | Duty cycle=0.5 | A |
| I_{FRMS} | RMS Forward Current (Square wave, 50% duty) | $T_c = 80^\circ C$ | |
| | | | 39 |

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

All ratings @ $T_j = 25^\circ\text{C}$ unless otherwise specified

Electrical Characteristics

| Symbol | Characteristic | Test Conditions | | Min | Typ | Max | Unit |
|--------------|---------------------------------|---|---------------------------|-----|-----|-----------|------------------|
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{GS} = 0\text{V}, V_{DS} = 500\text{V}$ | $T_j = 25^\circ\text{C}$ | | | 25 | μA |
| | | $V_{GS} = 0\text{V}, V_{DS} = 400\text{V}$ | $T_j = 125^\circ\text{C}$ | | | 250 | |
| $R_{DS(on)}$ | Drain – Source on Resistance | $V_{GS} = 10\text{V}, I_D = 22\text{A}$ | | | | 100 | $\text{m}\Omega$ |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{GS} = V_{DS}, I_D = 2.5\text{mA}$ | | 2 | | 4 | V |
| I_{GSS} | Gate – Source Leakage Current | $V_{GS} = \pm 20\text{V}, V_{DS} = 0\text{V}$ | | | | ± 100 | nA |

Dynamic Characteristics


| Symbol | Characteristic | Test Conditions | | Min | Typ | Max | Unit |
|--------------|------------------------------|---|--|-----|------|-----|-------------|
| C_{iss} | Input Capacitance | $V_{GS} = 0\text{V}$ | | | 7410 | | pF |
| C_{oss} | Output Capacitance | $V_{DS} = 25\text{V}$ | | | 1050 | | |
| C_{rss} | Reverse Transfer Capacitance | $f = 1\text{MHz}$ | | | 390 | | |
| Q_g | Total gate Charge | $V_{GS} = 10\text{V}$ | | | 312 | | nC |
| Q_{gs} | Gate – Source Charge | $V_{Bus} = 250\text{V}$ | | | 37 | | |
| Q_{gd} | Gate – Drain Charge | $I_D = 44\text{A} @ T_j = 25^\circ\text{C}$ | | | 127 | | |
| $T_{d(on)}$ | Turn-on Delay Time | $V_{GS} = 15\text{V}$ | | | 18 | | ns |
| T_r | Rise Time | $V_{Bus} = 250\text{V}$ | | | 16 | | |
| $T_{d(off)}$ | Turn-off Delay Time | $I_D = 44\text{A} @ T_j = 25^\circ\text{C}$ | | | 54 | | |
| T_f | Fall Time | $R_G = 0.6\Omega$ | | | 5 | | |

Chopper diode ratings and characteristics

| Symbol | Characteristic | Test Conditions | | Min | Typ | Max | Unit |
|-----------|----------------------------------|-------------------------------------|---------------------------|-----------------------------------|---------------------------|-----|---------------|
| V_F | Diode Forward Voltage | $I_F = 30\text{A}$ | | | 1.6 | 1.8 | V |
| | | $I_F = 60\text{A}$ | | | 1.9 | | |
| | | $I_F = 30\text{A}$ | $T_j = 125^\circ\text{C}$ | | 1.4 | | |
| I_{RM} | Maximum Reverse Leakage Current | $V_R = 600\text{V}$ | $T_j = 25^\circ\text{C}$ | | | 250 | μA |
| | | $V_R = 600\text{V}$ | $T_j = 125^\circ\text{C}$ | | | 500 | |
| C_T | Junction Capacitance | $V_R = 200\text{V}$ | | | 44 | | pF |
| t_{rr} | Reverse Recovery Time | $I_F = 1\text{A}, V_R = 30\text{V}$ | $T_j = 25^\circ\text{C}$ | | 23 | | ns |
| | Reverse Recovery Time | $di/dt = 100\text{A}/\mu\text{s}$ | $T_j = 25^\circ\text{C}$ | | 85 | | |
| | | | | $T_j = 125^\circ\text{C}$ | | 160 | |
| I_{RRM} | Maximum Reverse Recovery Current | $I_F = 30\text{A}$ | $V_R = 400\text{V}$ | $di/dt = 200\text{A}/\mu\text{s}$ | $T_j = 25^\circ\text{C}$ | 4 | A |
| | | | | | $T_j = 125^\circ\text{C}$ | 8 | |
| Q_{rr} | Reverse Recovery Charge | | | | $T_j = 25^\circ\text{C}$ | 130 | nC |
| | | | | | $T_j = 125^\circ\text{C}$ | 700 | |
| t_{rr} | Reverse Recovery Time | $I_F = 30\text{A}$ | $T_j = 125^\circ\text{C}$ | | 70 | | ns |
| Q_{rr} | Reverse Recovery Charge | $V_R = 400\text{V}$ | | | 1300 | | nC |
| I_{RRM} | Maximum Reverse Recovery Current | $di/dt = 1000\text{A}/\mu\text{s}$ | | | 30 | | A |

Thermal and package characteristics

| Symbol | Characteristic | Min | Typ | Max | Unit |
|----------------|--|--------|------|------|------|
| R_{thJC} | Junction to Case Thermal Resistance | MOSFET | | 0.28 | °C/W |
| | | Diode | | 1.21 | |
| R_{thJA} | Junction to Ambient (IGBT & Diode) | | | 20 | |
| V_{ISOL} | RMS Isolation Voltage, any terminal to case $t=1$ min, $I_{iso}<1$ mA, 50/60Hz | 2500 | | | V |
| T_J, T_{STG} | Storage Temperature Range | -55 | | 150 | °C |
| T_L | Max Lead Temp for Soldering: 0.063" from case for 10 sec | | | 300 | |
| Torque | Mounting torque (Mounting = 8-32 or 4mm Machine and terminals = 4mm Machine) | | | 1.5 | N.m |
| Wt | Package Weight | | 29.2 | | g |

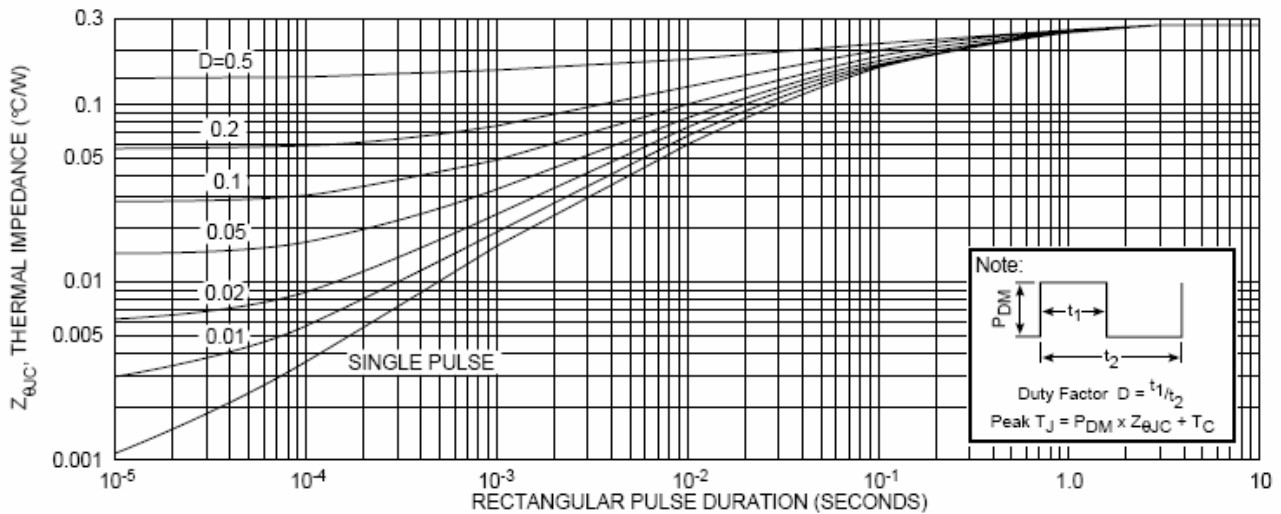Typical MOSFET Performance Curve


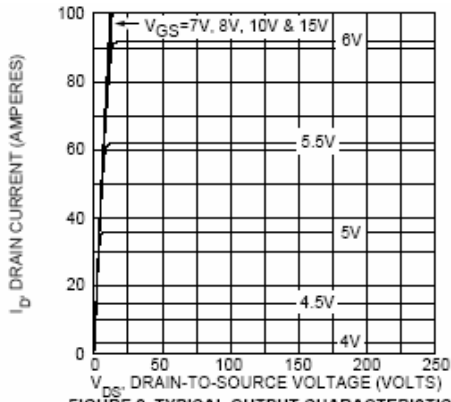


FIGURE 2, TYPICAL OUTPUT CHARACTERISTICS

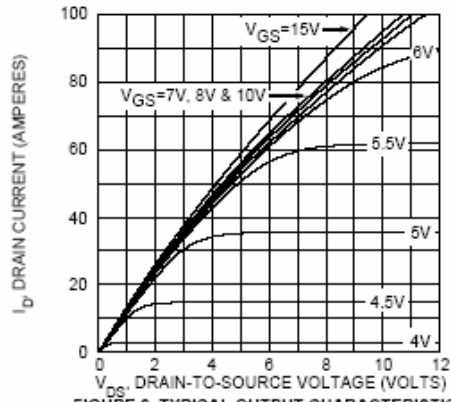


FIGURE 3, TYPICAL OUTPUT CHARACTERISTICS

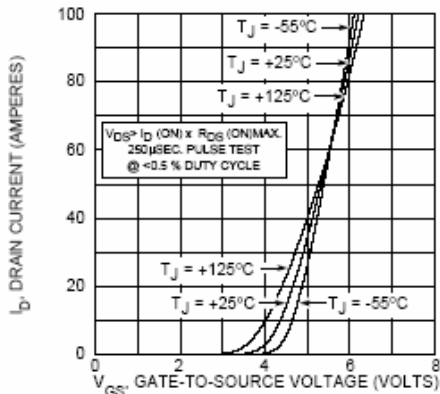


FIGURE 4, TYPICAL TRANSFER CHARACTERISTICS

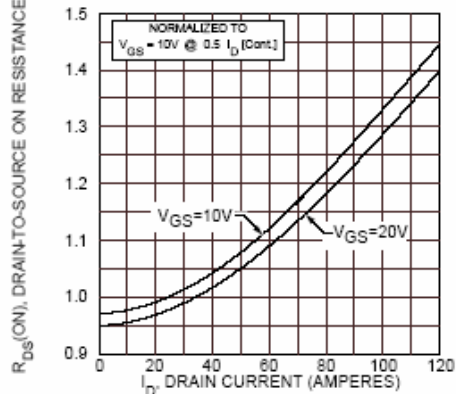


FIGURE 5, $R_{DS(ON)}$ vs DRAIN CURRENT

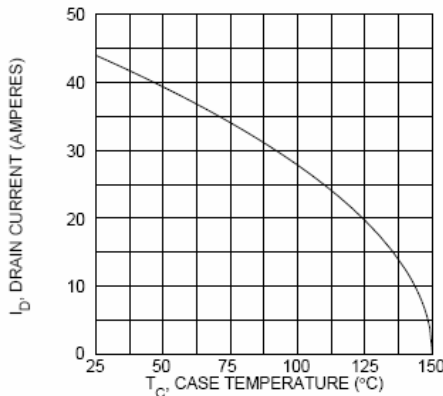


FIGURE 6, MAXIMUM DRAIN CURRENT vs CASE TEMPERATURE

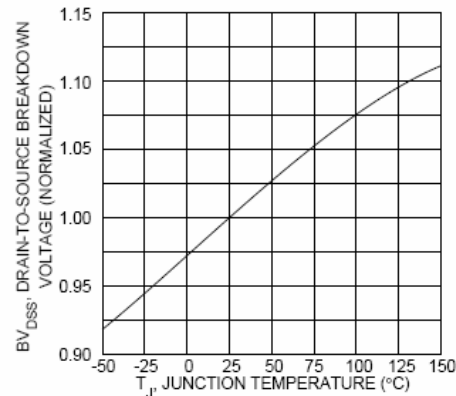


FIGURE 7, BREAKDOWN VOLTAGE vs TEMPERATURE

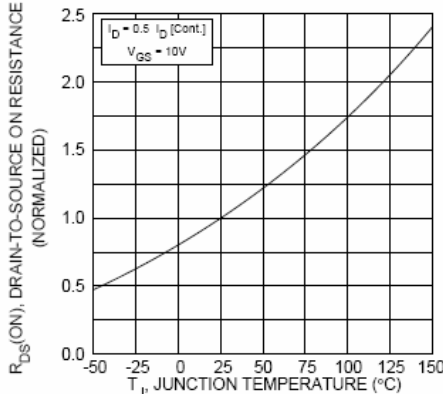


FIGURE 8, ON-RESISTANCE vs. TEMPERATURE

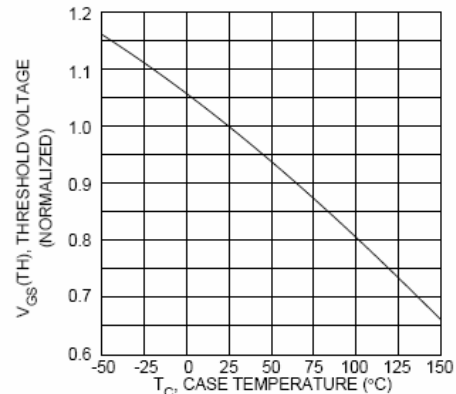


FIGURE 9, THRESHOLD VOLTAGE vs TEMPERATURE

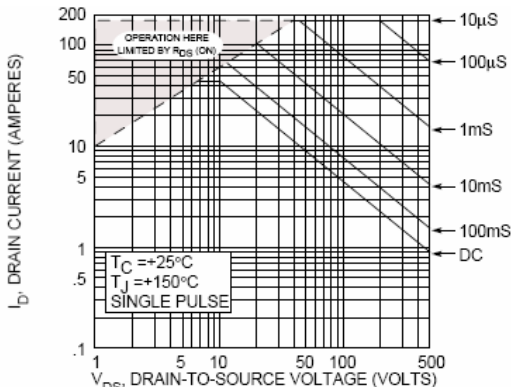


FIGURE 10, MAXIMUM SAFE OPERATING AREA

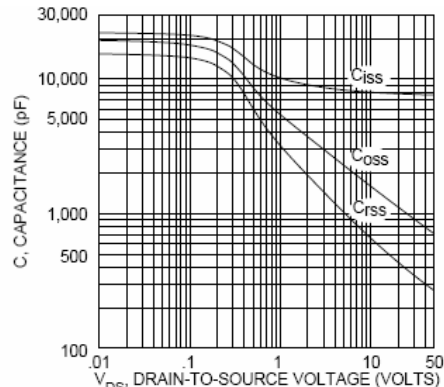


FIGURE 11, TYPICAL CAPACITANCE vs DRAIN-TO-SOURCE VOLTAGE

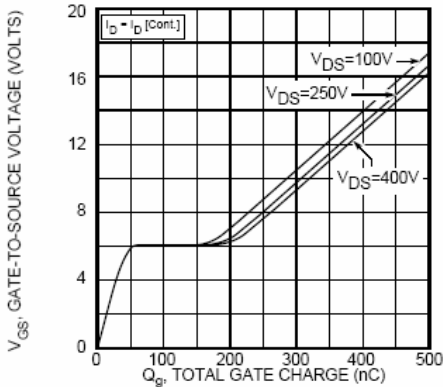


FIGURE 12, GATE CHARGES vs GATE-TO-SOURCE VOLTAGE

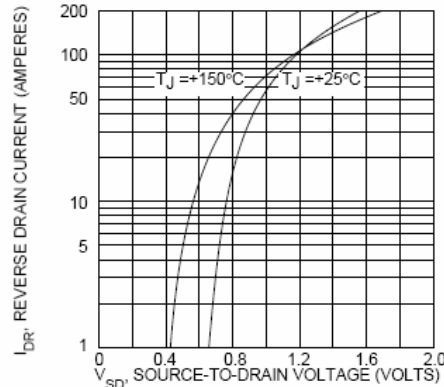


FIGURE 13, TYPICAL SOURCE-DRAIN DIODE FORWARD VOLTAGE

Typical Diode Performance Curve

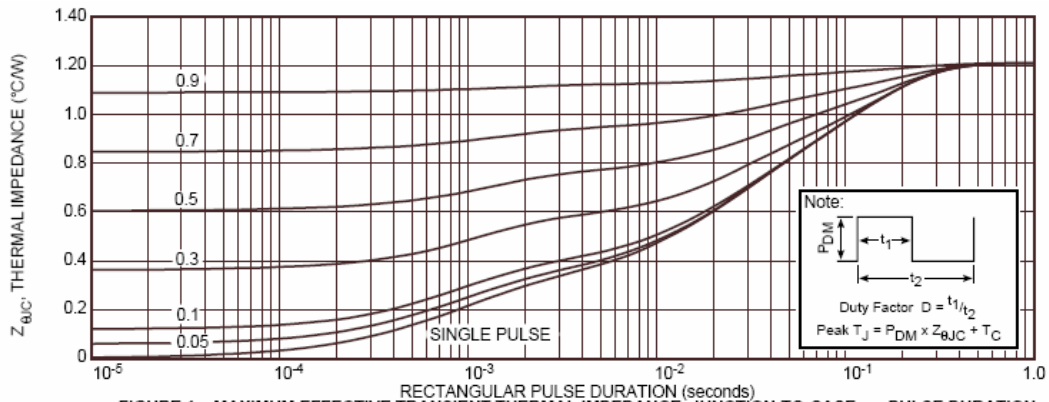


FIGURE 1a. MAXIMUM EFFECTIVE TRANSIENT THERMAL IMPEDANCE, JUNCTION-TO-CASE vs. PULSE DURATION

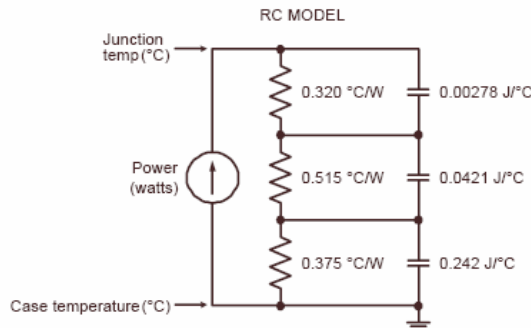


FIGURE 1b, TRANSIENT THERMAL IMPEDANCE MODEL

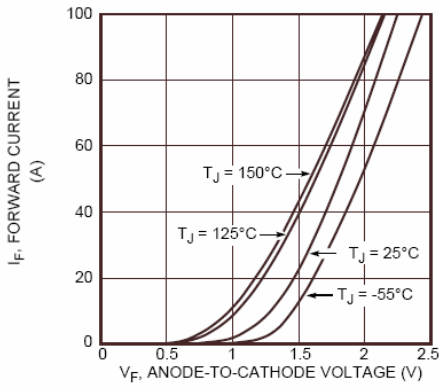


Figure 2. Forward Current vs. Forward Voltage

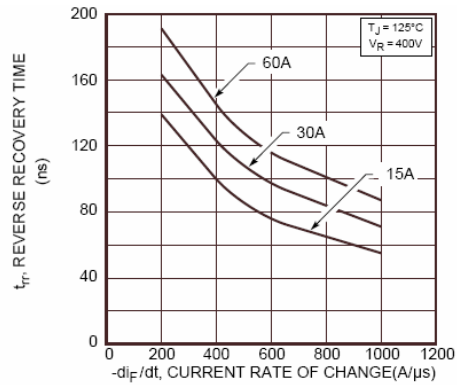


Figure 3. Reverse Recovery Time vs. Current Rate of Change

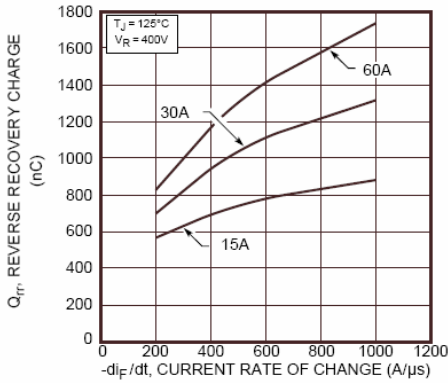


Figure 4. Reverse Recovery Charge vs. Current Rate of Change

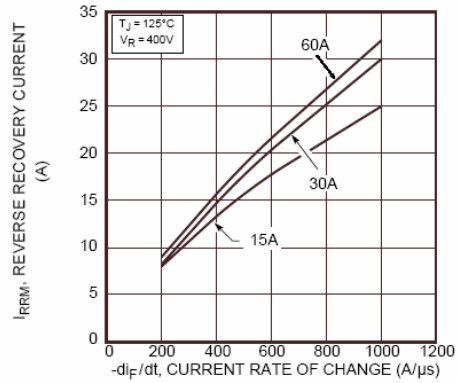


Figure 5. Reverse Recovery Current vs. Current Rate of Change

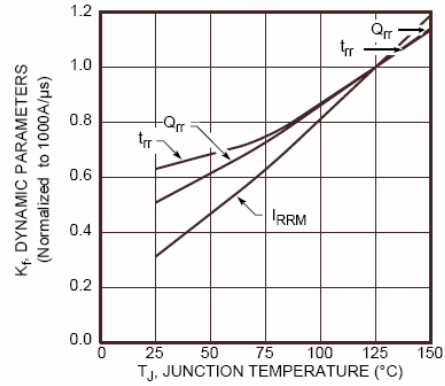


Figure 6. Dynamic Parameters vs. Junction Temperature

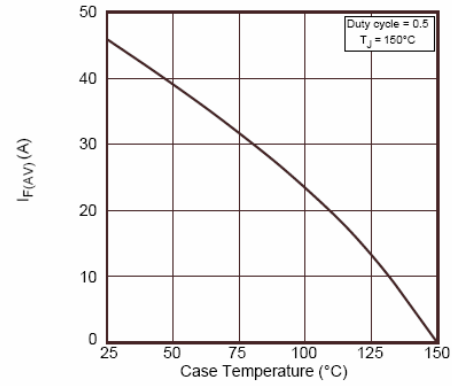


Figure 7. Maximum Average Forward Current vs. Case Temperature

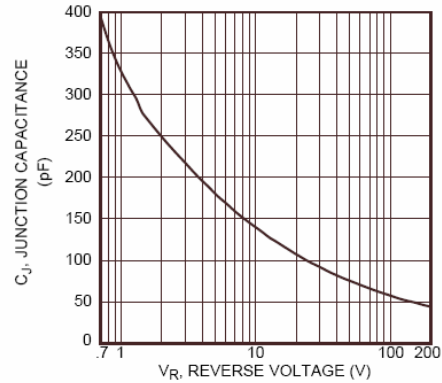


Figure 8. Junction Capacitance vs. Reverse Voltage

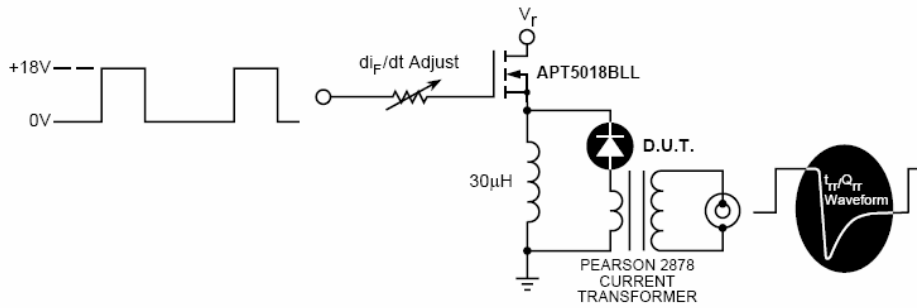


Figure 9. Diode Test Circuit


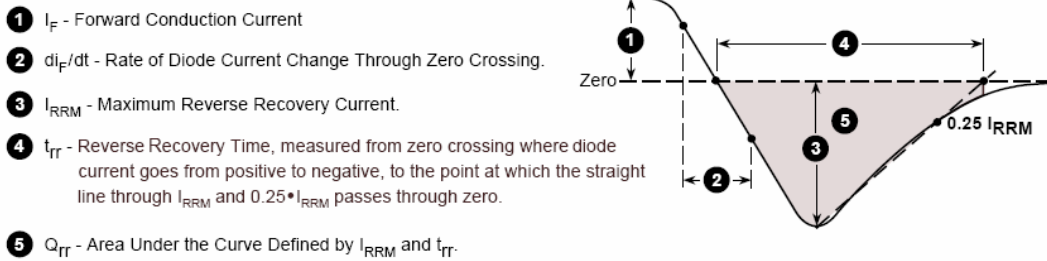


Figure 10. Diode Reverse Recovery Waveform and Definitions

SOT-227 (ISOTOP[®]) Package Outline

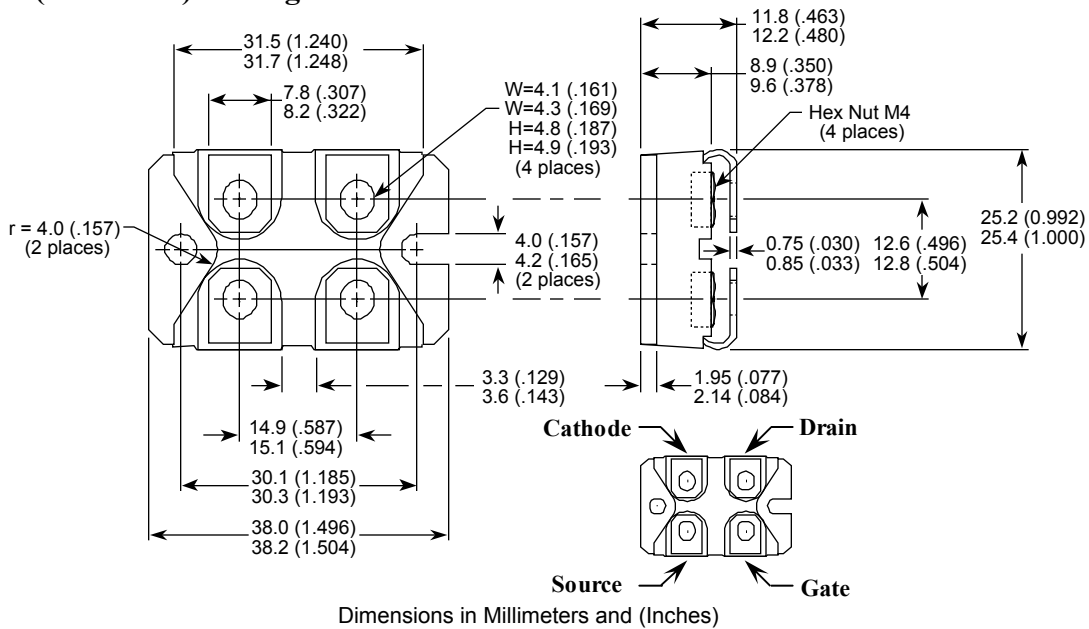

ISOTOP[®] is a registered trademark of ST Microelectronics NV

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S. and Foreign patents pending. All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru