



**ULTRAVOLT® M SERIES**  
MINIATURE, MICRO-SIZED  
HIGH VOLTAGE BIASING SUPPLIES





# Single-output, micro-sized HV modules


The miniature, micro-sized M series is the ideal solution for applications requiring biasing voltage ranging from 0 to 3000 V and very small current—only 16.4 cc (1.00 in<sup>3</sup>). Less than 12.7 mm (0.5") high, these modules are ideal for low-profile applications.

## Features

- › Seven models from 0 to 600, 1000, 1250, 1500, 2000, 2500, or 3000 V
- › Output power: 0.5, 0.8, or 1 W
- › Tight line/load regulation
- › Arc and continuous short circuit protection
- › Self-restoring output voltage
- › Low cost
- › Miniature and lightweight
- › Voltage monitoring
- › Low ripple (0.01% peak to peak)
- › Optional flying lead for high voltage output

## Typical Applications



- › Bias supplies
- › Electrostatic chucks
- › Hand held x-ray fluorescence (XRF)
- › Avalanche photo diodes (APD)
- › Photomultiplier tubes (PMT)
- › Silicon detector (SiD)
- › X-ray flat panel detector (FPD)
- › Ionization chamber detector

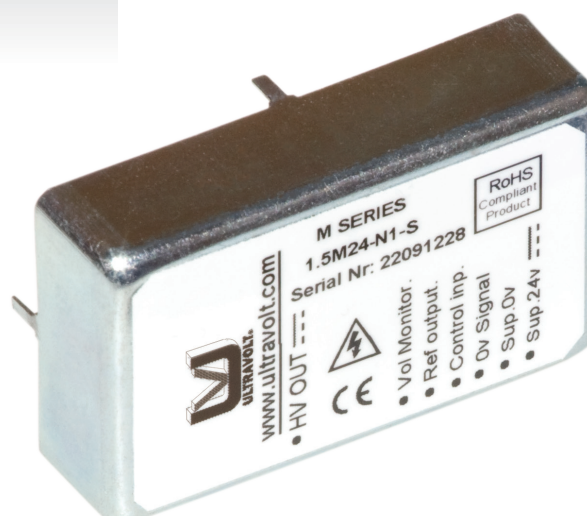



| PARAMETER                                           | SPECIFICATIONS                                                                            |      |      |                             |      |      | UNITS      |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------|------|------|-----------------------------|------|------|------------|
| Input Voltage Vin (Pins 1 and 2)                    | 5 ±0.5 (2 to 3 kV ONLY), 12 ±1, 15 ±1 (600 V to 1.5 kV ONLY), or 24 ±2                    |      |      |                             |      |      | VDC        |
| Input Voltage                                       | 5 (2 to 3 kV ONLY)                                                                        |      |      | 12                          |      |      | V          |
| Input Current                                       | No load: 55, full load: 450                                                               |      |      | No load: 45, full load: 200 |      |      | mA         |
| Polarity                                            | Fixed positive and fixed negative                                                         |      |      |                             |      |      | -          |
| Output Voltage                                      | 0 to 600                                                                                  |      |      | 0 to 1000                   |      |      | VDC        |
| Input Voltage                                       | 12                                                                                        | 15   | 24   | 12                          | 15   | 24   | VDC        |
| Output Power                                        | 0.5                                                                                       | 0.8  | 1    | 0.5                         | 0.8  | 1    | W          |
| Output Current                                      | 0.83                                                                                      | 1.33 | 1.67 | 0.5                         | 0.8  | 1    | mA         |
| Output Voltage                                      | 0 to 1250                                                                                 |      |      | 0 to 1500                   |      |      | VDC        |
| Input Voltage                                       | 12                                                                                        | 15   | 24   | 12                          | 15   | 24   | VDC        |
| Output Power                                        | 0.5                                                                                       | 0.8  | 1    | 0.5                         | 0.8  | 1    | W          |
| Output Current                                      | 0.4                                                                                       | 0.64 | 0.8  | 0.33                        | 0.53 | 0.67 | mA         |
| HV Setting                                          | 10 to 100 K (potentiometer across Vref. and signal ground, wiper to adjust)               |      |      |                             |      |      | -          |
| Load Voltage Regulation                             | < 0.01% of full output voltage for no load to full load                                   |      |      |                             |      |      | VDC        |
| Line Voltage Regulation                             | < 0.01% of full output voltage over specified input voltage range                         |      |      |                             |      |      | VDC        |
| Residual Ripple                                     | < 0.01% at full load                                                                      |      |      |                             |      |      | V pk to pk |
| Temperature Coefficient                             | 100 ppm/°C for the max output voltage after starting and over temperature range 0 to 50°C |      |      |                             |      |      | -          |
| Output Voltage Monitoring (600 to 1500 V)           | +1 V/1 kV max or -1 V/-1 kV max according to model polarity output impedance = 200 kΩ ±1% |      |      |                             |      |      | -          |
| Output Voltage Monitoring (2 to 3 kV)               | 12 to 24 V input only: 0 to +5 V±2%                                                       |      |      |                             |      |      | VDC        |
|                                                     | 5 V inputs: 0 to +2.5 V±2%                                                                |      |      |                             |      |      |            |
| Reference Voltage                                   | 12 to 24 V input only: 5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA                  |      |      |                             |      |      | -          |
|                                                     | 5 V inputs: 2.5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA                           |      |      |                             |      |      |            |
| Operating Temperature                               | -10 to +65, full load, max Eout, case temp                                                |      |      |                             |      |      | °C         |
| Storage Temperature                                 | -40 to +70                                                                                |      |      |                             |      |      | °C         |
| Safeguards                                          | Arc and short circuit protection                                                          |      |      |                             |      |      | -          |
| Options                                             | Flying lead for HV output                                                                 |      |      |                             |      |      | -          |
| Enhanced Interface (-EI)<br>Option (2 to 3 kV Only) | Enable/disable (ON/OFF): 0 to +0.5 V enable, +2.4V to V_input disable (default = disable) |      |      |                             |      |      | -          |
|                                                     | Output current monitor (5 V input only): 0 to +2.5 V ±2%                                  |      |      |                             |      |      |            |
|                                                     | Output current monitor (12 to 24 V input): 0 to +5.0 V ±2%                                |      |      |                             |      |      | -          |

| PARAMETER                                        | SPECIFICATIONS                                                                            |      |      |                              |       |       | UNITS      |
|--------------------------------------------------|-------------------------------------------------------------------------------------------|------|------|------------------------------|-------|-------|------------|
| Input Voltage Vin (Pins 1 and 2)                 | 5 ±0.5 (2 to 3 kV ONLY), 12 ±1, 15 ±1 (600 V to 1.5 kV ONLY), or 24 ±2                    |      |      |                              |       |       | VDC        |
| Input Voltage                                    | 15 (600 V to 1.5 kV ONLY)                                                                 |      |      | 24                           |       |       | V          |
| Input Current                                    | No load: 40, full load: 190                                                               |      |      | No load: 35,k full load: 160 |       |       | mA         |
| Polarity                                         | Fixed positive and fixed negative                                                         |      |      |                              |       |       | -          |
| Output Voltage                                   | 0 to 2000                                                                                 |      |      | 0 to 2500                    |       |       | VDC        |
| Input Voltage                                    | 5                                                                                         | 12   | 24   | 5                            | 12    | 24    | VDC        |
| Output Power                                     | 0.5                                                                                       | 0.8  | 1    | 0.5                          | 0.8   | 1     | W          |
| Output Current                                   | 0.25                                                                                      | 0.40 | 0.50 | 0.20                         | 0.32  | 0.40  | mA         |
| Output Voltage                                   |                                                                                           |      |      | 0 to 3000                    |       |       | VDC        |
| Input Voltage                                    |                                                                                           |      |      | 5                            | 12    | 24    | VDC        |
| Output Power                                     |                                                                                           |      |      | 0.5                          | 0.8   | 1     | W          |
| Output Current                                   |                                                                                           |      |      | 0.167                        | 0.267 | 0.333 | mA         |
| HV Setting                                       | 10 to 100 K (potentiometer across Vref. and signal ground, wiper to adjust)               |      |      |                              |       |       | -          |
| Load Voltage Regulation                          | < 0.01% of full output voltage for no load to full load                                   |      |      |                              |       |       | VDC        |
| Line Voltage Regulation                          | < 0.01% of full output voltage over specified input voltage range                         |      |      |                              |       |       | VDC        |
| Residual Ripple                                  | < 0.01% at full load                                                                      |      |      |                              |       |       | V pk to pk |
| Temperature Coefficient                          | 100 ppm/°C for the max output voltage after starting and over temperature range 0 to 50°C |      |      |                              |       |       | -          |
| Output Voltage Monitoring (600 to 1500 V)        | +1 V/1 kV max or -1 V/-1 kV max according to model polarity output impedance = 200 kΩ ±1% |      |      |                              |       |       | -          |
| Output Voltage Monitoring (2 to 3 kV)            | 12 to 24 V input only: 0 to +5 V±2%                                                       |      |      |                              |       |       | VDC        |
|                                                  | 5 V inputs: 0 to +2.5 V±2%                                                                |      |      |                              |       |       |            |
| Reference Voltage                                | 12 to 24 V input only: 5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA                  |      |      |                              |       |       | -          |
|                                                  | 5 V inputs: 2.5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA                           |      |      |                              |       |       |            |
| Operating Temperature                            | -10 to +65, full load, max Eout, case temp                                                |      |      |                              |       |       | °C         |
| Storage Temperature                              | -40 to +70                                                                                |      |      |                              |       |       | °C         |
| Safeguards                                       | Arc and short-circuit protection                                                          |      |      |                              |       |       | -          |
| Options                                          | Flying lead for HV output                                                                 |      |      |                              |       |       | -          |
| Enhanced Interface (-EI) Option (2 to 3 kV Only) | Enable/disable (ON/OFF): 0 to +0.5 V enable, +2.4V to V_input disable (default = disable) |      |      |                              |       |       | -          |
|                                                  | Output current monitor (5 V input only): 0 to +2.5 V ±2%                                  |      |      |                              |       |       |            |
|                                                  | Output current monitor (12 to 24 V input): 0 to +5.0 V ±2%                                |      |      |                              |       |       | -          |

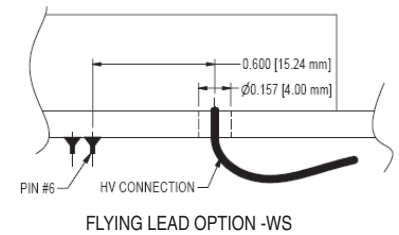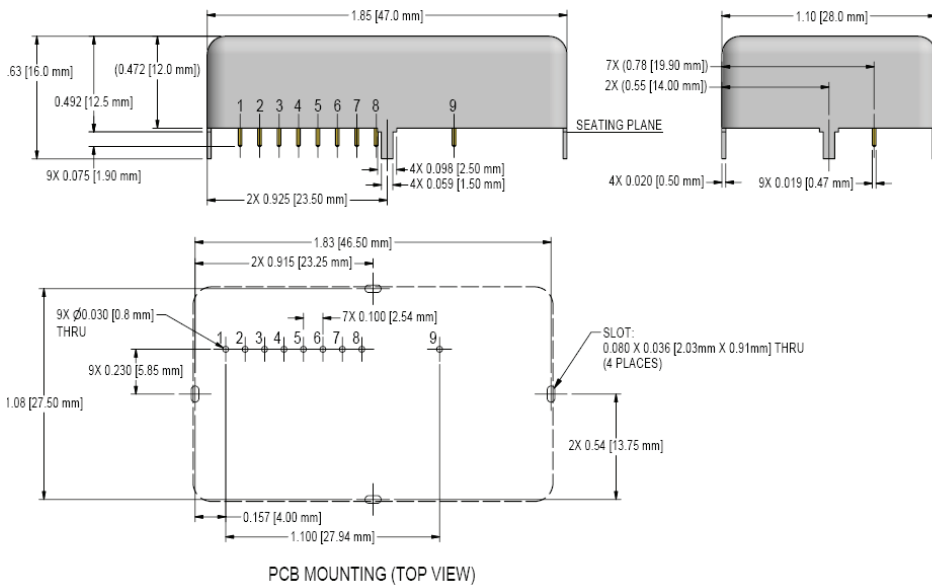

Note: Pins 7 and 8 are available for 2 kV to 3 kV units with enhanced interface option ONLY.  
Drawing views: third angle projections. Measurements are in inches (millimeters).

## PHYSICAL SPECIFICATIONS

|              |                                                                                          |
|--------------|------------------------------------------------------------------------------------------|
| Construction | Steel, tin-plated thickness 0.5 mm (0.02")<br>Insulation: fully potted in an epoxy resin |
| Volume       | 16.4 cc (1.00 in <sup>3</sup> )                                                          |
| Weight       | 35 g (1.23 oz)                                                                           |
| Tolerance    |                                                                                          |
| Overall      | ±0.76 mm (0.030")                                                                        |
| Pin to Pin   | ±0.38 mm (0.015")                                                                        |
| Pin to Tab   | ±0.51 mm (0.020")                                                                        |
| Tab to Tab   | ±0.25 mm (0.010")                                                                        |

Notes: 0.47 mm (0.019") round pins, length: 3 mm (0.12"), spacing: 2.54 mm (0.1")  
PCB mounting through 4 mounting tabs, length: 5 mm (0.2"), width: 1.5 mm (0.059"), thickness: 0.5 mm (0.02")  
Optional flying lead for HV output: coaxial cable (RG178), diameter: 2 mm (0.079"), length: 500 mm (19.685")

## CONNECTIONS

| Pin | Function                                         |
|-----|--------------------------------------------------|
| 1   | POSITIVE POWER INPUT                             |
| 2   | POWER GROUND                                     |
| 3   | SIGNAL GROUND                                    |
| 4   | REMOTE ADJUST INPUT                              |
| 5   | REFERENCE VOLTAGE                                |
| 6   | VOLTAGE MONITOR                                  |
| 7   | CURRENT MONITOR (available with -EI option only) |
| 8   | ENABLE (available with -EI option only)          |
| 9   | HV OUTPUT                                        |


Note: Mounting tabs must be connected to ground.

## ORDERING INFORMATION

|          |                                                      |            |
|----------|------------------------------------------------------|------------|
| Type     | 0 to 600 VDC Output                                  | 0.6 M      |
|          | 0 to 1000 VDC Output                                 | 1 M        |
|          | 0 to 1250 VDC Output                                 | 1.25 M     |
|          | 0 to 1500 VDC Output                                 | 1.5 M      |
|          | 0 to 2000 VDC Output                                 | 2 M        |
|          | 0 to 2500 VDC Output                                 | 2.5 M      |
|          | 0 to 3000 VDC Output                                 | 3 M        |
| Input    | 5 VDC Nominal (2 to 3 kV only)                       | 5          |
|          | 12 VDC Nominal                                       | 12         |
|          | 15 VDC Nominal (600 V to 1.5 kV only)                | 15         |
|          | 24 VDC Nominal                                       | 24         |
| Power    | 0.5 W Output                                         | 0.5        |
|          | 0.8 W Output                                         | 0.8        |
|          | 1 W Output                                           | 1          |
| Case     | Tin Steel Case                                       | (Standard) |
| Polarity | Positive Output                                      | -P         |
|          | Negative Output                                      | -N         |
| Option   | Shielded Flying Lead for HV Output (600 V to 1.5 kV) | -WS        |
|          | Flying Lead for HV Output (2 to 3 kV only)           | -W         |
|          | Current Monitor/Enable Pin (2 to 3 kV only)          | -EI        |



**RoHS COMPLIANT** Non-RoHS compliant units are available. Please contact the factory for more information.

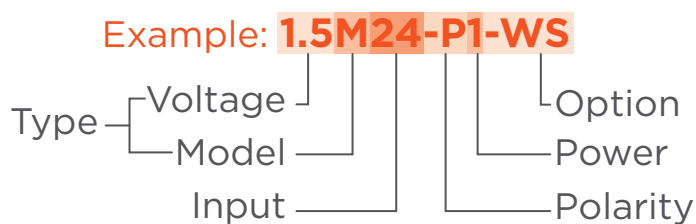

Popular accessories ordered with this product include the PCB-CONN-M/V.

The M series is not available in all territories. Please contact Advanced Energy for details concerning sales in your area.



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)