



4-Port 95W per Port Midspan Mega Power over Ethernet Midspans



Features

- Proprietary Detection, Disconnect and Overload Protection
- SNMP Management
- Mega PoE 95W per Port
- Diagnostic LEDs
- 1U Rack Mounting Kit Ships with Unit
- 1 Year Warranty¹
- Fully Compliant Detection, disconnect and Voltage Control per IEEE802.3af
- Gigabit Compatible
- Full Protection OCP, OVP
- Limited Power Source

Applications

- Wireless Access Points
- Computer Workstations
- Kiosks
- Security Systems
- IP Cameras
- Magnetic Locks

Safety Approvals

- cUL/UL
- CE

Mechanical Characteristics

- Length: 438mm (17.25in)
- Width: 228mm (8.98in)
- Height: 44.5mm (1.75in)
- Weight: 3.8Kg (8.5lbs)

Output Specifications

Model ²	DC Output Voltage	Load		Output Power per Port
		Min.	Max. ³	
POE576U-4MP-N-R	56V	15mA	1.69A	95W

Notes

1. Effective January 1, 2019, warranty is valid for one year from purchase date. Optional extended warranties available-please consult factory for more information
2. Model without SNMP management available upon special request
3. Max load applies to compliant load at 12.5K detection. If operating at 25K “IEEE802.3at mode” max load is 0.6A

Reference files:

1. [SNMPv2c_User_Manual-Rev1.7.pdf](#)
2. [Multiport_Midspan_Installation_Manual.pdf](#)
3. [SNMPv2c_Firmware-Rev1.7.zip](#)
4. [SNMPv2c_MIB_10_30_2009.zip](#)

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

INPUT:**Input Voltage Rating**

100 to 240VAC

Input Voltage Range

90 to 264VAC

AC Input Current

9.0A (RMS) 90VAC at maximum load
4.25A (RMS) 230VAC at maximum load

AC Input Frequency

47 to 63Hz

Leakage Current

3.5mA maximum at 264VAC and 60Hz

Max In-Rush Current:

30A for 115VAC at maximum load
60A for 230VAC at Maximum load
(Cold Start at Ambient 25°C)

OUTPUT:**Total Output Power**

95W per port
380W Maximum Total Power

Ripple and Regulation

250mV maximum

Efficiency

75% (typical) at maximum load, and 120VAC 60Hz

Hold-Up Time

16mS min. 120VAC and maximum load

Transient O/P Voltage Protection

60V maximum at switch on and off at any AC line Phase

Turn-On Delay Time

20 sec maximum at maximum load, 120VAC 60Hz

ENVIRONMENTAL**Temperature**

Operation 0 to +40C
Non-Operation -25 to +65C

Humidity

Operation 5 to 90%
Non-Operation 5 to 90%

EMC

EN55022 Class A, FCC Class A with UTP cabling

EN55022 Class B, FCC Class B with FTP cabling

Isolation Test

Primary to Secondary: 4242VDC for 1 min

Primary to Ground: 2121VDC for 1 min

Secondary to Ground: 2121VDC for 1 min

Immunity EN50082-1

ESD: EN61000-4-2 Level 3

RS: EN61000-4-3 Level 2

EFP: EN61000-4-4 Level 2

Surge: EN61000-4-5 Level 3

CS: EN61000-4-6 Level 2

Voltage Dips: EN61000-4-11

Harmonic: EN61000-3-2 Class A

IEEE802.3af/at Interoperability

If 25K Ohm is detect the unit operates in "IEEE802.3at mode" 33.6W 2 pair powering. 12.5K detection resistance required for full power.

FEATURE:**Cisco Legacy Detection**

No extern parts required for Legacy Devices:

VoIP Phones:7910, 7912, 7940, 7960

Access Points:350, 1100, 1200

Over-Voltage/Current, Short Circuit Protection

Outputs equipped with short circuit protection and overload protection as per 802.3af specification except at maximum average current is 1.69A

The output can be shorted permanently without damage

Over Temperature Protection

Automatic shutdown without damage

Indicators

Solid Green LED: Power detected “ON”

Flashing Green: IEEE802.3at or (af) detected

Yellow LED: Fault detected

SNMPv2c management port Interface

NIC interface for remote management via secure IP access

Input Connector

AC Input IEC320 C14

Output Connection

4-pair powering for full power

Pins 3, 4, 5, 6 (+)


Pins 1, 2, 7, 8 (-)

2-pair powering for IEEE802.3at mode

Pins 3, 6 (+)

Pins 1, 2 (-)

POE576U-4MPN-R Dimension Diagram Unit: mm

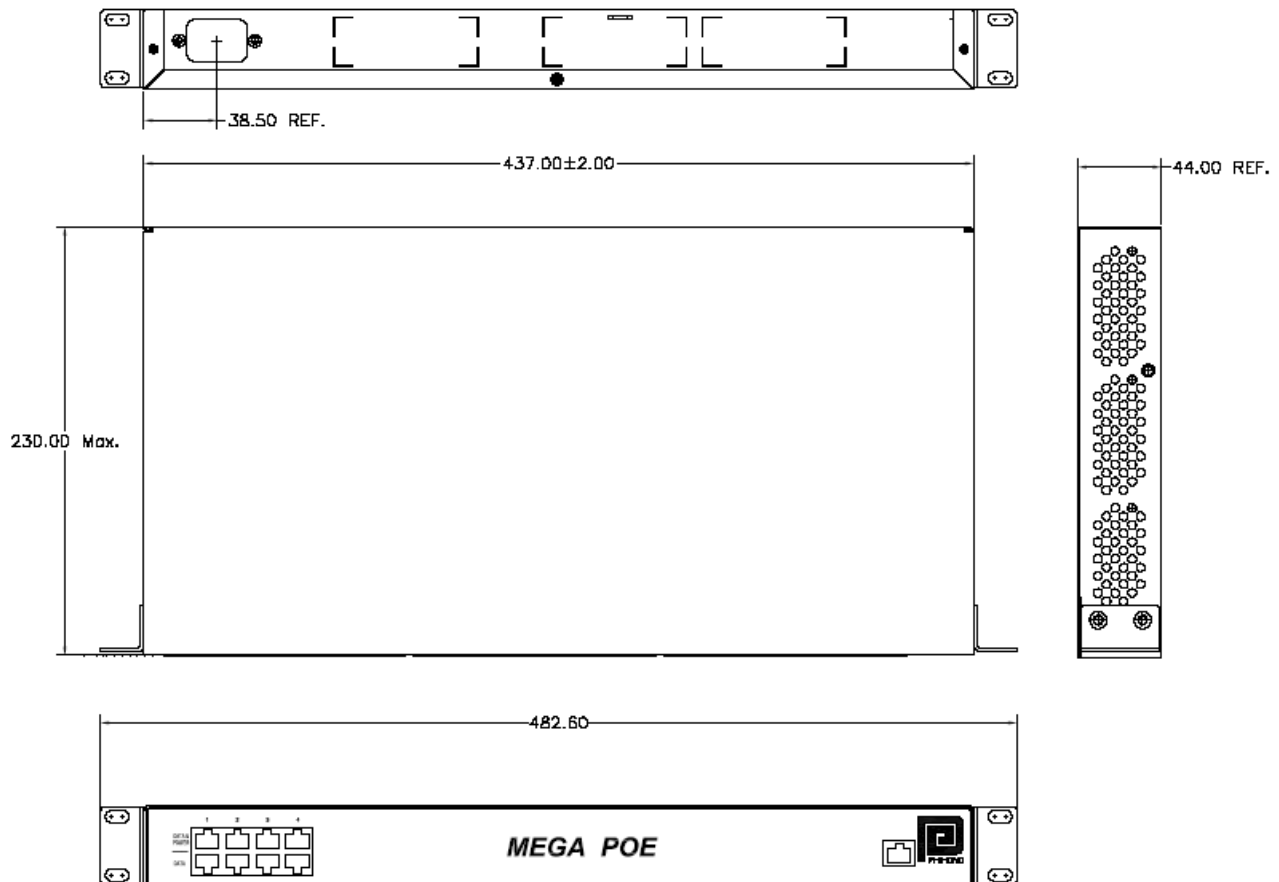

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru