


# C0G (NP0) Dielectric



## General Specifications

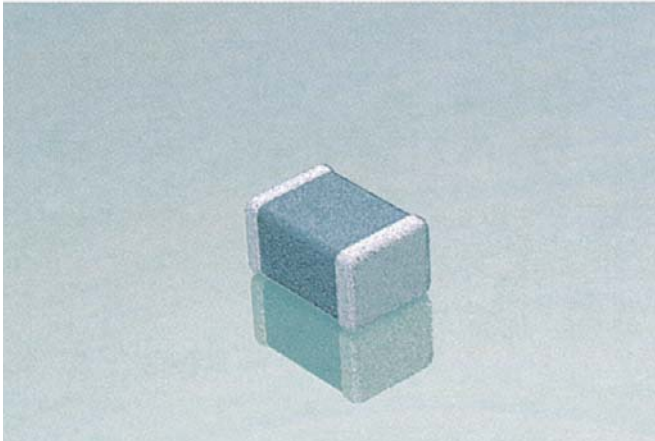

C0G (NP0) is the most popular formulation of the "temperature-compensating," EIA Class I ceramic materials. Modern C0G (NP0) formulations contain neodymium, samarium and other rare earth oxides.

C0G (NP0) ceramics offer one of the most stable capacitor dielectrics available. Capacitance change with temperature is  $0 \pm 30 \text{ ppm}/^\circ\text{C}$  which is less than  $\pm 0.3\% \Delta C$  from  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$ . Capacitance drift or hysteresis for C0G (NP0) ceramics is negligible at less than  $\pm 0.05\%$  versus up to  $\pm 2\%$  for films. Typical capacitance change with life is less than  $\pm 0.1\%$  for C0G (NP0), one-fifth that shown by most other dielectrics. C0G (NP0) formulations show no aging characteristics.

## PART NUMBER (see page 2 for complete part number explanation)

**0805**

**Size**  
(L" x W")

**5**

**Voltage**  
6.3V = 6  
10V = Z  
16V = Y  
25V = 3  
50V = 5  
100V = 1  
200V = 2  
500V = 7

**A**

**Dielectric**  
C0G (NP0) = A

**101**

**Capacitance Code (In pF)**  
2 Sig. Digits + Number of Zeros

**J**

**Capacitance Tolerance**  
B =  $\pm 10 \text{ pF}$  ( $< 10 \text{ pF}$ )  
C =  $\pm 25 \text{ pF}$  ( $< 10 \text{ pF}$ )  
D =  $\pm 50 \text{ pF}$  ( $< 10 \text{ pF}$ )  
F =  $\pm 1\%$  ( $\geq 10 \text{ pF}$ )  
G =  $\pm 2\%$  ( $\geq 10 \text{ pF}$ )  
J =  $\pm 5\%$   
K =  $\pm 10\%$

**A**

**Failure Rate**  
A = Not Applicable

**T**

**Terminations**  
T = Plated Ni and Sn  
7 = Gold Plated  
  
**Contact Factory For**  
1 = Pd/Ag Term

**2**


**Packaging**  
2 = 7" Reel  
4 = 13" Reel  
7 = Bulk Cass.  
9 = Bulk

**A**


**Special Code**  
A = Std. Product

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.  
Contact factory for non-specified capacitance values.


**Temperature Coefficient**

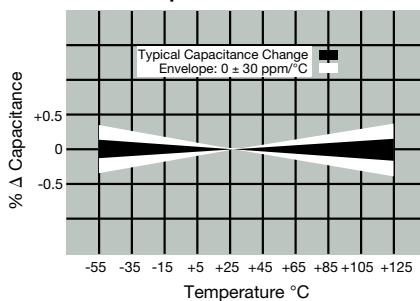


**Δ Capacitance vs. Frequency**

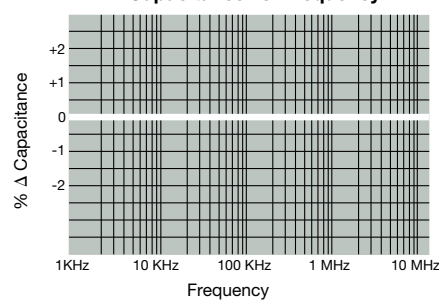


**Insulation Resistance vs Temperature**

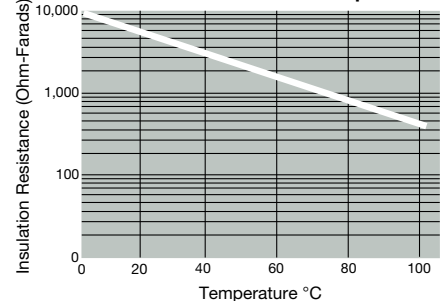


**Variation of Impedance with Cap Value**  
Impedance vs. Frequency  
0805 - C0G (NP0)  
10 pF vs. 100 pF vs. 1000 pF



**Variation of Impedance with Chip Size**  
Impedance vs. Frequency  
1000 pF - C0G (NP0)

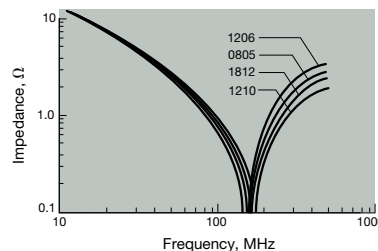


**Variation of Impedance with Ceramic Formulation**  
Impedance vs. Frequency  
1000 pF - C0G (NP0) vs X7R  
0805

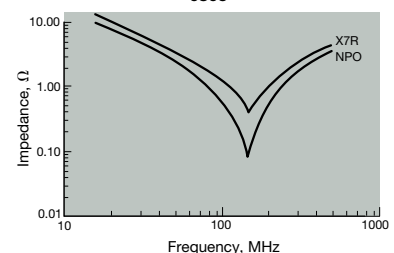

# C0G (NP0) Dielectric



## Specifications and Test Methods

| Parameter/Test                       |                       | NP0 Specification Limits                                                                                  | Measuring Conditions                                                                                                                                                                                                                                                         |                    |
|--------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| Operating Temperature Range          |                       | -55°C to +125°C                                                                                           | Temperature Cycle Chamber                                                                                                                                                                                                                                                    |                    |
| Capacitance                          |                       | Within specified tolerance                                                                                | Freq.: 1.0 MHz $\pm$ 10% for cap $\leq$ 1000 pF<br>1.0 kHz $\pm$ 10% for cap $>$ 1000 pF<br>Voltage: 1.0Vrms $\pm$ .2V                                                                                                                                                       |                    |
| Q                                    |                       | $<30$ pF: $Q \geq 400 + 20 \times \text{Cap Value}$<br>$\geq 30$ pF: $Q \geq 1000$                        |                                                                                                                                                                                                                                                                              |                    |
| Insulation Resistance                |                       | 100,000M $\Omega$ or 1000M $\Omega$ - $\mu$ F,<br>whichever is less                                       | Charge device with rated voltage for<br>60 $\pm$ 5 secs @ room temp/humidity                                                                                                                                                                                                 |                    |
| Dielectric Strength                  |                       | No breakdown or visual defects                                                                            | Charge device with 300% of rated voltage for<br>1-5 seconds, w/charge and discharge current<br>limited to 50 mA (max)<br>Note: Charge device with 150% of rated<br>voltage for 500V devices.                                                                                 |                    |
| Resistance to<br>Flexure<br>Stresses | Appearance            | No defects                                                                                                | Deflection: 2mm<br>Test Time: 30 seconds<br>                                                                                                                                              |                    |
|                                      | Capacitance Variation | $\pm 5\%$ or $\pm .5$ pF, whichever is greater                                                            |                                                                                                                                                                                                                                                                              |                    |
|                                      | Q                     | Meets Initial Values (As Above)                                                                           |                                                                                                                                                                                                                                                                              |                    |
|                                      | Insulation Resistance | $\geq$ Initial Value $\times$ 0.3                                                                         |                                                                                                                                                                                                                                                                              |                    |
| Solderability                        |                       | $\geq 95\%$ of each terminal should be covered<br>with fresh solder                                       | Dip device in eutectic solder at $230 \pm 5^\circ\text{C}$<br>for $5.0 \pm 0.5$ seconds                                                                                                                                                                                      |                    |
| Resistance to<br>Solder Heat         | Appearance            | No defects, $<25\%$ leaching of either end terminal                                                       | Dip device in eutectic solder at $260^\circ\text{C}$ for 60<br>seconds. Store at room temperature for $24 \pm 2$<br>hours before measuring electrical properties.                                                                                                            |                    |
|                                      | Capacitance Variation | $\leq \pm 2.5\%$ or $\pm .25$ pF, whichever is greater                                                    |                                                                                                                                                                                                                                                                              |                    |
|                                      | Q                     | Meets Initial Values (As Above)                                                                           |                                                                                                                                                                                                                                                                              |                    |
|                                      | Insulation Resistance | Meets Initial Values (As Above)                                                                           |                                                                                                                                                                                                                                                                              |                    |
|                                      | Dielectric Strength   | Meets Initial Values (As Above)                                                                           |                                                                                                                                                                                                                                                                              |                    |
| Thermal Shock                        | Appearance            | No visual defects                                                                                         | Step 1: $-55^\circ\text{C} \pm 2^\circ$                                                                                                                                                                                                                                      | $30 \pm 3$ minutes |
|                                      | Capacitance Variation | $\leq \pm 2.5\%$ or $\pm .25$ pF, whichever is greater                                                    | Step 2: Room Temp                                                                                                                                                                                                                                                            | $\leq 3$ minutes   |
|                                      | Q                     | Meets Initial Values (As Above)                                                                           | Step 3: $+125^\circ\text{C} \pm 2^\circ$                                                                                                                                                                                                                                     | $30 \pm 3$ minutes |
|                                      | Insulation Resistance | Meets Initial Values (As Above)                                                                           | Step 4: Room Temp                                                                                                                                                                                                                                                            | $\leq 3$ minutes   |
|                                      | Dielectric Strength   | Meets Initial Values (As Above)                                                                           | Repeat for 5 cycles and measure after<br>24 hours at room temperature                                                                                                                                                                                                        |                    |
| Load Life                            | Appearance            | No visual defects                                                                                         | Charge device with twice rated voltage in<br>test chamber set at $125^\circ\text{C} \pm 2^\circ\text{C}$<br>for 1000 hours (+48, -0).<br><br>Remove from test chamber and stabilize at<br>room temperature for 24 hours<br>before measuring.                                 |                    |
|                                      | Capacitance Variation | $\leq \pm 3.0\%$ or $\pm .3$ pF, whichever is greater                                                     |                                                                                                                                                                                                                                                                              |                    |
|                                      | Q<br>(C=Nominal Cap)  | $\geq 30$ pF: $Q \geq 350$<br>$\geq 10$ pF, $<30$ pF: $Q \geq 275 + 5C/2$<br>$<10$ pF: $Q \geq 200 + 10C$ |                                                                                                                                                                                                                                                                              |                    |
|                                      | Insulation Resistance | $\geq$ Initial Value $\times$ 0.3 (See Above)                                                             |                                                                                                                                                                                                                                                                              |                    |
|                                      | Dielectric Strength   | Meets Initial Values (As Above)                                                                           |                                                                                                                                                                                                                                                                              |                    |
| Load Humidity                        | Appearance            | No visual defects                                                                                         | Store in a test chamber set at $85^\circ\text{C} \pm 2^\circ\text{C}/$<br>$85\% \pm 5\%$ relative humidity for 1000 hours<br>(+48, -0) with rated voltage applied.<br><br>Remove from chamber and stabilize at<br>room temperature for $24 \pm 2$ hours<br>before measuring. |                    |
|                                      | Capacitance Variation | $\leq \pm 5.0\%$ or $\pm .5$ pF, whichever is greater                                                     |                                                                                                                                                                                                                                                                              |                    |
|                                      | Q                     | $\geq 30$ pF: $Q \geq 350$<br>$\geq 10$ pF, $<30$ pF: $Q \geq 275 + 5C/2$<br>$<10$ pF: $Q \geq 200 + 10C$ |                                                                                                                                                                                                                                                                              |                    |
|                                      | Insulation Resistance | $\geq$ Initial Value $\times$ 0.3 (See Above)                                                             |                                                                                                                                                                                                                                                                              |                    |
|                                      | Dielectric Strength   | Meets Initial Values (As Above)                                                                           |                                                                                                                                                                                                                                                                              |                    |


# C0G (NP0) Dielectric

## Capacitance Range




### PREFERRED SIZES ARE SHADED

| SIZE           |          | 01005                        |              | 0201                        |              | 0402                        |              | 0603                        |              |              |              | 0805                        |              |              |              |     | 1206                        |    |    |     |     |     |     |
|----------------|----------|------------------------------|--------------|-----------------------------|--------------|-----------------------------|--------------|-----------------------------|--------------|--------------|--------------|-----------------------------|--------------|--------------|--------------|-----|-----------------------------|----|----|-----|-----|-----|-----|
| Soldering      |          | Reflow Only                  |              | Reflow Only                 |              | Reflow/Wave                 |              | Reflow/Wave                 |              |              |              | Reflow/Wave                 |              |              |              |     | Reflow/Wave                 |    |    |     |     |     |     |
| Packaging      |          | All Paper                    |              | All Paper                   |              | All Paper                   |              | All Paper                   |              |              |              | Paper/Embossed              |              |              |              |     | Paper/Embossed              |    |    |     |     |     |     |
| (L) Length     | mm (in.) | 0.40 ± 0.02 (0.016 ± 0.0008) |              | 0.60 ± 0.03 (0.024 ± 0.001) |              | 1.00 ± 0.10 (0.040 ± 0.004) |              | 1.60 ± 0.15 (0.063 ± 0.006) |              |              |              | 2.01 ± 0.20 (0.079 ± 0.008) |              |              |              |     | 3.20 ± 0.20 (0.126 ± 0.008) |    |    |     |     |     |     |
| (W) Width      | mm (in.) | 0.20 ± 0.02 (0.008 ± 0.0008) |              | 0.30 ± 0.03 (0.011 ± 0.001) |              | 0.50 ± 0.10 (0.020 ± 0.004) |              | 0.81 ± 0.15 (0.032 ± 0.006) |              |              |              | 1.25 ± 0.20 (0.049 ± 0.008) |              |              |              |     | 1.60 ± 0.20 (0.063 ± 0.008) |    |    |     |     |     |     |
| (t) Terminal   | mm (in.) | 0.10 ± 0.04 (0.004 ± 0.016)  |              | 0.15 ± 0.05 (0.006 ± 0.002) |              | 0.25 ± 0.15 (0.010 ± 0.006) |              | 0.35 ± 0.15 (0.014 ± 0.006) |              |              |              | 0.50 ± 0.25 (0.020 ± 0.010) |              |              |              |     | 0.50 ± 0.25 (0.020 ± 0.010) |    |    |     |     |     |     |
| WVDC           |          | 16                           |              | 25                          | 50           | 16                          | 25           | 50                          | 16           | 25           | 50           | 100                         | 16           | 25           | 50           | 100 | 200                         | 16 | 25 | 50  | 100 | 200 | 500 |
| Cap (pF)       | 0.5      |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   | J   |
|                | 1.0      | B                            |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 1.2      | B                            |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 1.5      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 1.8      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 2.2      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 2.7      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 3.3      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 3.9      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 4.7      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 5.6      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 6.8      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 8.2      | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 10       | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 12       | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 15       | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 18       | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 22       | B                            |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 27       |                              |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 33       |                              |              | A                           | A            | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 39       |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 47       |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 56       |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 68       |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 82       |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 100      |                              |              | A                           |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 120      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 150      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 180      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | J   |     |
|                | 220      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | J                           | J  | J  | J   | J   | M   |     |
|                | 270      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | M                           | J  | J  | J   | J   | M   |     |
|                | 330      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | M                           | J  | J  | J   | J   | M   |     |
|                | 390      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | M                           | J  | J  | J   | J   | M   |     |
|                | 470      |                              |              |                             |              | C                           | C            | C                           | G            | G            | G            | G                           | J            | J            | J            | J   | M                           | J  | J  | J   | J   | M   |     |
|                | 560      |                              |              |                             |              |                             |              |                             | G            | G            | G            | G                           | J            | J            | J            | J   | M                           | J  | J  | J   | J   | M   |     |
|                | 680      |                              |              |                             |              |                             |              |                             | G            | G            | G            | G                           | J            | J            | J            | J   |                             | J  | J  | J   | J   | P   |     |
|                | 820      |                              |              |                             |              |                             |              |                             | G            | G            | G            | G                           | J            | J            | J            | J   |                             | J  | J  | J   | J   |     |     |
|                | 1000     |                              |              |                             |              |                             |              |                             | G            | G            | G            | G                           | J            | J            | J            | J   |                             | J  | J  | J   | J   |     |     |
|                | 1200     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            | J   |                             | J  | J  | J   | Q   |     |     |
|                | 1500     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            | J   |                             | J  | J  | J   | M   | Q   |     |
|                | 1800     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            | J   |                             | J  | J  | M   | M   |     |     |
|                | 2200     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            | N   |                             | J  | J  | M   | P   |     |     |
|                | 2700     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            | N   |                             | J  | J  | M   | P   |     |     |
|                | 3300     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            |     |                             | J  | J  | M   | P   |     |     |
|                | 3900     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            |     |                             | J  | J  | M   | P   |     |     |
|                | 4700     |                              |              |                             |              |                             |              |                             |              |              |              |                             | J            | J            | J            |     |                             | J  | J  | M   | P   |     |     |
|                | 5600     |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             | J  | J  | M   |     |     |     |
|                | 6800     |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             | M  | M  |     |     |     |     |
| Cap (μF)       | 8200     |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             | M  | M  |     |     |     |     |
|                | 0.010    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.012    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.015    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.018    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.022    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.027    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.033    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.039    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.047    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.068    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.082    |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | 0.1      |                              |              |                             |              |                             |              |                             |              |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |
|                | WVDC     | 25                           |              | 50                          | 16           | 25                          | 50           | 16                          | 25           | 50           | 100          | 16                          | 25           | 50           | 100          | 200 | 16                          | 25 | 50 | 100 | 200 | 500 |     |
| SIZE           |          | 01005                        |              | 0201                        |              | 0402                        |              | 0603                        |              |              |              | 0805                        |              |              |              |     | 1206                        |    |    |     |     |     |     |
| Letter         |          | A                            | B            | C                           | E            | G                           | J            | K                           | M            | N            | P            | Q                           | X            | Y            | Z            |     |                             |    |    |     |     |     |     |
| Max. Thickness |          | 0.33 (0.013)                 | 0.22 (0.009) | 0.56 (0.022)                | 0.71 (0.028) | 0.90 (0.035)                | 0.94 (0.037) | 1.02 (0.040)                | 1.27 (0.050) | 1.40 (0.055) | 1.52 (0.060) | 1.78 (0.070)                | 2.29 (0.090) | 2.54 (0.100) | 2.79 (0.110) |     |                             |    |    |     |     |     |     |
|                |          | PAPER                        |              |                             |              |                             |              |                             | EMBOSSED     |              |              |                             |              |              |              |     |                             |    |    |     |     |     |     |





1

[illegible][illegible]

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)